CABINET ELEVATIONS @ 3/8" = 1'-0"

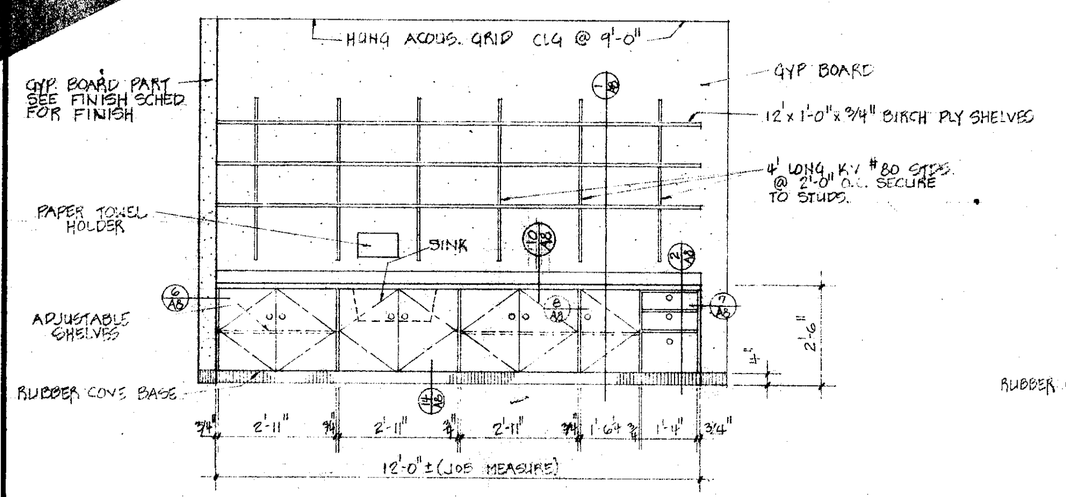

TYPE 'A' CABINET (TYPICAL IN ALL SPACES ∤ CLASSROOMS)
11 THUS REQ.
1 REVERSED REQ
18 TOTAL REQ
(NOTE: OMIT SINK IN SPACES 09, 12, 30, 33)

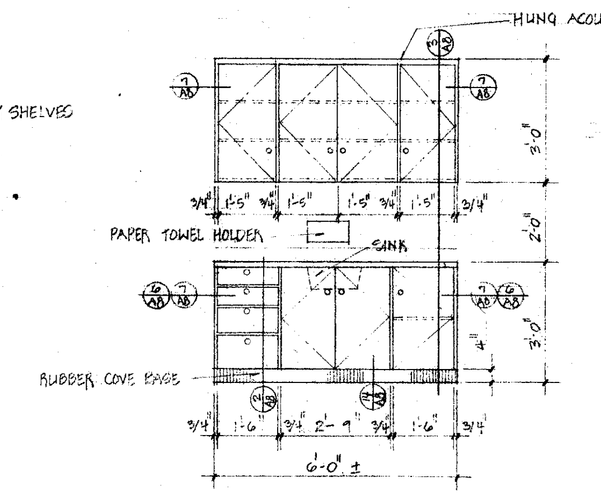

TYPE 'B' CABINET (TYPICAL IN CLINIC 03, STOR. 01 ∤ CONF. 22)
3 REQUIRED
(NOTE: OMIT SINK IN STOR. 01)

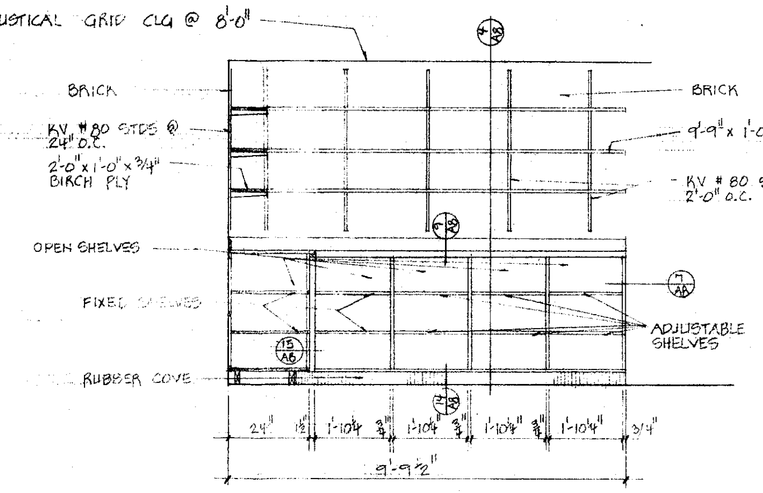

TYPE 'C' CABINET (TYPICAL IN STOR. 01)
1 REQUIRED

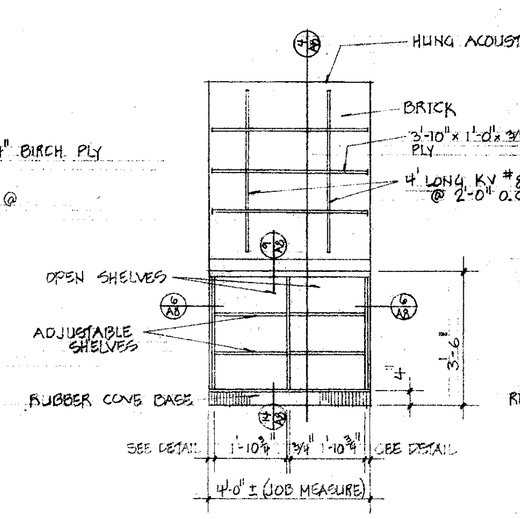

TYPE 'D' CABINET (TYPICAL IN STOR. 01)
1 REQUIRED

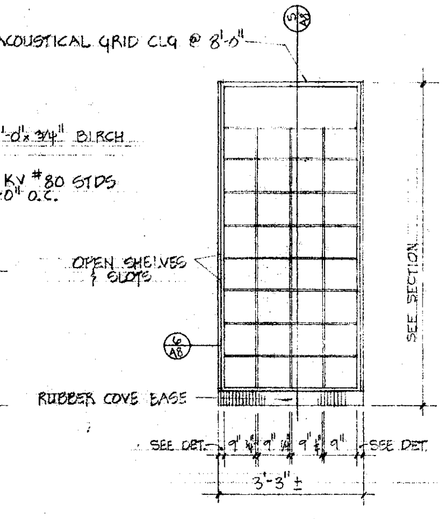

TYPE E CABINET (TYPICAL IN STOR. 01)
1 REQUIRED

CABINET SECTIONS @ 3/4" = 1'-0"

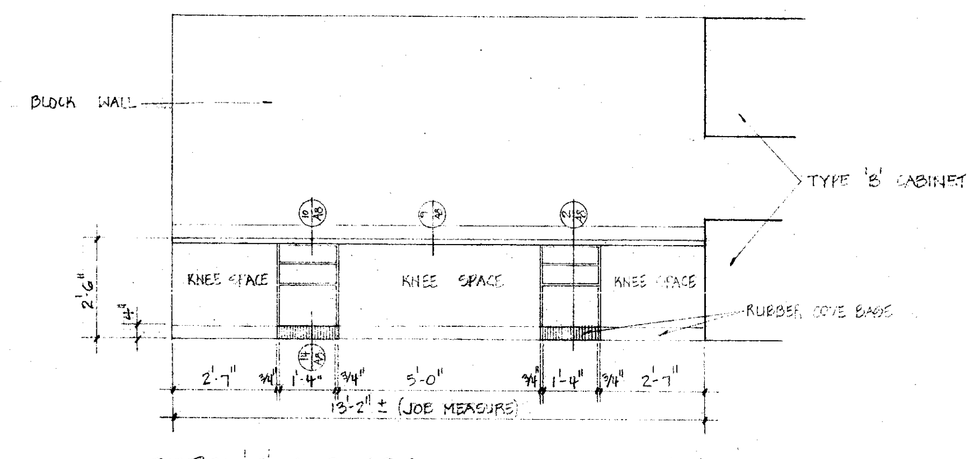

TYPE 'F' CABINET (TYPICAL IN CONFERENCE 22)
1 REQUIRED

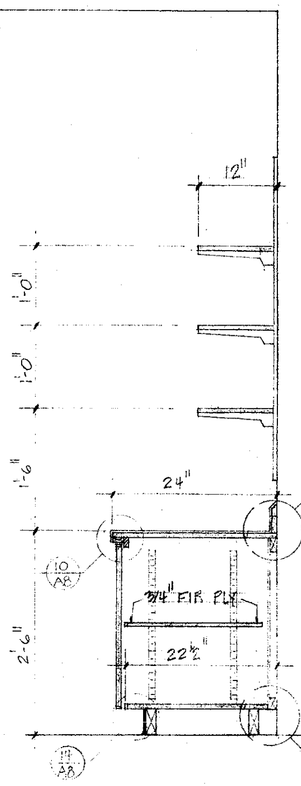

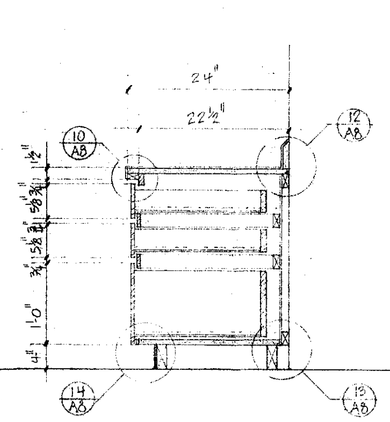

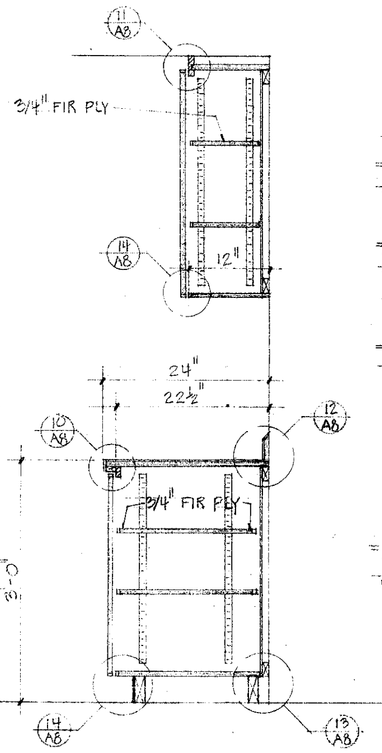

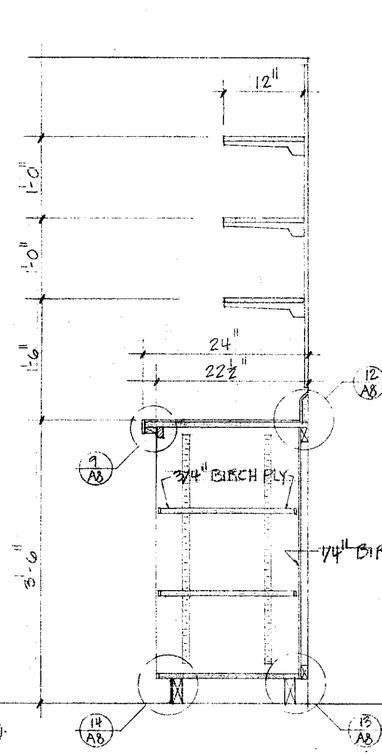

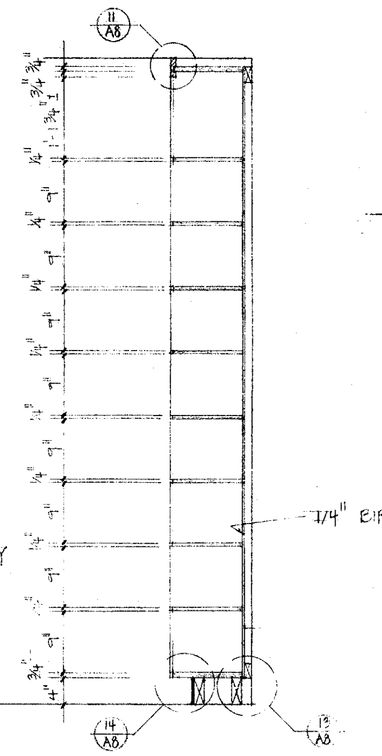

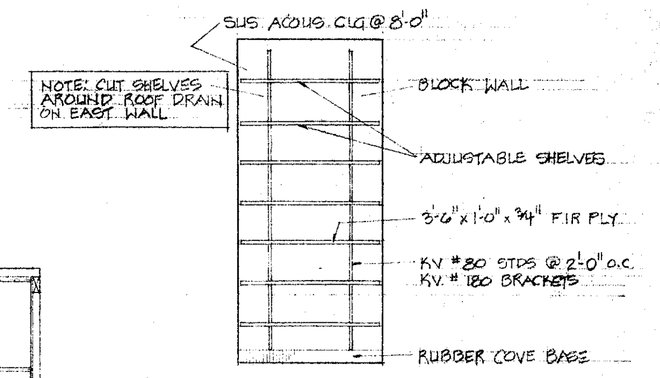

STORAGE SHELVES @ STOR 24
(TYPICAL @ EAST ∤ WEST WALLS)
3/8" = 1'-0"

CABINET DETAILS @ 3" = 1'-0"

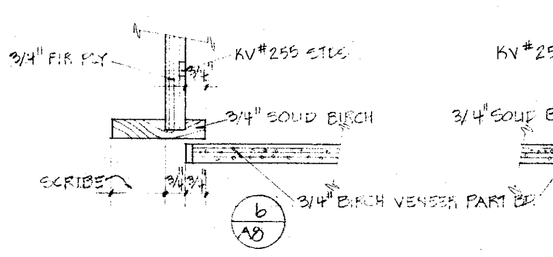

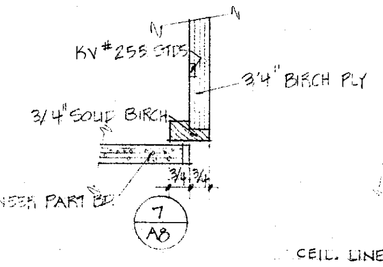

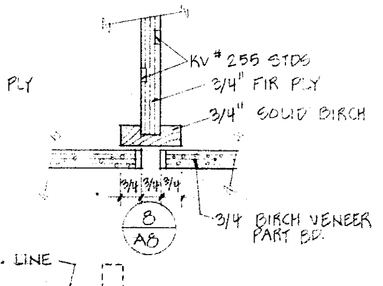



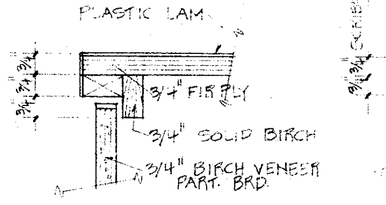

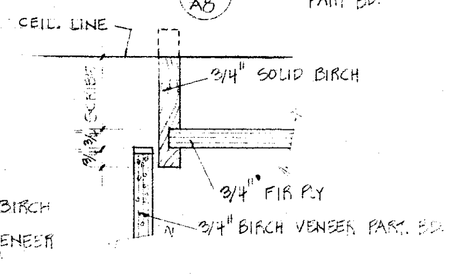

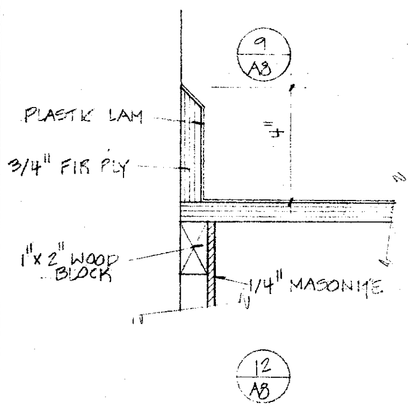



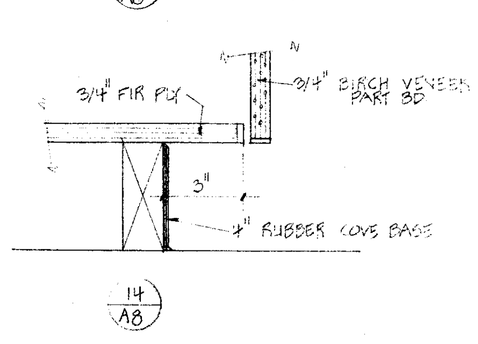

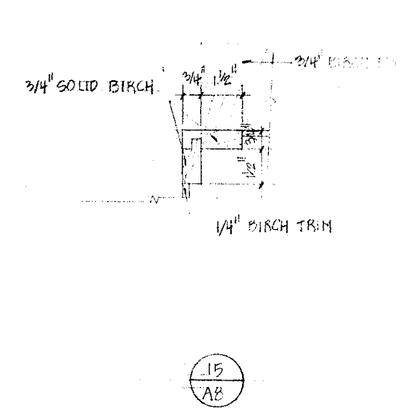

GENERAL MILLWORK NOTES

1. ALL EXPOSED CABINET SURFACES TO BE PLASTIC LAM. BIRCH VENEER PLYWOOD, BIRCH VENEER PARTICLE BOARD OR SOLID BIRCH.
2. ALL CABINET BACKS BEHIND CABINET DOOR SHALL BE 1/4" MASONITE.
3. 1/4" SOLID BIRCH EDGING REQUIRED ON ALL EXPOSED PLYWOOD EDGES, INCLUDING FRONT EDGE OF ALL ADJUSTABLE SHELVES.
4. COVER TOP, BACK, SIDES AND APRONS OF ALL BASE CABINETS W 1/16" PLASTIC LAMINATE.
5. GLUE JOINTS ALL CABINET JOINTS, USING WHITE CASEIN GLUE. KEEP GLUE OFF FINISHED CABINET SURFACES.
6. SUPPLY AND INSTALL HARDWARE SHOWN ON SCHEDULE, OR APPROVED EQUALS, ON ALL MILLWORK.
7. ALL MILLWORK SHALL BE VARNISHED UNLESS SHOWN OTHERWISE.
8. FACTORY MADE CABINETS MAY BE SUPPLIED & INSTALLED AT CONTRACTOR'S OPTION - SEE SPECS.

SCHEDULE OF MILLWORK HARDWARE

DESCRIPTION	HINGES	PULLS	CATCHES	LOCKS	DRAWER SLIDES	STDS & SUPPORTS
BASE CABINETS	STANLEY #386 US10	STANLEY #4478 US10	STANLEY #41	—	KV #1100	KV #255 #256
OVERHEAD CABINETS	DO	DO	DO	—	—	DO
OPEN SHELVES	—	—	—	—	—	KV #80 #180

EAST FILE COMP. IRVINE, CA

WILLIAM B. ROBB
ARCHITECT
FORT COLLINS, COLO.
DATE 5/15/72
DRAWN JE

CABINET ELEVATIONS
CABINET DETAILS & SECTIONS
MILLWORK NOTES
SCHED OF MILLWORK HARDWARE

ADDITION TO
CACHE LA POUDRE ELEMENTARY SCHOOL
LA PORTE, COLORADO

A7

33