

Hitachi Single-Chip Microcomputer

H8/3877U Series

H8/3877U

HD6473877U, HD6433877U

H8/3876U

HD6433876U

H8/3875U

HD6433875U

Hardware Manual

HITACHI

Notice

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

Preface

The H8/300L Series of single-chip microcomputers has a high-speed H8/300L CPU core, with many necessary peripheral system functions on-chip. The H8/300L CPU instruction set is compatible with the H8/300 CPU.

On-chip peripheral functions of the H8/3877U Series include a high-precision DTMF generator for tone dialing, a multitone generator, an LCD controller/driver, three types of timers, two serial communication interface channels, and an A/D converter.

This manual describes the hardware of the H8/3877U Series. For details on the H8/3877U Series instruction set, refer to the H8/300L Series Programming Manual.

Contents

Notice.....	2
Preface	4
Contents	5
Section 1 Overview	13
1.1 Overview	13
1.2 Internal Block Diagram.....	17
1.3 Pin Arrangement and Functions	18
1.3.1 Pin Arrangement.....	18
1.3.2 Pin Functions	19
Section 2 CPU.....	23
2.1 Overview	23
2.1.1 Features	23
2.1.2 Address Space.....	24
2.1.3 Register Configuration.....	24
2.2 Register Descriptions	25
2.2.1 General Registers.....	25
2.2.2 Control Registers	25
2.2.3 Initial Register Values	27
2.3 Data Formats.....	27
2.3.1 Data Formats in General Registers.....	28
2.3.2 Memory Data Formats	29
2.4 Addressing Modes.....	30
2.4.1 Addressing Modes	30
2.4.2 Effective Address Calculation.....	32
2.5 Instruction Set.....	36
2.5.1 Data Transfer Instructions.....	38
2.5.2 Arithmetic Operations.....	40
2.5.3 Logic Operations	41
2.5.4 Shift Operations	41
2.5.5 Bit Manipulations	43
2.5.6 Branching Instructions	47
2.5.7 System Control Instructions	49
2.5.8 Block Data Transfer Instruction	50
2.6 Basic Operational Timing	52
2.6.1 Access to On-Chip Memory (RAM, ROM).....	52
2.6.2 Access to On-Chip Peripheral Modules.....	53

2.7 CPU States.....	55
2.7.1 Overview.....	55
2.7.2 Program Execution State.....	56
2.7.3 Program Halt State.....	56
2.7.4 Exception-Handling State.....	56
2.8 Memory Map.....	57
2.8.1 Memory Map.....	57
2.9 Application Notes.....	58
2.9.1 Notes on Data Access.....	58
2.9.2 Notes on Bit Manipulation.....	60
2.9.3 Notes on Use of the EEPMOV Instruction.....	67
Section 3 Exception Handling.....	68
3.1 Overview.....	68
3.2 Reset.....	68
3.2.1 Overview.....	68
3.2.2 Reset Sequence.....	68
3.2.3 Interrupt Immediately after Reset.....	69
3.3 Interrupts.....	70
3.3.1 Overview.....	70
3.3.2 Interrupt Control Registers.....	72
3.3.3 External Interrupts.....	81
3.3.4 Internal Interrupts.....	82
3.3.5 Interrupt Operations.....	83
3.3.6 Interrupt Response Time.....	88
3.4 Application Notes.....	89
3.4.1 Notes on Stack Area Use.....	89
3.4.2 Notes on Rewriting Port Mode Registers.....	90
Section 4 Clock Pulse Generators.....	92
4.1 Overview.....	92
4.1.1 Block Diagram.....	92
4.1.2 System Clock and Subclock.....	92
4.2 System Clock Generator.....	93
4.3 Subclock Generator.....	96
4.4 Prescalers.....	99
4.5 Note on Oscillators.....	100
Section 5 Power-Down Modes Error! Bookmark not defined.	101
5.1 Overview.....	101
5.1.1 System Control Registers.....	105
5.2 Sleep Mode.....	108

5.2.1 Transition to Sleep Mode.....	108
5.2.2 Clearing Sleep Mode	108
5.3 Standby Mode.....	109
5.3.1 Transition to Standby Mode.....	109
5.3.2 Clearing Standby Mode	109
5.3.3 Oscillator Settling Time after Standby Mode is Cleared.....	110
5.4 Watch Mode	111
5.4.1 Transition to Watch Mode	111
5.4.2 Clearing Watch Mode.....	111
5.4.3 Oscillator Settling Time after Watch Mode is Cleared	111
5.5 Subsleep Mode.....	112
5.5.1 Transition to Subsleep Mode.....	112
5.5.2 Clearing Subsleep Mode	112
5.6 Subactive Mode	113
5.6.1 Transition to Subactive Mode	113
5.6.2 Clearing Subactive Mode.....	113
5.6.3 Operating Frequency in Subactive Mode.....	113
5.7 Active (medium-speed) Mode	114
5.7.1 Transition to Active (medium-speed) Mode	114
5.7.2 Clearing Active (medium-speed) Mode.....	114
5.7.3 Operating Frequency in Active (medium-speed) Mode	114
5.8 Direct Transfer.....	115
Section 6 ROM.....	117
6.1 Overview	117
6.1.1 Block Diagram.....	117
6.2 FROM Mode.....	118
6.2.1 Selection of PROM Mode	118
6.2.2 Socket Adapter Pin Arrangement and Memory Map	118
6.3 Programming	121
6.3.1 Programming and Verification.....	122
6.3.2 Programming Precautions	126
6.4 Reliability of Programmed Data.....	127
Section 7 RAM.....	129
7.1 Overview	129
7.1.1 Block Diagram.....	129
Section 8 I/O Ports	130
8.1 Overview	130
8.2 Port 1	133
8.2.1 Overview	133

8.2.2 Register Configuration and Description	133
8.2.3 Pin Functions.....	137
8.2.4 Pin States.....	138
8.2.5 MOS Input Pull-Up.....	139
8.3 Port 2	140
8.3.1 Overview	140
8.3.2 Register Configuration and Description	140
8.3.3 Pin Functions.....	144
8.3.4 Pin States.....	145
8.3.5 MOS Input Pull-Up.....	146
8.4 Port 5	147
8.4.1 Overview	147
8.4.2 Register Configuration and Description	147
8.4.3 Pin Functions.....	150
8.4.4 Pin States.....	151
8.4.5 MOS Input Pull-Up.....	151
8.5 Port 6	152
8.5.1 Overview	152
8.5.2 Register Configuration and Description	152
8.5.3 Pin Functions.....	154
8.5.4 Pin States.....	154
8.6 Port 7	156
8.6.1 Overview	156
8.6.2 Register Configuration and Description	156
8.6.3 Pin Functions.....	158
8.6.4 Pin States.....	158
8.7 Port 8	159
8.7.1 Overview	159
8.7.2 Register Configuration and Description	159
8.7.3 Pin Functions.....	161
8.7.4 Pin States.....	161
8.8 Port 9	162
8.8.1 Overview	162
8.8.2 Register Configuration and Description	162
8.8.3 Pin Functions.....	164
8.8.4 Pin States.....	164
8.9 Port A	165
8.9.1 Overview	165
8.9.2 Register Configuration and Description	165
8.9.3 Pin Functions.....	167
8.9.4 Pin States.....	168
8.10 Port B	169

8.10.1 Overview	169
8.10.2 Register Configuration and Description	169
8.11 Port D	170
8.11.1 Overview	170
8.11.2 Register Configuration and Description	170
8.11.3 Pin Functions	171
8.11.4 Pin States	171
8.12 Port E.....	172
8.12.1 Overview	172
8.12.2 Register Configuration and Description	172
8.12.3 Pin Functions	173
8.12.4 Pin States	174
Section 9 Timers	175
9.1 Overview	175
9.2 Timer A	176
9.2.1 Overview	176
9.2.2 Register Descriptions	178
9.2.3 Timer Operation	180
9.2.4 Timer A Operation States	181
9.3 Timer F.....	182
9.3.1 Overview	182
9.3.2 Register Descriptions	184
9.3.3 Interface with the CPU.....	191
9.3.4 Timer Operation	195
9.3.5 Application Notes	198
9.4 Timer G	200
9.4.1 Overview	200
9.4.2 Register Descriptions	202
9.4.3 Noise Canceller Circuit.....	206
9.4.4 Timer Operation	207
9.4.5 Application Notes	211
9.4.6 Sample Timer G Application	215
Section 10 Serial Communication Interface.....	217
10.1 Overview	217
10.2 SC11	218
10.2.1 Overview	218
10.2.2 Register Descriptions	220
10.2.3 Operation.....	225
10.2.4 Interrupts	229
10.3 SC13	230

10.3.1 Overview	230
10.3.2 Register Descriptions	233
10.3.3 Operation.....	251
10.3.4 Operation in Asynchronous Mode.....	256
10.3.5 Operation in Synchronous Mode.....	264
10.3.6 Multiprocessor Communication Function.....	271
10.3.7 Interrupts	277
10.3.8 Application Notes	278
Section 11 DTMF Generator.....	283
11.1 Overview	283
11.1.1 Features	284
11.1.2 Block Diagram.....	285
11.1.3 Pin Configuration.....	286
11.1.4 Register Configuration.....	286
11.2 Register Descriptions	286
11.2.1 DTMF Control Register (DTCR)	286
11.2.2 DTMF Load Register (DTLR)	289
11.3 Operation.....	290
11.3.1 Output Waveform	290
11.3.2 Programming	291
11.4 Typical Use.....	291
11.5 Application Notes	292
Section 12 A/D Converter.....	293
12.1 Overview	293
12.1.1 Features	293
12.1.2 Block Diagram.....	293
12.1.3 Pin Configuration.....	295
12.1.4 Register Configuration.....	295
12.2 Register Descriptions	296
12.2.1 A/D Result Register (ADRR).....	296
12.2.2 A/D Mode Register (AMR).....	296
12.2.3 A/D Start Register (ADSR).....	298
12.3 Operation.....	299
12.3.1 A/D Conversion Operation.....	299
12.3.2 Start of A/D Conversion by External Trigger Input.....	299
12.4 Interrupts	300
12.5 Typical Use.....	300
12.6 Application Notes	303
Section 13 LCD Controller/Driver	304

13.1 Overview	304
13.1.1 Features	304
13.1.2 Block Diagram.....	305
13.1.3 Pin Configuration.....	306
13.1.4 Register Configuration.....	306
13.2 Register Descriptions	307
13.2.1 LCD Port Control Register (LPCR).....	307
13.2.2 LCD Control Register (LCR)	311
13.3 Operation	313
13.3.1 Settings Prior to LCD Display.....	313
13.3.2 Relation of LCD RAM to Display.....	314
13.3.3 Connection to HD66100.....	315
13.3.4 Operation in Power-Down Modes	323
13.3.5 Boosting the LCD Driver Power Supply.....	324
Section 14 Multitone Generator.....	325
14.1 Overview	325
14.1.1 Features	325
14.1.2 Block Diagram.....	326
14.1.3 Pin Configuration.....	328
14.1.4 Register Configuration.....	328
14.2 Register Descriptions	329
14.2.1 Multitone Control Register (MTCR)	329
14.2.2 Effective Bit Length Register (EBLR)	331
14.2.3 Frame Register (FRMR).....	331
14.2.4 Fine-Tuning Register (FTNR).....	332
14.2.5 Initial Level Register (ITLR)	332
14.3 Operation	333
14.3.1 Output Waveform	333
14.3.2 Flow of Operation	334
14.4 Register Settings	336
14.4.1 How to Calculate Register Settings	336
14.4.2 Typical Register Settings	337
14.5 Bit Pattern Setting on MTG RAM	341
14.5.1 Bit Pattern on MTG RAM.....	341
14.5.2 Typical Bit Pattern Settings	342
14.5.3 Modification of Bit Patterns	344
14.6 Application Notes	345
Section 15 Electrical Characteristics.....	346
15.1 Absolute Maximum Ratings	346
15.2 Electrical Characteristics.....	347

15.2.1 Power Supply Voltage and operating Range.....	347
15.2.2 DC Characteristics	349
15.2.3 AC Characteristics	359
15.2.4 A/D Converter Characteristics	364
15.2.5 LCD Characteristics.....	366
15.2.6 DTMF and Multitone Generator Characteristics.....	368
15.3 Operation Timing.....	370
15.4 Output Load Circuits.....	373
Appendix A CPU Instruction Set	374
A.1 Instructions	374
A.2 Operation Code Map.....	388
A.3 Number of Execution States.....	390
Table A-3 Number of Cycles in Each Instruction.....	391
Table A-4 Number of Cycles in Each Instruction.....	392
Table A-4 Number of Cycles in Each Instruction (cont).....	394
Table A-4 Number of Cycles in Each Instruction (cont).....	395
Table A-4 Number of Cycles in Each Instruction (cont).....	397
Table A-4 Number of Cycles in Each Instruction (cont).....	399
Appendix B On-Chip Registers.....	400
B.1 I/O Registers (1).....	400
B.2 I/O Registers (2).....	406
Appendix C I/O Port Block Diagrams.....	445
C.1 Port 1 Block Diagrams	445
C.2 Port 2 Block Diagrams	450
C.3 Port 5 Block Diagram.....	458
C.4 Port 6 Block Diagram.....	459
C.5 Port 7 Block Diagram.....	460
C.6 Port 8 Block Diagram.....	461
C.7 Port 9 Block Diagram.....	462
C.8 Port A Block Diagram.....	463
C.9 Port B Block Diagram	464
C.10 Port D Block Diagram	465
C.11 Port E Block Diagram	466
Appendix D Port States in the Different Processing States	467
Appendix E Product Code Lineup.....	468
Appendix F Package Dimensions	469

Section 1 Overview

1.1 Overview

The H8/300L Series is a series of single-chip microcomputers (MCU: microcomputer unit), built around the high-speed H8/300L CPU and equipped with peripheral system functions on-chip.

Within the H8/300L Series, the H8/3877U Series of single-chip microcomputers features a high-precision DTMF generator for tone dialing, and a multitone generator. Other on-chip peripheral functions include an LCD controller/driver, three types of timers, two serial communication interface channels, and an A/D converter. The H8/3877U Series, in particular, features low-voltage A/D converter operation ($V_{cc} = AV_{cc} = 2.7 \text{ V to } 5.5 \text{ V}$), enabling these devices to be used in low-voltage, single power supply systems. The H8/3877U Series has three members, the H8/3877U, H8/3876U, and H8/3875U, with different amounts of on-chip memory: the H8/3877U has 60 kbytes of ROM and 2 kbytes of RAM; the H8/3876U has 48 kbytes of ROM and 2 kbytes of RAM; the H8/3875U has 40 kbytes of ROM and 2 kbytes of RAM.

The H8/3877U has a ZTAT™ version with user-programmable on-chip PROM.

Table 1-1 summarizes the features of the H8/3877U Series.

Note: * ZTAT is a trademark of Hitachi, Ltd.

Table 1-1 Features

Item	Description
CPU	<p>High-speed H8/300L CPU</p> <ul style="list-style-type: none">• General-register architecture General registers: Sixteen 8-bit registers (can be used as eight 16-bit registers)• Operating speed<ul style="list-style-type: none">— Max. operating speed: 5 MHz— Add/subtract: 0.4 μs (operating at 5 MHz)— Multiply/divide: 2.8 μs (operating at 5 MHz)— Can run on 32.768 kHz subclock• Instruction set compatible with H8/300 CPU<ul style="list-style-type: none">— Instruction length of 2 bytes or 4 bytes— Basic arithmetic operations between registers— MOV instruction for data transfer between memory and registers <p>CPU</p>

Table 1-1 Features (cont)

Item	Description
CPU	Instruction features <ul style="list-style-type: none">• Multiply (8 bits x 8 bits)• Divide (16 bits ÷ 8 bits)• Bit accumulator• Register-indirect designation of bit position
Interrupts	<ul style="list-style-type: none">• 31 interrupt sources• 14 external interrupt sources: NMI, IRQ₄ to IRQ₀, WKP₇ to WKP₀• 17 internal interrupt sources
Clock pulse generators	Two on-chip clock pulse generators <ul style="list-style-type: none">• System clock pulse generator: 1 MHz to 10 MHz• Subclock pulse generator: 32.768 kHz
Power-down modes	Six power-down modes <ul style="list-style-type: none">• Sleep mode• Standby mode• Watch mode• Subsleep mode• Subactive mode• Active (medium-speed) mode
Memory	Large on-chip memory <ul style="list-style-type: none">• H8/3877U: 60-kbyte ROM, 2-kbyte RAM• H8/3876U: 48-kbyte ROM, 2-kbyte RAM• H8/3875U: 40-kbyte ROM, 2-kbyte RAM
I/O ports	<ul style="list-style-type: none">• 80 I/O ports• I/O pins: 72• Input pins: 8

Table 1-1 Features (cont)

Item	Description
Timers	<p>Three on-chip timers</p> <ul style="list-style-type: none">• Timer A: 8-bit timer <p>Count-up timer with selection of eight internal clock signals divided from the system clock (ϕ)* and four clock signals divided from the watch clock (ϕ_w)*</p> <ul style="list-style-type: none">• Timer F: 16-bit timer<ul style="list-style-type: none">— Can be used as two independent 8-bit timers.— Count-up timer with selection of four internal clock signals or event input from external pin— Compare-match function with toggle output• Timer G: 8-bit timer<ul style="list-style-type: none">— Count-up timer with selection of four internal clock signals— Input capture function with built-in noise canceller circuit <p>Note: * ϕ and ϕ_w are defined in section 4, Clock Pulse Generators</p>
Serial communication interface	<p>Two channels on chip</p> <ul style="list-style-type: none">• SCI1: synchronous serial interface <p>Choice of 8-bit or 16-bit data transfer</p> <ul style="list-style-type: none">• SCI3: 8-bit synchronous or asynchronous serial interface <p>Built-in function for multiprocessor communication</p>
A/D converter	<ul style="list-style-type: none">• Successive approximations using a resistance ladder• Resolution: 8 bits• 8-channel analog input port• Conversion time: $31/\phi$, $62/\phi$ or $124/\phi$ per channel

Table 1-1 Features (cont)

Item	Description																
LCD controller/driver	Up to 52 segment pins and 4 common pins <ul style="list-style-type: none"> • Choice of four duty cycles (static, 1/2, 1/3, 1/4) • Segments can be expanded externally • Segment pins can be switched to general-purpose ports in groups of four 																
DTMF generator	Built-in tone dialer supporting OSC clock frequencies from 1.2 MHz to 10 MHz in 400-kHz steps																
Multitone generator	Can output arbitrary frequencies and waveforms in a wide range (40 Hz to 4000 Hz when OSC clock frequency is 10 MHz)																
Product lineup	Product Code																
	<table border="1"> <thead> <tr> <th>Mask ROM Version</th> <th>ZTAT™ Version</th> <th>Package</th> <th>ROM/RAM Size</th> </tr> </thead> <tbody> <tr> <td>HD6433877UH</td> <td>HD6473877UH</td> <td>100 pin QFP (FP-100B)</td> <td>ROM: 60 kbytes RAM: 2 kbytes</td> </tr> <tr> <td>HD6433876UH</td> <td>--</td> <td>100 pin QFP (FP-100B)</td> <td>ROM: 48 kbytes RAM: 2 kbytes</td> </tr> <tr> <td>HD6433875UH</td> <td>--</td> <td>100 pin QFP (FP-100B)</td> <td>ROM: 40 kbytes RAM: 2 kbytes</td> </tr> </tbody> </table>	Mask ROM Version	ZTAT™ Version	Package	ROM/RAM Size	HD6433877UH	HD6473877UH	100 pin QFP (FP-100B)	ROM: 60 kbytes RAM: 2 kbytes	HD6433876UH	--	100 pin QFP (FP-100B)	ROM: 48 kbytes RAM: 2 kbytes	HD6433875UH	--	100 pin QFP (FP-100B)	ROM: 40 kbytes RAM: 2 kbytes
	Mask ROM Version	ZTAT™ Version	Package	ROM/RAM Size													
	HD6433877UH	HD6473877UH	100 pin QFP (FP-100B)	ROM: 60 kbytes RAM: 2 kbytes													
HD6433876UH	--	100 pin QFP (FP-100B)	ROM: 48 kbytes RAM: 2 kbytes														
HD6433875UH	--	100 pin QFP (FP-100B)	ROM: 40 kbytes RAM: 2 kbytes														

1.3 Pin Arrangement and Functions

1.3.1 Pin Arrangement

The H8/3877U Series pin arrangement is shown in figure 1-2.

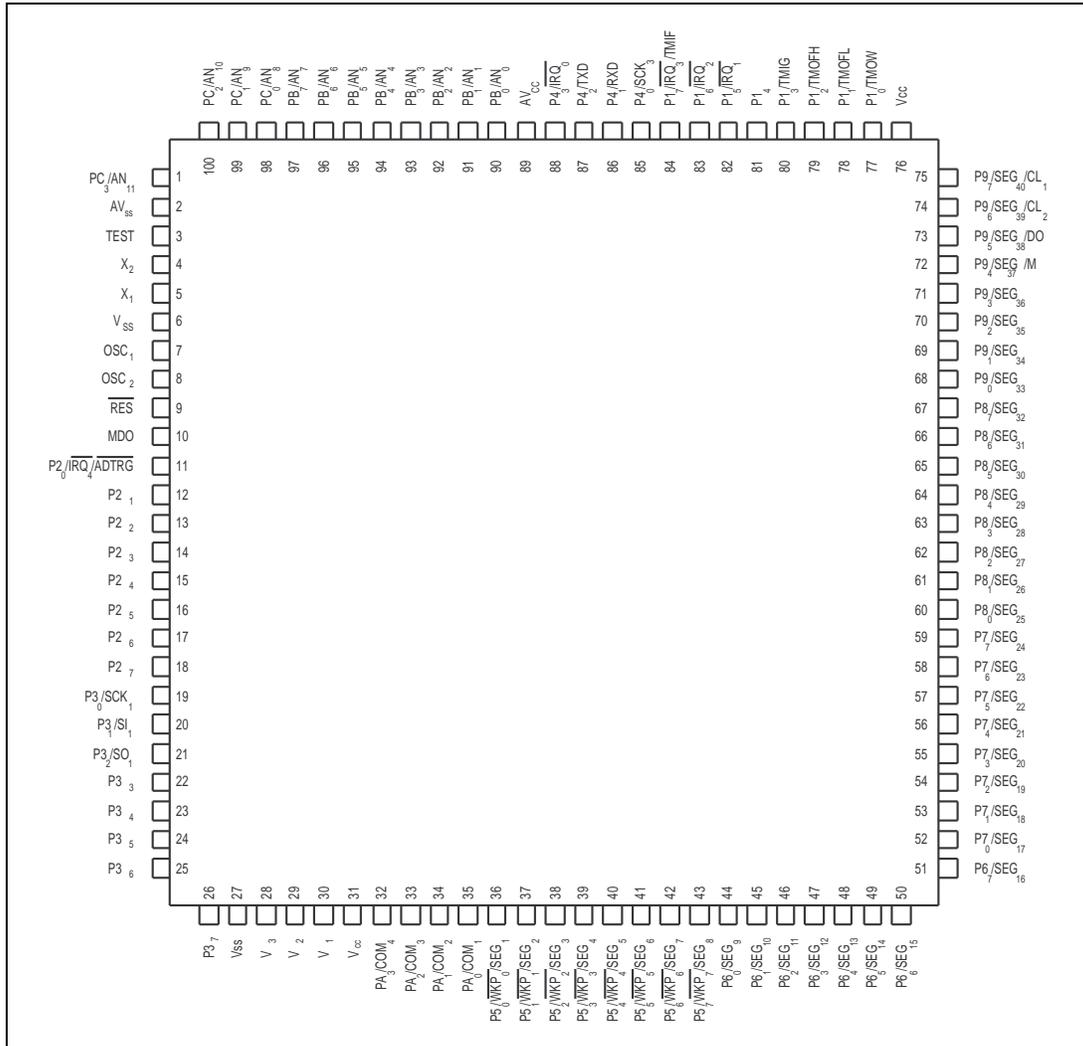


Figure 1-2 Pin Arrangement (FP-100B: Top View)

1.3.2 Pin Functions

Table 1-2 outlines the pin functions.

Table 1-2 Pin Functions

		Pin No.		
Type	Symbol	FP-100B	I/O	Name and Functions
Power source pins	V_{cc}	31, 76	Input	Power supply: All V_{cc} pins should be connected to the system power supply (+5 V)
	V_{ss}	6, 27	Input	Ground: All V_{ss} pins should be connected to the system power supply (0 V)
	AV_{cc}	89	Input	Analog power supply: This is the power supply pin for the A/D converter. When the A/D converter is not used, connect this pin to the system power supply (+5 V).
	AV_{ss}	2	Input	Analog ground: This is the A/D converter ground pin. It should be connected to the system power supply (0 V).
	AV_{ref}	93	Input	A/D converter reference level: This is a power supply pin for the reference level for A/D converter output. When the A/D converter is not used, connect this pin to the system power supply (+5 V).
	VT_{ref}	92	Input	DTMF and multitone generator reference level: This is a power supply pin for the reference level for DTMF and multitone output.
	V_1, V_2, V_3	30, 29, 28	Input	LCD power supply: These are power supply pins for the LCD controller/driver. A built-in resistor divider is provided for the power supply, so these pins are normally left open. Power supply conditions are $V_{cc} \geq V_1 \geq V_2 \geq V_3 \geq V_{ss}$.

Table 1-2 Pin Functions (cont)

Type	Symbol	Pin No.		Name and Functions
		FP-100B	I/O	
Clock pins	OSC ₁	7	Input	System clock: These pins connect to a crystal or ceramic oscillator, or can be used to input an external clock. See section 4, Clock Pulse Generators, for a typical connection diagram.
	OSC ₂	8	Output	
	X ₁	5	Input	Subclock: These pins connect to a 32.768-kHz crystal oscillator. See section 4, Clock Pulse Generators, for a typical connection diagram.
	X ₂	4	Output	
System control	RES	9	Input	Reset: When this pin is driven low, the chip is reset
	TEST	3	Input	Test: This is a test pin, not for use in application systems. It should be connected to V _{ss} .
Interrupt pins	NMI	10	Input	Nonmaskable interrupt: This is an input pin for the nonmaskable interrupt. Rising or falling edge sensing can be selected.
	IRQ ₀	18	Input	External interrupt request 0 to 4: These are input pins for external interrupts for which there is a choice between rising and falling edge sensing
	IRQ ₁	21		
	IRQ ₂	20		
	IRQ ₃	19		
	IRQ ₄	11		
	WKP ₇ to WKP ₀	43 to 36	Input	Wakeup interrupt request 0 to 7: These are input pins for external interrupts that are detected at the falling edge
Timer pins	TMOW	26	Output	Clock output: This is an output pin for wave-forms generated by the timer A output circuit
	TMIF	19	Input	Timer F event counter input: This is an event input pin for input to the timer F counter
	TMOFL	25	Output	Timer FL output: This is an output pin for waveforms generated by the timer FL output compare function
	TMOFH	24	Output	Timer FH output: This is an output pin for waveforms generated by the timer FH output compare function
	TMIG	23	Input	Timer G capture input: This is an input pin for the timer G input capture function

Table 1-2 Pin Functions (cont)

		Pin No.			
Type	Symbol	FP-100B	I/O	Name and Functions	
I/O ports	PB ₇ to PB ₀	94 to 100, 1	Input	Port B: This is an 8-bit input port	
	PA ₃ to PA ₀	32 to 35	I/O	Port A: This is a 4-bit I/O port. Input or output can be designated for each bit by means of port control register A (PCRA)	
	PD ₇ to PD ₀	84 to 77	I/O	Port D: This is an 8-bit I/O port. Input or output can be designated for each bit by means of port control register D (PCRD)	
	PE ₃ to PE ₀	88 to 85	I/O	Port E: This is a 4-bit I/O port. Input or output can be designated for each bit by means of port control register E (PCRE)	
	P1 ₇ to P1 ₀	19 to 26	I/O	Port 1: This is an 8-bit I/O port. Input or output can be designated for each bit by means of port control register 1 (PCR1)	
	P2 ₇ to P2 ₀	18 to 11	I/O	Port 2: This is an 8-bit I/O port. Input or output can be designated for each bit by means of port control register 2 (PCR2)	
	P5 ₇ to P5 ₀	43 to 36	I/O	Port 5: This is an 8-bit I/O port. Input or output can be designated for each bit by means of port control register 5 (PCR5)	
	P6 ₇ to P6 ₀	51 to 44	I/O	Port 6: This is an 8-bit I/O port. Input or output can be designated for each bit by means of port control register 6 (PCR6)	
	P7 ₇ to P7 ₀	59 to 52	I/O	Port 7: This is an 8-bit I/O port. Input or output can be designated for each bit by means of port control register 7 (PCR7)	
	P8 ₇ to P8 ₀	67 to 60	I/O	Port 8: This is an 8-bit I/O port. Input or output can be designated for each bit by means of port control register 8 (PCR8)	
P9 ₇ to P9 ₀	75 to 68	I/O	Port 9: This is an 8-bit I/O port. Input or output can be designated for each bit by means of port control register 9 (PCR9)		
Serial communication interface (SCI)	SI ₁	13	Input	SCI1 receive data input: This is the SCI1 data input pin	
	SO ₁	14	Output	SCI1 send data output: This is the SCI1 data output pin	
	SCK ₁	12	I/O	SCI1 clock I/O: This is the SCI1 clock I/O pin	

Table 1-2 Pin Functions (cont)

Type	Symbol	Pin No.		Name and Functions
		FP-100B	I/O	
Serial communication interface (SCI)	RXD	16	Input	SCI3 receive data input: This is the SCI3 data input pin
	TXD	17	Output	SCI3 send data output: This is the SCI3 data output pin
	SCK ₃	15	I/O	SCI3 clock I/O: This is the SCI3 clock I/O pin
A/D converter	AN ₇ to AN ₀	94 to 100, 1	Input	Analog input channels 0 to 7: These are analog data input channels to the A/D converter
	ADTRG	11	Input	A/D converter trigger input: This is the external trigger input pin to the A/D converter
LCD controller/driver	COM ₄ to COM ₁	35 to 32	Output	LCD common output: These are LCD common output pins
	SEG _{s2} to SEG ₁	88 to 77, 75 to 36	Output	LCD segment output: These are LCD segment output pins
	CL ₁	88	Output	LCD latch clock: This is the display data latch clock output pin for external segment expansion
	CL ₂	87	Output	LCD shift clock: This is the display data shift clock output pin for external segment expansion
	DO	86	Output	LCD serial data output: This is the serial display data output pin for external segment expansion
	M	85	Output	LCD alternated signal output: This is the LCD alternated signal output pin for external segment expansion
DTMF generator	TONED	91	Output	DTMF signal: This is the output pin for the DTMF signal
Multitone generator	TONEM	90	Output	Multitone signal: This is the output pin for the multitone signal

Section 2 CPU

2.1 Overview

The H8/300L CPU has sixteen 8-bit general registers, which can also be paired as eight 16-bit registers. Its concise, optimized instruction set is designed for high-speed operation.

2.1.1 Features

Features of the H8/300L CPU are listed below.

- General-register architecture
 - Sixteen 8-bit general registers, also usable as eight 16-bit general registers
- Instruction set with 55 basic instructions, including:
 - Multiply and divide instructions
 - Powerful bit-manipulation instructions
- Eight addressing modes
 - Register direct
 - Register indirect
 - Register indirect with displacement
 - Register indirect with post-increment or pre-decrement
 - Absolute address
 - Immediate
 - Program-counter relative
 - Memory indirect
- 64-kbyte address space
- High-speed operation
 - All frequently used instructions are executed in two to four states
 - High-speed arithmetic and logic operations
 - 8- or 16-bit register-register add or subtract: 0.4 μ s*
 - 8 x 8-bit multiply: 2.8 μ s*
 - 16 \div 8-bit divide: 2.8 μ s*
- Low-power operation modes
 - SLEEP instruction for transfer to low-power operation

Note: * These values are at $\phi = 5$ MHz.

2.1.2 Address Space

The H8/300L CPU supports an address space of up to 64 kbytes for storing program code and data.

See 2.8, Memory Map, for details of the memory map.

2.1.3 Register Configuration

Figure 2-1 shows the register structure of the H8/300L CPU. There are two groups of registers: the general registers and control registers.

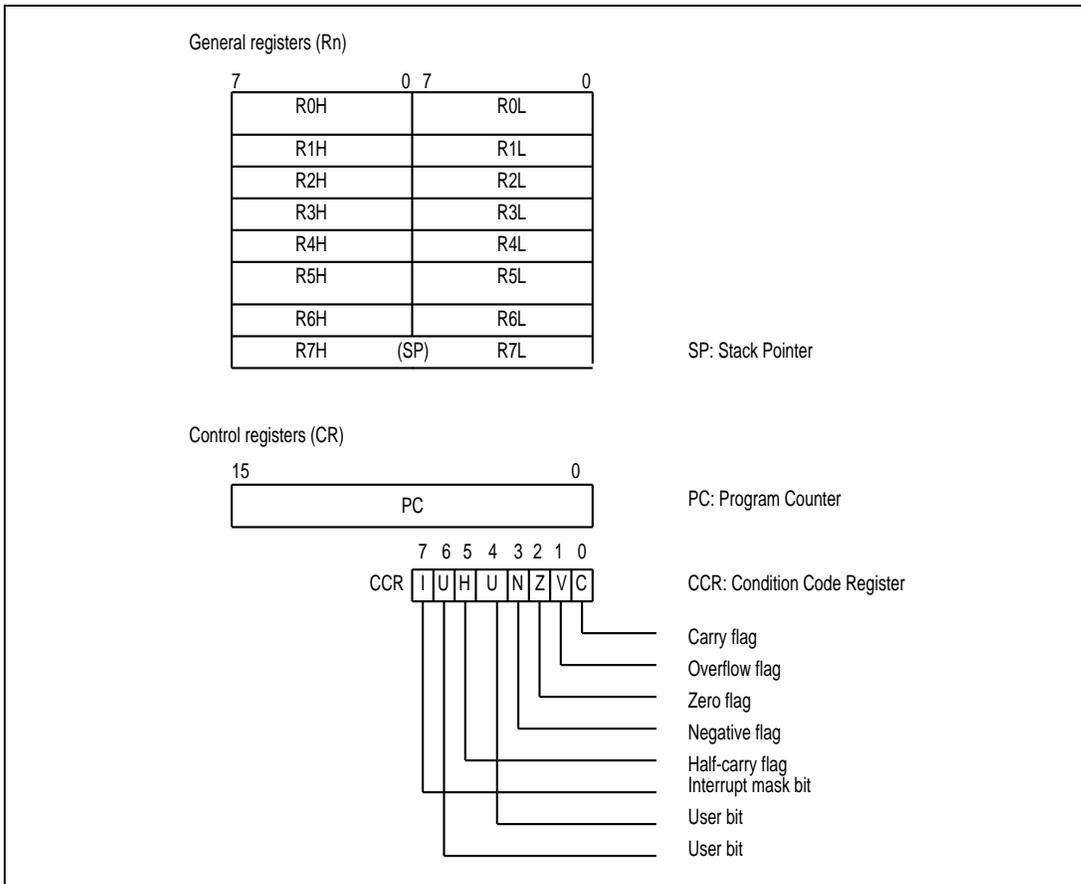


Figure 2-1 CPU Registers

2.2 Register Descriptions

2.2.1 General Registers

All the general registers can be used as both data registers and address registers.

When used as data registers, they can be accessed as 16-bit registers (R0 to R7), or the high bytes (R0H to R7H) and low bytes (R0L to R7L) can be accessed separately as 8-bit registers.

When used as address registers, the general registers are accessed as 16-bit registers (R0 to R7).

R7 also functions as the stack pointer (SP), used implicitly by hardware in exception processing and subroutine calls. When it functions as the stack pointer, as indicated in figure 2-2, SP (R7) points to the top of the stack.

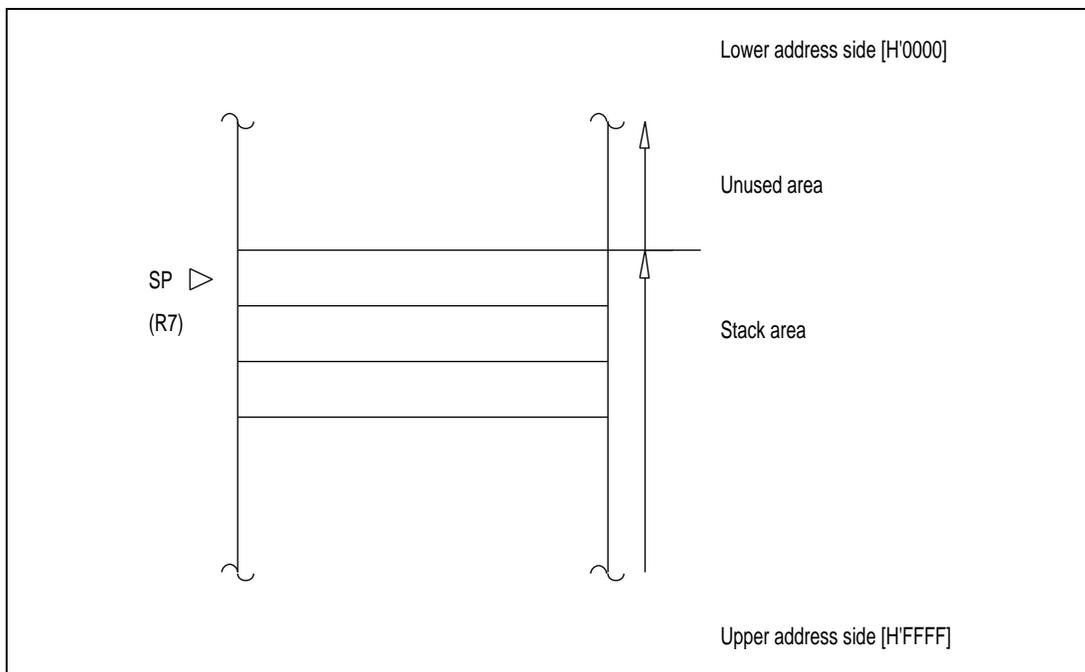


Figure 2-2 Stack Pointer

2.2.2 Control Registers

The CPU control registers include a 16-bit program counter (PC) and an 8-bit condition code register (CCR).

Program Counter (PC): This 16-bit register indicates the address of the next instruction the CPU will execute. All instructions are fetched 16 bits (1 word) at a time, so the least significant bit of the PC is ignored (always regarded as 0).

Condition Code Register (CCR): This 8-bit register contains internal status information, including the interrupt mask bit (I) and half-carry (H), negative (N), zero (Z), overflow (V), and carry (C) flags. These bits can be read and written by software (using the LDC, STC, ANDC, ORC, and XORC instructions). The N,Z,V, and C flags are used as branching conditions for conditional branching (Bcc) instructions.

Bit 7--Interrupt Mask Bit (I): When this bit is set to 1, interrupts are masked. This bit is set to 1 automatically at the start of exception handling. The interrupt mask bit may be read and written by software. For further details, see section 3, Interrupts.

Bit 6--User Bit (U): Can be used freely by the user.

Bit 5--Half-Carry Flag (H): When the ADD.B, ADDX.B, SUB.B, SUBX.B, CMP.B, or NEG.B instruction is executed, this flag is set to 1 if there is a carry or borrow at bit 3, and is cleared to 0 otherwise.

The H flag is used implicitly by the DAA and DAS instructions.

When the ADD.W, SUB.W, or CMP.W instruction is executed, the H flag is set to 1 if there is a carry or borrow at bit 11, and is cleared to 0 otherwise.

Bit 4--User Bit (U): Can be used freely by the user.

Bit 3--Negative Flag (N): Indicates the most significant bit (sign bit) of the result of an instruction.

Bit 2--Zero Flag (Z): Set to 1 to indicate a zero result, and cleared to 0 to indicate a non-zero result.

Bit 1--Overflow Flag (V): Set to 1 when an arithmetic overflow occurs, and cleared to 0 at other times.

Bit 0--Carry Flag (C): Set to 1 when a carry occurs, and cleared to 0 otherwise. Used by:

- Add instructions, to indicate a carry
- Subtract instructions, to indicate a borrow
- Shift and rotate instructions, to store the value shifted out of the end bit

The carry flag is also used as a bit accumulator by bit manipulation instructions.

Some instructions leave some or all of the flag bits unchanged.

Refer to the H8/300L Series Programming Manual for the action of each instruction on the flag bits.

2.2.3 Initial Register Values

When the CPU is reset, the program counter (PC) is initialized to the value stored at address H'0000 in the vector table, and the I bit in the CCR is set to 1. The other CCR bits and the general registers are not initialized. In particular, the stack pointer (R7) is not initialized. To prevent program crashes the stack pointer should be initialized by software, by the first instruction executed after a reset.

2.3 Data Formats

The H8/300L CPU can process 1-bit data, 4-bit (BCD) data, 8-bit (byte) data, and 16-bit (word) data. Bit manipulation instructions operate on 1-bit data specified as bit *n* in a byte operand (*n* = 0,1,2,...7).

- All arithmetic and logic instructions except ADDS and SUBS can operate on byte data.
- The MOV.W, ADD.W, SUB.W, CMP.W, ADDS, SUBS, MULXU (8 bits x 8 bits), and DIVXU (16 bits / 8 bits) instructions operate on word data.
- The DAA and DAS instructions perform decimal arithmetic adjustments on byte data in packed BCD form. Each nibble of the byte is treated as a decimal digit.

2.3.1 Data Formats in General Registers

Data of all the sizes above can be stored in general registers as shown in figure 2-3.

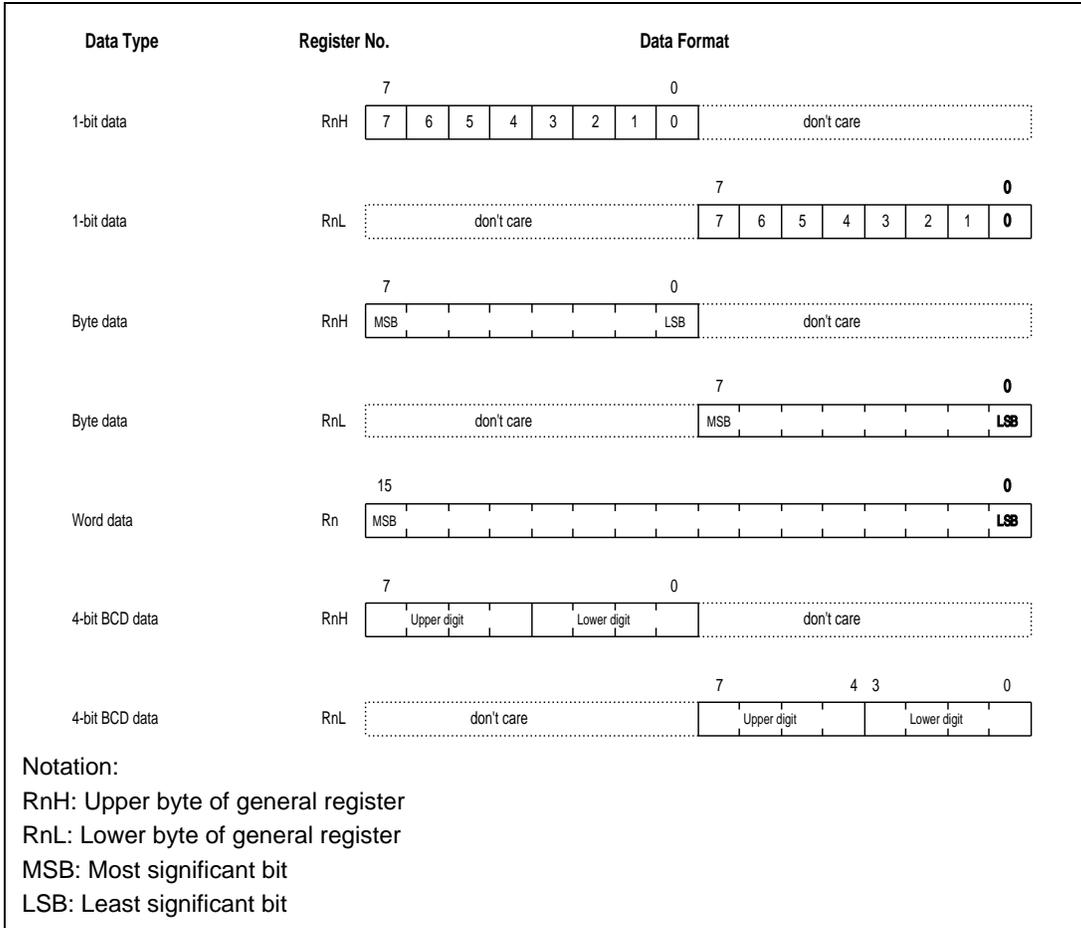


Figure 2-3 Register Data Formats

2.3.2 Memory Data Formats

Figure 2-4 indicates the data formats in memory. For access by the H8/300L CPU, word data stored in memory must always begin at an even address. In word access the least significant bit of the address is regarded as 0. If an odd address is specified, the access is performed at the preceding even address. This rule affects the MOV.W instruction, and also applies to instruction fetching.

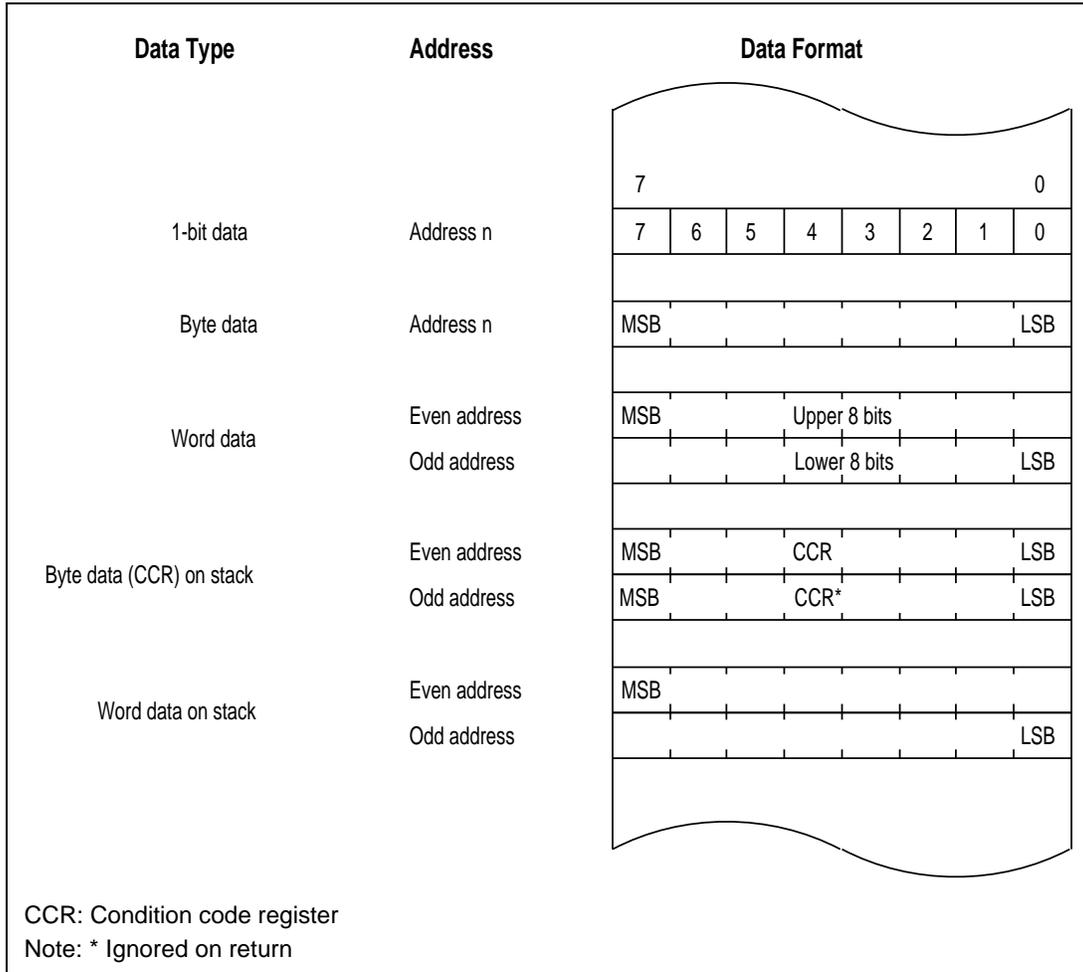


Figure 2-4 Memory Data Formats

When the stack is accessed using R7 as an address register, word access should always be performed. When the CCR is pushed on the stack, two identical copies of the CCR are pushed to make a complete word. When they are restored, the lower byte is ignored.

2.4 Addressing Modes

2.4.1 Addressing Modes

The H8/300L CPU supports the eight addressing modes listed in table 2-1. Each instruction uses a subset of these addressing modes.

Table 2-1 Addressing Modes

No.	Address Modes	Symbol
1	Register direct	Rn
2	Register indirect	@Rn
3	Register indirect with displacement	@(d:16,Rn)
4	Register indirect with post-increment Register indirect with pre-decrement	@Rn+ @-Rn
5	Absolute address	@aa:8 or @aa:16
6	Immediate	#xx:8 or #xx:16
7	Program-counter relative	@(d:8, PC)
8	Memory indirect	@@aa:8

- 1. Register Direct--Rn:** The register field of the instruction specifies an 8- or 16-bit general register containing the operand.
Only the MOV.W, ADD.W, SUB.W, CMP.W, ADDS, SUBS, MULXU (8 bits x 8 bits),
- 2. Register Indirect--@Rn:** The register field of the instruction specifies a 16-bit general register containing the address of the operand in memory.
- 3. Register Indirect with Displacement--@(d:16,Rn):** The instruction has a second word (bytes 3 and 4) containing a displacement which is added to the contents of the specified general register to obtain the operand address in memory.
This mode is used only in MOV instructions. For the MOV.W instruction, the resulting address must be even.

4. Register Indirect with Post-Increment or Pre-Decrement-@Rn+ or @-Rn:

— Register indirect with post-increment-@Rn+

The @Rn+ mode is used with MOV instructions that load registers from memory.

The register field of the instruction specifies a 16-bit general register containing the address of the operand. After the operand is accessed, the register is incremented by 1 for MOV.B or 2 for MOV.W. For MOV.W, the original contents of the 16-bit general register must be even.

— Register indirect with pre-decrement-@-Rn

The @-Rn mode is used with MOV instructions that store register contents to memory.

The register field of the instruction specifies a 16-bit general register which is decremented by 1 or 2 to obtain the address of the operand in memory. The register retains the decremented value. The size of the decrement is 1 for MOV.B or 2 for MOV.W. For MOV.W, the original contents of the register must be even.

5. Absolute Address--@aa:8 or @aa:16: The instruction specifies the absolute address of the operand in memory.

The absolute address may be 8 bits long (@aa:8) or 16 bits long (@aa:16). The MOV.B and bit manipulation instructions can use 8-bit absolute addresses. The MOV.B, MOV.W, JMP, and JSR instructions can use 16-bit absolute addresses.

For an 8-bit absolute address, the upper 8 bits are assumed to be 1 (H'FF). The address range is H'FF00 to H'FFFF (65280 to 65535).

6. Immediate--#xx:8 or #xx:16: The instruction contains an 8-bit operand (#xx:8) in its second byte, or a 16-bit operand (#xx:16) in its third and fourth bytes. Only MOV.W instructions can contain 16-bit immediate values.

The ADDS and SUBS instructions implicitly contain the value 1 or 2 as immediate data.

Some bit manipulation instructions contain 3-bit immediate data in the second or fourth byte of the instruction, specifying a bit number.

7. Program-Counter Relative--@(d:8,PC): This mode is used in the Bcc and BSR instructions. An 8-bit displacement in byte 2 of the instruction code is sign -extended to 16 bits and added to the program counter contents to generate a branch destination address. The possible branching range is - 126 to + 128 bytes (-63 to +64 words) from the current address. The displacement should be an even number.

8. Memory Indirect--@@aa:8: This mode can be used by the JMP and JSR instructions. The second byte of the instruction code specifies an 8-bit absolute address. The word located at this address contains the branch destination address.

The upper 8 bits of the absolute address are assumed to be 0 (H'00), so the address range is from H'0000 to H'00FF (0to255). Note that with the H8/300L Series, the lower end of the address area is also used as a vector area. See 3.3, Interrupts, for details on the vector area.

If an odd address is specified as a branch destination or as the operand address of a MOV.W instruction, the least significant bit is regarded as 0, causing word access to be performed at the address preceding the specified address. See 2.3.2, Memory Data Formats, for further information.

2.4.2 Effective Address Calculation

Table 2-2 shows how effective addresses are calculated in each of the addressing modes.

Arithmetic and logic instructions use register direct addressing (1). The ADD.B, ADDX, SUBX, CMP.B, AND, OR, and XOR instructions can also use immediate addressing (6).

Data transfer instructions can use all addressing modes except program-counter relative (7) and memory indirect (8).

Bit manipulation instructions use register direct (1), register indirect (2), or absolute addressing (5) to specify a byte operand, and 3-bit immediate addressing (6) to specify a bit position in that byte. The BSET, BCLR, BNOT, and BTST instructions can also use register direct addressing (1) to specify the bit position.

Table 2-2 Effective Address Calculation

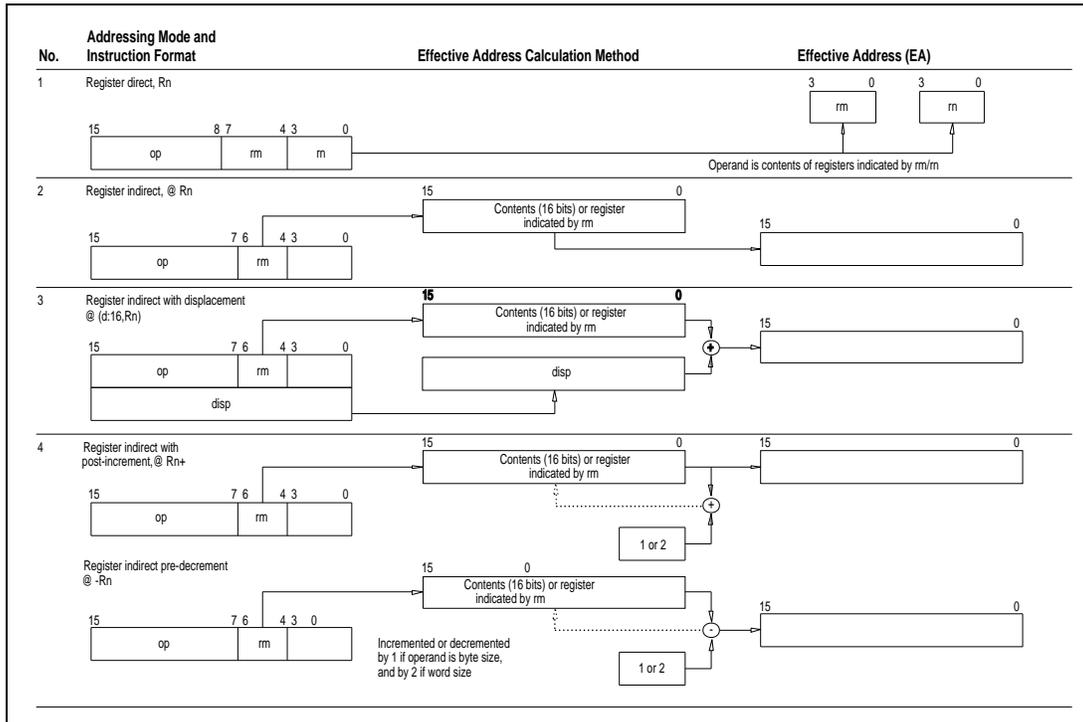


Table 2-2 Effective Address Calculation (cont)

No.	Addressing Mode and Instruction Format	Effective Address Calculation Method	Effective Address (EA)
5	Absolute address		
6	Immediate #xx:8		
		Operand is 1- or 2-byte immediate data	
7	Program-counter relative @ (d:8,PC)		

Table 2-2 Effective Address Calculation (cont)

No.	Addressing Mode and Instruction Format	Effective Address Calculation Method	Effective Address (EA)
8	Memory indirect, @@ aa:8		
<p>Notation: rm, rn: Register field op: Operation field disp: Displacement IMM: Immediate data abs: Absolute address</p>			

2.5 Instruction Set

The H8/300L Series can use a total of 55 instructions, which are grouped by function in table 2-3.

2-3 Instruction Set

Function	Instructions	Number
Data transfer	MOV, PUSH*1, POP*1	1
Arithmetic operations	ADD, SUB, ADDX, SUBX, INC, DEC, ADDS,SUBS, DAA, DAS, MULXU, DIVXU, CMP, NEG	14
Logic operations	AND, OR, XOR, NOT	4
Shift	SHAL, SHAR, SHLL, SHLR, ROTL, ROTR, ROTXL, ROTXR	8
Bit manipulation	BSET, BCLR, BNOT, BTST, BAND, BIAN, BOR, BIOR, BXOR, BIXOR, BLD, BILD, BST, BIST	14
Branch	Bcc*2, JMP, BSR, JSR, RTS	5
System control	RTE, SLEEP, LDC, STC, ANDC, ORC, XORC, NOP	8
Block data transfer	EPMOV	1

Total: 55

Notes: 1. PUSH Rn is equivalent to MOV.W Rn, @-SP.

POP Rn is equivalent to MOV.W @ SP

2. Bcc is a conditional branch instruction in which cc represents a condition code.

The following sections give a concise summary of the instructions in each category, and indicate the bit patterns of their object code. The notation used is defined next.

Notation

Rd	General register (destination)
Rs	General register (source)
Rn	General register
(EAd), <EAd>	Destination operand
(EAs), <EAs>	Source operand
CCR	Condition code register
N	N (negative) flag of CCR
Z	Z (zero) flag of CCR
V	V (overflow) flag of CCR
C	C (carry) flag of CCR
PC	Program counter
SP	Stack pointer
#IMM	Immediate data
disp	Displacement
+	Addition
-	Subtraction
x	Multiplication
÷	Division
^	AND logical
∨	OR logical
⊕	Exclusive OR logical
→	Move
~	Logical negation (logical complement)
:3	3-bit length
:8	8-bit length
:16	16-bit length
(), < >	Contents of operand indicated by effective address

2.5.1 Data Transfer Instructions

Table 2-4 describes the data transfer instructions. Figure 2-5 shows their object code formats.

Table 2-4 Data Transfer Instructions

Instruction	Size*	Function
MOV	B/W	(EAs)→ Rd, Rs → (EAd) Moves data between two general registers or between a general register and memory, or moves immediate data to a general register. The Rn, @Rn, @(d:16, Rn), @aa:16, #xx:16, @-Rn, and @Rn+ addressing modes are available for byte or word data. The @aa:8 addressing mode is available for byte data only. The @-R7 and @R7+ modes require word operands. Do not specify byte size for these two modes.
POP	W	@SP+ →Rn Pops a 16-bit general register from the stack. Equivalent to MOV.W @SP+, Rn.
PUSH	W	Rn→ @-SP Pushes a 16-bit general register onto the stack. Equivalent to MOV.W Rn, @-SP.

Notes: * Size: Operand size

B: Byte

W: Word

Certain precautions are required in data access. See 2.9.1, Notes on Data Access, for details.

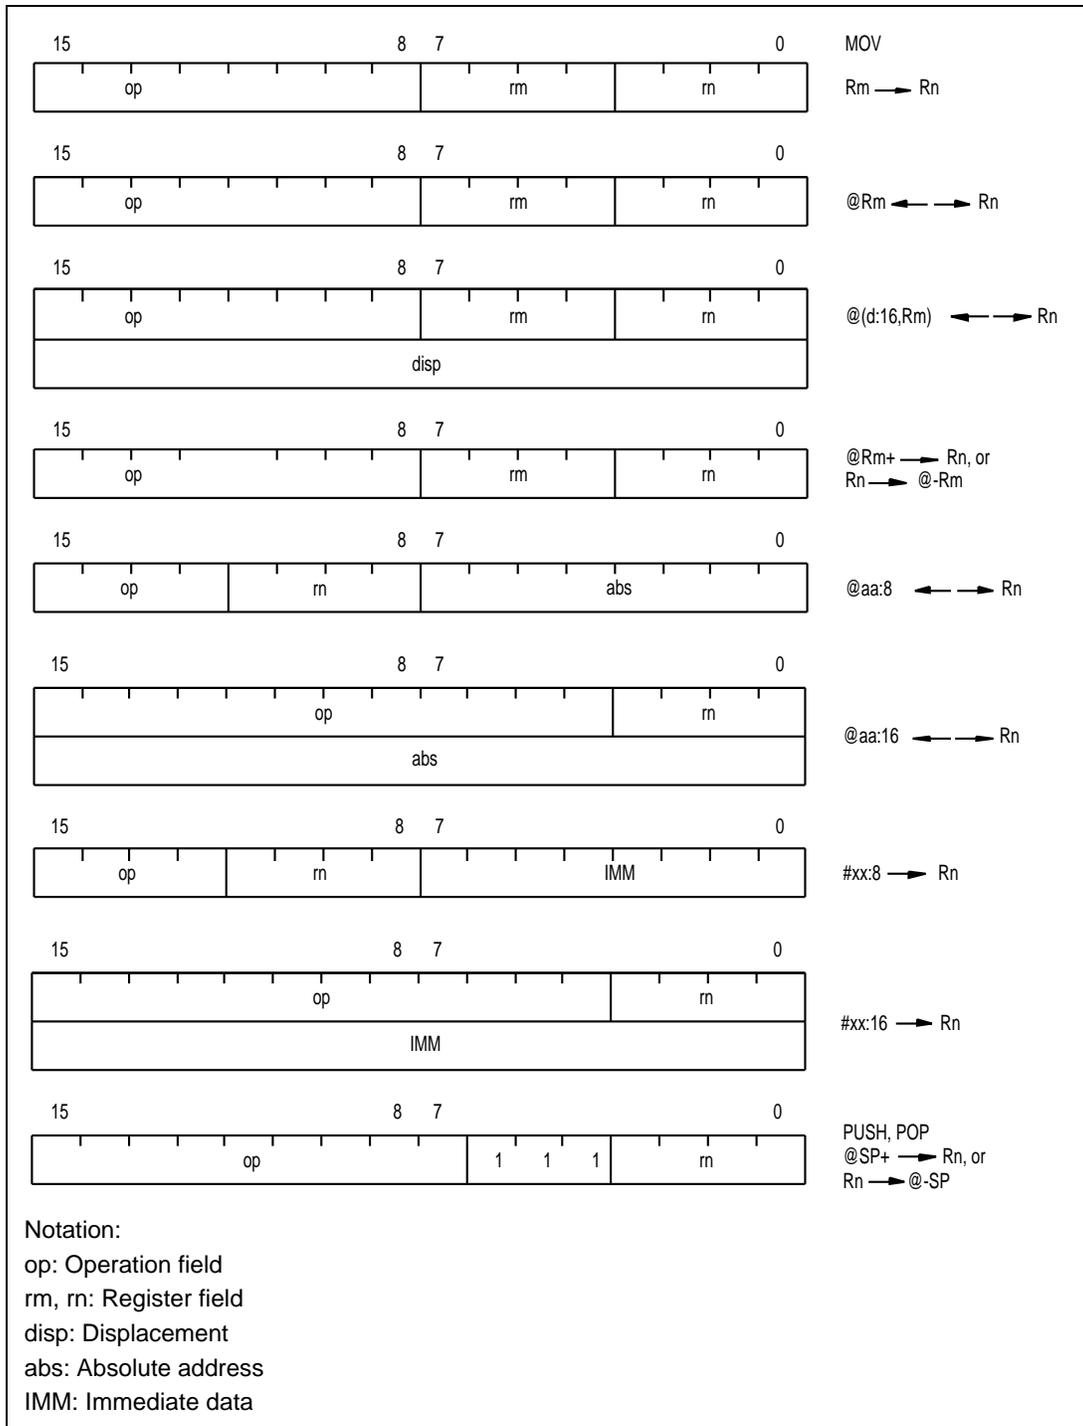


Figure 2-5 Data Transfer Instruction Codes

HITACHI

2.5.2 Arithmetic Operations

Table 2-5 describes the arithmetic instructions. Table 2-5 Arithmetic Instructions

Instruction	Size*	Function
ADD SUB	B/W	$Rd + Rs \rightarrow Rd, Rd + \#IMM \rightarrow Rd$ Performs addition or subtraction on data in two general registers, or addition in immediate data and data in a general register. Immediate data cannot be subtracted from data in a general register. Word data can be added or subtracted only when both words are in general registers.
ADDX SUBX	B	$Rd \pm Rs \pm C \rightarrow Rd, Rd \pm \#IMM C \rightarrow Rd$ Performs addition or subtraction with carry or borrow on byte data in two general registers, or addition or subtraction on immediate data and data in a general register.
INC DEC	B	$Rd \pm 1 \rightarrow Rd$ Increments or decrements a general register
ADDS SUBS	W	$Rd \pm 1 \rightarrow Rd, Rd \pm 2 \rightarrow Rd$ Adds or subtracts immediate data to or from data in a general register. The immediate data must be 1 or 2.
DAA DAS	B	$Rd \text{ decimal adjust} \rightarrow Rd$ Decimal-adjusts (adjusts to packed BCD) an addition or subtraction result in a general register by referring to the CCR
MULXU	B	$Rd \times Rs \rightarrow Rd$ Performs 8-bit x 8-bit unsigned multiplication on data in two general registers, providing a 16-bit result
DIVXU	B	$Rd \div Rs \rightarrow Rd$ Performs 16-bit ÷ 8-bit unsigned division on data in two general registers, providing an 8-bit quotient and 8-bit remainder
CMP	B/W	$Rd - Rs, Rd - \#IMM$ Compares data in a general register with data in another general register or with immediate data, and the result is stored in the CCR. Word data can be compared only between two general registers.
NEG	B	$0 - Rd \rightarrow Rd$ Obtains the two's complement (arithmetic complement) of data in a general register

Notes: * Size: Operand size

B: Byte

W: Word

2.5.3 Logic Operations

Table 2-6 describes the four instructions that perform logic operations.

Table 2-6 Logic Operation Instructions

Instruction	Size*	Function
AND	B	$Rd \wedge Rs \rightarrow Rd$, $Rd \wedge \#IMM \rightarrow Rd$ Performs a logical AND operation on a general register and another general register or immediate data
OR	B	$Rd \vee Rs \rightarrow Rd$, $Rd \vee \#IMM \rightarrow Rd$ Performs a logical OR operation on a general register and another general register or immediate data
XOR	B	$Rd \oplus Rs \rightarrow Rd$, $Rd \oplus \#IMM \rightarrow Rd$ Performs a logical exclusive OR operation on a general register and another general register or immediate data
NOT	B	$\sim Rd \rightarrow Rd$ Obtains the one's complement (logical complement) of general register contents

Notes: * Size: Operand size

B: Byte

2.5.4 Shift Operations

Table 2-7 describes the eight shift instructions.

Table 2-7 Shift Instructions

Instruction	Size*	Function
SHAL	B	$Rd \text{ shift} \rightarrow Rd$
SHAR	B	Performs an arithmetic shift operation on general register contents
SHLL SHLR	B	$Rd \text{ shift} \rightarrow Rd$ Performs a logical shift operation on general register contents
ROTL	B	$Rd \text{ rotate} \rightarrow Rd$
ROTR	B	Rotates general register contents
ROTXL	B	$Rd \text{ rotate through carry} \rightarrow Rd$
ROTXR	B	Rotates general register contents through the C (carry) bit

Notes: * Size: Operand size

B: Byte

Figure 2-6 shows the instruction code format of arithmetic, logic, and shift instructions.

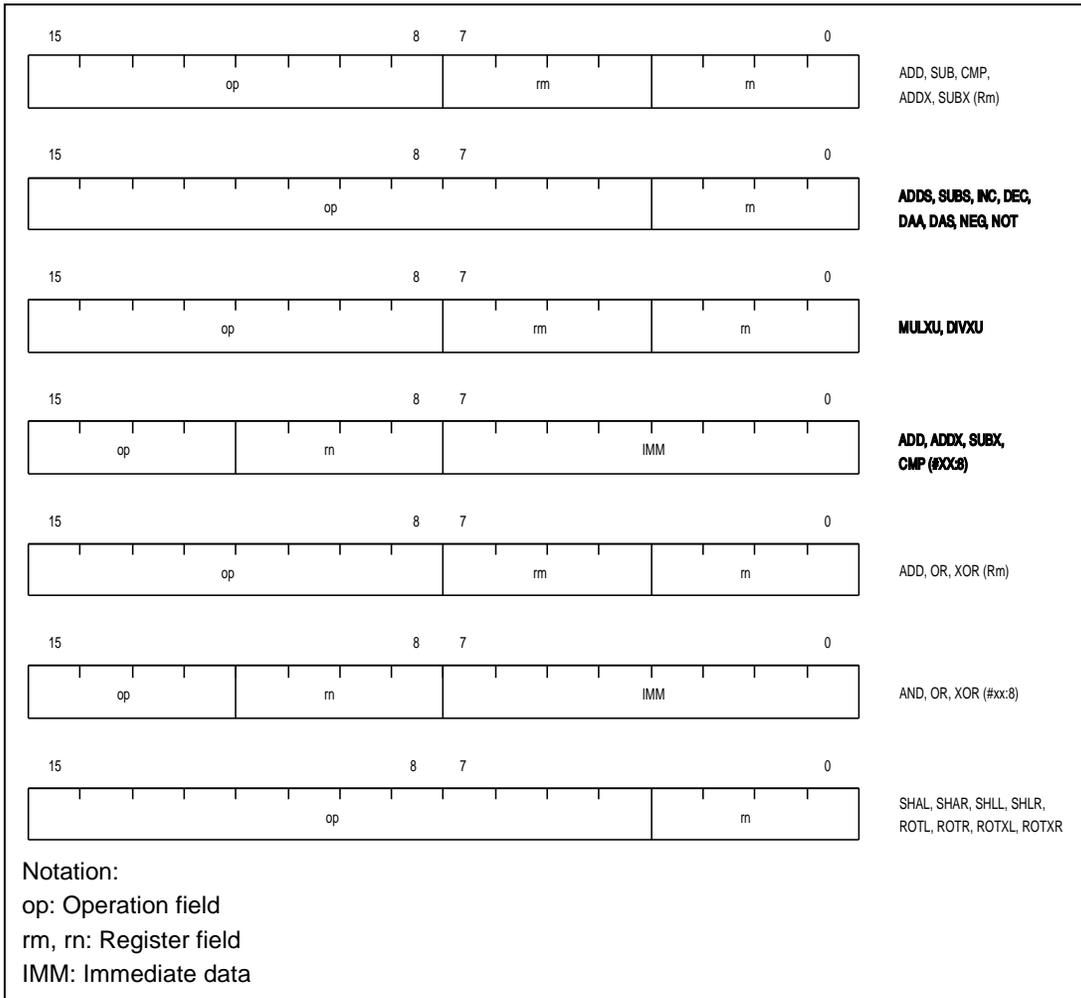


Figure 2-6 Arithmetic, Logic, and Shift Instruction Codes

2.5.5 Bit Manipulations

Table 2-8 describes the bit-manipulation instructions. Figure 2-7 shows their object code formats.

Table 2-8 Bit- Manipulation Instructions

Instruction	Size*	Function
BSET	B	1 → (<bit-No.> of <EAd>) Sets a specified bit in a general register or memory to 1. The bit number is specified by 3-bit immediate data or the lower three bits of a general register.
BCLR	B	0 → (<bit-No.> of <EAd>) Clears a specified bit in a general register or memory to 0. The bit number is specified by 3-bit immediate data or the lower three bits of a general register.
BNOT	B	~(<bit-No.> of <EAd>) → (<bit-No.> of <EAd>) Inverts a specified bit in a general register or memory. The bit number is specified by 3-bit immediate data or the lower three bits of a general register.
BTST	B	~(<bit-No.> of <EAd>) → Z Tests a specified bit in a general register or memory and sets or clears the Z flag accordingly. The bit number is specified by 3-bit immediate data or the lower three bits of a general register.
BAND	B	$C \wedge (<bit-No.> \text{ of } <EAd>) \rightarrow C$ ANDs the C flag with a specified bit in a general register or memory, and stores the result in the C flag.
BIAND	B	$C \wedge [\sim(<bit-No.> \text{ of } <EAd>)] \rightarrow C$ ANDs the C flag with the inverse of a specified bit in a general register or memory, and stores the result in the C flag. The bit number is specified by 3-bit immediate data.
BOR	B	$C \vee (<bit-No.> \text{ of } <EAd>) \rightarrow C$ ORs the C flag with a specified bit in a general register or memory, and stores the result in the C flag.
BIOR	B	$C \vee [\sim(<bit-No.> \text{ of } <EAd>)] \rightarrow C$ ORs the C flag with the inverse of a specified bit in a general register or memory, and stores the result in the C flag. The bit number is specified by 3-bit immediate data.

Notes: * Size: Operand size

B: Byte

Table 2-8 Bit- Manipulation Instructions (cont)

Instruction	Size*	Function
BXOR	B	$C \oplus (\text{<bit-No.> of <EAd>}) \rightarrow C$ XORs the C flag with a specified bit in a general register or memory, and stores the result in the C flag.
BIXOR	B	$C \oplus [\sim (\text{<bit-No.> of <EAd>})] \rightarrow C$ XORs the C flag with the inverse of a specified bit in a general register or memory, and stores the result in the C flag. The bit number is specified by 3-bit immediate data.
BLD	B	$(\text{<bit-No.> of <EAd>}) \rightarrow C$ Copies a specified bit in a general register or memory to the C flag.
BILD	B	$\sim(\text{<bit-No.> of <EAd>}) \rightarrow C$ Copies the inverse of a specified bit in a general register or memory to the C flag. The bit number is specified by 3-bit immediate data.
BST	B	$C \rightarrow (\text{<bit-No.> of <EAd>})$ Copies the C flag to a specified bit in a general register or memory.
BIST	B	$\sim C \rightarrow (\text{<bit-No.> of <EAd>})$ Copies the inverse of the C flag to a specified bit in a general register or memory. The bit number is specified by 3-bit immediate data.

Notes: * Size Operand size

B: Byte

Certain precautions are required in bit manipulation. See 2.9.2, Notes on Bit Manipulation, for details.

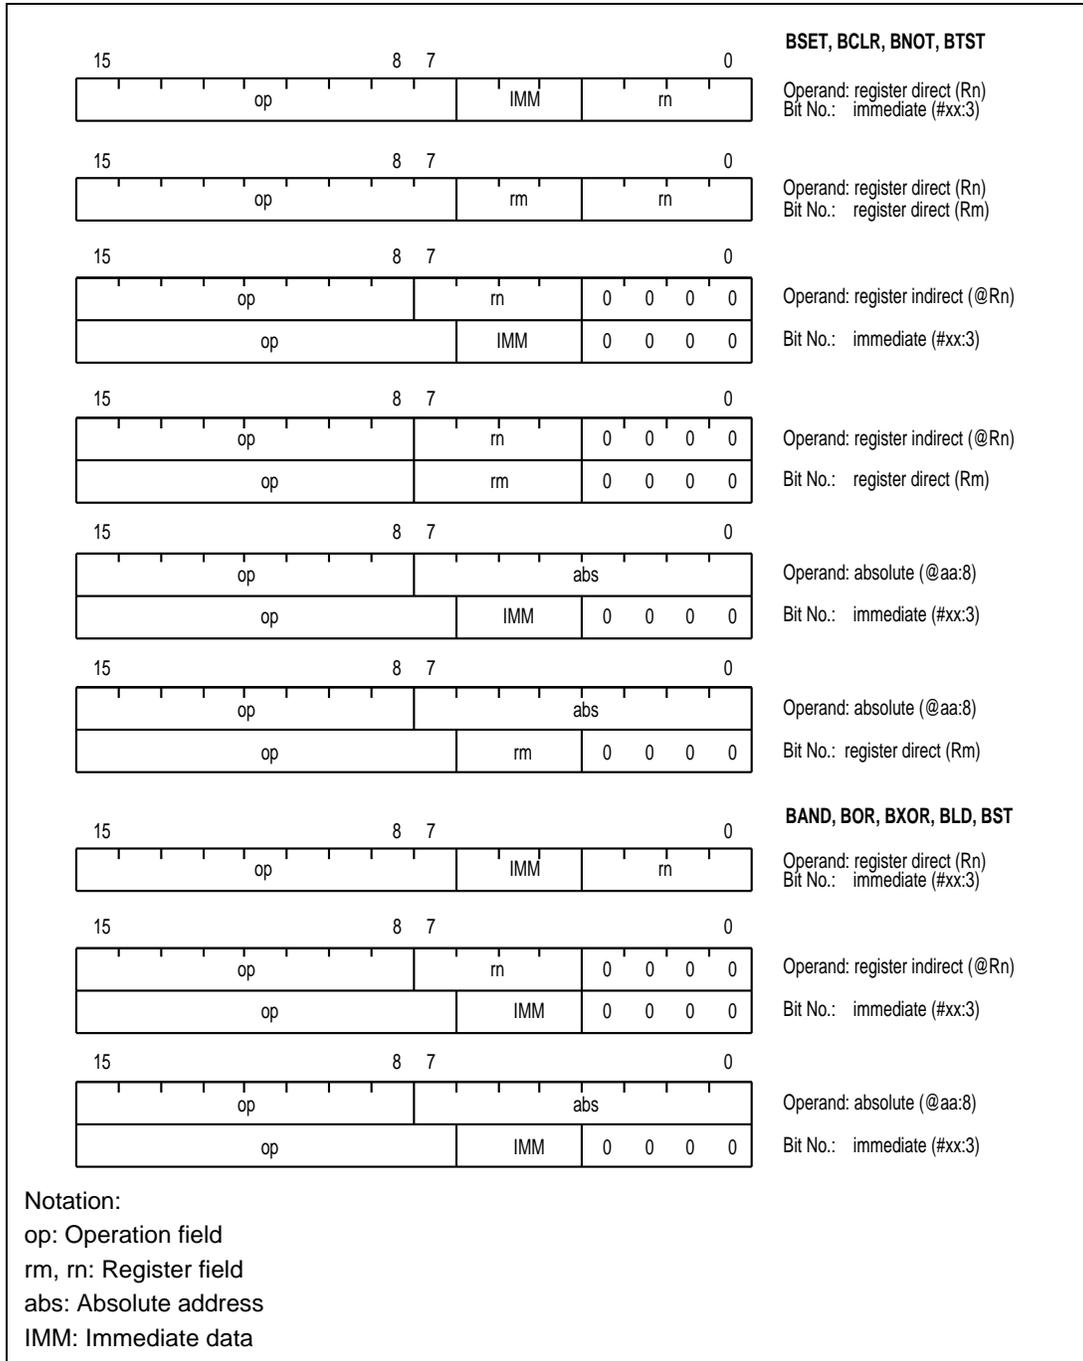


Figure 2-7 Bit Manipulation Instruction Codes

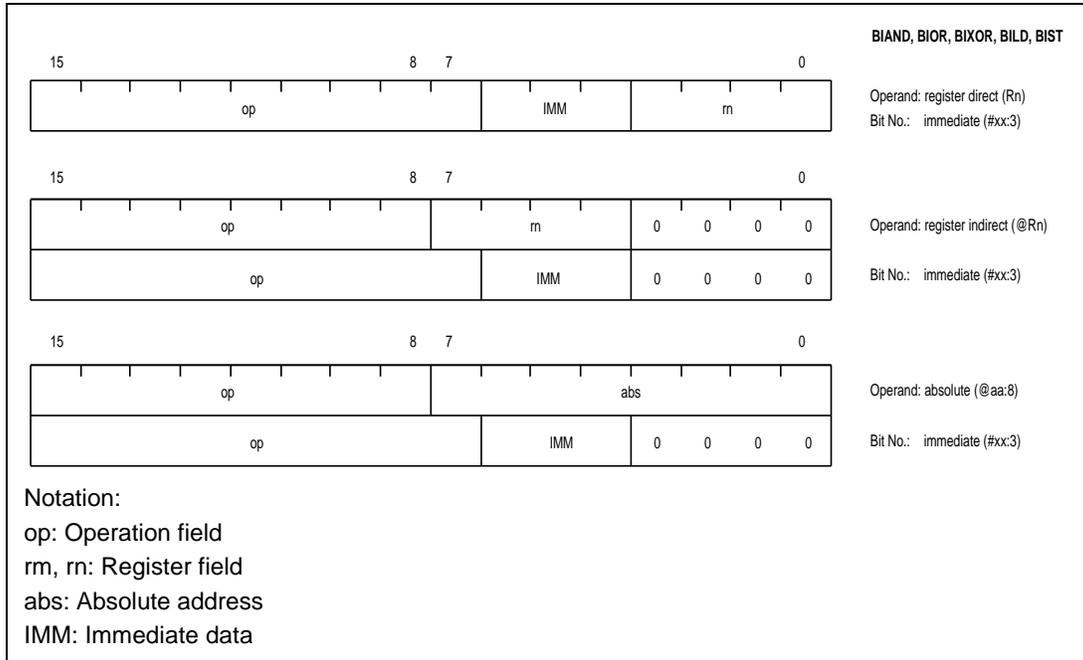


Figure 2-7 Bit Manipulation Instruction Codes (cont)

2.5.6 Branching Instructions

Table 2-9 describes the branching instructions. Figure 2-8 shows their object code formats.

Table 2-9 Branching Instructions

Instruction	Size	Function																																																			
Bcc	-	Branches to the designated address if condition cc is true. The branching conditions are given below.																																																			
		<table border="1"> <thead> <tr> <th>Mnemonic</th> <th>Description</th> <th>Condition</th> </tr> </thead> <tbody> <tr> <td>BRA (BT)</td> <td>Always (true)</td> <td>Always</td> </tr> <tr> <td>BRN (BF)</td> <td>Never (false)</td> <td>Never</td> </tr> <tr> <td>BHI</td> <td>High</td> <td>CvZ = 0</td> </tr> <tr> <td>BLS</td> <td>Low or same</td> <td>CvZ = 1</td> </tr> <tr> <td>BCC (BHS)</td> <td>Carry clear (high or same)</td> <td>C = 0</td> </tr> <tr> <td>BCS (BLO)</td> <td>Carry set (low)</td> <td>C = 1</td> </tr> <tr> <td>BNE</td> <td>Not equal</td> <td>Z = 0</td> </tr> <tr> <td>BEQ</td> <td>Equal</td> <td>Z = 1</td> </tr> <tr> <td>BVC</td> <td>Overflow clear</td> <td>V = 0</td> </tr> <tr> <td>BVS</td> <td>Overflow set</td> <td>V = 1</td> </tr> <tr> <td>BPL</td> <td>Plus</td> <td>N = 0</td> </tr> <tr> <td>BMI</td> <td>Minus</td> <td>N = 1</td> </tr> <tr> <td>BGE</td> <td>Greater or equal</td> <td>$N \oplus V = 0$</td> </tr> <tr> <td>BLT</td> <td>Less than</td> <td>$N \oplus V = 1$</td> </tr> <tr> <td>BGT</td> <td>Greater than</td> <td>$Zv (N \oplus V) = 0$</td> </tr> <tr> <td>BLE</td> <td>Less or equal</td> <td>$Zv (N \oplus V) = 1$</td> </tr> </tbody> </table>	Mnemonic	Description	Condition	BRA (BT)	Always (true)	Always	BRN (BF)	Never (false)	Never	BHI	High	CvZ = 0	BLS	Low or same	CvZ = 1	BCC (BHS)	Carry clear (high or same)	C = 0	BCS (BLO)	Carry set (low)	C = 1	BNE	Not equal	Z = 0	BEQ	Equal	Z = 1	BVC	Overflow clear	V = 0	BVS	Overflow set	V = 1	BPL	Plus	N = 0	BMI	Minus	N = 1	BGE	Greater or equal	$N \oplus V = 0$	BLT	Less than	$N \oplus V = 1$	BGT	Greater than	$Zv (N \oplus V) = 0$	BLE	Less or equal	$Zv (N \oplus V) = 1$
Mnemonic	Description	Condition																																																			
BRA (BT)	Always (true)	Always																																																			
BRN (BF)	Never (false)	Never																																																			
BHI	High	CvZ = 0																																																			
BLS	Low or same	CvZ = 1																																																			
BCC (BHS)	Carry clear (high or same)	C = 0																																																			
BCS (BLO)	Carry set (low)	C = 1																																																			
BNE	Not equal	Z = 0																																																			
BEQ	Equal	Z = 1																																																			
BVC	Overflow clear	V = 0																																																			
BVS	Overflow set	V = 1																																																			
BPL	Plus	N = 0																																																			
BMI	Minus	N = 1																																																			
BGE	Greater or equal	$N \oplus V = 0$																																																			
BLT	Less than	$N \oplus V = 1$																																																			
BGT	Greater than	$Zv (N \oplus V) = 0$																																																			
BLE	Less or equal	$Zv (N \oplus V) = 1$																																																			
JMP	--	Branches unconditionally to a specified address																																																			
BSR	--	Branches to a subroutine at a specified displacement from the current address																																																			
JSR	--	Branches to a subroutine at a specified address																																																			
RTS	--	Returns from a subroutine																																																			

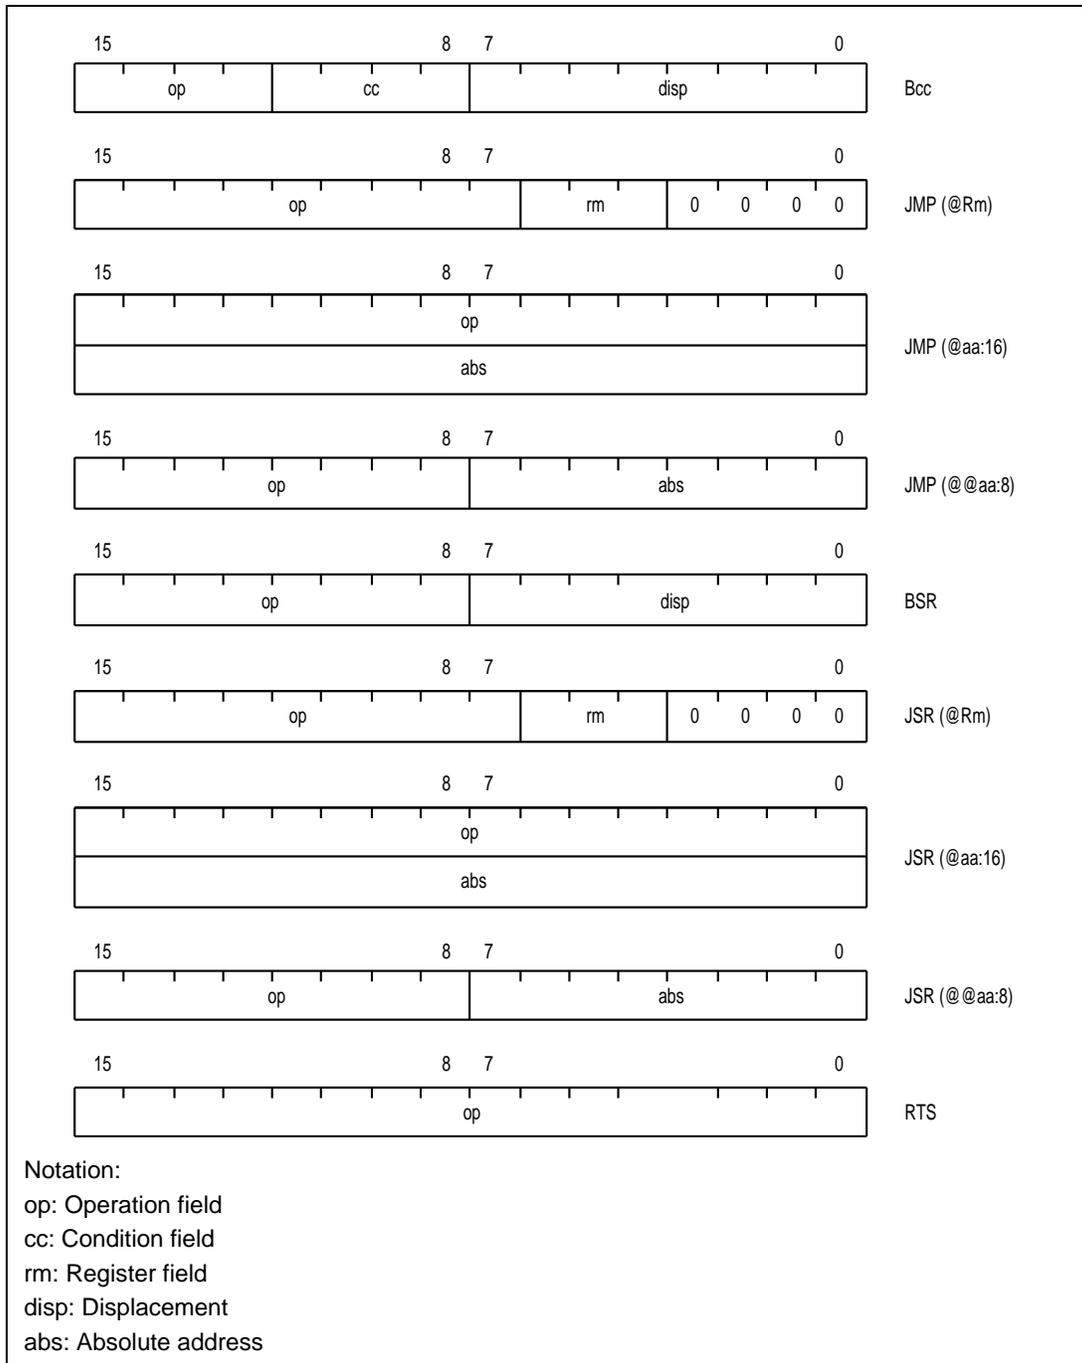


Figure 2-8 Branching Instruction Codes

2.5.7 System Control Instructions

Table 2-10 describes the system control instructions. Figure 2-9 shows their object code formats.

Table 2-10 System Control Instructions

Instruction	Size*	Function
RTE	--	Returns from an exception-handling routine
SLEEP	--	Causes a transition from active mode to a power-down mode. See section 5, Power-Down Modes, for details
LDC	B	Rs → CCR, #IMM → CCR Moves immediate data or general register contents to the condition code register
STC	B	CCR → Rd Copies the condition code register to a specified general register
ANDC	B	CCR ∨ #IMM → CCR Logically ANDs the condition code register with immediate data
ORC	B	CCR ∨ #IMM → CCR Logically ORs the condition code register with immediate data
XORC	B	CCR ∨ #IMM → CCR Logically exclusive-ORs the condition code register with immediate data
NOP	-	PC + 2 → PC Only increments the program counter

Notes: *Size: Operand size

B: Byte

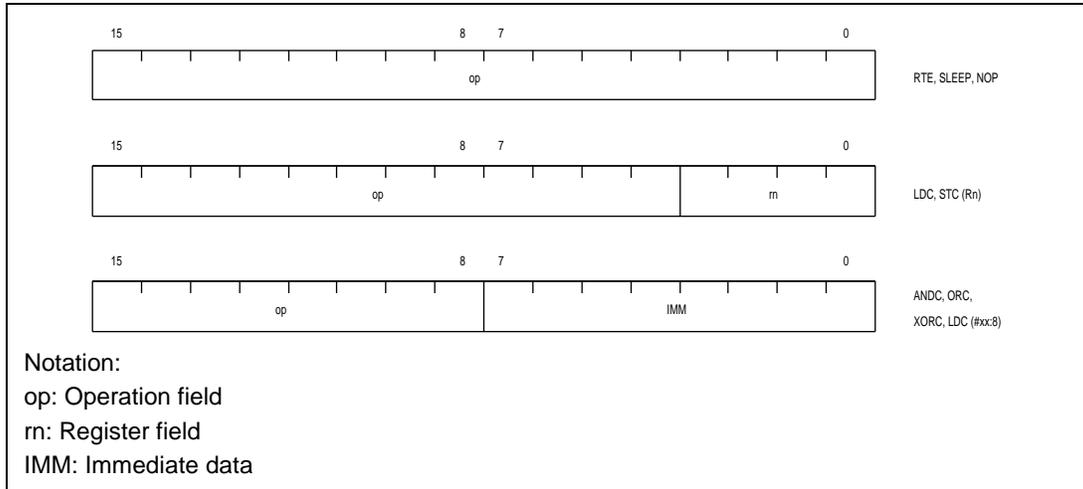


Figure 2-9 System Control Instruction Codes

2.5.8 Block Data Transfer Instruction

Table 2-11 describes the block data transfer instruction. Figure 2-10 shows its object code format.

Table 2-11 Block Data Transfer Instruction

Instruction	Size	Function
EEPMOV	--	<p>If R4L \neq 0 then repeat @R5 + -> @R6 + R4L - 1 -> R4L until R4L = 0 else next;</p> <p>Moves a data block according to parameters set in general registers R4L, R5, and R6.</p> <p>R4L: Size of block (bytes) R5: Starting source address R6: Starting destination address</p> <p>Execution of the next instruction starts as soon as the block transfer is completed.</p>

Certain precautions are required in using the EEPMOV instruction. See 2.9.3, Notes on Use of the EEPMOV Instruction, for details.

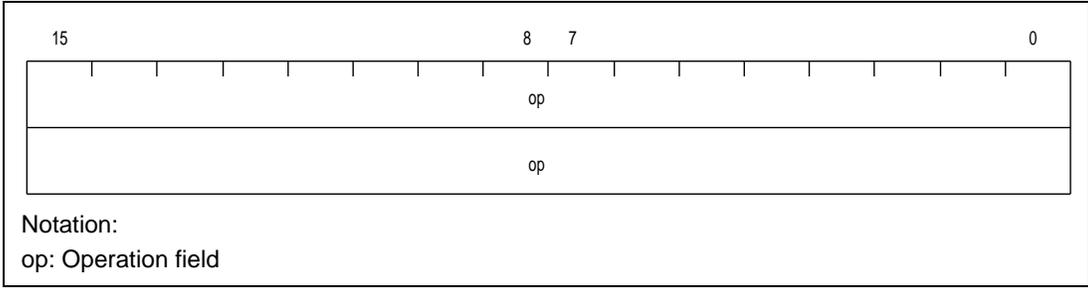


Figure 2-10 Block Data Transfer Instruction Code

2.6 Basic Operational Timing

CPU operation is synchronized by a system clock (ϕ) or a subclock (ϕ_{SUB}). For details on these clock signals see section 4, Clock Pulse Generators. The period from a rising edge of ϕ or ϕ_{SUB} to the next rising edge is called one state. A bus cycle consists of two states or three states. The cycle differs depending on whether access is to on-chip memory or to on-chip peripheral modules.

2.6.1 Access to On-Chip Memory (RAM, ROM)

Access to on-chip memory takes place in two states. The data bus width is 16 bits, allowing access in byte or word size. Figure 2-11 shows the on-chip memory access cycle.

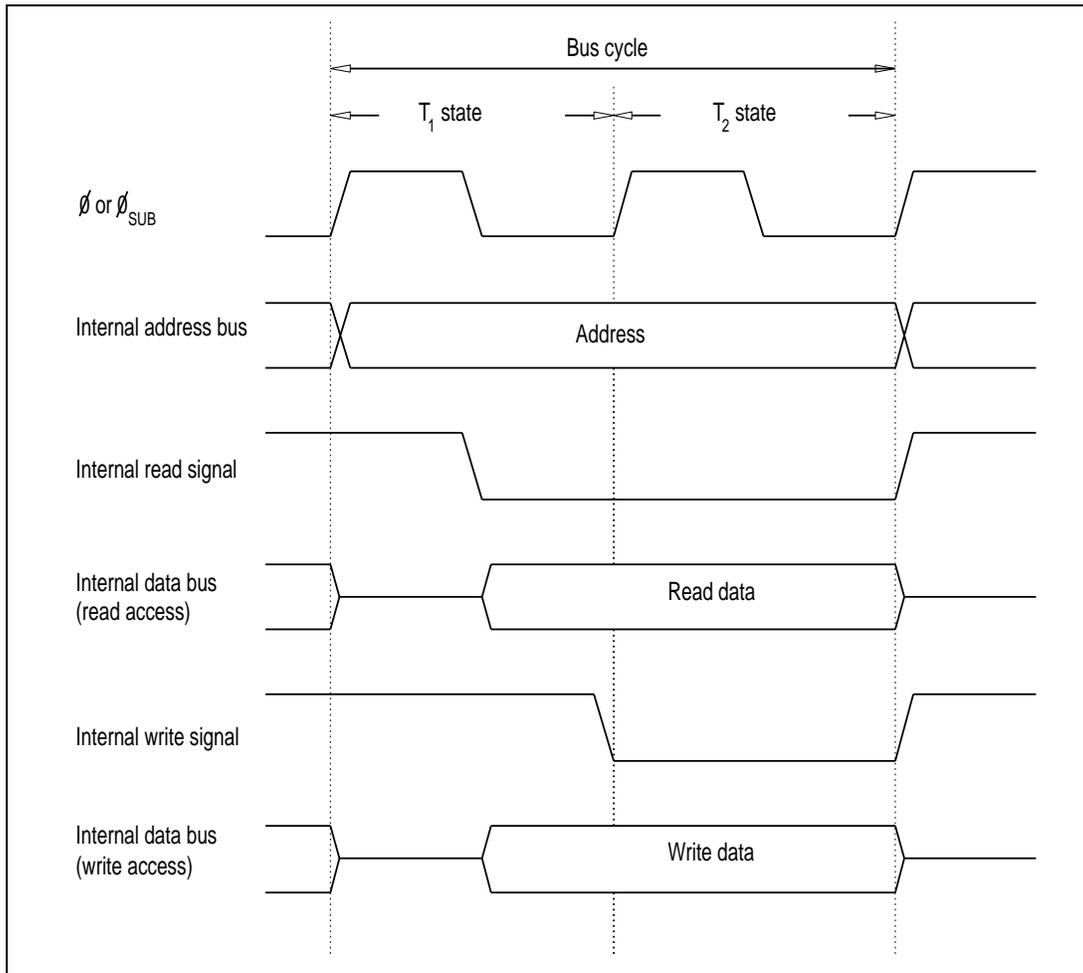


Figure 2-11 On-Chip Memory Access Cycle

2.6.2 Access to On-Chip Peripheral Modules

On-chip peripheral modules are accessed in two states or three states. The data bus width is 8 bits, so access is by byte size only. This means that for accessing word data, two instructions must be used. Figures 2-12 and 2-13 show the on-chip peripheral module access cycle.

Two-state access to on-chip peripheral modules

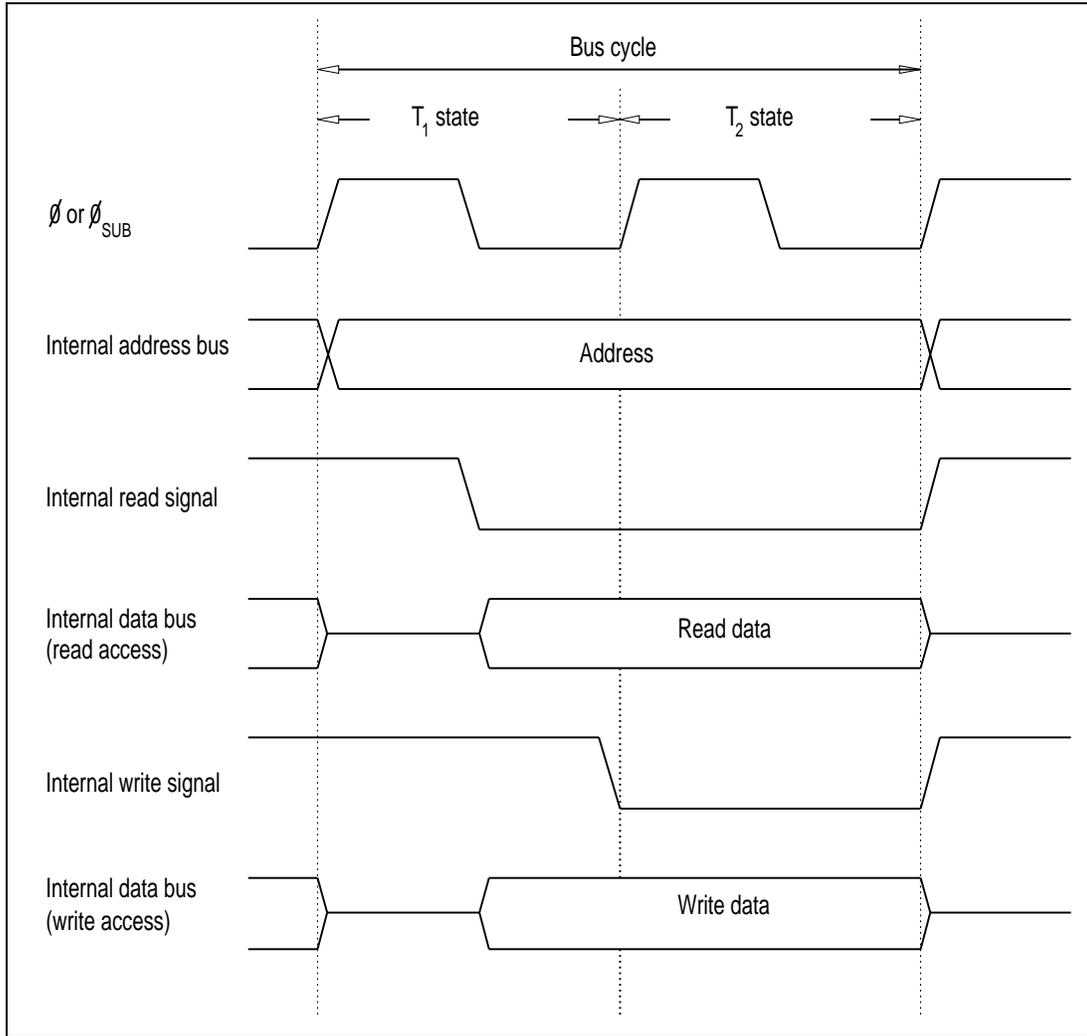


Figure 2-12 On-Chip Peripheral Module Access Cycle (2-State Access)

Three-state access to on-chip peripheral modules

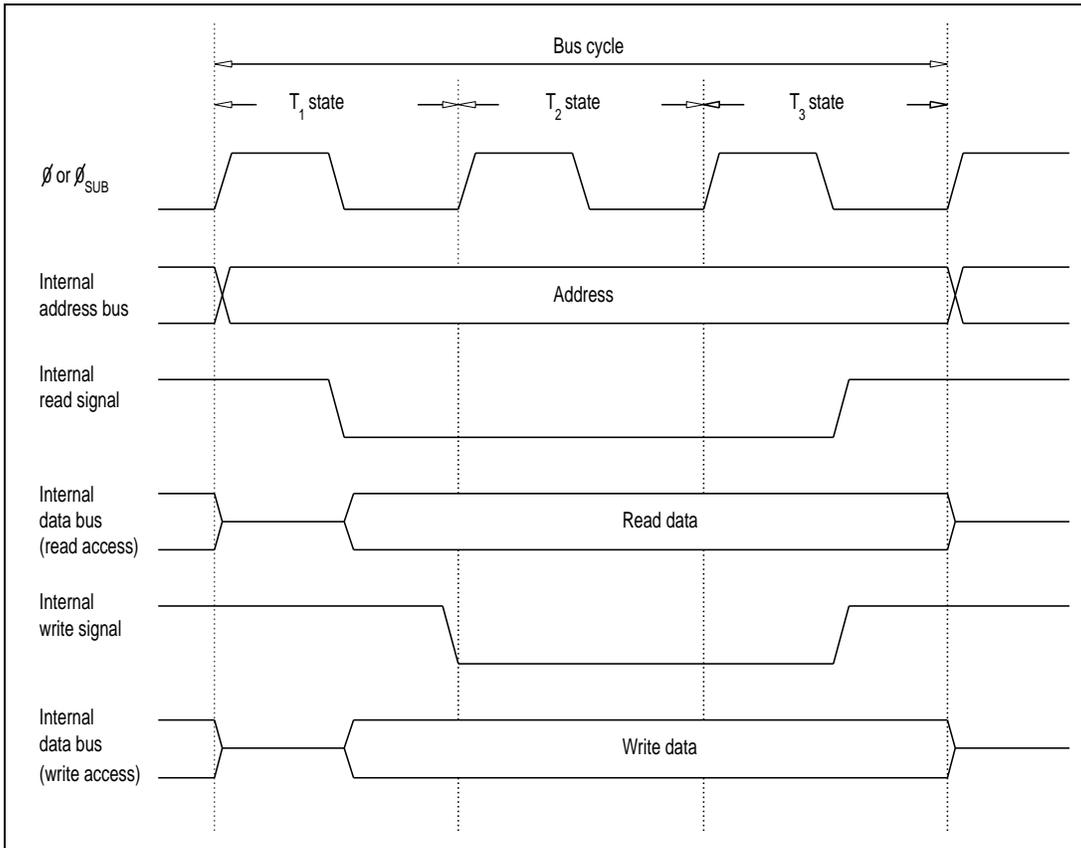


Figure 2-13 On-Chip Peripheral Module Access Cycle (3-State Access)

2.7 CPU States

2.7.1 Overview

There are four CPU states: the reset state, program execution state, program halt state, and exception-handling state. The program execution state includes active (high-speed or medium-speed) mode and subactive mode. In the program halt state there are a sleep mode, standby mode, watch mode, and sub-sleep mode. These states are shown in figure 2-14.

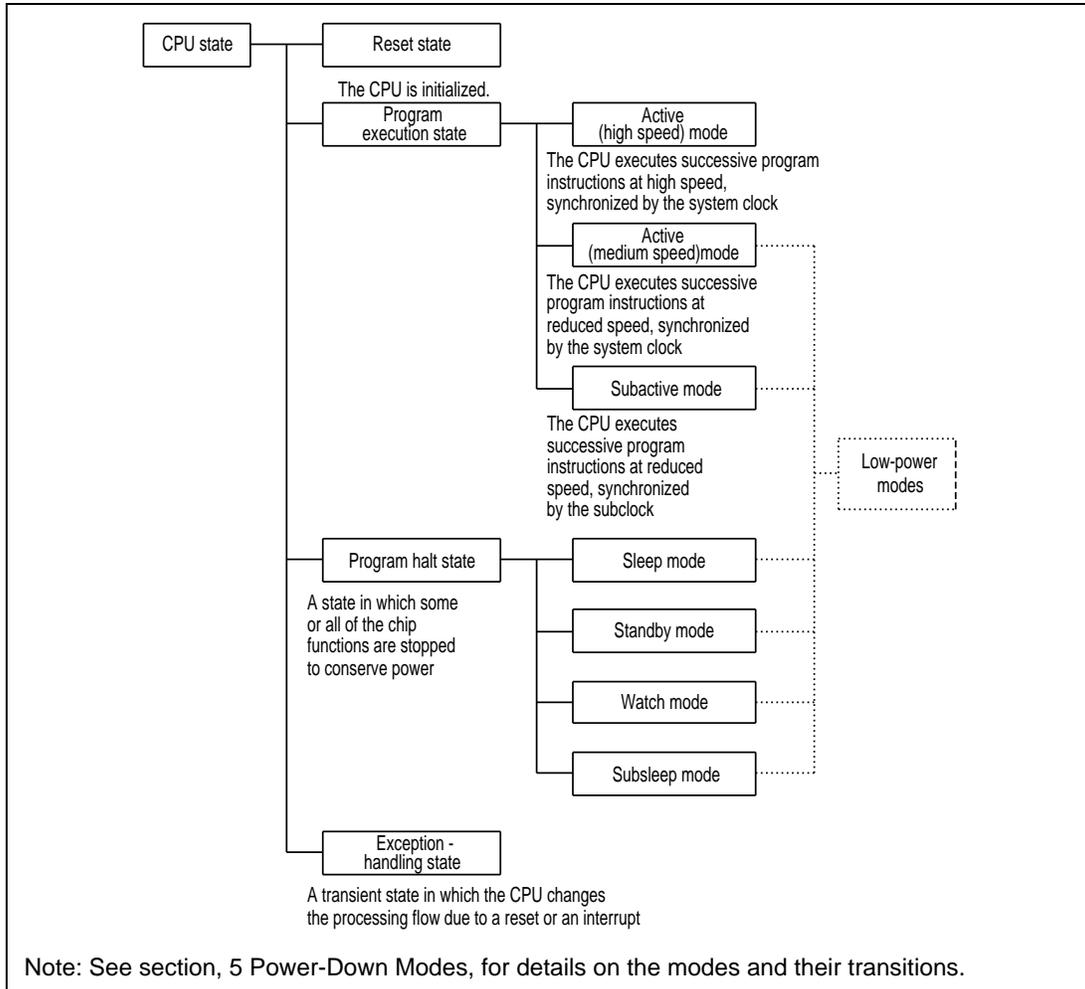


Figure 2-14 CPU Operation States

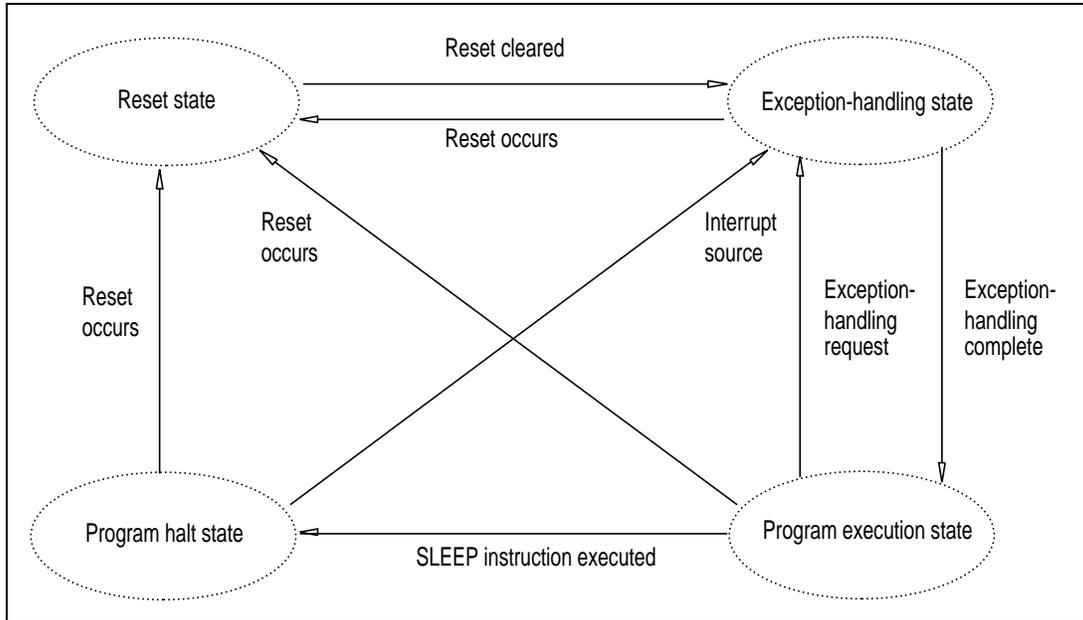


Figure 2-15 State Transitions

2.7.2 Program Execution State

In the program execution state the CPU executes program instructions in sequence.

There are three modes in this state, two active modes (high speed and medium speed) and one subactive mode. Operation is synchronized with the system clock in active mode (high speed and medium speed), and with the subclock in subactive mode. See section 5, Power-Down Modes for details on these modes.

2.7.3 Program Halt State

In the program halt state there are four modes: sleep mode, standby mode, watch mode, and subsleep mode. See section 5, Power-Down Modes for details on these modes.

2.7.4 Exception-Handling State

The exception-handling state is a transient state occurring when exception handling is started by a reset or interrupt and the CPU changes its normal processing flow. In exception handling caused by an interrupt, SP (R7) is referenced and the PC and CCR values are saved on the stack.

For details on interrupt handling, see 3.3, Interrupts.

2.8 Memory Map

2.8.1 Memory Map

Figure 2-16 shows a memory map for the H8/3877U Series.

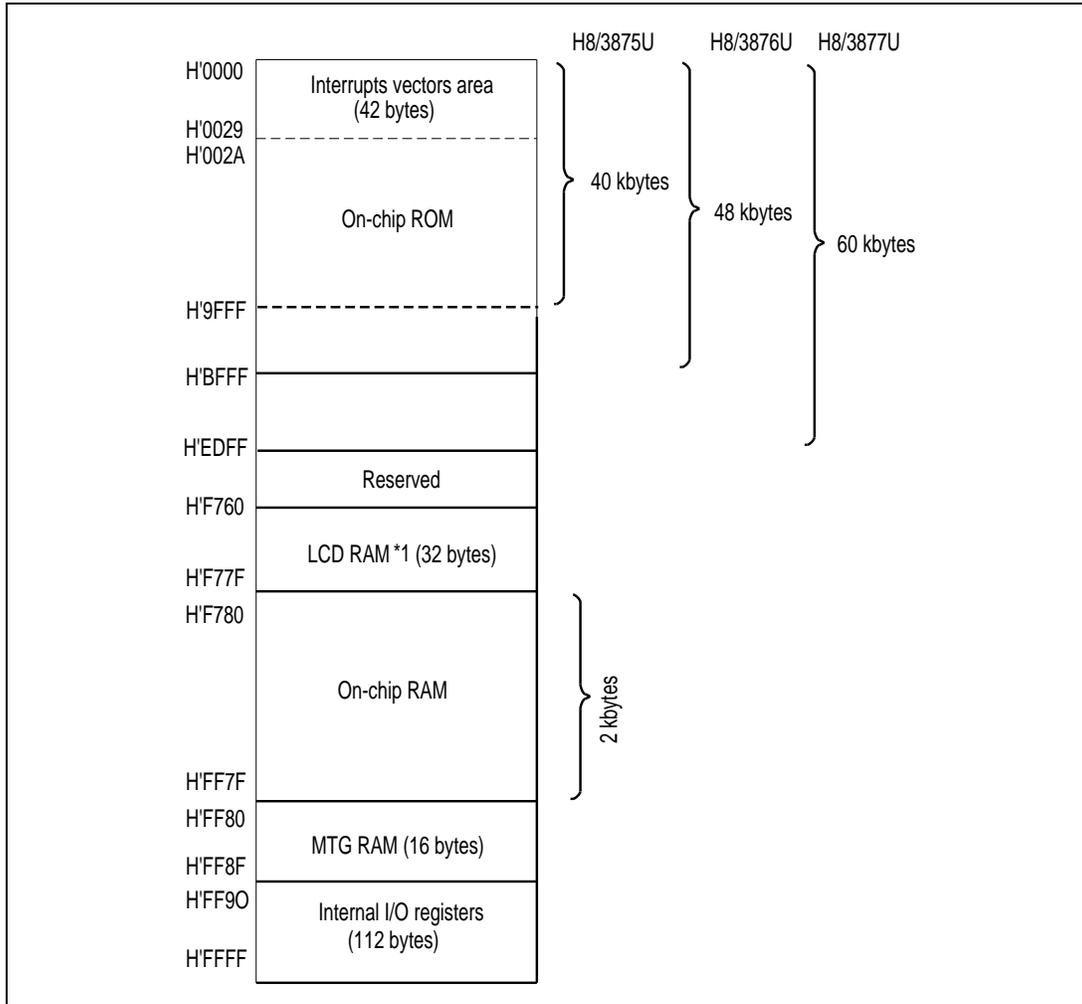


Figure 2-16 H8/3877U Series Memory Map

2.9 Application Notes

2.9.1 Notes on Data Access

1. The address space of the H8/300L CPU includes empty areas in addition to the RAM, registers, and ROM areas available to the user. If these empty areas are mistakenly accessed by an application program, the following results will occur.

Data transfer from CPU to empty area:

The transferred data will be lost. This action may also cause the CPU to misoperate.

Data transfer from empty area to CPU:

Unpredictable data is transferred.

2. Internal data transfer to or from on-chip modules other than the ROM and RAM areas makes use of an 8-bit data width. If word access is attempted to these areas, the following results will occur.

Word access from CPU to I/O register area:

Upper byte: Will be written to I/O register.

Lower byte: Transferred data will be lost.

Word access from I/O register to CPU:

Upper byte: Will be written to upper part of CPU register.

Lower byte: Unpredictable data will be written to lower part of CPU register.

Byte size instructions should therefore be used when transferring data to or from I/O registers other than the on-chip ROM and RAM areas.

Figure 2-17 shows the data size and number of states in which on-chip peripheral modules can be accessed.

		H8/3875U	H8/3876U	H8/3877U	Access		States
					Word	Byte	
H'0000	Interrupts vectors area (42 bytes)	}	}	}	0	0	2
H'0029							
H'002A							
H'9FFF	On-chip ROM	}	}	}	0	0	2
H'BFFF							
H'EDFF	Reserved				-	-	-
H'F760	LCD RAM *1 (32 bytes)				0	0	2
H'F77F	On-chip RAM	}			0	0	2
H'F780							
H'FF7F	MTG RAM (16 bytes)				x	0	2
H'FF80							
H'FF8F	Internal I/O registers (112 bytes)				x	0	2 or 3
H'FF90							
H'FFFF							

0 : Access possible
x : Not possible

Figure 2-17 Data Size and Number of States for Access to and from On-Chip Peripheral Modules

2.9.2 Notes on Bit Manipulation

The BSET, BCLR, BNOT, BST, and BIST instructions read one byte of data, modify the data, then write the data byte again. Special care is required when using these instructions in cases where two registers are assigned to the same address, in the case of registers that include write-only bits, and when the instruction accesses an I/O.

Order of Operation Operation

1	Read	Read byte data at the designated address
2	Modify	Modify a designated bit in the read data
3	Write	Write the altered byte data to the designated address

1. Bit manipulation in two registers assigned to the same address

Example 1

Figure 2-18 shows an example in which two timer registers share the same address. When a bit manipulation instruction accesses the timer load register and timer counter of a reloadable timer, since these two registers share the same address, the following operations take place.

Order of Operation Operation

1	Read	Timer counter data is read (one byte)
2	Modify	The CPU modifies (sets or resets) the bit designated in the instruction
3	Write	The altered byte data is written to the timer load register

The timer counter is counting, so the value read is not necessarily the same as the value in the timer load register. As a result, bits other than the intended bit in the timer load register may be modified to the timer counter value.

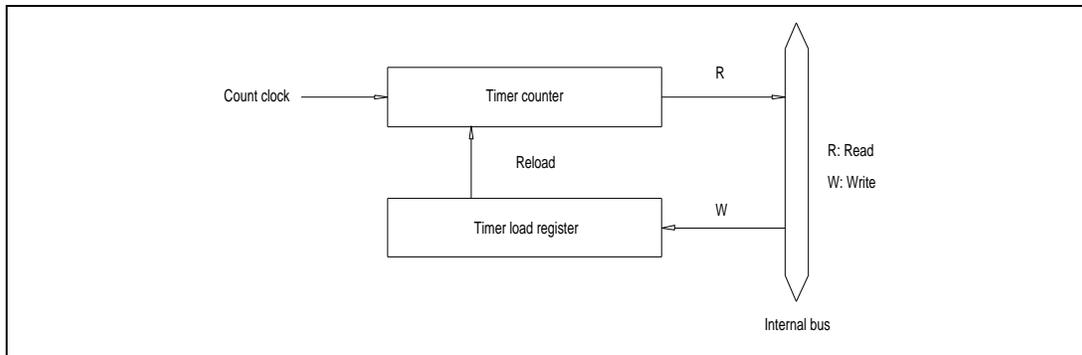


Figure 2-18 Timer Configuration Example

This example does not apply to the on-chip timers in the H8/3877U Series.

Example 2

Here a BSET instruction is executed designating port 2.

P2₇ and P2₆ are designated as input pins, with a low-level signal input at P2₇ and a high-level signal at P2₆. The remaining pins, P2₅ to P2₀, are output pins and output low-level signals. In this example, the BSET instruction is used to change pin P2₀ to high-level output.

[A: Prior to executing BSET]

	P2 ₇	P2 ₆	P2 ₅	P2 ₄	P2 ₃	P2 ₂	P2 ₁	P2 ₀
Input/output	Input	Input	Output	Output	Output	Output	Output	Output
Pin state	Low level	High level	Low level	Low level	Low level	Low level	Low level	Low level
PCR2	0	0	1	1	1	1	1	1
PDR2	1	0	0	0	0	0	0	0

[B: BSET instruction executed]

```
BEST #0 ,@PDR2
```

The BSET instruction is executed designating port 2.

[C: After executing BSET]

	P2 ₇	P2 ₆	P2 ₅	P2 ₄	P2 ₃	P2 ₂	P2 ₁	P2 ₀
Input/output	Input	Input	Output	Output	Output	Output	Output	Output
Pin state	Low level	High level	Low level	Low level	Low level	Low level	Low level	Low level
PCR2	0	0	1	1	1	1	1	1
PDR2	0	1	0	0	0	0	0	1

[D: Explanation of how BSET operates]

When the BSET instruction is executed, first the CPU reads port 2.

Since P2₇ and P2₆ are input pins, the CPU reads the pin states (low-level and high-level input). P2₅ to P2₀ are output pins, so the CPU reads the value in PDR2. In this example PDR2 has a value of H'80, but the value read by the CPU is H'40.

Next, the CPU sets bit 0 of the read data to 1, changing the PDR2 data to H'41. Finally, the CPU writes this value (H'41) to PDR2, completing execution of BSET.

As a result of this operation, bit 0 in PDR2 becomes 1, and P2₀ outputs a high-level signal. However, bits 7 and 6 of PDR2 end up with different values.

To avoid this problem, store a copy of the PDR2 data in a work area in memory. Perform the bit manipulation on the data in the work area, then write this data to PDR2.

[A: Prior to executing BSET]

```
MOV. B #80, ROL
MOV. B ROL, @RAM0
MOV. B ROL, @PDR2
```

The PDR2 value (H'80) is written to a work area in memory (RAM0) as well as to PDR2.

	P2 ₇	P2 ₆	P2 ₅	P2 ₄	P2 ₃	P2 ₂	P2 ₁	P2 ₀
Input/output	Input	Input	Output	Output	Output	Output	Output	Output
Pin state	Low level	High level	Low level	Low level	Low level	Low level	Low level	Low level
PCR2	0	0	1	1	1	1	1	1
PDR2	1	0	0	0	0	0	0	0
RAM0	1	0	0	0	0	0	0	0

[B: BSET instruction executed]

```
BSET #0, @RAM0
```

The BSET instruction is executed designating the PDR2 work area (RAM0).

[C: After executing BSET]

```
MOV. B @RAM0, ROL  
MOV. B ROL, @PDR2
```

The work area (RAM0) value is written to PDR2.

	P2₇	P2₆	P2₅	P2₄	P2₃	P2₂	P2₁	P2₀
Input/output	Input	Input	Output	Output	Output	Output	Output	Output
Pin state	Low level	High level	Low level	Low level	Low level	Low level	Low level	Low level
PCR2	0	0	1	1	1	1	1	1
PDR2	1	0	0	0	0	0	0	1
RAM0	1	0	0	0	0	0	0	1

2. Bit manipulation in a register containing a write-only bit

Example 3

In this example, the port 2 control register PCR2 is accessed by a BCLR instruction.

As in the examples above, P2₇ and P2₆ are input pins, with a low-level signal input at P2₇ and a high-level signal at P2₆. The remaining pins, P2₅ to P2₀, are output pins that output low-level signals. In this example, the BCLR instruction is used to change pin P2₀ to an input port. It is assumed that a high-level signal will be input to this input pin.

[A: Prior to executing BCLR]

	P2 ₇	P2 ₆	P2 ₅	P2 ₄	P2 ₃	P2 ₂	P2 ₁	P2 ₀
Input/output	Input	Input	Output	Output	Output	Output	Output	Output
Pin state	Low level	High level	Low level	Low level	Low level	Low level	Low level	Low level
PCR2	0	0	1	1	1	1	1	1
PDR2	1	0	0	0	0	0	0	0

[B: BCLR instruction executed]

```
BCLR #0 , @PCR2
```

The BCLR instruction is executed designating PCR2.

[C: After executing BCLR]

	P2 ₇	P2 ₆	P2 ₅	P2 ₄	P2 ₃	P2 ₂	P2 ₁	P2 ₀
Input/output	Output	Input						
Pin state	Low level	High level	Low level	Low level	Low level	Low level	Low level	Low level
PCR2	1	1	1	1	1	1	1	0
PDR2	1	0	0	0	0	0	0	0

[D: Explanation of how BCLR operates]

When the BCLR instruction is executed, first the CPU reads port 2. Since PCR2 is a write-only register, the CPU reads a value of H'FF, even though the PCR2 value is actually H'3F.

Next, the CPU clears bit 0 in the read data to 0, changing the data to H'FE. Finally, this value (H'FF) is written to PCR2 and BCLR instruction execution ends.

As a result of this operation, bit 0 in PCR2 becomes 0, making P2₀ an input port. However, bits 7 and 6 in PCR2 change to 1, so that P2₇ and P2₆ change from input pins to output pins.

To avoid this problem, store a copy of the PCR2 data in a work area in memory. Perform the bit manipulation on the data in the work area, then write this data to PCR2.

[A: Prior to executing BCLR]

```

MOV. B #3F, ROL
MOV. B ROL, @RAM0
MOV. B ROL, @PCR2

```

The PCR2 value (H'3F) is written to a work area in memory (RAM0) as well as to PCR2.

	P2₇	P2₆	P2₅	P2₄	P2₃	P2₂	P2₁	P2₀
Input/output	Input	Input	Output	Output	Output	Output	Output	Output
Pin state	Low level	High level	Low level	Low level	Low level	Low level	Low level	Low level
PCR2	0	0	1	1	1	1	1	1
PDR2	1	0	0	0	0	0	0	0
RAM0	0	0	1	1	1	1	1	1

[B: BCLR instruction executed]

```
BCLR #0, @RAM0
```

The BCLR instruction is executed designating the PCR2 work area (RAM0).

[C: After executing BCLR]

```

MOV. B @RAM0, ROL
MOV. B ROL, @PCR2

```

The work area (RAM0) value is written to PCR2.

	P2₇	P2₆	P2₅	P2₄	P2₃	P2₂	P2₁	P2₀
Input/output	Input	Input	Output	Output	Output	Output	Output	Output
Pin state	Low level	High level	Low level	Low level	Low level	Low level	Low level	Low level
PCR2	0	0	1	1	1	1	1	0
PDR2	1	0	0	0	0	0	0	0
RAM0	0	0	1	1	1	1	1	0

Table 2-12 lists the registers with shared addresses. Table 2-13 lists the registers that contain write-only bits.

Table 2-12 Registers with Shared Addresses

Register Name	Abbreviation	Address
Port data register 1*	PDR1	H'FFD4
Port data register 2*	PDR2	H'FFD5
Port data register 5*	PDR5	H'FFD8
Port data register 6*	PDR6	H'FFD9
Port data register 7*	PDR7	H'FFDA
Port data register 8*	PDR8	H'FFDB
Port data register 9*	PDR9	H'FFDC
Port data register A*	PDRA	H'FFDD
Port data register D*	PDRD	H'FFD2
Port data register E*	PDRE	H'FFD3


Note: * The port data register addresses are also assigned directly to input pins.

Table 2-13 Registers with Write-Only Bits


Register Name	Abbreviation	Address
Port control register 1	PCR1	H'FFE4
Port control register 2	PCR2	H'FFE5
Port control register 5	PCR5	H'FFE8
Port control register 6	PCR6	H'FFE9
Port control register 7	PCR7	H'FFEA
Port control register 8	PCR8	H'FFEB
Port control register 9	PCR9	H'FFEC
Port control register A	PCRA	H'FFED
Port control register D	PCRD	H'FFE2
Port control register E	PCRE	H'FFE3
Timer control register F	TCRF	H'FFB6

2.9.3 Notes on Use of the EEPMOV Instruction

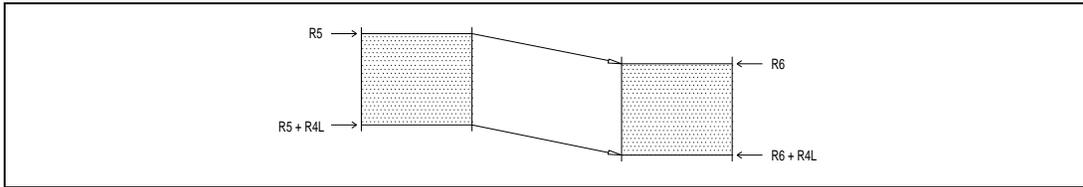- The EEPMOV instruction is a block data transfer instruction. It moves the number of bytes specified by R4L from the address specified by R5 to the address specified by R6.



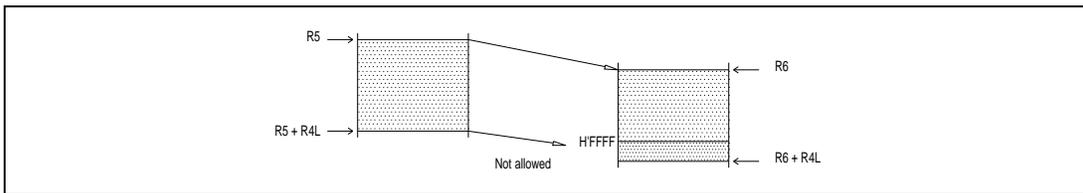- When setting R4L and R6, make sure that the final destination address (R6 + R4L) does not exceed H'FFFF. The value in R6 must not change from H'FFFF to H'0000 during execution of the instruction.



Section 3 Exception Handling

3.1 Overview

Exception handling is performed in the H8/3877U Series when a reset or interrupt occurs. Table 3-1 shows the priorities of these two types of exception handling.

Table 3-1 Exception Handling Types and Priorities

Priority	Exception Source	Time of Start of Exception Handling
High	Reset	Exception handling starts as soon as the reset state is cleared
	Interrupt	When an interrupt is requested, exception handling starts after execution of the present instruction or the exception handling in progress is completed.
Low		

3.2 Reset

3.2.1 Overview

A reset is the highest-priority exception. The internal state of the CPU and the registers of the on-chip peripheral modules are initialized.

3.2.2 Reset Sequence

As soon as the $\overline{\text{RES}}$ pin goes low, all processing is stopped and the H8/3877U enters the reset state.

To make sure the chip is reset properly, observe the following precautions.

- At power on: Hold the $\overline{\text{RES}}$ pin low until the clock pulse generator output stabilizes.
- Resetting during operation: Hold the $\overline{\text{RES}}$ pin low for at least 10 system clock cycles.

Reset exception handling begins when the $\overline{\text{RES}}$ pin is held low for a given period, then returned to the high level. Reset exception handling takes place as follows

- The CPU internal state and the registers of on-chip peripheral modules are initialized, with the I bit of the condition code register (CCR) set to 1
- The PC is loaded from the reset exception handling vector address (H'0000 to H'0001), after which the program starts executing from the address indicated in PC.

When system power is turned on or off, the $\overline{\text{RES}}$ pin should be held low.

Figure 3-1 shows the reset sequence.

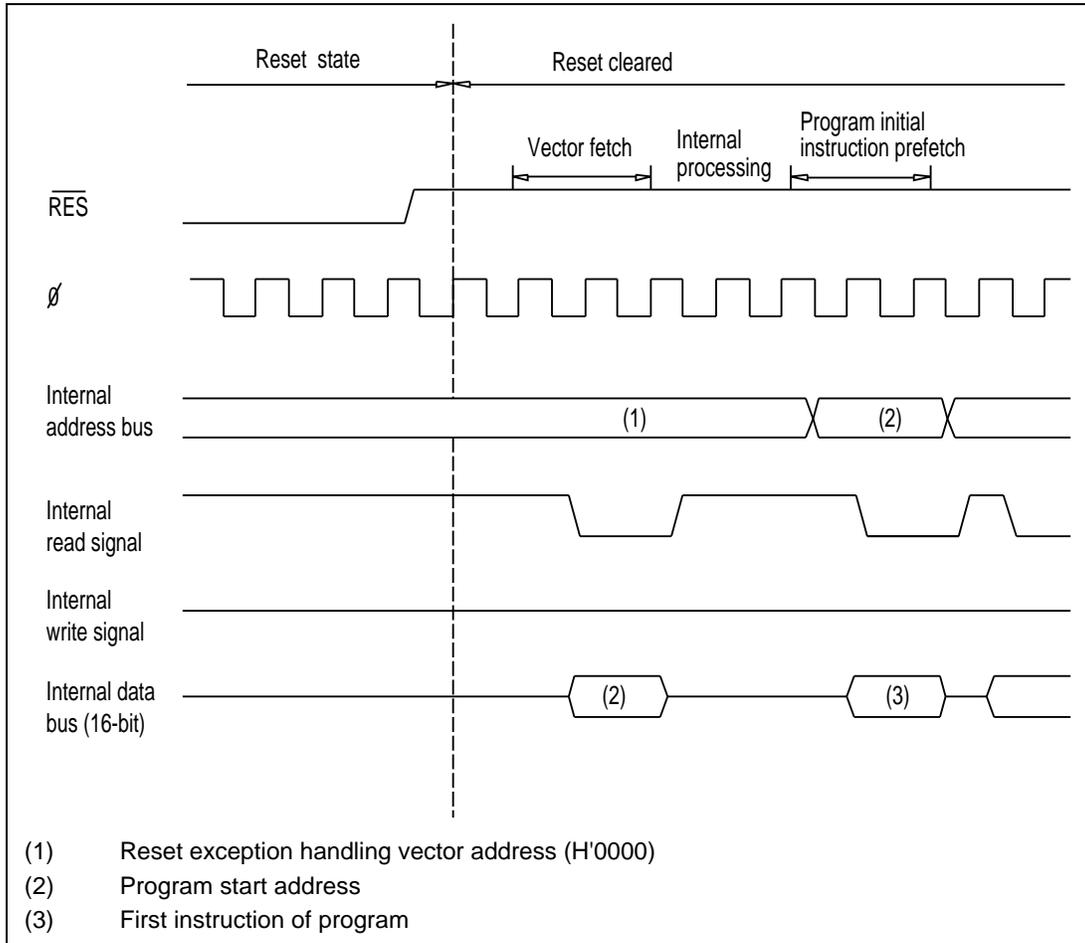


Figure 3-1 Reset Sequence

3.2.3 Interrupt Immediately after Reset

After a reset, if an interrupt were to be accepted before the stack pointer (SP: R7) was initialized, PC and CCR would not be pushed onto the stack correctly, resulting in program runaway. To prevent this, immediately after reset exception handling all interrupts are masked. For this reason, the initial program instruction is always executed immediately after a reset. This instruction should initialize the stack pointer (e.g. `MOV.W #xx: 16, SP`).

3.3 Interrupts

3.3.1 Overview

The interrupt sources include 14 external interrupts (NMI, WKP₀ to WKP₇, IRQ₀ to IRQ₄), and 17 internal interrupts from on-chip peripheral modules. Table 3-2 shows the interrupt sources, their priorities, and their vector addresses. When more than one interrupt is requested, the interrupt with the highest priority is processed.

The interrupts have the following features:

- NMI is the highest-priority interrupt and is always accepted. Internal and external interrupts other than NMI can be masked by the I bit of CCR. When this bit is set to 1, interrupt request flags are set but interrupts are not accepted, except for NMI.
- NMI and IRQ₀ to IRQ₄ can each be set independently to either rising edge sensing or falling edge sensing.

Table 3-2 Interrupt Sources and Priorities

Priority	Interrupt Source	Interrupt	Vector Number	Vector Address
High	RES	Reset	0	H'0000 to H'0001
	NMI	NMI	3	H'0006 to H'0007
	IRQ ₀	IRQ ₀	4	H'0008 to H'0009
	IRQ ₁	IRQ ₁	5	H'000A to H'000B
	IRQ ₂	IRQ ₂	6	H'000C to H'000D
	IRQ ₃	IRQ ₃	7	H'000E to H'000F
	IRQ ₄	IRQ ₄	8	H'0010 to H'0011
	WKP ₀	WKP ₀	9	H'0012 to H'0013
	WKP ₁	WKP ₁		
	WKP ₂	WKP ₂		
	WKP ₃	WKP ₃		
	WKP ₄	WKP ₄		
	WKP ₅	WKP ₅		
	WKP ₆	WKP ₆		
WKP ₇	WKP ₇			
Low	SCI1	SCI1 transfer complete	10	H'0014 to H'0015

Table 3-2 Interrupt Sources and Priorities (cont)

Priority	Interrupt Source	Interrupt	Vector Number	Vector Address
High	Timer A	Timer A overflow	11	H'0016 to H'0017
	Timer FL	Timer FL compare match	14	H'001C to H'001D
		Timer FL overflow		
	Timer FH	Timer FH compare match	15	H'001E to H'001F
		Timer FH overflow		
	Timer G	Timer G input capture	16	H'0020 to H'0021
Timer G overflow				
Multitone generator	Multitone half-cycle	17	H'0022 to H'0023	
SC13		SC13 receive data full	18	H'0024 to H'0025
		SC13 transmit data empty		
		SC13 transmit end		
		SC13 overrun error		
		SC13 framing error		
		SC13 parity error		
A/D converter	A/D conversion end	19	H'0026 to H'0027	
Low	(SLEEP instruction executed)	Direct transfer	20	H'0028 to H'0029

Note: Vector addresses H'0002 to H'0005 and H'0018 to H'001B are reserved and cannot be used.

3.3.2 Interrupt Control Registers

Table 3-3 lists the registers that control interrupts.

Table 3-3 Interrupt Control Registers

Register Name	Abbreviation	R/W	Initial Value	Address
Interrupt edge select register	IEGR	R/W	H'60	H'FFF2
Interrupt enable register 1	IENR1	R/W	H'00	H'FFF3
Interrupt enable register 2	IENR2	R/W	H'03	H'FFF4
Interrupt request register 1	IRR1	R/W*	H'20	H'FFF6
Interrupt request register 2	IRR2	R/W*	H'03	H'FFF7
Wakeup interrupt request register	IWPR	R/W*	H'00	H'FFF9

Note: *Write is enabled only for writing of 0 to clear a flag.

1. Interrupt edge select register (IEGR)

Bit	7	6	5	4	3	2	1	0
	NMIEG	—	—	IEG4	IEG3	IEG2	IEG1	IEG0
Initial value	0	1	1	0	0	0	0	0
Read/Write	R/W	—	—	R/W	R/W	R/W	R/W	R/W

IEGR is an 8-bit read/write register, used to designate whether pins NMI and IRQ_0 to IRQ_4 are set to rising edge sensing or falling edge sensing.

Bit 7: NMI edge select (NMIEG)

Bit 7 selects the input sensing of the NMI pin.

Bit 7 Description

NMIEG

0	Falling edge of \overline{NMI} pin input is detected	(initial value)
1	Rising edge of \overline{NMI} pin input is detected	

Bits 6 and 5: Reserved bits

Bits 6 and 5 are reserved: they are always read as 1, and cannot be modified.

Bit 4: $\overline{\text{IRQ}}_4$ edge select (IEG4)
 Bit 4 selects the input sensing of pin $\overline{\text{IRQ}}_4/\overline{\text{ADTRG}}$.

Bit 4 Description
IEG4

0	Falling edge of $\overline{\text{IRQ}}_4/\overline{\text{ADTRG}}$ pin input is detected	(initial value)
1	Rising edge of $\overline{\text{IRQ}}_4/\overline{\text{ADTRG}}$ pin input is detected	

Bit 3: $\overline{\text{IRQ}}_3$ edge select (IEG3)
 Bit 3 selects the input sensing of pin $\overline{\text{IRQ}}_3/\text{TMIF}$.

Bit 3 Description
IEG3

0	Falling edge of $\overline{\text{IRQ}}_3/\text{TMIF}$ pin input is detected	(initial value)
1	Rising edge of $\overline{\text{IRQ}}_3/\text{TMIF}$ pin input is detected	

Bit 2: $\overline{\text{IRQ}}_2$ edge select (IEG2)
 Bit 2 selects the input sensing of pin $\overline{\text{IRQ}}_2$.

Bit 2 Description
IEG2

0	Falling edge of $\overline{\text{IRQ}}_2$ pin input is detected	(initial value)
1	Rising edge of $\overline{\text{IRQ}}_2$ pin input is detected	

Bit 1: $\overline{\text{IRQ}}_1$ edge select (IEG1)
 Bit 1 selects the input sensing of pin $\overline{\text{IRQ}}_1$.

Bit 1 Description
IEG1

0	Falling edge of $\overline{\text{IRQ}}_1$ pin input is detected	(initial value)
1	Rising edge of $\overline{\text{IRQ}}_1$ pin input is detected	

Bit 0: $\overline{\text{IRQ}}_0$ edge select (IEG0)
 Bit 0 selects the input sensing of pin $\overline{\text{IRQ}}_0$.

Bit 0 IEG0	Description	
0	Falling edge of $\overline{IRQ_0}$ pin input is detected	(initial value)
1	Rising edge of $\overline{IRQ_0}$ pin input is detected	

2. Interrupt enable register 1 (IENR1)

Bit	7	6	5	4	3	2	1	0
	IENTA	IENS1	IENWP	IEN4	IEN3	IEN2	IEN1	IEN0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

IENR1 is an 8-bit read/write register that enables or disables interrupt requests.

Bit 7: timer A interrupt enable (IENTA)

Bit 7 enables or disables timer A overflow interrupt requests.

Bit 7 IENTA	Description
----------------	-------------

0	Disables timer A interrupts (initial value)
1	Enables timer A interrupts

Bit 6: SCI1 interrupt enable (IENS1)

Bit 6 enables or disables SCI1 transfer complete interrupt requests.

Bit 6 IENS1	Description
----------------	-------------

0	Disables SCI1 interrupts (initial value)
1	Enables SCI1 interrupts

Bit 5: wakeup interrupt enable (IENWP)

Bit 5 enables or disables WKP₇ to WKP₀ interrupt requests.

Bit 5 IENWP	Description
----------------	-------------

0	Disables interrupt requests from \overline{WKP}_7 to \overline{WKP}_0 (initial value)
1	Enables interrupt requests from \overline{WKP}_7 to \overline{WKP}_0

Bit 4 to 0: $\overline{\text{IRQ}}_4$ to $\overline{\text{IRQ}}_0$ interrupt enable (IEN4 to IEN0)
 Bit 4 to 0 enables or disables $\overline{\text{IRQ}}_4$ to $\overline{\text{IRQ}}_0$ interrupt requests.

Bits 4 to 0 Description
IEN4 to IEN0

0	Disables interrupt requests from $\overline{\text{IRQ}}_4$ to $\overline{\text{IRQ}}_0$	(initial value)
1	Enables interrupt requests from $\overline{\text{IRQ}}_4$ to $\overline{\text{IRQ}}_0$	

3. Interrupt Enables Register 2 (IENR2)

Bit	7	6	5	4	3	2	1	0
	IENDT	IENAD	IENMT	IENTG	IENFHH	IENFLL	-	-
Initial value	0	0	0	0	0	0	1	1
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	-	-

IENR2 is an 8-bit read/write register that enables or disables interrupt requests.

BIT 7: Direct transfer interrupt enable (IENDT)
 Bit 7 enables or disables direct transfer interrupt requests.

Bit 7 Description
IENDT

0	Disables direct transfer interrupt requests	(initial value)
1	Enables direct transfer interrupt requests	

Bit 6: A/D converter interrupt enable (IENAD)
 Bit 6 enables or disables A/D converter interrupt requests.

Bit 6 Description
IENAD

0	Disables A/D converter interrupt requests	(initial value)
1	Enables A/D converter interrupt requests	

Bit 5: Multitone generator interrupt enable (IENMT)
 Bit 5 enables or disables multitone half-cycle interrupt requests.

Bit 5	Description	
IENMT		
0	Disables multitone half-cycle interrupts	(initial value)
1	Enables multitone half-cycle interrupts	

Bit 4: Timer G interrupt enable (IENTG)
 Bit 4 enables or disables timer G input capture and overflow interrupt requests.

Bit 4	Description	
IENMT		
0	Disables timer G interrupts	(initial value)
1	Enables timer G interrupts	

Bit 3: Timer FH interrupt enable (IENTFH)
 Bit 3 enables or disables timer FH compare match and overflow interrupt requests.

Bit 3 IENTFH	Description	
0	Disables timer FH interrupts	(initial value)
1	Enables timer FH interrupts	

Bit 2: Timer FL interrupt enable (IENTFL)
 Bit 2 enables or disables timer FL compare match and overflow interrupt requests.

Bit 2 IENTFL	Description	
0	Disables timer FL interrupts	(initial value)
1	Enables timer FL interrupts	

Bits 1 and 0: Reserved bits

Bits 1 and 0 are reserved: they are always read as 1, and cannot be modified.

SCI3 interrupt control is covered in 10.3.2, in the description of serial control register 3.

4. Interrupt request 1 (IRR1)

Bit	7	6	5	4	3	2	1	0
	IRRTA	IRRS1	—	IRRI4	IRRI3	IRRI2	IRRI1	IRRI0
Initial value	0	0	1	0	0	0	0	0
Read/Write	R/W *	R/W *	—	R/W *				

Note: *Only a write of 0 for flag clearing is possible.

IRR1 is an 8-bit read/write register, in which the corresponding bit is set to 1 when a timer A, SCI1, or IRQ₄ to IRQ₀ interrupt is requested. The flags are not cleared automatically when an interrupt is accepted. It is necessary to write 0 to clear each flag.

Bit 7: Timer A interrupt request flag (IRRTA)

Bit 7 IRRTA	Description
0	Clearing conditions: (initial value) When IRRTA = 1, it is cleared by writing 0
1	Setting conditions: When the timer A counter value overflows (goes from H'FF to H'00)

Bit 6: SCI1 interrupt request flag (IRRS1)

Bit 6 IRRS1	Description
0	Clearing conditions: (initial value) When IRRS1 = 1, it is cleared by writing 0
1	Setting conditions: When an SCI1 transfer is completed

Bit 5: Reserved bit

Bit 5 is reserved; it is always read as 1, and cannot be modified.

Bit 4 to 0: IRQ_n to IRQ_0 interrupt request flags (IRRI4 to IRRI0)

Bits 4 to 0	IRRI4 to IRRI0	Description
0		Clearing conditions: When $IRRIn = 1$, it is cleared by writing 0 to $IRRIn$. (initial value)
1		Setting conditions: $IRRIn$ is set when pin IRQ_n is set to interrupt input, and the designated signal edge is detected.

(n = 4 to 0)

5. Interrupt request register 2 (IRR2)

Bit	7	6	5	4	3	2	1	0
	IRRDT	IRRAD	IRRMT	IRRTG	IRRTFH	IRRTFL	—	—
Initial value	0	0	0	0	0	0	1	1
Read/Write	R/W *	R/W *	R/W *	R/W *				

Note: *Only a write of 0 for flag clearing is possible.

IRR2 is an 8-bit read/write register, in which the corresponding bit is set to 1 when a direct transfer, A/D converter, multitone generator, timer G, timer FH, timer FL, timer C, or timer B interrupt is requested. The flags are not cleared automatically when an interrupt is accepted. It is necessary to write 0 to clear each flag.

Bit 7: Direct transfer interrupt request flag (IRRDT)

Bit 7	IRRDT	Description
0		Clearing conditions: When $IRRDT = 1$, it is cleared by writing 0 (initial value)
1		Setting conditions: When $DTON = 1$ and a direct transfer is made immediately after a SLEEP instruction is executed

Bit 6: A/D converter interrupt request flag (IRRAD)

Bit 6	IRRAD	Description
0		Clearing conditions: When $IRRAD = 1$, it is cleared by writing 0 (initial value)
1		Setting conditions: When A/D conversion is completed and $ADSF$ is reset

Bit 5: Multitone generator interrupt request flag (IRRMT)

Bit 5 IRRMT	Description	
0	Clearing conditions: When IRRMT = 1, it is cleared by writing 0	(initial value)
1	Setting conditions: When the multitone generator has output one half-cycle of data	

Bit 4: Timer G interrupt request flag (IRRTG)

Bit 4 IRRTG	Description	
0	Clearing conditions: When IRRTG = 1, it is cleared by writing 0	(initial value)
1	Setting conditions: When pin TMIG is set to TMIG input and the designated signal edge is detected	

Bit 3: Timer FH interrupt request flag (IRRTFH)

Bit 3 IRRTFH	Description	
0	Clearing conditions: When IRRTFH = 1, it is cleared by writing 0	(initial value)
1	Setting conditions: When counter FH matches output compare register FH in 8-bit timer mode, or when 16-bit counter F (TCFL, TCFH) matches output compare register F (OCRFL, OCRFH) in 16-bit timer mode	

Bit 2: Timer FL interrupt request flag (IRRTFL)

Bit 2 IRRTFL	Description	
0	Clearing conditions: When IRRTFL = 1, it is cleared by writing 0	(initial value)
1	Setting conditions: When counter FL matches output compare register FL in 8-bit timer mode	

Bits 1 and 0: Reserved bits

Bits 1 and 0 are reserved: they are always read as 1, and cannot be modified.

6. Wakeup interrupt request register (IWPR)

Bit	7	6	5	4	3	2	1	0
	IWPF7	IWPF6	IWPF5	IWPF4	IWPF3	IWPF2	IWPF1	IWPF0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W *							

Note: *Only a write of 0 for flag clearing is possible.

IWPR is an 8-bit read/write register, in which the corresponding bit is set to 1 when pins \overline{WKP}_7 , to \overline{WKP}_0 are set to wakeup input and a pin receives a falling edge input. The flags are not cleared automatically when an interrupt is accepted. It is necessary to write 0 to clear each flag.

Bits 7 to 0: Wakeup interrupt request flags (IWPF7 to IWPF0)

Bits 7 to 0 IWPF7 to IWPF0	Description
0	Clearing conditions: When $IWPF_n = 1$, it is cleared by writing 0 to $IWPF_n$.
1	Setting conditions: $IWPF_n$ is set when pin \overline{WKP}_n , is set to wakeup interrupt input, and a falling edge input is detected at the pin.

(n-7 to 0)

3.3.3 External Interrupts

There are 14 external interrupts, NMI, \overline{WKP}_0 to \overline{WKP}_7 , and IRQ_0 to IRQ_4 .

1. NMI interrupt

The NMI interrupt is requested by input at the NMI pin. This interrupt can be detected by either rising edge sensing or falling edge sensing, depending on the setting of bit NMIEG in IEGR1. The NMI interrupt has highest priority and is always accepted, regardless of the setting of the I bit in CCR. The NMI interrupt has exception vector 3. When this exception is recognized, the I bit is set to 1 in CCR.

2. Interrupts WKP₀ to WKP₇

Interrupts WKP₀ to WKP₇ are requested by falling edge inputs at pins $\overline{\text{WKP}}_0$ to $\overline{\text{WKP}}_7$. When these pins are designated as $\overline{\text{WKP}}_0$ to $\overline{\text{WKP}}_7$ pins in port mode register 5 (PMR5) and falling edge input is detected, the corresponding bit in the wakeup interrupt request register (IWPR) is set to 1, requesting an interrupt. Wakeup interrupt requests can be disabled by clearing the IENWP bit in IENR1 to 0. It is also possible to mask all interrupts by setting the CCR I bit to 1.

When an interrupt exception handling request is received for interrupts WKP0 to WKP7, the CCR I bit is set to 1. The vector number for interrupts WKP0 to WKP7 is 9. Since all eight interrupts are assigned the same vector number, the interrupt source must be determined by the exception handling routine.

3. Interrupts IRQ₀ to IRQ₄

Interrupts IRQ₀ to IRQ₄ are requested by inputs into pins $\overline{\text{IRQ}}_0$ to $\overline{\text{IRQ}}_4$. These interrupts are detected by either rising edge sensing or falling edge sensing, depending on the settings of bits IEG0 to IEG4 in the edge select register (IEGR).

When these pins are designated as pins $\overline{\text{IRQ}}_0$ to $\overline{\text{IRQ}}_4$ in port mode registers 1 and 2 (PMR1 and PMR2) and the designated edge is input, the corresponding bit in IRR1 is set to 1, requesting an interrupt. Interrupts IRQ₀ to IRQ₄ can be disabled by clearing bits IEN0 to IEN4 in IENR1 to 0. All interrupts can be masked by setting the I bit in CCR to 1.

When IRQ₀ to IRQ₄ interrupt exception handling is initiated, the I bit is set to 1. Vector numbers 4 to 8 are assigned to interrupts IRQ₀ to IRQ₄. The order of priority is from IRQ₀ (high) to IRQ₄ (low). Table 3-2 gives details.

3.3.4 Internal Interrupts

There are 17 internal interrupts that can be requested by the on-chip peripheral modules. When a peripheral module requests an interrupt, the corresponding bit in IRR1 or IRR2 is set to 1. Individual interrupt requests can be disabled by clearing the corresponding bit in IENR1 or IENR2 to 0. All interrupts can be masked by setting the I bit in CCR to 1. When an internal interrupt request is accepted, the I bit is set to 1. Vector numbers 10 to 20 are assigned to these interrupts. Table 3-2 shows the order of priority of interrupts from on-chip peripheral modules.

3.3.5 Interrupt Operations

Interrupts are controlled by an interrupt controller. Figure 3-2 shows a block diagram of the interrupt controller. Figure 3-3 shows the flow up to interrupt acceptance.

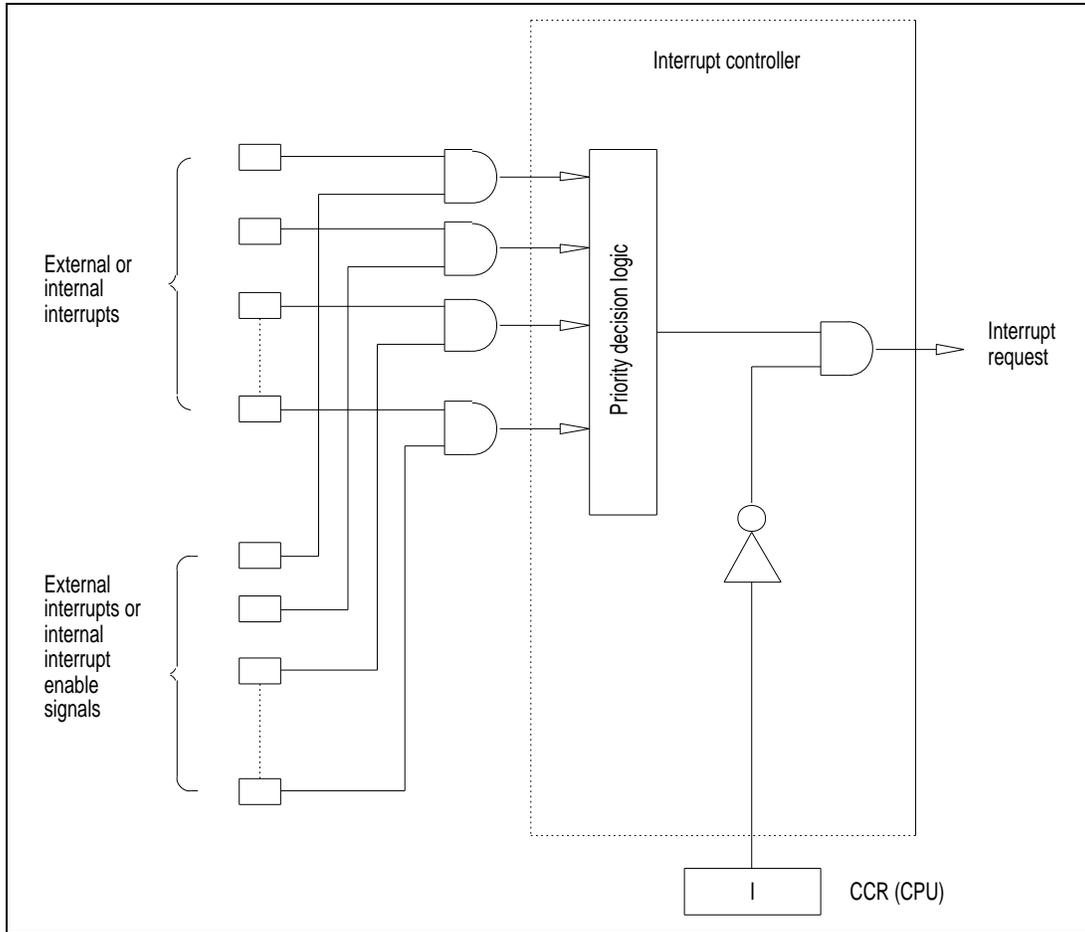


Figure 3-2 Block Diagram of Interrupt Controller

Interrupt operation is described as follows:

- When an interrupt condition is met while the interrupt enable register bit is set to 1, an interrupt request signal is sent to the interrupt controller.
- When the interrupt controller receives an interrupt request, it sets the interrupt request flag.
- From among the interrupts with interrupt request flags set to 1, the interrupt controller selects the interrupt request with the highest priority and holds the others pending. (Refer to table 3-2 for a list of interrupt priorities.)

- The interrupt controller checks the I bit of CCR. If the I bit is 0, the selected interrupt request is accepted; if the I bit is 1, the interrupt request is held pending.
- If the interrupt is accepted, after processing of the current instruction is completed, both PC and CCR are pushed onto the stack. The state of the stack at this time is shown in figure 3-4. The PC value pushed onto the stack is the address of the first instruction to be executed upon return from interrupt handling.
- The I bit of CCR is set to 1, masking all further interrupts.
- The vector address corresponding to the accepted interrupt is generated, and the interrupt handling routine located at the address indicated by the contents of the vector address is executed.

Notes:

1. When disabling interrupts by clearing bits in an interrupt enable register, or when clearing bits in an interrupt request register, always do so while interrupts are masked (I=1).
2. If the above clear operations are performed while I=0, and as a result a conflict arises between the clear instruction and an interrupt request, exception processing for the interrupt will be executed after the clear instruction has been executed.

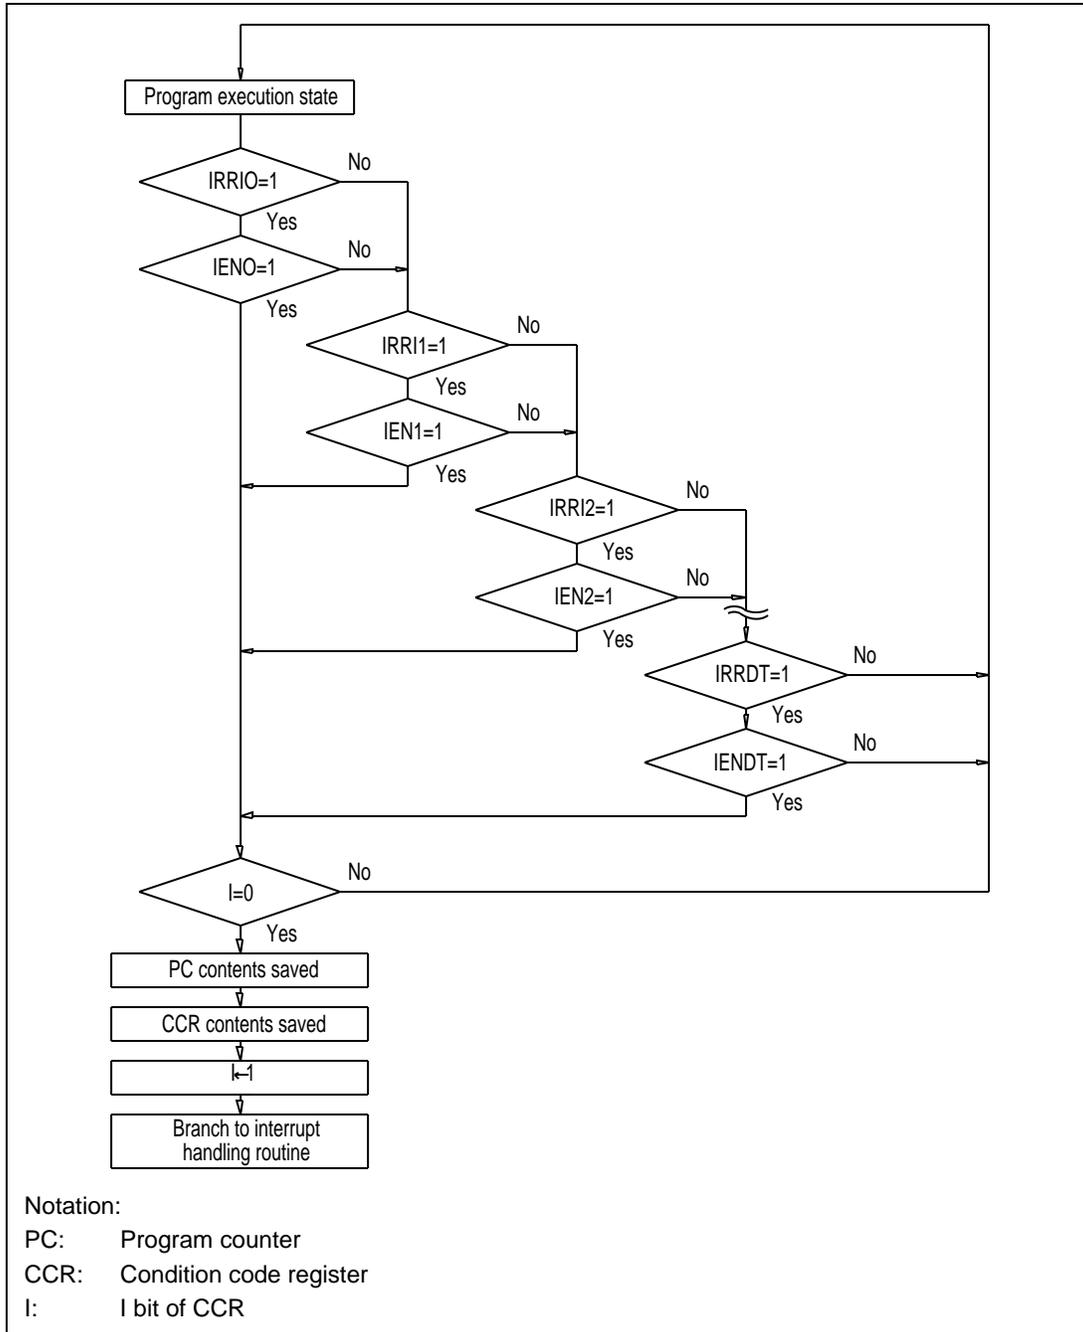


Figure 3-3 Flow up to Interrupt Acceptance

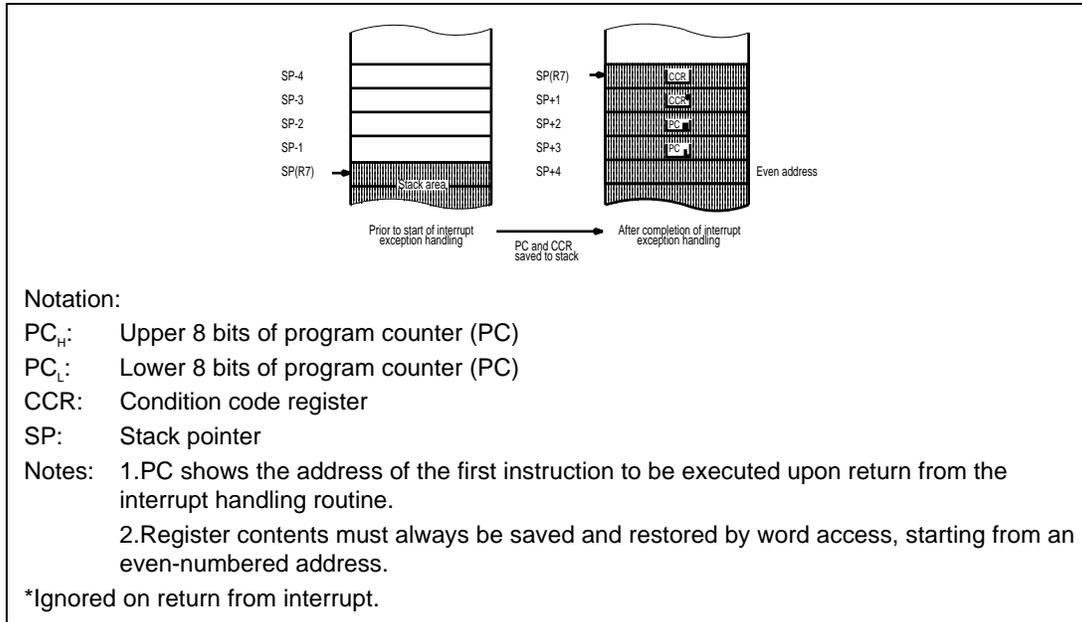


Figure 3-4 Stack State after Completion of Interrupt Exception Handling

Figure 3-5 shows a typical interrupt sequence where the program area is in the on-chip ROM and the stack area is in the on-chip RAM.

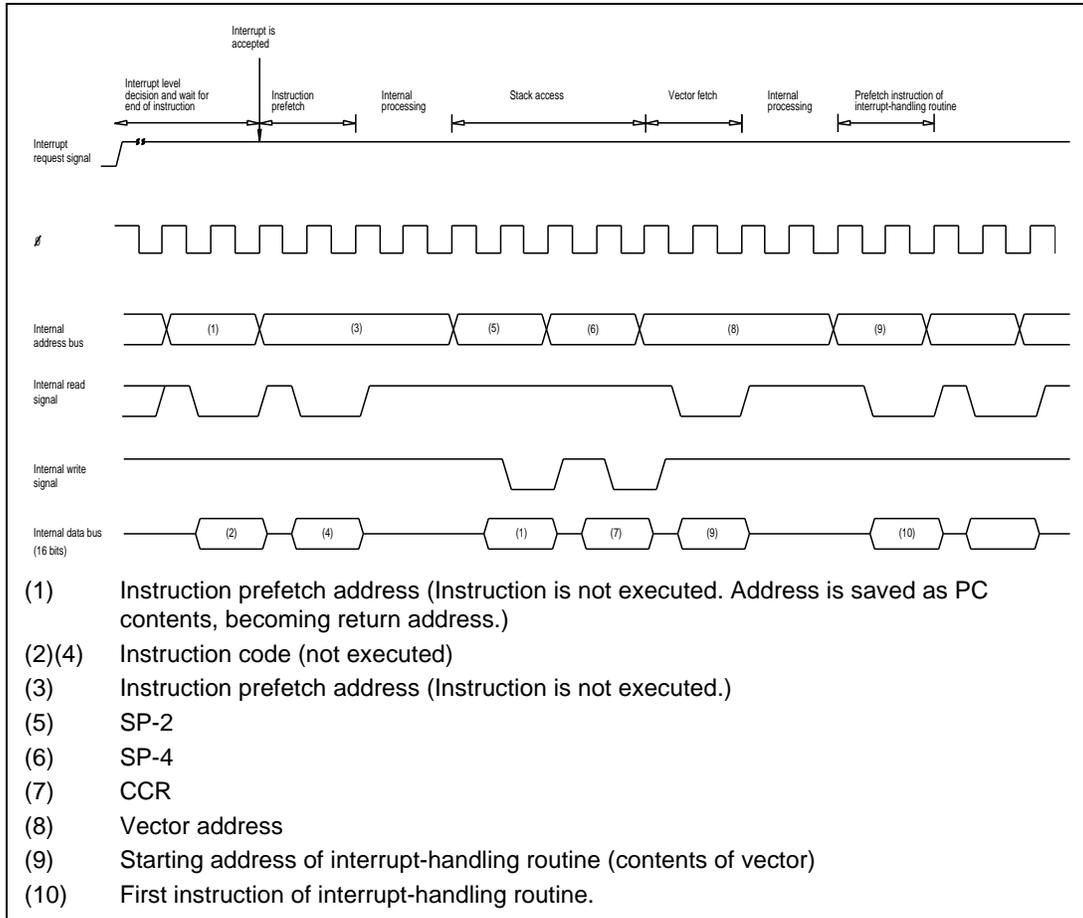


Figure 3-5 Interrupt Sequence

3.3.6 Interrupt Response Time

Table 3-4 shows the number of wait states after an interrupt request flag is set until the first instruction of the interrupt handler is executed.

Table 3-4 Interrupt Wait States

Item	States
Waiting time for completion of executing instruction*	1 to 13
Saving of PC and CCR to stack	4
Vector fetch	2
Instruction fetch	4
Internal processing	4
Total	15 to 27

Note: * Not including EEPMOV instruction.

3.4 Application Notes

3.4.1 Notes on Stack Area Use

When word data is accessed in the H8/3877U Series, the least significant bit of the address is regarded as 0. Access to the stack always takes place in word size, so the stack pointer (SP: R7) should never indicate an odd address. Use PUSH Rn (MOV.W Rn, @-SP) or POP Rn (MOV.W @SP+, Rn) to save or restore register values.

Setting an odd address in SP may cause a program to crash. An example is shown in figure 3-6.

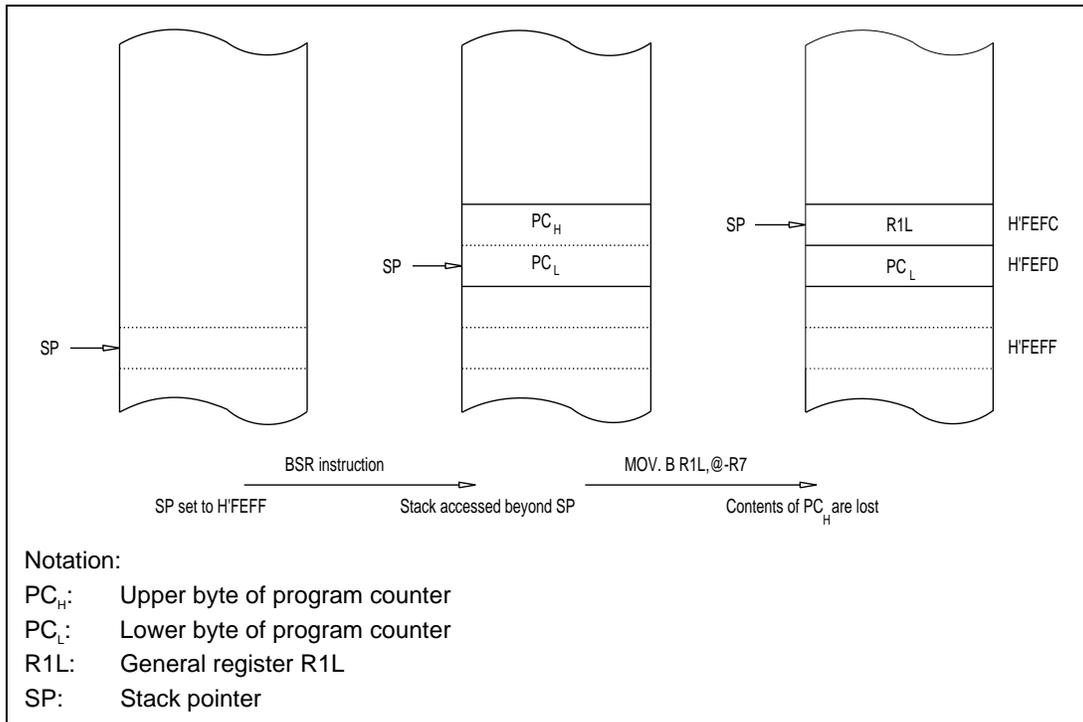


Figure 3-6 Operation when Odd Address is Set in SP

When CCR contents are saved to the stack during interrupt exception handling or restored when RTE is executed, this also takes place in word size. Both the upper and lower bytes of word data are saved to the stack; on return, the even address contents are restored to CCR while the odd address contents are ignored.

3.4.2 Notes on Rewriting Port Mode Registers

When a port mode register is rewritten to switch the functions of external interrupt pins, the following points should be observed.

When an external interrupt pin function is switched by rewriting the port mode register that controls these pins (\overline{IRQ}_4 to \overline{IRQ}_0 , and \overline{WKP}_7 to \overline{WKP}_0), the interrupt request flag may be set to 1 at the time the pin function is switched, even if no valid interrupt is input at the pin. Be sure to clear the interrupt request flag to 0 after switching pin functions. Table 3-5 shows the conditions under which interrupt request flags are set to 1 in this way.

Table 3-5 Conditions under which Interrupt Request Flag is Set to 1

Interrupt Request Flags Set to 1	Conditions
IRR1	IRRI4 When PMR2 bit IRQ4 is changed from 0 to 1 while pin \overline{IRQ}_4 is low and IEGR bit IEG4 = 0. When PMR2 bit IRQ4 is changed from 1 to 0 while pin \overline{IRQ}_4 is low and IEGR bit IEG4 = 1.
	IRRI3 When PMR1 bit IRQ3 is changed from 0 to 1 while pin \overline{IRQ}_3 is low and IEGR bit IEG3 = 0. When PMR1 bit IRQ3 is changed from 1 to 0 while pin \overline{IRQ}_3 is low and IEGR bit IEG3 = 1.
IRR12	When PMR1 bit IRQ2 is changed from 0 to 1 while pin \overline{IRQ}_2 is low and IEGR bit IEG2 = 0. When PMR1 bit IRQ2 is changed from 1 to 0 while pin \overline{IRQ}_2 is low and IEGR bit IEG2 = 1.
	IRRI1 When PMR1 bit IRQ1 is changed from 0 to 1 while pin \overline{IRQ}_1 is low and IEGR bit IEG1 = 0. When PMR1 bit IRQ1 is changed from 1 to 0 while pin \overline{IRQ}_1 is low and IEGR bit IEG1 = 1.
IRR10	When PMR2 bit IRQ0 is changed from 0 to 1 while pin \overline{IRQ}_0 is low and IEGR bit IEG0 = 0. When PMR2 bit IRQ0 is changed from 1 to 0 while pin \overline{IRQ}_0 is low and IEGR bit IEG0 = 1.

Table 3-5 Conditions under which Interrupt Request Flag is Set to 1 (cont)

**Interrupt Request Conditions
Flags Set to 1**

IWPR	IWPF7	When PMR5 bit WKP7 is changed from 0 to 1 while pin WKP ₇ is low
	IWPF6	When PMR5 bit WKP6 is changed from 0 to 1 while pin WKP ₆ is low
	IWPF5	When PMR5 bit WKP5 is changed from 0 to 1 while pin WKP ₅ is low
	IWPF4	When PMR5 bit WKP4 is changed from 0 to 1 while pin WKP ₄ is low
	IWPF3	When PMR5 bit WKP3 is changed from 0 to 1 while pin WKP ₃ is low
	IWPF2	When PMR5 bit WKP2 is changed from 0 to 1 while pin WKP ₂ is low
	IWPF1	When PMR5 bit WKP1 is changed from 0 to 1 while pin WKP ₁ is low
	IWPF0	When PMR5 bit WKP0 is changed from 0 to 1 while pin WKP ₀ is low

Figure 3-7 shows the procedure for setting a bit in a port mode register and clearing the interrupt request flag.

When switching a pin function, mask the interrupt before setting the bit in the port mode register. After accessing the port mode register, execute at least one instruction (e.g., NOP), then clear the interrupt request flag from 1 to 0. If the instruction to clear the flag is executed immediately after the port mode register access without executing an intervening instruction, the flag will not be cleared.

An alternative method is to avoid the setting of interrupt request flags when pin functions are switched by keeping the pins at the high level so that the conditions in table 3-5 do not occur.

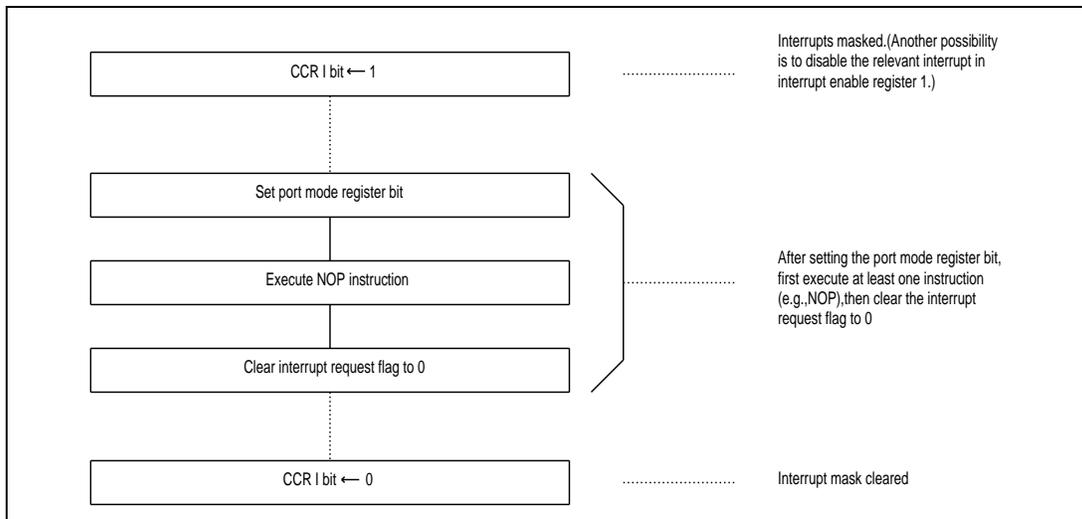


Figure 3-7 Port Mode Register Setting and Interrupt Request Flag Clearing Procedure

Section 4 Clock Pulse Generators

4.1 Overview

Clock oscillator circuitry (CPG: clock pulse generator) is provided on-chip, including both a system clock pulse generator and a subclock pulse generator. The system clock pulse generator consists of a system clock oscillator and system clock dividers. The subclock pulse generator consists of a subclock oscillator circuit and a subclock divider.

4.1.1 Block Diagram

Figure 4-1 shows a block diagram of the clock pulse generators.

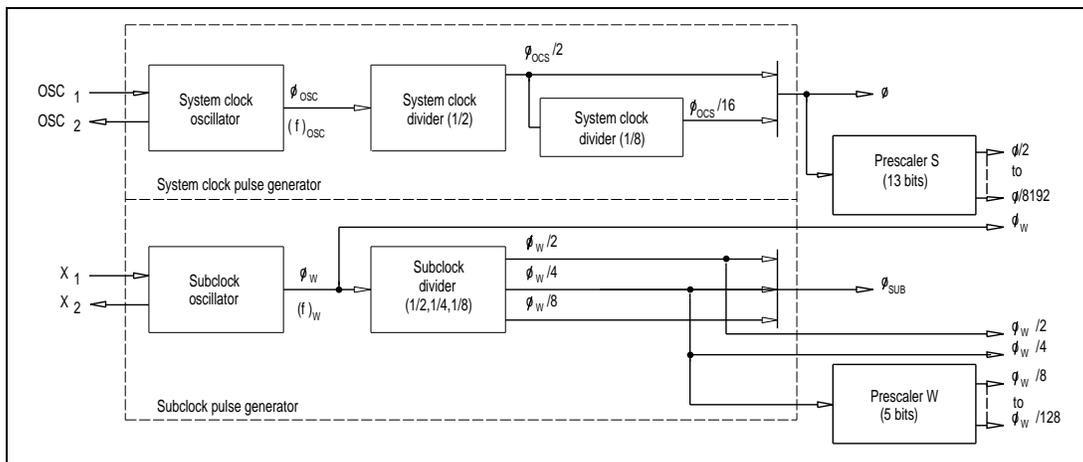


Figure 4-1 Block Diagram of Clock Pulse Generators

4.1.2 System Clock and Subclock

The basic clock signals that drive the CPU and on-chip peripheral modules are ϕ and ϕ_{SUB} . Four of the clock signals have names: ϕ is the system clock, ϕ_{SUB} is the subclock, ϕ_{OSC} is the oscillator clock, and ϕ_W is the watch clock.

The clock signals available for use by peripheral modules are ϕ_{OSC} , $\phi/2$, $\phi/4$, $\phi/8$, $\phi/16$, $\phi/32$, $\phi/64$, $\phi/128$, $\phi/256$, $\phi/512$, $\phi/1024$, $\phi/2048$, $\phi/4096$, $\phi/8192$, ϕ_W , $\phi_W/2$, $\phi_W/4$, $\phi_W/8$, $\phi_W/16$, $\phi_W/32$, $\phi_W/64$, and $\phi_W/128$. The clock requirements differ from one module to another.

4.2 System Clock Generator

Clock pulse can be supplied to the system clock divider either by connecting a crystal or ceramic oscillator, or by providing external clock input.

1. Connecting a crystal oscillator

Figure 4-2 shows a typical method of connecting a crystal oscillator.

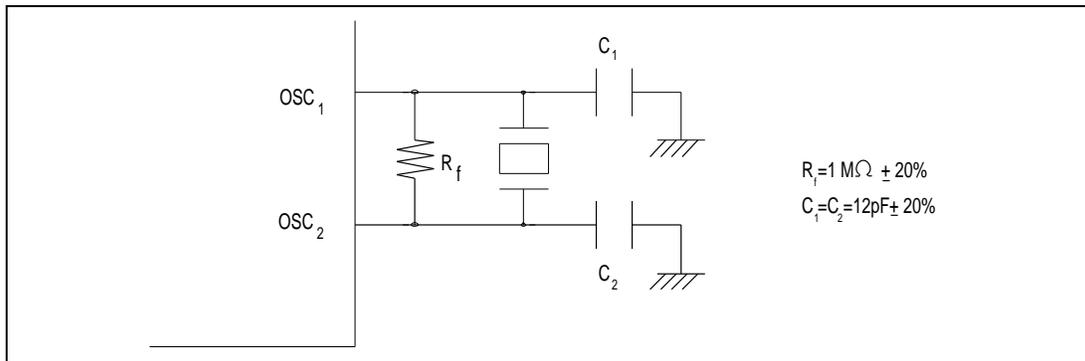


Figure 4-2 Typical Connection to Crystal Oscillator

Figure 4-3 shows the equivalent circuit of a crystal oscillator. An oscillator having the characteristics given in table 4-1 should be used.

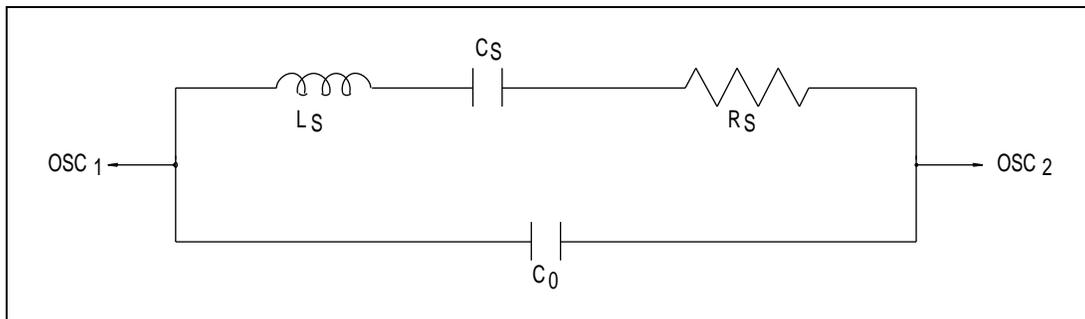


Figure 4-3 Equivalent Circuit of Crystal Oscillator

Table 4-1 Crystal Oscillator Parameters

Frequency (MHz)	2	4	8	10
Rs max (Ω)	500	100	50	30
Co max (pF)	7			

2 Connecting a ceramic oscillator

Figure 4-4 shows a typical method of connecting a ceramic oscillator.

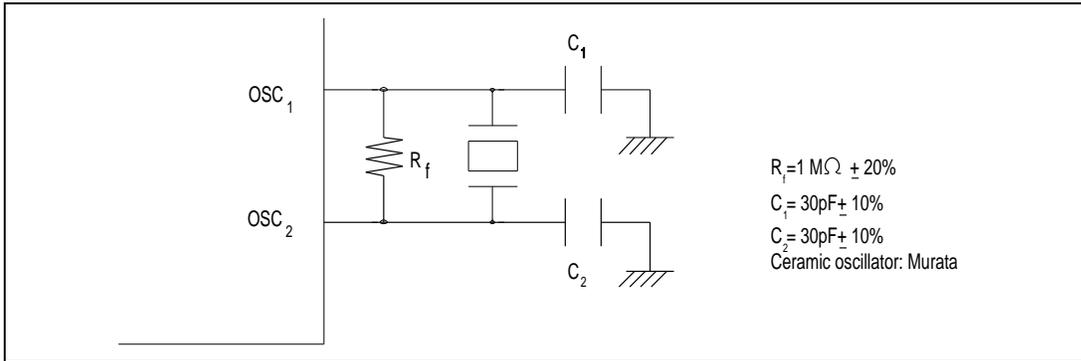


Figure 4-4 Typical Connection to Ceramic Oscillator

3. Notes on board design

When generating clock pulses by connecting a crystal or ceramic oscillator, pay careful attention to the following points.

Avoid running signal lines close to the oscillator circuit, since the oscillator may be adversely affected by induction currents. (See figure 4-5.)

The board should be designed so that the oscillator and load capacitors are located as close as possible to pins OSC₁ and OSC₂.

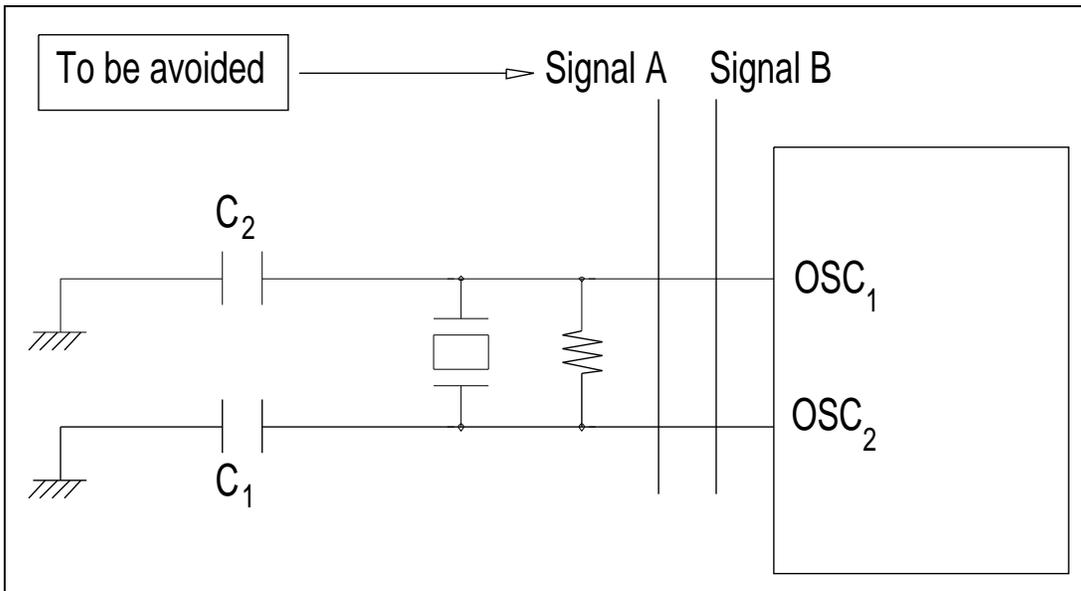


Figure 4-5 Board Design of Oscillator Circuit

4. External clock input method

Connect an external clock signal to pin OSC₁, and leave pin OSC₂ open. Figure 4-6 shows a typical connection.

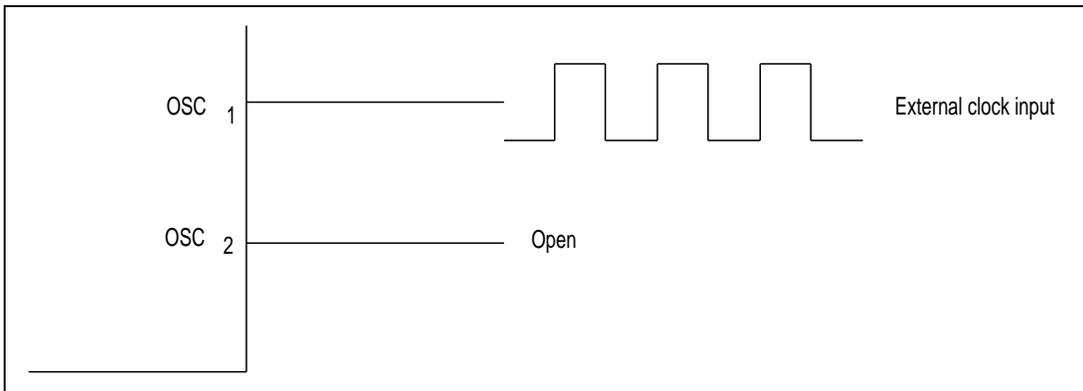


Figure 4-6 External Clock Input (Example)

Frequency	Oscillator Clock (ϕ_{osc})
Duty cycle	45% to 55%

4.3 Subclock Generator

1. Connecting a 32.768-kHz crystal oscillator

Clock pulses can be supplied to the subclock divider by connecting a 32.768-kHz crystal oscillator, as shown in figure 4-7. Follow the same precautions as noted under 4.2.3 for the system clock.

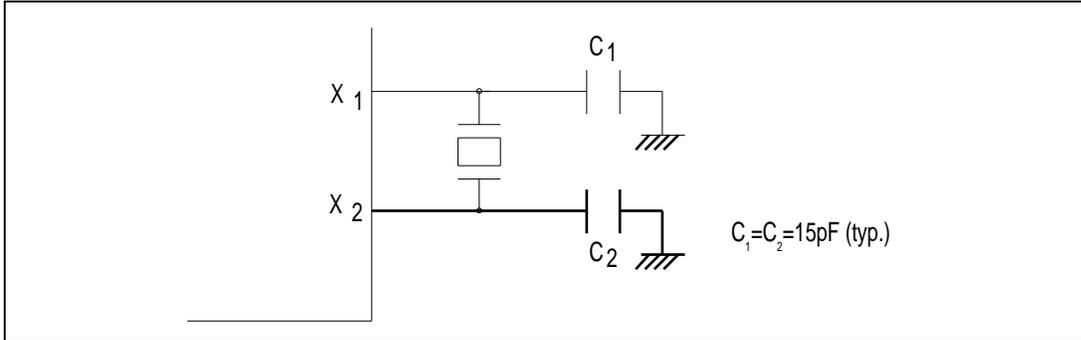


Figure 4-7 Typical Connection to 32.768-kHz Crystal Oscillator (Subclock)

Figure 4-8 shows the equivalent circuit of the 32.768-kHz crystal oscillator.

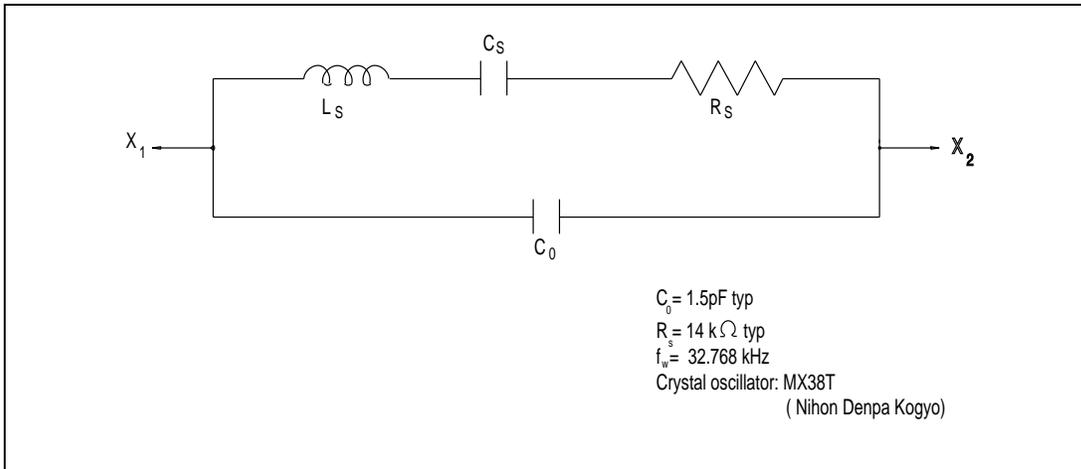


Figure 4-8 Equivalent Circuit of 32.768-kHz Crystal Oscillator

2. Inputting an external clock

(1) Circuit configuration

An external clock is input to the X_1 pin. The X_2 pin should be left open.

An example of the connection in this case is shown in figure 4-9.

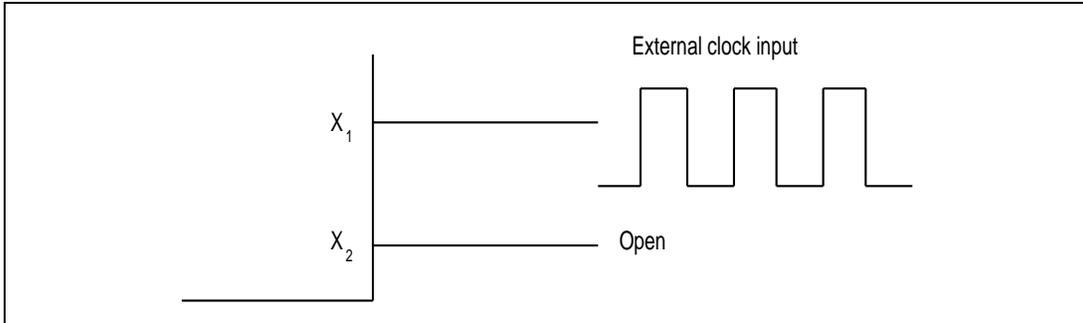


Figure 4-9 Example of Connection when Inputting an External Clock

(2) External clock

Input a square waveform to the X_1 pin. When using the CPU, timer A, timer C, timer G, or an LCD, with a subclock (ϕ_w) clock selected, do not stop the clock supply to the X_1 pin.

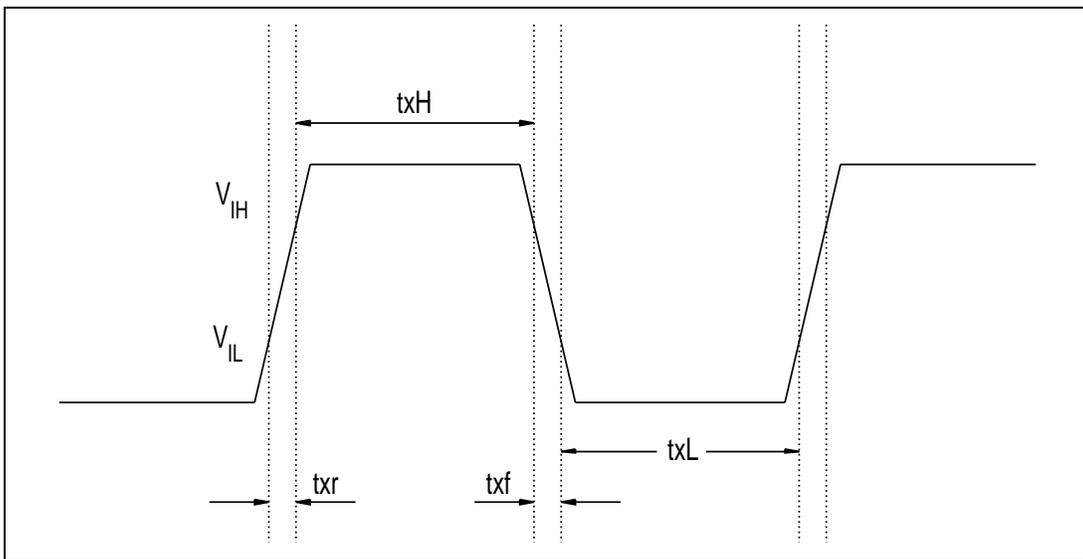


Figure 4-10 External Subclock Timing

The DC characteristics and timing of an external clock input to the X_1 pin are shown in table 4-2.

Table 4-2 DC Characteristics and Timing

($V_{CC} = 2.7\text{ V to }5.5\text{ V}$, $AV_{CC} = 2.7\text{ V to }5.5\text{ V}$, $V_{SS} = AV_{SS} = 0.0\text{ V}$, $T_a = -20^\circ\text{C to }+75^\circ\text{C}$, unless otherwise specified, including subactive mode)

Item	Symbol	Pin	Applicable			Unit	Notes
			Min	Typ	Max		
Input high voltage	V_{IH}	X_1	$V_{CC}-0.3$	--	$V_{CC}+0.3$	V	Figure 4.10
Input low voltage	V_{IL}		-0.3	--	0.3		
External subclock rise time	txr		--	--	100	ns	Figure 4.10
External subclock fall time	txf		--	--	100		
External subclock oscillation frequency	fx		--	32.768	--	kHz	
External subclock high width	txH		12.0	--	--	μs	Figure 4.10
External subclock low width	txL		12.0	--	--	μs	

3. Pin connection when not using subclock

When the subclock is not used, connect pin X_1 to V_{CC} and leave pin X_2 open, as shown in figure 4-9.

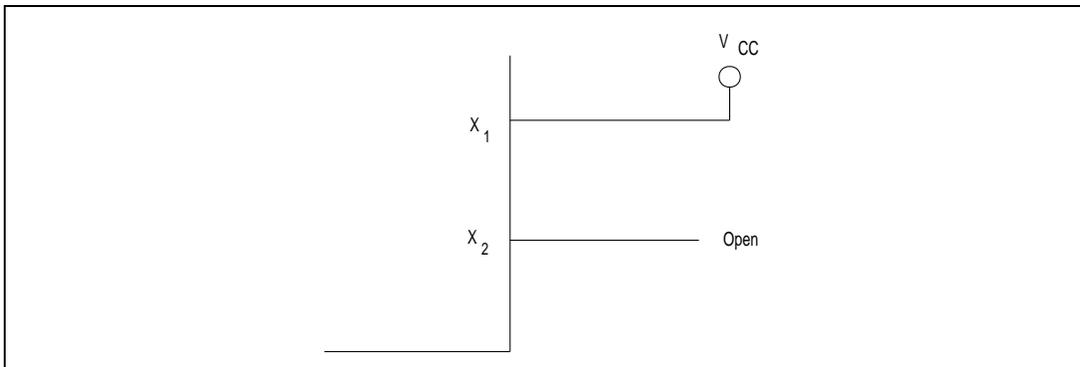


Figure 4-11 Pin Connection when not Using Subclock

4.4 Prescalers

The H8/3877U Series is equipped with two on-chip prescalers having different input clocks (prescaler S and prescaler W). Prescaler S is a 13-bit counter using the system clock (ϕ) as its input clock. Its prescaled outputs provide internal clock signals for on-chip peripheral modules. Prescaler W is a 5-bit counter using a 32.768-kHz signal divided by 4 ($\phi_w/4$) as its input clock. Its prescaled outputs are used by timer A as a time base for timekeeping.

1. Prescaler S (PSS)

Prescaler S is a 13-bit counter using the system clock (ϕ) as its input clock. It is incremented once per clock period.

Prescaler S is initialized to H'0000 by a reset, and starts counting on exit from the reset state. In standby mode, watch mode, subactive mode, and subsleep mode, the system clock pulse generator stops. Prescaler S also stops and is initialized to H'0000.

The CPU cannot read or write prescaler S.

The output from prescaler S is shared by the on-chip peripheral modules. The divider ratio can be set separately for each on-chip peripheral function.

In active (medium-speed) mode the clock input to prescaler S is $\phi_{osc}/16$.

2. Prescaler W (PSW)

Prescaler W is a 5-bit counter using a 32.768 kHz signal divided by 4 ($\phi_w/4$) as its input clock.

Prescaler W is initialized to H'00 by a reset, and starts counting on exit from the reset state.

Even in standby mode, watch mode, subactive mode, or subsleep mode, prescaler W continues functioning so long as clock signals are supplied to pins X₁ and X₂.

Prescaler W can be reset by setting 1s in bits TMA3 and TMA2 of timer mode register A (TMA).

Output from prescaler W can be used to drive timer A, in which case timer A functions as a time base for timekeeping.

4.5 Note on Oscillators

Oscillator characteristics of both the masked ROM and ZTAT™ versions are closely related to board design and should be carefully evaluated by the user, referring to the examples shown in this section. Oscillator circuit constants will differ depending on the oscillator element, stray capacitance in its interconnecting circuit, and other factors. Suitable constants should be determined in consultation with the oscillator element manufacturer. Design the circuit so that the oscillator element never receives voltages exceeding its maximum rating.

Section 5 Power-Down Modes **Error! Bookmark not defined.**

5.1 Overview

The H8/3877U Series has seven modes of operation after a reset. These include six power-down modes, in which power dissipation is significantly reduced.

Table 5-1 gives a summary of the seven operation modes. All but the active (high-speed) mode are power-down modes.

Table 5-1 Operation Modes

Operating Mode	Description
Active (high-speed) mode	The CPU runs on the system clock, executing program instructions at high speed
Active (medium-speed) mode	The CPU runs on the system clock, executing program instructions at reduced speed
Subactive mode	The CPU runs on the subclock, executing program instructions at reduced speed
Sleep mode	The CPU halts. On-chip peripheral modules continue to operate on the system clock.
Subsleep mode	The CPU halts. Timer A, timer C, timer G, and the LCD controller continue to operate on the subclock.
Watch mode	The CPU halts. The time-base function of Timer A and the LCD controller continue to operate on the subclock.
Standby mode	The CPU and all on-chip peripheral modules stop operating

In this section the two active modes (high-speed and medium-speed) are referred to collectively as active mode.

Figure 5-1 shows the transitions among these operation modes. Table 5-2 indicates the internal states in each mode.

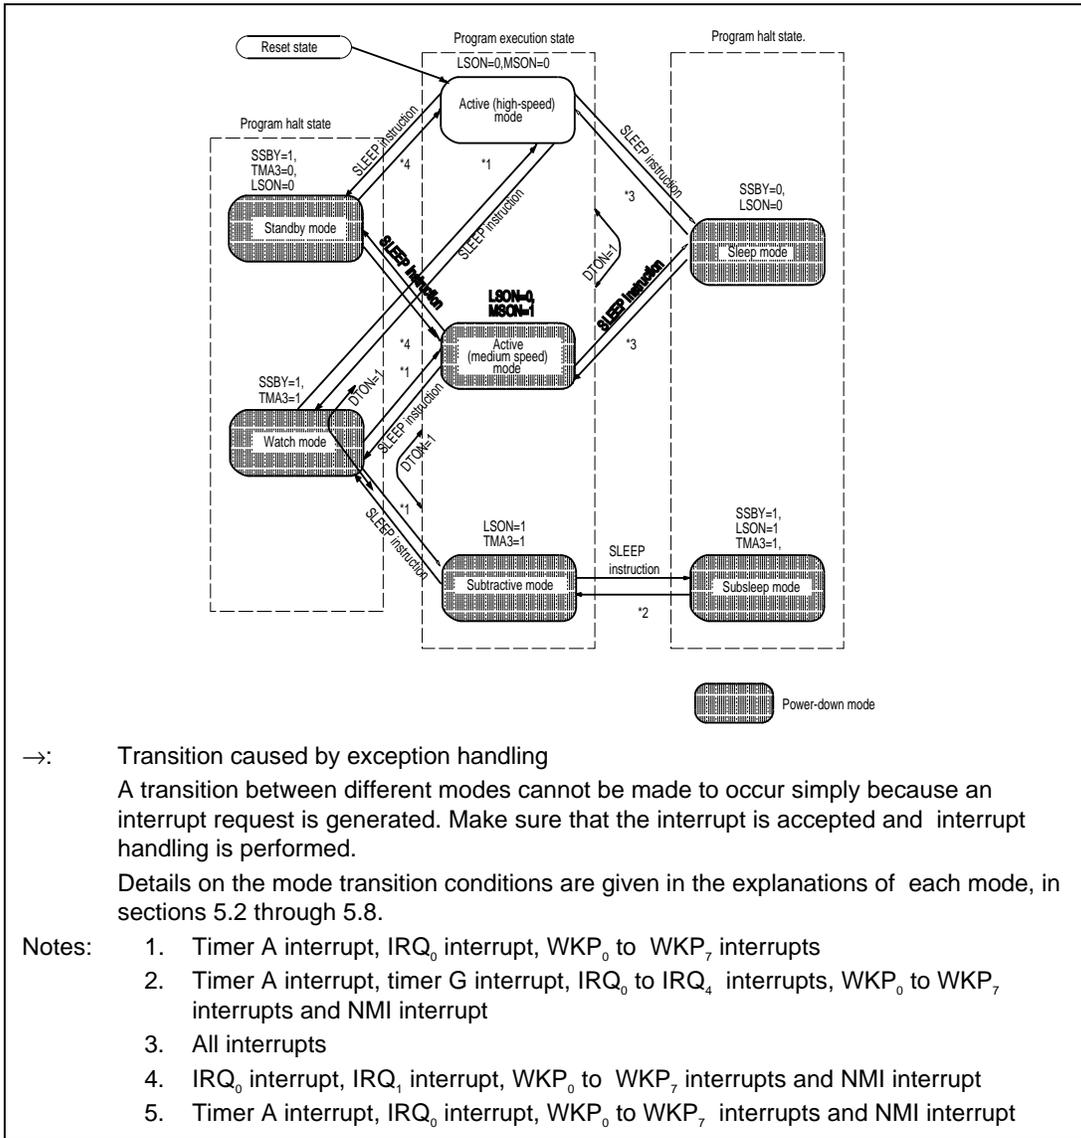


Figure 5-1 Operation Mode Transition Diagram

Table 5-2 Internal State in Each Operation Mode

		Active Mode						
Function		High Speed	Medium Speed	Sleep Mode	Watch Mode	Subactive Mode	Subsleep Mode	Standby Mode
System clock oscillator		Functional	Functional	Functional	Stopped	Stopped	Stopped	Stopped
Subclock oscillator		Functional	Functional	Functional	Functional	Functional	Functional	Functional
CPU operation	Instructions	Functional	Functional	Stopped	Stopped	Functional	Stopped	Stopped
	RAM			Retained	Retained		Retained	Retained
	Registers							
	I/O							Retained* ¹
External interrupts	NMI	Functional	Functional	Functional	Functional	Functional	Functional	Functional
	IRQ ₀							
	IRQ ₁					Retained* ⁵		
	IRQ ₂							Retained* ⁵
	IRQ ₃							
	IRQ ₄							
	WKP ₀	Functional	Functional	Functional	Functional	Functional	Functional	Functional
	WKP ₁							
	WKP ₂							
	WKP ₃							
	WKP ₄							
Peripheral module functions	Timer A	Functional	Functional	Functional	Functional* ⁴	Functional* ⁴	Functional* ⁴	Retained
	Timer F				Retained	Retained	Retained	
	Timer G					Functional/ Retained* ²	Functional/ Retained* ²	
	SCI1	Functional	Functional	Functional	Retained	Retained	Retained	Retained
	SCI3				Reset	Reset	Reset	Reset
	DTMF	Functional	Functional	Functional	Reset	Reset	Reset	Reset
	A/D	Functional	Functional	Functional	Retained	Retained	Retained	Retained

Active Mode

Function	High Speed	Medium Speed	Sleep Mode	Watch Mode	Subactive Mode	Subsleep Mode	Standby Mode
LCD	Functional	Functional	Functional	Functional/ Retained ^{1*3}	Functional/ Retained ^{*3}	Functional/ Retained ^{1*3}	Retained
Multitone generator	Functional	Functional	Functional	Reset	Reset	Reset	Reset

- Notes: 1 Register contents held; high-impedance output.
2. Functional only if $\phi / 2$ internal clock is selected; otherwise stopped and retained.
3. Functional only if ϕ_w , $\phi_w/2$ or $\phi_w/4$ internal clock is selected; otherwise stopped and retained.
4. Functional when timekeeping time-base function is selected.
5. External interrupt requests are ignored. The interrupt request register contents are not affected.

5.1.1 System Control Registers

The operation mode is selected using the system control registers described in table 5-3.

Table 5-3 System Control Register

Name	Abbreviation	R/W	Initial Value	Address
System control register 1	SYSCR1	R/W	H'07	H'FFF0
System control register 2	SYSCR2	R/W	H'E0	H'FFF1

1. System control register 1 (SYSCR1)

Bit	7	6	5	4	3	2	1	0
	SSBY	STS2	STS1	STS0	LSO	—	—	—
Initial value	0	0	0	0	0	1	1	1
Read/Write	R/W	R/W	R/W	R/W	R/W	—	—	—

SYSCR1 is an 8-bit read/write register for control of the power-down modes.

Upon reset, SYSCR1 is initialized to H'07.

Bit 7: Software standby (SSBY)

This bit designates transition to standby mode or watch mode.

Bit 7 SSBY	Description
0	<ul style="list-style-type: none"> When a SLEEP instruction is executed in active mode, a transition is made to sleep mode. (initial value) When a SLEEP instruction is executed in subactive mode, a transition is made to subsleep mode.
1	<ul style="list-style-type: none"> When a SLEEP instruction is executed in active mode, a transition is made to standby mode or watch mode. When a SLEEP instruction is executed in subactive mode, a transition is made to watch mode.

Bits 6 to 4: Standby timer select 2 to 0 (STS2 to STS0)

These bits designate the time the CPU and peripheral modules wait for stable clock operation after exiting from standby mode or watch mode to active mode due to an interrupt. The designation should be made according to the clock frequency so that the waiting time is at least 10 ms.

Bit 6 STS2	Bit 5 STS1	Bit 4 STS0	Description
0	0	0	Wait time = 8,192 states (initial value)
0	0	1	Wait time = 16,384 states
0	1	0	Wait time = 32,768 states
0	1	1	Wait time = 65,536 states
1	*	*	Wait time = 131,072 states

Note: * Don't care

Bit 3: Low speed on flag (LSON)

This bit chooses the system clock (ϕ) or subclock (ϕ_{SUB}) as the CPU operating clock when watch mode is cleared. The resulting operation mode depends on the combination of other control bits and interrupt input.

Bit 3 LSON Description

0	The CPU operates on the system clock (ϕ) (initial value)
1	The CPU operates on the subclock (ϕ_{SUB})

Bits 2 to 0: Reserved bits

These bits are reserved; they are always read as 1, and cannot be modified.

2. System control register 2 (SYSCR2)

Bit	7	6	5	4	3	2	1	0
	—	—	—	NESEL	DTON	MSON	SA1	SA0
Initial value	1	1	1	0	0	0	0	0
Read/Write	—	—	—	R/W	R/W	R/W	R/W	R/W

SYSCR2 is an 8-bit read/write register for power-down mode control.

Upon reset, SYSCR2 is initialized to H'E0.

Bits 7 to 5: Reserved bits

These bits are reserved; they are always read as 1, and cannot be modified.

Bit 4: Noise elimination sampling frequency select (NESEL)

This bit selects the frequency at which the watch clock signal (ϕ_w) generated by the subclock pulse generator is sampled, in relation to the oscillator clock (ϕ_{osc}) generated by the system clock pulse generator. When $\phi_{osc}=2$ to 10 MHz, clear NESEL to 0.

Bit 4 NESEL	Description
0	Sampling rate is $\phi_{osc}/16$ (initial value)
1	Sampling rate is $\phi_{osc}/4$

Bit 3: Direct transfer on flag (DTON)

This bit designates whether or not to make direct transitions among active (high-speed), active (medium-speed) and subactive mode when a SLEEP instruction is executed. The mode to which the transition is made after the SLEEP instruction is executed depends on a combination of this and other control bits.

Bit 3 DTON	Description
0	When a SLEEP instruction is executed in active mode, a transition is made to standby mode, watch mode, or sleep mode. (initial value) When a SLEEP instruction is executed in subactive mode, a transition is made to watch mode or subsleep mode.
1	When a SLEEP instruction is executed in active (high-speed) mode, a direct transition is made to active (medium-speed) mode if SSBY = 0, MSON = 1, and LSON = 0, or to subactive mode if SSBY = 1, TMA3 = 1, and LSON = 1. When a SLEEP instruction is executed in subactive mode, a direct transition is made to active (high-speed) mode if SSBY = 1, TMA3 = 1, LSON = 0, and MSON = 0, or to active (medium-speed) mode if SSBY = 1, TMA3 = 1, LSON = 0, and MSON = 1. When a SLEEP instruction is executed in subactive mode, a direct transition is made to active (high-speed) mode if SSBY = 1, TMA3 = 1, LSON = 0, and MSON = 0, or to active (medium-speed) mode if SSBY = 1, TMA3 = 1, LSON = 0, and MSON = 1.

Bit 2: Medium speed on flag (MSON)

After standby, watch, or sleep mode is cleared, this bit selects active (high-speed) or active (medium-speed) mode.

Bit 2 MSON	Description
0	Operation is in active (high-speed) mode (initial value)
1	Operation is in active (medium-speed) mode

Bits 1 and 0: Subactive mode clock select (SA1 and SA0)

These bits select the CPU clock rate ($\phi_w/2$, $\phi_w/4$, $\phi_w/8$) in subactive mode. SA1 and SA0 cannot be modified in subactive mode.

Bit 1 SA1	Bit 0 SA0	Description
0	0	$\phi_w/8$ (initial value)
0	1	$\phi_w/4$
1	*	$\phi_w/2$

Note: * Don't care

5.2 Sleep Mode

5.2.1 Transition to Sleep Mode

The system goes from active mode to sleep mode when a SLEEP instruction is executed while the SSBY and LSON bits in system control register 1 (SYSCR1) are cleared to 0. In sleep mode CPU operation is halted but the on-chip peripheral functions are operational. The CPU register contents are retained.

5.2.2 Clearing Sleep Mode

Sleep mode is cleared by an interrupt (timer A, timer F, timer G, NMI, IRQ_0 to IRQ_4 , WKP_0 to WKP_7 , SCI1, SCI3, A/D converter, multitone generator) or by input at the \overline{RES} pin.

- Clearing by interrupt

When an interrupt is requested, sleep mode is cleared and interrupt exception handling starts. Operation resumes in active (high-speed) mode if $MSON = 0$ in SYSCR2, or active (medium-speed) mode if $MSON = 1$. Sleep mode is not cleared if the I bit of the condition code register (CCR) is set to 1 or the particular interrupt is disabled in the interrupt enable register.

- Clearing by \overline{RES} input

When the \overline{RES} pin goes low, the CPU goes into the reset state and sleep mode is cleared.

5.3 Standby Mode

5.3.1 Transition to Standby Mode

The system goes from active mode to standby mode when a SLEEP instruction is executed while the SSBY bit in SYSCR1 is set to 1, the LSON bit is cleared to 0, and bit TMA3 in timer register A (TMA) is cleared to 0. In standby mode the clock pulse generator stops, so the CPU and on-chip peripheral modules stop functioning. As long as a minimum required voltage is applied, the CPU register contents and data in the on-chip RAM will be retained. The I/O ports go to the high-impedance state.

5.3.2 Clearing Standby Mode

Standby mode is cleared by an interrupt (NMI, IRQ_0 , IRQ_1 , WKP_0 to WKP_7) or by input at the \overline{RES} pin.

- Clearing by interrupt

When an interrupt is requested, the system clock pulse generator starts. After the time set in bits STS2-STSO in SYSCR1 has elapsed, a stable system clock signal is supplied to the entire chip, standby mode is cleared, and interrupt exception handling starts. Operation resumes in active (high-speed) mode if $MSON = 0$ in SYSCR2, or active (medium-speed) mode if $MSON = 1$. Standby mode is not cleared if the I bit of CCR is set to 1 or the particular interrupt is disabled in the interrupt enable register.

- Clearing by \overline{RES} input

When the \overline{RES} pin goes low, the system clock pulse generator starts and standby mode is cleared. After the pulse generator output has stabilized, if the \overline{RES} pin is driven high, the CPU starts reset exception handling.

Since system clock signals are supplied to the entire chip as soon as the system clock pulse generator starts functioning, the \overline{RES} pin should be kept at the low level until the pulse generator output stabilizes.

5.3.3 Oscillator Settling Time after Standby Mode is Cleared

Bits STS2 to STS0 in SYSCR1 should be set as follows:

- When a crystal oscillator is used

Table 5-4 gives settings for various operating frequencies. Set bits STS2 to STS0 for a waiting time of at least 10 ms.

- When an external clock is used

Any values may be set. Normally the minimum time (STS2 = STS1 = STS0 = 0) should be set.

Table 5-4 Clock Frequency and Settling Time (times are in ms)

STS2	STS1	STS0	Waiting Time	5 MHz	4 MHz	2 MHz	1 MHz	0.5 MHz
0	0	0	8,192 states	1.6	2.0	4.1	8.2	[16.4]
0	0	1	16,384 states	3.2	4.1	8.2	[16.4]	32.8
0	1	0	32,768 states	6.6	8.2	[16.4]	32.8	65.5
0	1	1	65,536 states	[13.1]	[16.4]	32.8	65.5	131.1
1	*	*	131,072 states	26.2	32.8	65.5	131.1	262.1

Note: *Don't care

5.4 Watch Mode

5.4.1 Transition to Watch Mode

The system goes from active or subactive mode to watch mode when a SLEEP instruction is executed while the SSBY bit in SYSCR1 is set to 1 and bit TMA3 in TMA is set to 1.

In watch mode, operation of on-chip peripheral modules other than timer A and the LCD controller is halted. The LCD controller can be selected to operate or to halt. As long as a minimum required voltage is applied, the contents of CPU registers and some registers of the on-chip peripheral modules*, and the on-chip RAM contents, are retained. I/O ports keep the same states as before the transition.

Note: *The contents of SCI3, DTMF generator, and multi-tone generator registers are reset.

5.4.2 Clearing Watch Mode

Watch mode is cleared by an interrupt (timer A, NMI, IRQ₀, WKP₀ to WKP₇) or by a low input at the $\overline{\text{RES}}$ pin.

- Clearing by interrupt

When watch mode is cleared by a timer A, IRQ₀, or WKP₀ to WKP₇ interrupt request, the mode to which a transition is made depends on the settings of LSON in SYSCR1 and MSON in SYSCR2. If both LSON and MSON are cleared to 0, transition is to active (high-speed) mode; if LSON = 0 and MSON = 1, transition is to active (medium-speed) mode; if LSON = 1, transition is to subactive mode. When watch mode is cleared by an NMI interrupt request, the transition is to active (high-speed) mode if MSON = 0 or to active (medium-speed) mode if MSON = 1, but never to subactive mode. When the transition is to active mode, after the time set in SYSCR1 bits STS2 to STS0 has elapsed, a stable clock signal is supplied to the entire chip, watch mode is cleared, and interrupt exception handling starts. Watch mode is not cleared if the I bit of CCR is set to 1 or the particular interrupt is disabled in the interrupt enable register.

- Clearing by $\overline{\text{RES}}$ input

Clearing by $\overline{\text{RES}}$ pin is the same as for standby mode; see 5.3.2, Clearing Standby Mode.

5.4.3 Oscillator Settling Time after Watch Mode is Cleared

The waiting time is the same as for standby mode; see 5.3.3, Oscillator Settling Time after Standby Mode is Cleared.

5.5 Subsleep Mode

5.5.1 Transition to Subsleep Mode

The system goes from subactive mode to subsleep mode when a SLEEP instruction is executed while the SSBY bit in SYSCR1 is cleared to 0, LSON is set to 1, and bit TMA3 in TMA is set to 1.

In subsleep mode, operation of on-chip peripheral modules other than timer A, timer G, and the LCD controller is halted. As long as a minimum required voltage is applied, the contents of CPU registers and some registers of the on-chip peripheral modules*, and the on-chip RAM contents, are retained. I/O ports keep the same states as before the transition.

Note: *The contents of SCI3, DTMF generator, and multi-tone generator registers are reset.

5.5.2 Clearing Subsleep Mode

Subsleep mode is cleared by an interrupt (timer A, timer G, NMI, IRQ₀ to IRQ₄, WKP₀ to WKP₇) or by a low input at the $\overline{\text{RES}}$ pin.

- Clearing by interrupt
When an interrupt is requested, subsleep mode is cleared and interrupt exception handling starts. Subsleep mode is not cleared if the I bit of CCR is set to 1 or the particular interrupt is disabled in the interrupt enable register.
- Clearing by $\overline{\text{RES}}$ input
Clearing by $\overline{\text{RES}}$ input is the same as for standby mode; see 5.3.2, Clearing Standby Mode.

5.6 Subactive Mode

5.6.1 Transition to Subactive Mode

Subactive mode is entered from watch mode if a timer A, IRQ_0 , or WKP_0 to WKP_7 interrupt is requested while the LSON bit in SYSCR1 is set to 1. From subsleep mode, subactive mode is entered if a timer A, timer G, NMI, IRQ_0 to IRQ_4 , or WKP_0 to WKP_7 interrupt is requested. A transition to subactive mode does not take place if the I bit of CCR is set to 1 or the particular interrupt is disabled in the interrupt enable register.

The contents of SCI3, DTMF generator, and multi-tone generator registers are reset.

5.6.2 Clearing Subactive Mode

Subactive mode is cleared by a SLEEP instruction or by a low input at the \overline{RES} pin.

- Clearing by SLEEP instruction
If a SLEEP instruction is executed while the SSBY bit in SYSCR1 is set to 1 and bit TMA3 in TMA is set to 1, subactive mode is cleared and watch mode is entered. If a SLEEP instruction is executed while $SSBY = 0$ and $LSON = 1$ in SYSCR1 and $TMA3 = 1$ in TMA, subsleep mode is entered. Direct transfer to active mode is also possible; see 5.8, Direct Transfer, below.
- Clearing by \overline{RES} pin
Clearing by \overline{RES} pin is the same as for standby mode; see 5.3.2, Clearing Standby Mode.

5.6.3 Operating Frequency in Subactive Mode

The operating frequency in subactive mode is set in bits SA1 and SA0 in SYSCR2. The choices are $f_w/2$, $f_w/4$, and $f_w/8$.

5.7 Active (medium-speed) Mode

5.7.1 Transition to Active (medium-speed) Mode

If the MSON bit in SYSCR2 is set to 1 while the LSON bit in SYSCR1 is cleared to 0, a transition to active (medium-speed) mode results from NMI, IRQ₀, IRQ₁, or WKP₀ to WKP₇ interrupts in standby mode, timer A, NMI, IRQ₀, or WKP₀ to WKP₇ interrupts in watch mode, or any interrupt in sleep mode. A transition to active (medium-speed) mode does not take place if the I bit of CCR is set to 1 or the particular interrupt is disabled in the interrupt enable register.

5.7.2 Clearing Active (medium-speed) Mode

Active (medium-speed) mode is cleared by a SLEEP instruction or by a low input at the $\overline{\text{RES}}$ pin.

- Clearing by SLEEP instruction

A transition to standby mode takes place if a SLEEP instruction is executed while the SSBY bit in SYSCR1 is set to 1, the LSON bit in SYSCR1 is cleared to 0, and bit TMA3 in TMA is cleared to 0. The system goes to watch mode if the SSBY bit in SYSCR1 is set to 1 and bit TMA3 in TMA is set to 1 when a SLEEP instruction is executed. Sleep mode is entered if both SSBY and LSON are cleared to 0 when a SLEEP instruction is executed. Direct transfer to active (high-speed) mode or to subactive mode is also possible. See 5.8, Direct Transfer, below for details.

- Clearing by $\overline{\text{RES}}$ pin

When the $\overline{\text{RES}}$ pin goes low, the CPU enters the reset state and active (medium-speed) mode is cleared.

5.7.3 Operating Frequency in Active (medium-speed) Mode

In active (medium-speed) mode, the CPU is clocked at 1/8 the frequency in active (high-speed) mode. The DTMF generator and multitone generator, however, continue to operate on the OSC clock (ϕ_{osc}).

5.8 Direct Transfer

The CPU can execute programs in three modes: active (high-speed) mode, active (medium-speed) mode, and subactive mode. A direct transfer is a transition among these three modes without the stopping of program execution. A direct transfer can be made by executing a SLEEP instruction while the DTON bit in SYSCR2 is set to 1. After the mode transition, direct transfer interrupt exception handling starts.

If the direct transfer interrupt is disabled in interrupt enable register 2, a transition is made instead to sleep mode or watch mode. Note that if a direct transition is attempted while the I bit in CCR is set to 1, sleep mode or watch mode will be entered, and it will be impossible to clear the resulting mode by means of an interrupt.

- Direct transfer from active (high-speed) mode to active (medium-speed) mode
When a SLEEP instruction is executed in active (high-speed) mode while the SSBY and LSON bits in SYSCR1 are cleared to 0, the MSON bit in SYSCR2 is set to 1, and the DTON bit in SYSCR2 is set to 1, a transition is made to active (medium-speed) mode via sleep mode.
- Direct transfer from active (medium-speed) mode to active (high-speed) mode
When a SLEEP instruction is executed in active (medium-speed) mode while the SSBY and LSON bits in SYSCR1 are cleared to 0, the MSON bit in SYSCR2 is cleared to 0, and the DTON bit in SYSCR2 is set to 1, a transition is made to active (high-speed) mode via sleep mode.
- Direct transfer from active (high-speed) mode to subactive mode
When a SLEEP instruction is executed in active (high-speed) mode while the SSBY and LSON bits in SYSCR1 are set to 1, the DTON bit in SYSCR2 is set to 1, and bit TMA3 in TMA is set to 1, a transition is made to subactive mode via watch mode.
- Direct transfer from subactive mode to active (high-speed) mode
When a SLEEP instruction is executed in subactive mode while the SSBY bit in SYSCR1 is set to 1, the LSON bit in SYSCR1 is cleared to 0, the MSON bit in SYSCR2 is cleared to 0, the DTON bit in SYSCR2 is set to 1, and bit TMA3 in TMA is set to 1, a transition is made directly to active (high-speed) mode via watch mode after the waiting time set in SYSCR1 bits STS2 to STS0 has elapsed.
- Direct transfer from active (medium-speed) mode to subactive mode
When a SLEEP instruction is executed in active (medium-speed) mode while the SSBY and LSON bits in SYSCR1 are set to 1, the DTON bit in SYSCR2 is set to 1, and bit TMA3 in TMA is set to 1, a transition is made to subactive mode via watch mode.
- Direct transfer from subactive mode to active (medium-speed) mode

When a SLEEP instruction is executed in subactive mode while the SSBY bit in SYSCR1 is set to 1, the LSON bit in SYSCR1 is cleared to 0, the MSON bit in SYSCR2 is set to 1, the DTON bit in SYSCR2 is set to 1, and bit TMA3 in TMA is set to 1, a transition is made directly to active (medium-speed) mode via watch mode after the waiting time set in SYSCR1 bits STS2 to STS0 has elapsed.

Section 6 ROM

6.1 Overview

The H8/3877U has 60 kbytes of on-chip ROM, while the H8/3867U has 48 kbytes and the H8/3875U has 40 kbytes. The ROM is connected to the CPU by a 16-bit data bus, allowing high-speed 2-state access for both byte data and word data.

6.1.1 Block Diagram

Figure 6-1 shows a block diagram of the on-chip ROM.

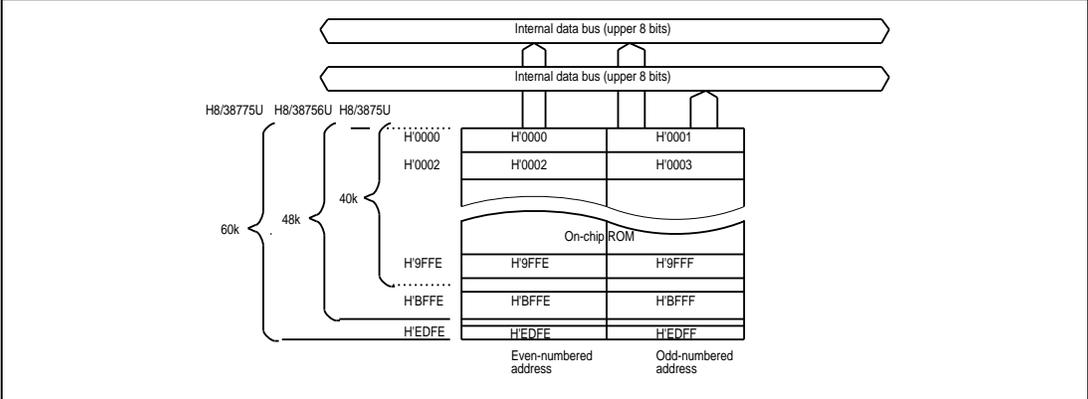


Figure 6-1 ROM Block Diagram

6.2 FROM Mode

6.2.1 Selection of PROM Mode

If the on-chip ROM is PROM, setting the chip to PROM mode stops operation as a microcontroller and allows the PROM to be programmed in the same way as the HN27C101, except that page programming is not supported. Table 6-1 shows how to select PROM mode.

Table 6-1 Selection of PROM Mode

Pin Name	Setting
TEST	High level
PB ₇ /AN ₇	Low level
PB ₆ /AN ₆	
PB ₅ /AN ₅	High level

6.2.2 Socket Adapter Pin Arrangement and Memory Map

A standard PROM programmer can be used to program the PROM. A socket adapter is required for conversion to 32 pins, as listed in table 6-2.

Figure 6-2 shows the pin-to-pin wiring of the socket adapter. Figure 6-3 shows a memory map.

Table 6-2 Socket Adapter

Package	Socket Adapter
100-pin (FP100B)	HS3877ESH-01H

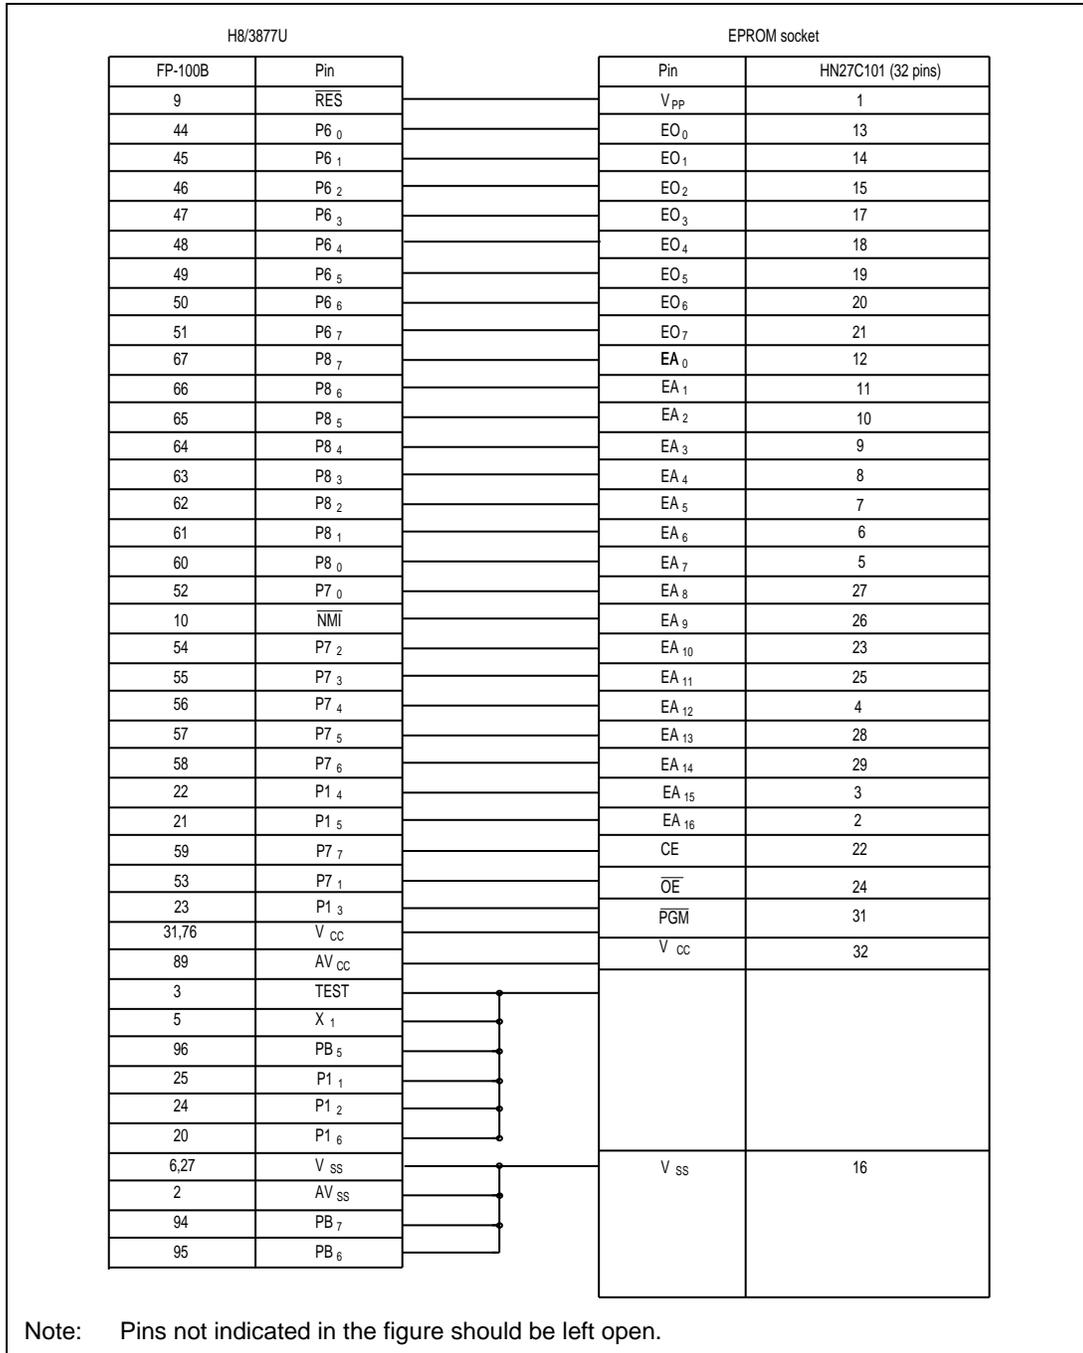


Figure 6-2 Socket Adapter Pin Correspondence

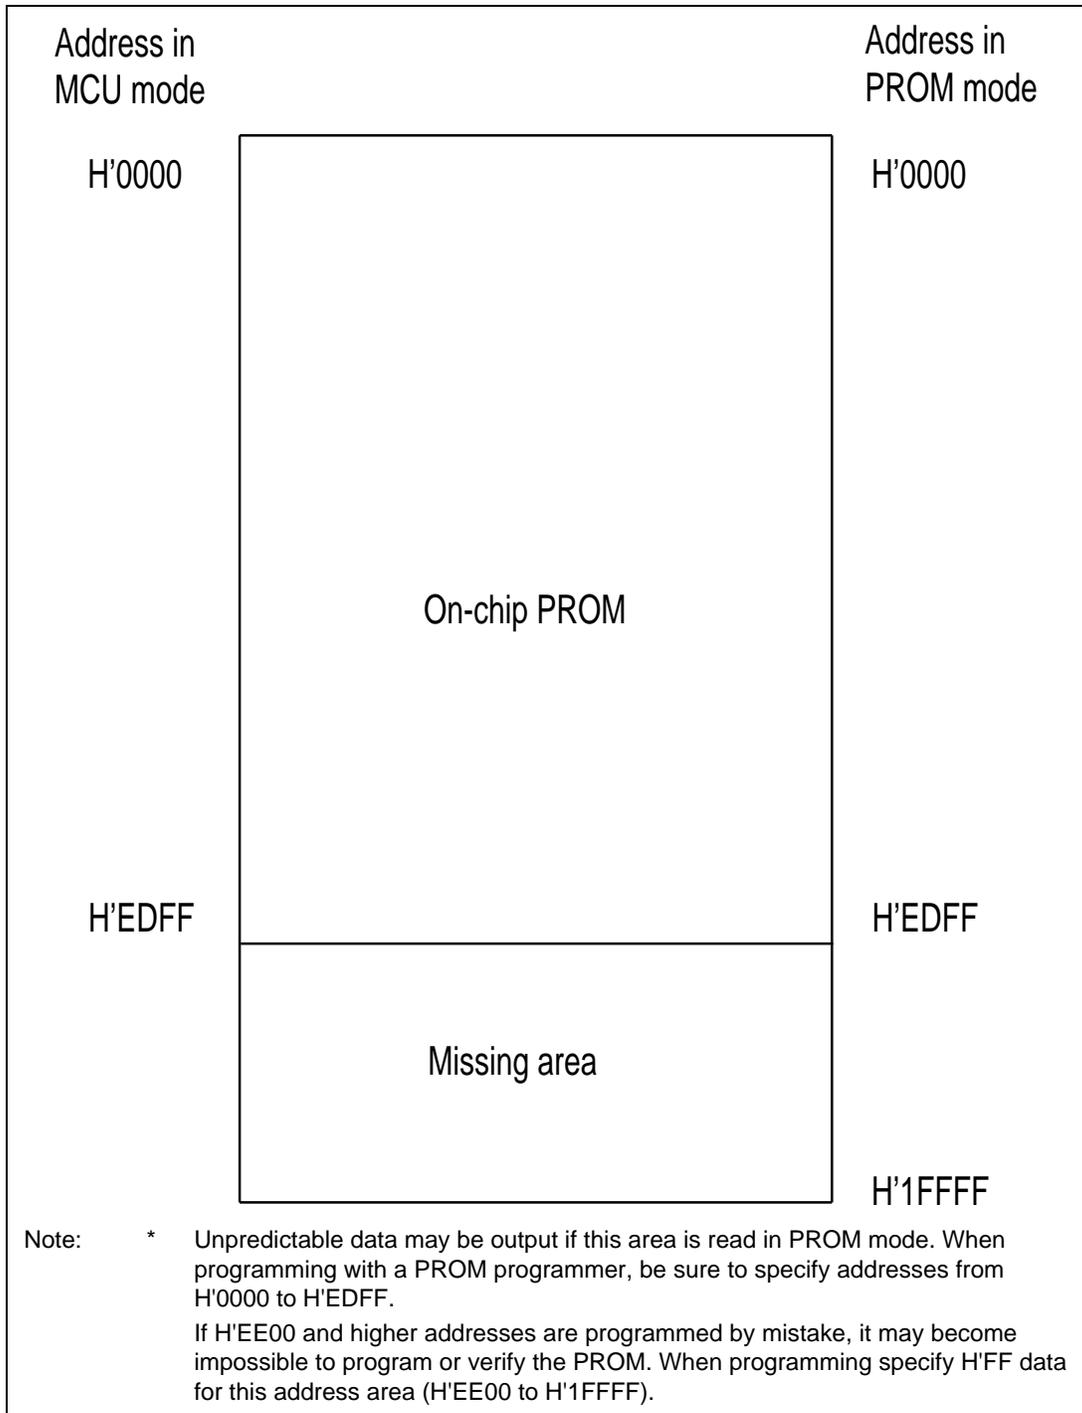


Figure 6-3 Memory Map in PROM Mode

6.3 Programming

The program, verify, and other modes are selected as shown in table 6-3 in PROM mode.

Table 6-3 Mode Selection in PROM Mode

Mode	Pin						
	CE	OE	PGM	V _{pp}	V _{cc}	EO ₇ to EO ₀	EA ₁₆ to EA ₀
Write	L	H	L	V _{pp}	V _{cc}	Data input	Address input
Verify	L	L	H	V _{pp}	V _{cc}	Data output	Address input
Programming disabled	L	L	I	V _{pp}	V _{cc}	High impedance	Address input
	L	H	H				
	H	L	L				
	H	H	H				

Notation:

L: Low level

H: High level

V_{pp}: V_{pp} level

V_{cc}: V_{cc} level

The programming and verifying specifications in PROM mode are the same as the specifications of the standard HN27C101 EPROM. Page programming is not supported, however. The PROM programmer must not be set to page mode. PROM programmers that support only page programming cannot be used. When selecting a PROM programmer, make sure that it supports a byte-byte high-speed, high-reliability programming method. Be sure to set the address range to H'0000 to H'EDFF.

6.3.1 Programming and Verification

An efficient, high-speed, high-reliability programming procedure can be used to program and verify data. This procedure programs the chip quickly without subjecting it to voltage stress and without sacrificing data reliability. Figure 6-4 shows the basic high-speed, high-reliability programming flow chart.

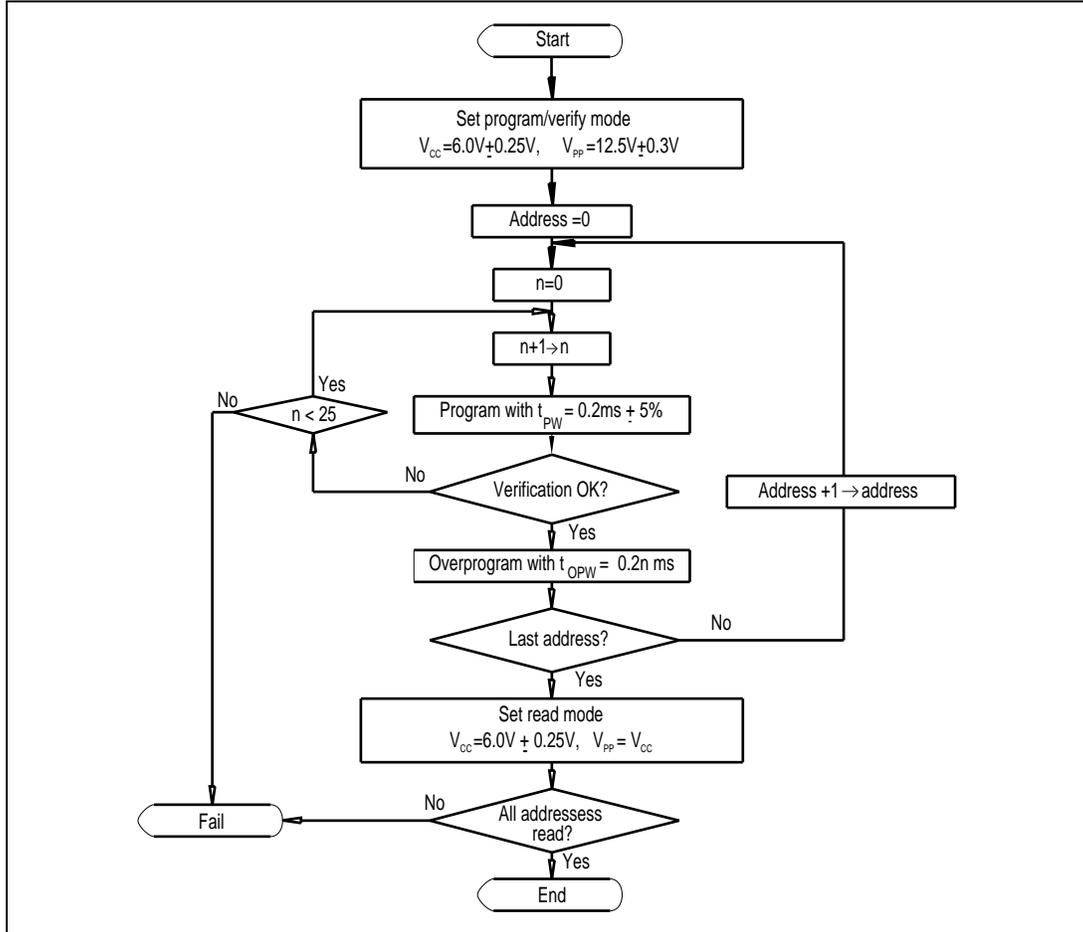


Figure 6-4 High-Speed, High-Reliability Programming Flow Chart

Table 6-4 and table 6-5 give the electrical characteristics in programming mode.

Table 6-4 DC Characteristics (preliminary)

(Conditions: $V_{cc}=6.4\text{ V}\pm 0.25\text{ V}$, $V_{pp}=12.5\text{ V}\pm 0.3\text{ V}$, $V_{ss}=0\text{ V}$, $T_a=25^\circ\text{C}\pm 5^\circ\text{C}$)

Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Input high-level voltage	$\cdot\text{EO}_7$ to EO_0 , EA_{16} to EA_0 OE, CE, PGM	V_{IH}	2.4	--	$V_{cc}+0.3$	V
Input low-level voltage	EO_7 to EO_0 , EA_{16} to EA_0 OE, CE, PGM	V_{IL}	-0.3	--	0.8	V
Output high-level voltage	EO_7 to EO_0	V_{OH}	2.4	--	--	V $I_{OH}=-200\ \mu\text{A}$
Output low-level voltage	EO_7 to EO_0	V_{OL}	--	--	0.45	V $I_{OL}=0.8\ \text{mA}$
Input leakage current	EO_7 to EO_0 , EA_{16} to EA_0 OE, CE, PGM	$ I_{IL} $	--	--	2	μA $V_{in}=5.25\text{ V}/0.5\text{ V}$
V_{cc} current		I_{cc}	--	--	40	mA
V_{pp} current		I_{pp}	--	--	40	mA

Table 6-5 AC Characteristics (preliminary)(Conditions: $V_{cc}=6.0\text{ V}\pm 0.25\text{ V}$, $V_{pp}=12.5\text{ V}\pm 0.3\text{ V}$, $T_a=25^\circ\text{C}\pm 5^\circ\text{C}$)

Item	Symbol	Min	Typ	Max	Unit	Test Conditions
Address setup time	t_{AS}	2	--	--	μs	Figure 6-5*1
OE setup time	t_{OES}	2	--	--	μs	
Data setup time	t_{DS}	2	--	--	μs	
Address hold time	t_{AH}	0	--	--	μs	
Data hold time	t_{DH}	2	--	--	μs	
Data output disable time	t_{DF}^{*2}	--	--	130	ns	
V_{pp} setup time	t_{VPS}	2	--	--	μs	
Programming pulse width	t_{PW}	0.19	0.20	0.21	ms	
PGM pulse width for over programming	t_{OPW}^{*3}	0.19	--	5.25	ms	
V_{cc} setup time	t_{VCS}	2	--	--	μs	
CE setup time	t_{CES}	2	--	--	μs	
Data output delay time	t_{OE}	0	--	200	ns	

Notes: 1. Input pulse level: 0.45 V to 2.4 V

Input rise time/fall time $\leq 20\text{ ns}$

Timing reference levels Input: 0.8 V, 2.0 V

Output: 0.8 V, 2.0 V

2. t_{DF} is defined at the point at which the output is floating and the output level cannot be read.
3. t_{OPW} is defined by the value given in the programming flow chart in figure 6-4

Figure 6-5 shows a program/verify timing diagram.

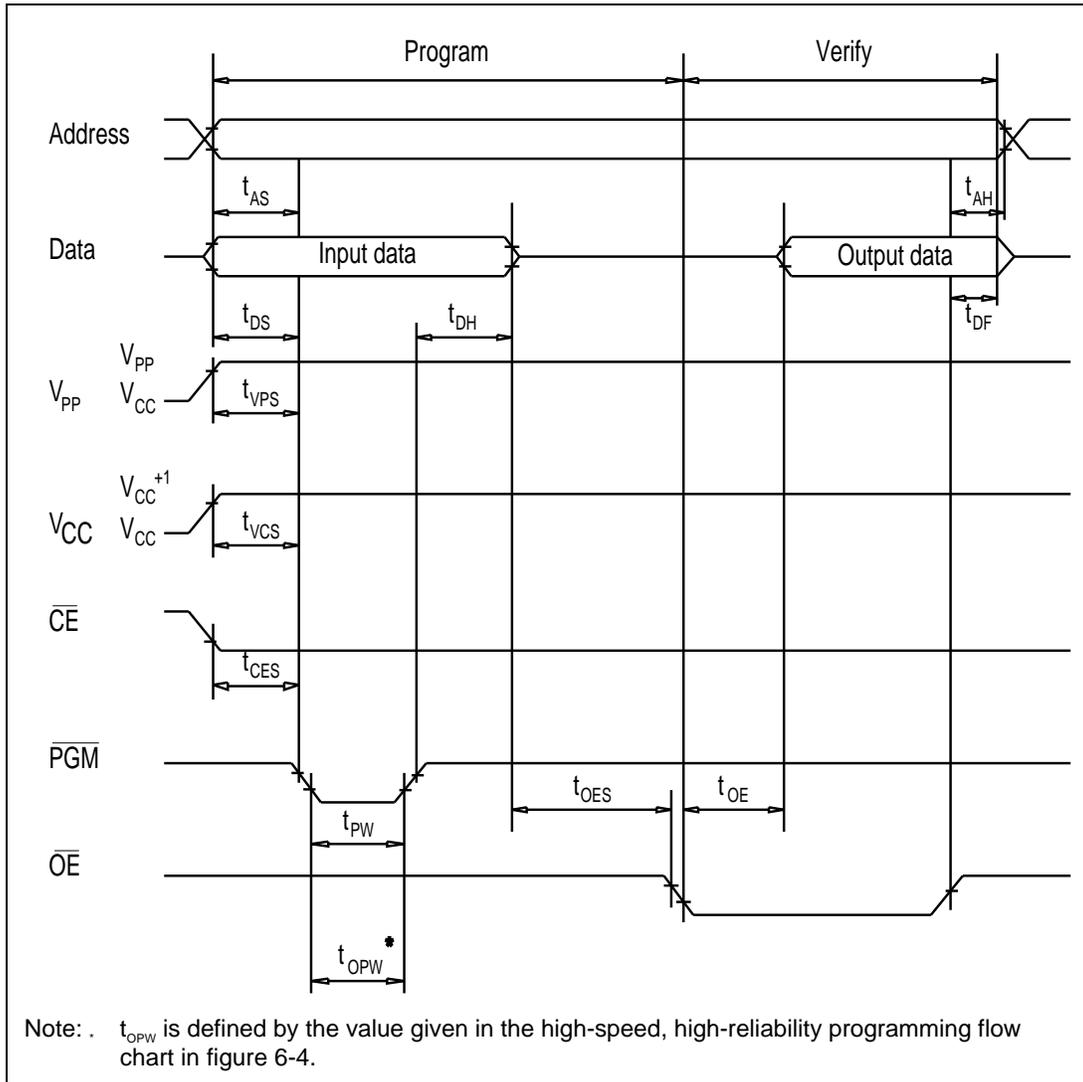


Figure 6-5 PROM Program/Verify Timing

6.3.2 Programming Precautions

- Use the specified programming voltage and timing
The programming voltage in PROM mode (V_{pp}) is 12.5 V. Use of a higher voltage can permanently damage the chip. Be especially careful with respect to PROM programmer overshoot
Setting the PROM programmer to Hitachi specifications for the HN27C101 will result in correct V_{pp} of 12.5 V
- Make sure the index marks on the PROM programmer socket, socket adapter, and chip are properly aligned. If they are not, the chip may be destroyed by excessive current flow. Before programming, be sure that the chip is properly mounted in the PROM programmer
- Avoid touching the socket adapter or chip while programming, since this may cause contact faults and write errors
- Select the programming mode carefully. The chip cannot be programmed in page programming mode
- When programming with a PROM programmer, be sure to specify addresses from H'0000 to H'EDFF. If address H'EE00 and higher addresses are programmed by mistake, it may become impossible to program the PROM or verify the programmed data. When programming, assign H'FF data to the address area from H'EE00 to H'1FFFF

6.4 Reliability of Programmed Data

A highly effective way of assuring data retention characteristics after programming is to screen the chips by baking them at a temperature of 150°C. This quickly eliminates PROM memory cells prone to initial data retention failure

Figure 6-6 shows a flowchart of this screening procedure

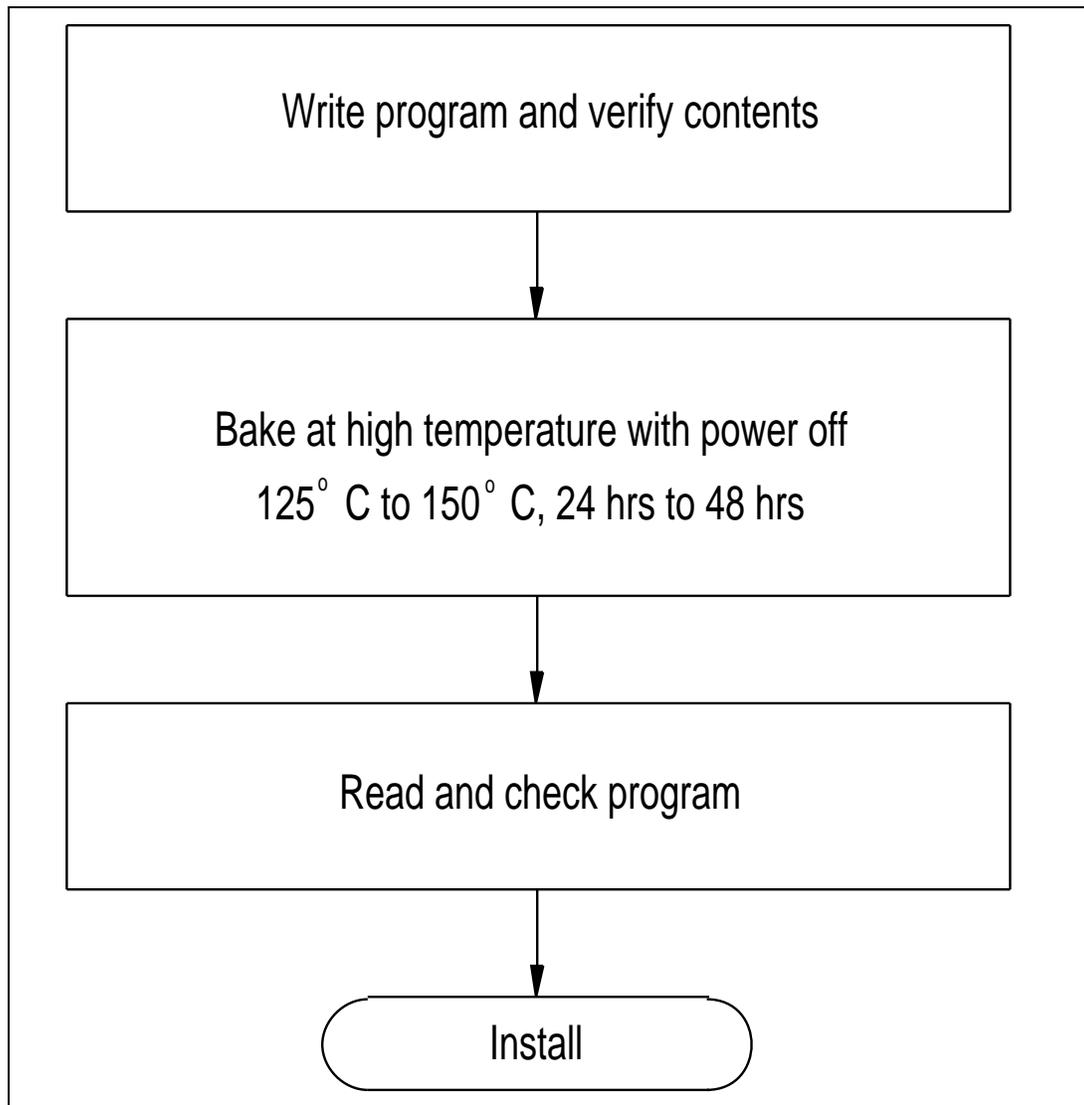


Figure 6-6 Recommended Screening Procedure

If write errors occur repeatedly while the same PROM programmer is being used, stop programming and check for problems in the PROM programmer and socket adapter, etc

Please notify your Hitachi representative of any problems occurring during programming or in screening after high-temperature baking.

Section 7 RAM

7.1 Overview

The H8/3877U Series has 2 kbytes of high-speed static RAM on-chip. The RAM is connected to the CPU by a 16-bit data bus, allowing high-speed 2-state access for both byte data and word data.

7.1.1 Block Diagram

Figure 7-1 shows a block diagram of the on-chip RAM.

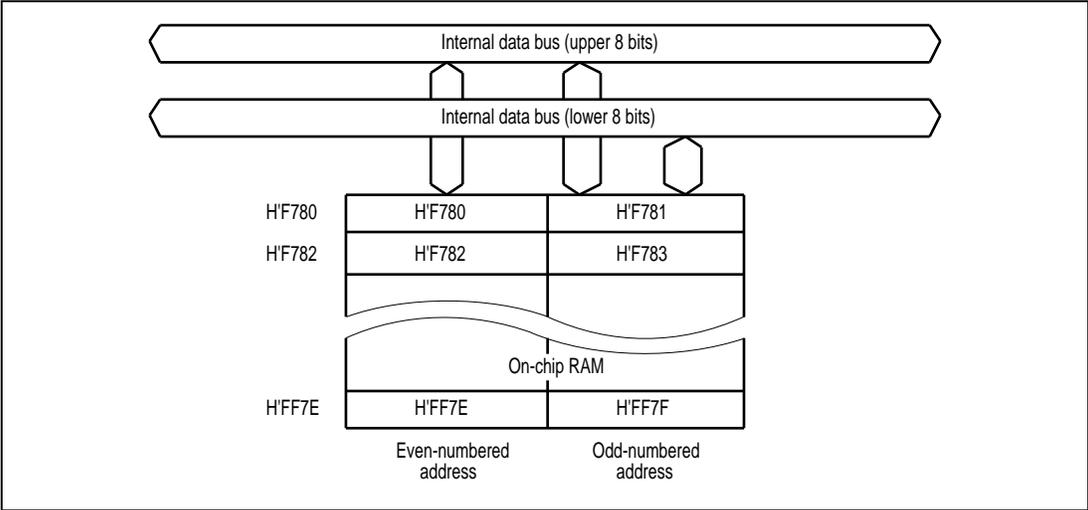


Figure 7-1 RAM Block Diagram

Section 8 I/O Ports

8.1 Overview

The H8/3877U Series is provided with eight 8-bit I/O ports, two 4-bit I/O ports, and one 8-bit input-only port. Table 8-1 indicates the functions of each port.

Each port has of a port control register (PCR) that controls input and output, and a port data register (PDR) for storing output data. Input or output can be assigned to individual bits. See 2.9.2, Notes on Bit Manipulation, for information on executing bit-manipulation instructions to write data in PCR or PDR.

Ports 5, 6, 7, 8, 9, A, D, and E double as LCD segment pins and common pins. The choice of pin functions can be made in 4-bit groupings.

Block diagrams of each port are given in Appendix C.

Table 8-1 Port Functions

Port	Description	Pins	Other Functions	Function Switching Register
Port 1	• 8-bit I/O port	P1 ₇ to P1 ₅ / $\overline{\text{IRQ}}_3$ to $\overline{\text{IRQ}}_1$ /TMIF	External interrupts 3 to 1 Timer event input TMIF	PMR1 TCRF
		P1 ₄	None	
	• High-current port	P1 ₃ /TMIG	Timer G input capture	PMR1
		P1 ₂ , P1 ₁ / TMOFH, TMOFL	Timer F output compare	PMR1
		P1 ₀ /TMOW	Timer A clock output	PMR1
Port 2	• 8-bit I/O port	P2 ₇ / $\overline{\text{IRQ}}_0$	External interrupt 0	PMR2
		• High-current port	P2 ₆ /TXD P2 ₅ /RXD P2 ₄ /SCK ₃	SC13 data output (TXD), data input (RXD), clock input/output (SCK3)
	P2 ₃ /SO ₁ P2 ₂ /SI ₁ P2 ₁ /SCK ₁		SCI1 data output (SO1), data input (SI ₁), clock input/output (SCK1)	PMR2
	P2 ₀ / $\overline{\text{IRQ}}_4$ / $\overline{\text{ADTRG}}$		External interrupt 4 and A/D converter external trigger	PMR2

Table 8-1 Port Functions (cont)

Port	Description	Pins	Other Functions	Function Switching Register
Port 5	<ul style="list-style-type: none"> 8-bit I/O port Input pull-up MOS option 	P5 ₇ to P5 ₀ / WKP ₇ to WKP ₀ / SEG ₈ to SEG ₁	Wakeup input (\overline{WKP}_7 to \overline{WKP}_0) Segment output (SEG ₈ to SEG ₁) LPCR SEG ₈ to SEG ₁	PMR5
Port 6	<ul style="list-style-type: none"> 8-bit I/O port Input pull-up MOS option 	P6 ₇ to P6 ₀ / SEG ₁₆ to SEG ₉	Segment output (SEG ₁₆ to SEG ₉)	LPCR
Port 7	<ul style="list-style-type: none"> 8-bit I/O port 	P7 ₇ to P7 ₀ / SEG ₂₄ to SEG ₁₇	Segment output (SEG ₂₄ to SEG ₁₇)	LPCR
Port 8	<ul style="list-style-type: none"> 8-bit I/O port 	P8 ₇ to P8 ₀ / SEG ₃₂ to SEG ₂₅	Segment output (SEG ₃₂ to SEG ₂₅)	LPCR
Port 9	<ul style="list-style-type: none"> 8-bit I/O port 	P9 ₇ to P9 ₀ / SEG ₄₀ to SEG ₃₃	Segment output (SEG ₄₀ to SEG ₃₃)	LPCR
Port A	<ul style="list-style-type: none"> 4-bit I/O port 	PA ₃ to PA ₀ / COM ₄ to COM ₁	Common output (COM ₄ to COM ₁) LPCR	
Port B	<ul style="list-style-type: none"> 8-bit input port 	PB ₇ to PB ₀ / AN ₇ to AN ₀	A/D converter analog input	AMR
Port D	<ul style="list-style-type: none"> 8-bit I/O port 	PD ₇ to PD ₀ / SEG ₄₈ to SEG ₄₁	Segment output (SEG ₄₈ to SEG ₄₁)	LPCR
Port E	<ul style="list-style-type: none"> 4-bit I/O Port 	PE ₃ /SEG ₅₂ /CL ₁ PE ₂ /SEG ₅₁ /CL ₂ PE ₁ /SEG ₅₀ /DO ₁ PE ₀ /SEG ₄₉ /M	Segment output (SEG ₅₂ to SEG ₄₉) LPCR Latch clock (CL ₁), shift clock (CL ₂), display data (DO), and alternated signal (M) for external segment expansion	LPCR

8.2 Port 1

8.2.1 Overview

Port 1 is an 8-bit I/O port. Figure 8-1 shows its pin configuration.

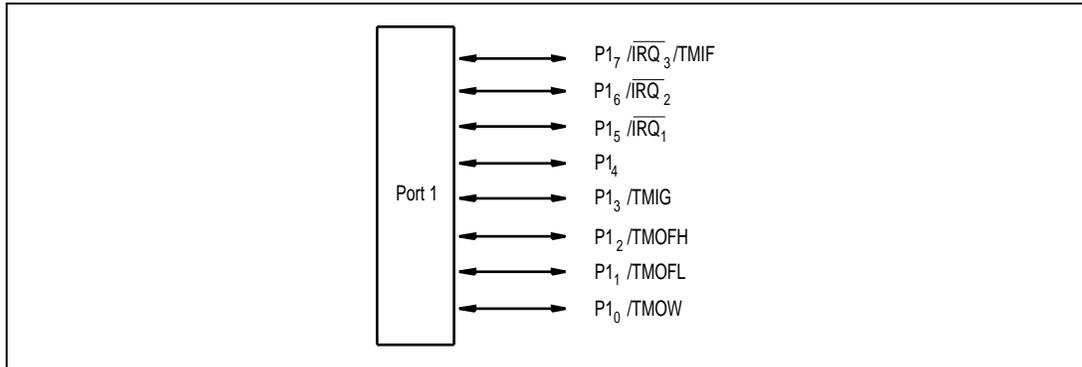


Figure 8-1 Port 1 Pin Configuration

8.2.2 Register Configuration and Description

Table 8-2 shows the port 1 register configuration.

Table 8-2 Port 1 Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register 1	PDR1	R/W	H'00	H'FFD4
Port control register 1	PCR1	W	H'00	H'FFE4
Port pull-up control register 1	PUCR1	R/W	H'00	H'FF9C
Port mode register 1	PMR1	R/W	H'10	H'FF98

1. Port data register 1 (PDR1)

Bit	7	6	5	4	3	2	1	0
	P1 ₇	P1 ₆	P1 ₅	P1 ₄	P1 ₃	P1 ₂	P1 ₁	P1 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR1 is an 8-bit register that stores data for pins P1₇ to P1₀. If port 1 is read while PCR1 bits are set to v1, the values stored in PDR1 read, regardless of the actual pin states. If port 1 is read while PCR1 bits are cleared to 0, the pin states are read.

Upon reset, PDR 1 is initialized to H'00.

2. Port control register 1 (PCR1)

Bit	7	6	5	4	3	2	1	0
	PCR1 ₇	PCR1 ₆	PCR1 ₅	PCR1 ₄	PCR1 ₃	PCR1 ₂	PCR1 ₁	PCR1 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

PCR1 is an 8-bit register for controlling whether each of the port 1 pins P1₇ to P1₀ functions as an input pin or output pin. Setting a PCR1 bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCR1 and in PDR1 are valid only when the corresponding pin is designated in PMR1 as a general I/O pin.

Upon reset, PCR1 is initialized to H'00.

PCR1 is a write-only register. All bits are read as 1.

3. Port pull-up control register 1 (PUCR1)

Bit	7	6	5	4	3	2	1	0
	PUCR1 ₇	PUCR1 ₆	PUCR1 ₅	PUCR1 ₄	PUCR1 ₃	PUCR1 ₂	PUCR1 ₁	PUCR1 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PUCR1 controls whether the MOS pull-up of each port 1 pin is on or off. When a PCR1 bit is cleared to 0, setting the corresponding PUCR1 bit to 1 turns on the MOS pull-up for the corresponding pin, while clearing the bit to 0 turns off the MOS pull-up.

Upon reset, PUCR1 is initialized to H'00.

4. Port mode register 1 (PMR1)

Bit	7	6	5	4	3	2	1	0
	IRQ3	IRQ2	IRQ1	–	TMIG	TMOFH	TMOFL	TMOW
Initial value	0	0	0	1	0	0	0	0
Read/Write	R/W	R/W	R/W	–	R/W	R/W	R/W	R/W

PMR1 is an 8-bit read/write register, controlling the selection of pin functions for port 1 pins. Upon reset, PMR1 is initialized to H'10.

Bit 7: $P1_7/\overline{IRQ}_3$ /TMIF pin function switch (IRQ3)

This bit selects whether pin $P1_7/\overline{IRQ}_3$ /TMIF is used as $P1_7$ or as \overline{IRQ}_3 /TMIF.

Bit 7 Description IRQ3

0	Functions as $P1_7$ I/O pin	(initial value)
1	Functions as \overline{IRQ}_3 /TMIF input pin	

Note: Rising or falling edge sensing can be designated for \overline{IRQ}_3 /TMIF.

For information about TMIF pin settings, see 9.3.2 (3), Timer Control Register F (TCRF).

Bit 6: $P1_6/\overline{IRQ}_2$ pin function switch (IRQ2)

This bit selects whether pin $P1_6/\overline{IRQ}_2$ is used as $P1_6$ or as \overline{IRQ}_2 .

Bit 6 Description IRQ2

0	Functions as $P1_6$ I/O pin	(initial value)
1	Functions as \overline{IRQ}_2 input pin	

Note: Rising or falling edge sensing can be designated for \overline{IRQ}_2 .

Bit 5: $P1_5/\overline{IRQ}_1$ pin function switch (IRQ1)

This bit selects whether pin $P1_5/\overline{IRQ}_1$ is used as $P1_5$ or as \overline{IRQ}_1 .

Bit 5 Description IRQ1

0	Functions as $P1_5$ I/O pin	(initial value)
1	Functions as \overline{IRQ}_1 input pin	

Note: Rising or falling edge sensing can be designated for \overline{IRQ}_1 .

Bit 4: Reserved bit

Bit 4 is reserved: it is always read as 1, and cannot be modified.

Bit 3: P1₃/TMIG pin function switch (TMIG)

This bit selects whether pin P1₃/TMIG is used as P1₃ or as TMIG.

Bit 3 Description
TMIG

0	Functions as P1 ₃ I/O pin	(initial value)
1	Functions as TMIG input pin	

Bit 2: P1₂/TMOFH pin function switch (TMOFH)

This bit selects whether pin P1₂/TMOFH is used as P1₂ or as TMOFH.

Bit 2 Description
TMOFH

0	Functions as P1 ₂ I/O pin	(initial value)
1	Functions as TMOFH output pin	

Bit 1: P1₁/TMOFL pin function switch (TMOFL)

This bit selects whether pin P1₁/TMOFL is used as P1₁ or as TMOFL.

Bit 1 Description
TMOFL

0	Functions as P1 ₁ I/O pin	(initial value)
1	Functions as TMOFL output pin	

Bit 0: P1₀/TMOW pin function switch (TMOW)

This bit selects whether pin P1₀/TMOW is used as P1₀ or as TMOW.

Bit 0 Description
TMOW

0	Functions as P1 ₀ I/O pin	(initial value)
1	Functions as TMOW output pin	

8.2.3 Pin Functions

Table 8-3 shows the port 1 pin functions.

Table 8-3 Port 1 Pin Functions

Pin	Pin Functions and Selection Method			
P1 ₇ /IRQ ₃ /TMIF	The pin function depends on bit IRQ3 in PMR1, bits CKSL2 to CKSL0 in TCRF, and bit PCR1 ₇ in PCR1.			
	IRQ3	0		1
	PCR1 ₇	0	1	*
	CKSL2 to CKSL0	*		Not 0** 0**
	Pin function	P1 ₇ input	P1 ₇ output	IRQ ₃ input IRQ ₃ /TMIF input
Note: When using this pin for TMIF input, clear bit IEN3 to 0 in IENR1 to disable IRQ ₃ interrupts.				
P1 ₆ /IRQ ₂	The pin function depends on bit IRQ2 in PMR1 and bit PCR1 ₆ in PCR1.			
	IRQ2	0		1
	PCR1 ₆	0	1	*
	Pin function	P1 ₆ input pin	P1 ₆ output pin	IRQ ₂ input pin
	P1 ₅ /IRQ ₁	The pin function depends on bit IRQ1 in PMR1 and bit PCR1 ₅ in PCR1.		
IRQ1		0		1
PCR1 ₅		0	1	*
Pin function		P1 ₅ input pin	P1 ₅ output pin	IRQ ₁ input pin
P1 ₄		The pin function depends on bit PCR1 ₄ in PCR1.		
	PCR1 ₄	0	1	
	Pin function	P1 ₄ input pin		P1 ₄ output pin
P1 ₃ /TMIG	The pin function depends on bit TMIG in PMR1 and bit PCR1 ₃ in PCR1.			
	TMIG	0		1
	PCR1 ₃	0	1	*
	Pin function	P1 ₃ input pin	P1 ₃ output pin	TMIG input pin

P1 ₂ /TMOFH	The pin function depends on bit TMOFH in PMR1 and bit PCR1 ₂ in PCR1.			
	TMOFH	0		1
	PCR1 ₂	0	1	*
	Pin function	P1 ₂ input pin	P1 ₂ output pin	TMOFH output pin

Note: *Don't care

Table 8-3 Port 1 Pin Functions (cont)

Pin	Pin Functions and Selection Method			
P1 ₁ /TMOFL	The pin function depends on bit TMOFL in PMR1 and bit PCR11 in PCR1.			
	TMOFL	0		1
	PCR1 ₁	0	1	*
	Pin function	P1 ₁ input pin	P1 ₁ output pin	TMOFL output pin

P1 ₀ /TMOW	The pin function depends on bit TMOW in PMR1 and bit PCR1 ₀ in PCR1.			
	TMOW	0		1
	PCR1 ₀	0	1	*
	Pin function	P1 ₀ input pin	P1 ₀ output pin	TMOW output pin

Note: *Don't care

8.2.4 Pin States

Table 8-4 shows the port 1 pin states in each operating mode.

Table 8-4 Port 1 Pin States

Pins	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
P1 ₇ /IRQ ₃ /TMF	High	Retains	Retains	High	Retains	Functional	Functional
P1 ₆ /IRQ ₂	impedance	previous	previous	impedance*	previous		
P1 ₅ /IRQ ₁ P1 ₄		state	state		state		
P1 ₃ /TMIG							
P1 ₂ /TMOFH							
P1 ₁ /TMOFL							
P1 ₀ /TMOW							

Note: *A high-level signal is output when the MOS pull-up is in the on state.

8.2.5 MOS Input Pull-Up

Port 1 has a built-in MOS input pull-up function that can be controlled by software. When a PCR1 bit is cleared to 0, setting the corresponding PUCR1 bit to 1 turns on the MOS pull-up for that pin. The MOS input pull-up function is in the off state after a reset.

PCR1 _n	0		1
PUCR1 _n	0	1	*
MOS input pull-up	Off	On	Off

Note: *Don't care

(n = 7 to 0)

8.3 Port 2

8.3.1 Overview

Port 2 is an 8-bit I/O port. Figure 8-2 shows its pin configuration.

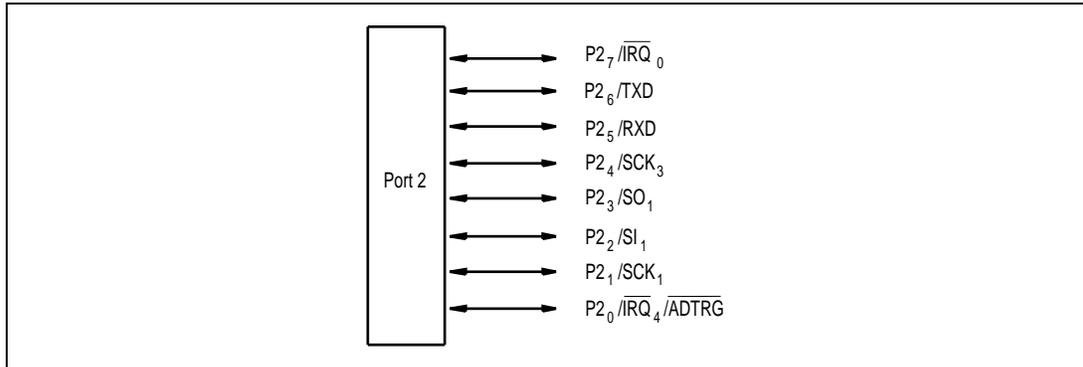


Figure 8-2 Port 2 Pin Configuration

8.3.2 Register Configuration and Description

Table 8-5 shows the port 2 register configuration.

Table 8-5 Port 2 Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register 2	PDR2	R/W	H'00	H'FFD5
Port control register 2	PCR2	W	H'00	H'FFE5
Port mode register 2	PMR2	R/W	H'40	H'FF99
Port pull-up control register 2	PUCR2	R/W	H'00	H'FF9D

1. Port data register 2 (PDR2)

Bit	7	6	5	4	3	2	1	0
	P2 ₇	P2 ₆	P2 ₅	P2 ₄	P2 ₃	P2 ₂	P2 ₁	P2 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR2 is an 8-bit register that stores data for pins P2₇ to P2₀. If port 2 is read while PCR2 bits are set to 1, the values stored in PDR2 are read, regardless of the actual pin states. If port 2 is read while PCR2 bits are cleared to 0, the pin states are read.

Upon reset, PDR2 is initialized to H'00.

2. Port control register 2 (PCR2)

Bit	7	6	5	4	3	2	1	0
	PCR2 ₇	PCR2 ₆	PCR2 ₅	PCR2 ₄	PCR2 ₃	PCR2 ₂	PCR2 ₁	PCR2 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

PCR2 is an 8-bit register for controlling whether each of the port 2 pins p2₇ to P2₀ functions as an input pin or output pin. Setting a PCR2 bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCR2 and in PDR2 are valid only when the corresponding pin is designated in PMR2 as a general I/O pin.

Upon reset, PCR2 is initialized to H'00.

PCR2 is a write-only register, which always reads all 1s.

3. Port mode register 2 (PMR2)

Bit	7	6	5	4	3	2	1	0
	IRQ0	–	POF1	NCS	SO1	SI1	SCK1	IRQ4
Initial value	0	1	0	0	0	0	0	0
Read/Write	R/W	–	R/W	R/W	R/W	R/W	R/W	R/W

PMR2 is an 8-bit read/write register, controlling the selection of pin functions for pins P2₀ to P2₃ and P2₇, controlling the PMOS on/off option for pin P2₃/SO₁, and controlling the TMIG input noise canceller.

Upon reset, PMR2 is initialized to H'40.

Bits 7: $P2_7/\overline{IRQ}_0$ pin function switch (IRQ0)

This bit selects whether pin $P2_7/\overline{IRQ}_0$ is used as $P2_7$ or \overline{IRQ}_0 .

Bit 7 IRQ0	Description	
0	Functions as $P2_7$ I/O pin	(initial value)
1	Functions as IRQ_0 input pin	

Bit 6: Reserved bit

Bit 6 is reserved: it is always read as 1, and cannot be modified.

Bit 5: $P2_3/SO_1$ pin PMOS control (POF1)

This bit controls the PMOS transistor in the $P2_3/SO_1$ pin output buffer.

Bit 5 POF1	Description	
0	CMOS output	(initial value)
1	NMOS open-drain output	

Bit 4: TMIG noise canceller select (NCS)

This bit controls the noise canceller circuit for input capture at pin TMIG.

Bit 4 NCS	Description	
0	Noise canceller function not selected	(initial value)
1	Noise canceller function selected	

Bit 3: $P2_3/SO_1$ pin function switch (SO1)

This bit selects whether pin $P2_3/SO_1$ is used as $P2_3$ or SO_1 .

Bit 3 SO1	Description	
0	Functions as $P2_3$ I/O pin	(initial value)
1	Functions as SO_1 output pin	

Bit 2: P₂/SI₁ pin function switch (SI1)
 This bit selects whether pin P₂/SI₁ is used as P₂ or SI₁.

Bit 2 SI1	Description	
0	Functions as P ₂ I/O pin	(initial value)
1	Functions as SI ₁ input pin	

Bit 1: P₂/SCK₁ pin function switch (SCK1)
 This bit selects whether pin P₂/SCK₁ is used as P₂ or SCK₁.

Bit 1 SCK1	Description	
0	Functions as P ₂ I/O pin	(initial value)
1	Functions as SCK ₁ I/O pin	

Bit 0: P₂ $\overline{\text{IRQ}}_4\overline{\text{ADTRG}}$ pin function switch (IRQ4)
 This bit selects whether pin P₂IRQ₄ is used as P₂ or $\overline{\text{IRQ}}_4\overline{\text{ADTRG}}$.

Bit 0 IRQ4	Description	
0	Functions as P ₂ I/O pin	(initial value)
1	Functions as $\overline{\text{IRQ}}_4\overline{\text{ADTRG}}$ input pin	

Note: For information about ADTRG pin settings, see 12.3.2, Start of A/D Conversion by External Trigger Input.

4. Port pull-up control register 2 (PUCR2)

Bit	7	6	5	4	3	2	1	0
	PUCR2 ₇	PUCR2 ₆	PUCR2 ₅	PUCR2 ₄	PUCR2 ₃	PUCR2 ₂	PUCR2 ₁	PUCR2 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PUCR2 controls whether the MOS pull-up of each port 2 pin is one or off. When a PCR2 bit is cleared to 0, setting the corresponding PUCR2 bit to 1 turns on the MOS pull-up for the corresponding pin, while clearing the bit to 0 turns off the MOS pull-up.

Upon reset, PUCR2 is initialized to H'00.

8.3.3 Pin Functions

Table 8-6 shows the port 2 pin functions.

Table 8-6 Port 2 Pin Functions

Pin	Pin Functions and Selection Method				
P2 ₇ /IRQ ₀	The pin function depends on bit IRQ0 in PCR2 and bit PCR2 ₇ in PCR2.				
	IRQ0	0		1	
	PCR2 ₇	0	1	*	
	Pin function	P2 ₇ input pin	P2 ₇ output pin	IRQ ₀ input pin	
P2 ₆ /TXD	The pin function depends on bit TE in SCR of SCI3 and bit PCR2 ₆ in PCR2.				
	TE	0		1	
	PCR2 ₆	0	1	*	
	Pin function	P2 ₆ input pin	P2 ₆ output pin	TXD output pin	
P2 ₅ /RXD	The pin function depends on bit RE in SCR of SCI3 and bit PCR2 ₅ in PCR2.				
	RE	0		1	
	PCR2 ₅	0	1	*	
	Pin function	P2 ₅ input pin	P2 ₅ output pin	RXD input pin	
P2 ₄ /SCK ₃	The pin function depends on bits CKE1 and CKE0 in SCR of SCI3, bit COM in SMR of SCI3, and bit PCR2 ₄ in PCR2.				
	CKE1	0		1	
	CKE0	0	0	1	*
	COM	0	1	*	*
	PCR2 ₄	0	1	*	*
	Pin function	P2 ₄ input pin	P2 ₄ output pin	SCK ₃ output pin	SCK ₃ input pin
P2 ₃ /SO1	The pin function depends on bit SO1 in PMR2 and bit PCR2 ₃ in PCR2.				
	SO1	0		1	
	PCR2 ₃	0	1	*	
	Pin function	P2 ₃ input pin	P2 ₃ output pin	SO ₁ output pin	

Note: * Don't care

Table 8-6 Port 2 Pin Functions (cont)

Pin	Pin Functions and Selection Method				
P2 ₂ /SI ₁	The pin function depends on bit SI1 in PMR2 and bit PCR2 ₂ in PCR2.				
	SI1		0		1
	PCR2 ₂	0		1	*
	Pin function	P2 ₂ input pin		P2 ₂ output pin	SI ₁ input pin
P2 ₁ /SCK ₁	The pin function depends on bit SCK1 in PMR2, bit CKS3 in SCR1, and bit PCR2 ₁ in PCR2.				
	SCK1		0		1
	CKS3		*		0
	PCR2 ₁	0		1	*
Pin function	P2 ₁ input pin		P2 ₁ output pin	SCK ₁ output pin	SCK ₁ input pin
P2 ₀ /IRQ ₄ /ADTRG	The pin function depends on bit IRQ4 in PMR2, bit TRGE in AMR, and bit PCR2 ₀ in PCR2.				
	IRQ4		0		1
	PCR2 ₀	0		1	*
	TRGE		*		0
Pin function	P2 ₀ input		P2 ₀ output	IRQ ₄ input	IRQ ₄ ADTRG input

Note: When using this pin for ADTRG input, clear bit IEN4 to 0 in IENR1 to disable IRQ₄ interrupts.

Note: *Don't care

8.3.4 Pin States

Table 8-7 shows the port 2 pin states in each operating mode.

Table 8-7 Port 2 Pin States

Pins	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
P2 ₇ $\overline{\text{IRQ}}_0$	High	Retains	Retains	High	Retains	Functional	Functional
P2 ₆ TXD	impedance	previous	previous	impedance	previous		
P2 ₅ /RXD		state*	state		state		
P2 ₄ /SCK ₃ P2 ₃ /S							
O ₁ P2 ₂ /SI ₁ P							
2 ₁ /SCK ₁ P2 ₀ $\overline{\text{I}}$							
$\overline{\text{RQ}}_i$ / ADTRG							

Note: *High level output if the MOS pull-up is on.

8.3.5 MOS Input Pull-Up

Port 2 has a built-in MOS input pull-up function that can be controlled by software. When a PCR2 bit is cleared to 0, setting the corresponding PUCR2 bit to 1 turns on the MOS pull-up for that pin. The MOS input pull-up function is in the off state after a reset.

PCR2 _n		0		1
PUCR2 _n		0	1	*
MOS input pull-up		Off	On	Off

Note: *Don't care (n = 7 to 0)

8.4 Port 5

8.4.1 Overview

Port 5 is an 8-bit I/O port, configured as shown in figure 8-3.

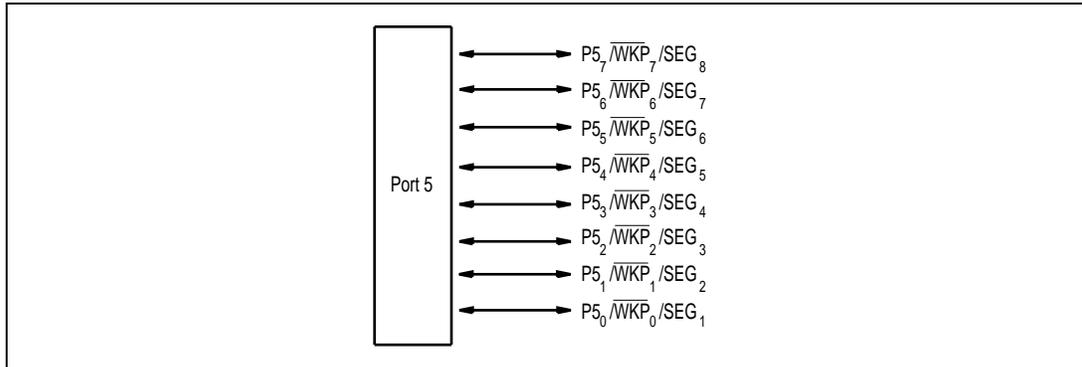


Figure 8-3 Port 5 Pin Configuration

8.4.2 Register Configuration and Description

Table 8-8 shows the port 5 register configuration.

Table 8-8 Port 5 Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register 5	PDR5	R/W	H'00	H'FFD8
Port control register 5	PCR5	W	H'00	H'FFE8
Port pull-up control register 5	PUCR5	R/W	H'00	H'FF9E
Port mode register 5	PMR5	R/W	H'00	H'FF9B

1. Port data register 5 (PDR5)

Bit	7	6	5	4	3	2	1	0
	P5 ₇	P5 ₆	P5 ₅	P5 ₄	P5 ₃	P5 ₂	P5 ₁	P5 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR5 is an 8-bit register that stores data for port 5 pins P5₇ to P5₀. If port 5 is read while PCR5 bits are set to 1, the values stored in PDR5 are read, regardless of the actual pin states. If port 5 is read while PCR5 bits are cleared to 0, the pin states are read.

Upon reset, PDR5 is initialized to H'00.

2. Port control register 5 (PCR5)

Bit	7	6	5	4	3	2	1	0
	PCR5 ₇	PCR5 ₆	PCR5 ₅	PCR5 ₄	PCR5 ₃	PCR5 ₂	PCR5 ₁	PCR5 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

PCR5 is an 8-bit register for controlling whether each of the port 5 pins P5₇ to P5₀ functions as an input pin or output pin. Setting a PCR5 bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCR5 and in PDR5 are valid only when the corresponding pin is designated as a general I/O pin in PMR5 and in bits SGS3 to SGS0 of LPCR.

Upon reset, PCR5 is initialized to H'00.

PCR5 is a write-only register. All bits are read as 1.

3. Port pull-up control register 5 (PUCR5)

Bit	7	6	5	4	3	2	1	0
	PUCR5 ₇	PUCR5 ₆	PUCR5 ₅	PUCR5 ₄	PUCR5 ₃	PUCR5 ₂	PUCR5 ₁	PUCR5 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PUCR5 controls whether the MOS pull-up of each port 5 pin is on or off. When a PCR5 bit is cleared to 0, setting the corresponding PUCR5 bit to 1 turns on the MOS pull-up for the corresponding pin, while clearing the bit to 0 turns off the MOS pull-up.

Upon reset, PUCR5 is initialized to H'00.

4. Port mode register 5 (PMR5)

Bit	7	6	5	4	3	2	1	0
	WKP7	WKP6	WKP5	WKP4	WKP3	WKP2	WKP1	WKP0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PMR5 is an 8-bit read/write register, controlling the selection of pin functions for port 5 pins. Upon reset, PMR5 is initialized to H'00.

Bit n: $P5_n/\overline{WKP}_n/SEG_{n+1}$ pin function switch (WKPn)

When pin $P5_n/\overline{WKP}_n/SEG_{n+1}$ is not used as a SEG_{n+1} pin, this bit selects whether it is used as $P5_n$ or as \overline{WKP}_n .

Bit n	Description
WKPn	

0	Functions as $P5_n$ I/O pin	(initial value)
1	Functions as \overline{WKP}_n input pin	

(n = 7 to 0)

Note: For information on use as a SEG_{n+1} pin, see 13.2.1, LCD Port Control Register (LPCR).

8.4.3 Pin Functions

Table 8-9 shows the port 5 pin functions.

Table 8-9 Port 5 Pin Functions

Pin	Pin Functions and Selection Method					
$P5_7/\overline{WKP}_7/$ SEG_8 to $P5_4/$ \overline{WKP}_4/SEG_5	The pin function depends on bit WKP_n in PMR5, bit $PCR5_n$ in PCR5, and bits SGS3 to SGS0 in LPCR. (n = 7 to 4)					
	SGS3 to SGS0	0***			1***	
	WKP_n	0			1	
	$PCR5_n$	0	1	*	*	
	Pin function	$P5_n$ input pin	$P5_n$ output pin	WKP_n input pin	SEG_{n+1} output pin	
$P5_3/\overline{WKP}_3/$ SEG_4 to $P5_0/$ \overline{WKP}_0/SEG_1	The pin function depends on bit WKP_n in PMR5, bit $PCR5_n$ in PCR5, and bits SGS3 to SGS0 in LPCR. (n = 3 to 0)					
	SGS3 to SGS0	0*** or 1**0			1**1	
	WKP_n	0		1	*	
	$PCR5_n$	0	1	*	*	
	Pin function	$P5_n$ input pin	$P5_n$ output pin	WKP_n input pin	SEG_{n+1} output pin	

Note: Don't care

8.4.4 Pin States

Table 8-10 shows the port 5 pin states in each operating mode.

Table 8-10 Port 5 Pin States

Pins	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
P5 ₇ / $\overline{WKP_7}$ S EG ₈ to P5 ₀ / $\overline{WKP_0}$ / SEG ₁	High- mpedance	Retains previous state	Retains previous state	High impedance*	Retains previous state	Functional	Functional

Note: * A high-level signal is output when the MOS pull-up is in the on state.

8.4.5 MOS Input Pull-Up

Port 5 has a built-in MOS input pull-up function that can be controlled by software. When a PCR5 bit is cleared to 0, setting the corresponding PUCR5 bit to 1 turns on the MOS pull-up for that pin. The MOS pull-up function is in the off state after a reset.

PCR5 _n		0		1
PUCR5 _n		0	1	*
MOS input pull-up		Off	On	Off

Note: *Don't care (n = 7 to 0)

8.5 Port 6

8.5.1 Overview

Port 6 is an 8-bit I/O port, configured as shown in figure 8-4.

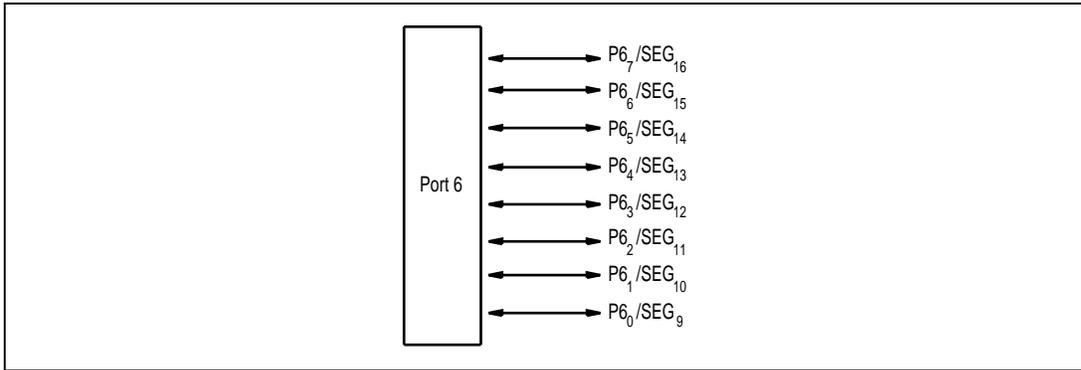


Figure 8-4 Port 6 Pin Configuration

8.5.2 Register Configuration and Description

Table 8-11 shows the port 6 register configuration.

Table 8-11 Port 6 Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register 6	PDR6	R/W	H'00	H'FFD9
Port control register 6	PCR6	W	H'00	H'FFE9
Port pull-up control register 6	PUCR6	R/W	H'00	H'FF9F

1. Port data register 6 (PDR6)

Bit	7	6	5	4	3	2	1	0
	P6 ₇	P6 ₆	P6 ₅	P6 ₄	P6 ₃	P6 ₂	P6 ₁	P6 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR6 is an 8-bit register that stores data for port 6 pins P6₇ to P6₀. If port 6 is read while PCR6 bits are set to 1, the values stored in PDR6 are read, regardless of the actual pin states. If port 6 is read while PCR6 bits are cleared to 0, the pin states are read.

Upon reset, PDR6 is initialized to H'00.

2. Port control register 6 (PCR6)

Bit	7	6	5	4	3	2	1	0
	PCR6 ₇	PCR6 ₆	PCR6 ₅	PCR6 ₄	PCR6 ₃	PCR6 ₂	PCR6 ₁	PCR6 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

PCR6 is an 8-bit register for controlling whether each of the port 6 pins P6₇ to P6₀ functions as an input pin or output pin. Setting a PCR6 bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCR6 and in PDR6 are valid only when the corresponding pin is designated in LPCR bits SGS3 to SGS0 as a general I/O pin.

Upon reset, PCR6 is initialized to H'00.

PCR6 is a write-only register. All bits are read as 1.

3. Port pull-up control register 6 (PUCR6)

Bit	7	6	5	4	3	2	1	0
	PUCR6 ₇	PUCR6 ₆	PUCR6 ₅	PUCR6 ₄	PUCR6 ₃	PUCR6 ₂	PUCR6 ₁	PUCR6 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PUCR6 controls whether the MOS pull-up of each port 6 pin is on or off. When a PCR6 bit is cleared to 0, setting the corresponding PUCR6 bit to 1 turns on the MOS pull-up for the corresponding pin, while clearing the bit to 0 turns off the MOS pull-up.

Upon reset, PUCR6 is initialized to H'00.

8.5.3 Pin Functions

Table 8-12 shows the port 6 pin functions.

Table 8-12 Port 6 Pin Functions

Pin	Pin Functions and Selection Method			
P6 ₇ /SEG ₁₆ to P6 ₄ /SEG ₁₃	The pin function depends on bit PCR6 _n in PCR6 and bits SGS3 to SGS0 in LPCR.			
	(n = 7 to 4)			
	SGS3 to SGS0	00** or 010*		011* or 1***
	PCR6 _n	0	1	*
	Pin function	P6 _n input pin	P6 _n output pin	SEG _{n+9} output pin
P6 ₃ /SEG ₁₂ to P6 ₀ /SEG ₉	The pin function depends on bit PCR6 _n in PCR6 and bits SGS3 to SGS0 in LPCR.			
	(n = 3 to 0)			
	SGS3 to SGS0	00**, 010* or 0110		0111 or 1***
	PCR6 _n	0	1	*
	Pin function	P6 _n input pin	P6 _n output pin	SEG _{n+9} output pin

Note: *Don't care

8.5.4 Pin States

Table 8-13 shows the port 6 pin states in each operating mode.

Table 8-13 Port 6 Pin States

Pins	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
P6 ₇ /SEG ₁₆ to P6 ₀ /SEG ₉	High-impedance	Retains previous state	Retains previous state	High-impedance*	Retains previous state	Functional	Functional

Note: * A high-level signal is output when the MOS pull-up is in the on state.

8.5.5 MOS Input Pull-Up

Port 6 has a built-in MOS input pull-up function that can be controlled by software. When a PCR6 bit is cleared to 0, setting the corresponding PUCR6 bit to 1 turns on the MOS pull-up for that pin. The MOS pull-up function is in the off state after a reset.

PCR6 _n	0		1
PUC6 _n	0	1	*
MOS input pull-up	Off	On	Off

Note: *Don't care (n = 7 to 0)

8.6 Port 7

8.6.1 Overview

Port 7 is an 8-bit I/O port, configured as shown in figure 8-5.

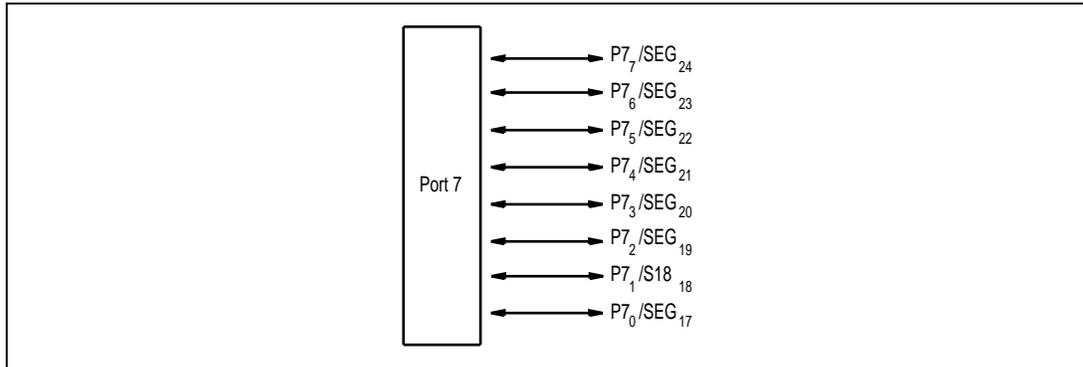


Figure 8-5 Port 7 Pin Configuration

8.6.2 Register Configuration and Description

Table 8-14 shows the port 7 register configuration.

Table 8-14 Port 7 Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register 7	PDR7	R/W	H'00	H'FFDA
Port control register 7	PCR7	W	H'00	H'FFEA

1. Port data register 7 (PDR7)

Bit	7	6	5	4	3	2	1	0
	P7 ₇	P7 ₆	P7 ₅	P7 ₄	P7 ₃	P7 ₂	P7 ₁	P7 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR7 is an 8-bit register that stores data for port 7 pins P7₇ to P7₀. If port 7 is read while PCR7 bits are set to 1, the values stored in PDR7 are read, regardless of the actual pin states. If port 7 is read while PCR7 bits are cleared to 0, the pin states are read.

Upon reset, PDR7 is initialized to H'00.

2. Port control register 7 (PCR7)

Bit	7	6	5	4	3	2	1	0
	PCR7 ₇	PCR7 ₆	PCR7 ₅	PCR7 ₄	PCR7 ₃	PCR7 ₂	PCR7 ₁	PCR7 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

PCR7 is an 8-bit register for controlling whether each of the port 7 pins P7₇ to P7₀ functions as an input pin or output pin. Setting a PCR7 bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCR7 and in PDR7 are valid only when the corresponding pin is designated in LPCR bits SGS3 to SGS0 as a general I/O pin.

Upon reset, PCR7 is initialized to H'00.

PCR7 is a write-only register. All bits are read as 1.

8.6.3 Pin Functions

Table 8-15 shows the port 7 pin functions.

Table 8-15 Port 7 Pin Functions

Pin	Pin Functions and Selection Method			
P7 ₇ /SEG ₂₄ to P7 ₄ /SEG ₂₁	The pin function depends on bit PCR7 _n in PCR7 and bits SGS3 to SGS0 in LPCR. (n = 7 to 4)			
	SGS3 to SGS0		00**	01** or 1***
	PCR7 _n	0	1	*
	Pin function	P7 _n input pin	P7 _n output pin	SEG _{n+17} output pin
P7 ₃ /SEG ₂₀ to P7 ₀ /SEG ₁₇	The pin function depends on bit PCR7 _n in PCR7 and bits SGS3 to SGS0 in LPCR. (n = 3 to 0)			
	SGS3 to SGS0		00** or 0100	0101, 011* or 1***
	PCR7 _n	0	1	*
	Pin function	P7 _n input pin	P7 _n output pin	SEG _{n+17} output pin

Note: *Don't care

8.6.4 Pin States

Table 8-16 shows the port 7 pin states in each operating mode.

Table 8-16 Port 7 Pin States

Pins	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
P7 ₇ /SEG ₂₄ to P7 ₀ /SEG ₁₇	High impedance	Retains previous state	Retains previous state	High-impedance	Retains previous state	Functional	Functional

8.7 Port 8

8.7.1 Overview

Port 8 is an 8-bit I/O port configured as shown in figure 8-6.

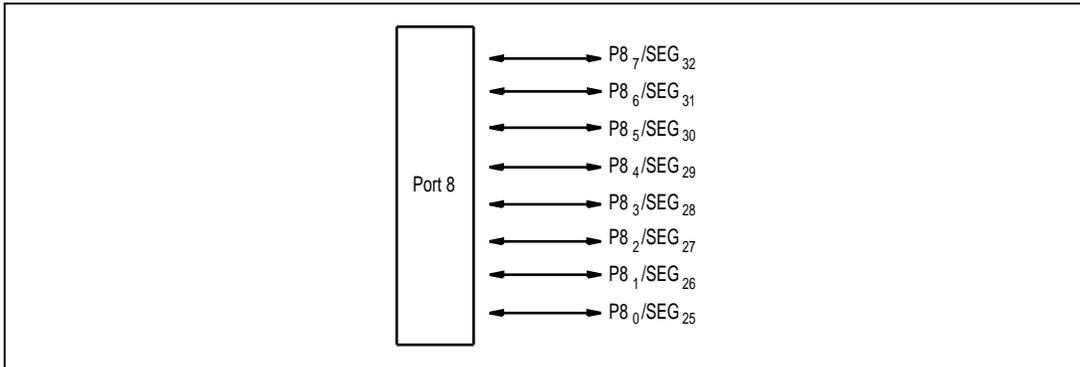


Figure 8-6 Port 8 Pin Configuration

8.7.2 Register Configuration and Description

Table 8-17 shows the port 8 register configuration.

Table 8-17 Port 8 Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register 8	PDR8	R/W	H'00	H'FFDB
Port control register 8	PCR8	W	H'00	H'FFEB

1. Port data register 8 (PDR8)

Bit	7	6	5	4	3	2	1	0
	P8 ₇	P8 ₆	P8 ₅	P8 ₄	P8 ₃	P8 ₂	P8 ₁	P8 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR8 is an 8-bit register that stores data for port 8 pins P8₇ to P8₀. If port 8 is read while PCR8 bits are set to 1, the values stored in PDR8 are read, regardless of the actual pin states. If port 8 is read while PCR8 bits are cleared to 0, the pin states are read.

Upon reset, PDR8 is initialized to H'00.

2. Port control register 8 (PCR8)

Bit	7	6	5	4	3	2	1	0
	PCR8 ₇	PCR8 ₆	PCR8 ₅	PCR8 ₄	PCR8 ₃	PCR8 ₂	PCR8 ₁	PCR8 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

PCR8 is an 8-bit register for controlling whether each of the port 8 pins P8₇ to P8₀ functions as an input or output pin. Setting a PCR8 bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCR8 and in PDR8 are valid only when the corresponding pin is designated in LPCR bits SGS3 to SGS0 as a general I/O pin.

Upon reset, PCR8 is initialized to H'00.

PCR8 is a write-only register. All bits are read as 1.

8.7.3 Pin Functions

Table 8-18 gives the port 8 pin functions.

Table 8-18 Port 8 Pin Functions

Pin	Pin Functions and Selection Method			
P8 ₇ /SEG ₃₂ to P8 ₄ /SEG ₂₉	The pin function depends on bit PCR8 _n in PCR8 and bits SGS3 to SGS0 in LPCR.			
	(n = 7 to 4)			
	SGS3 to SGS0		000*	001*, 01** or 1***
	PCR8 _n	0	1	*
	Pin function	P8 _n input pin	P8 _n output pin	SEG _{n+25} output pin
P8 ₃ /SEG ₂₈ to P8 ₀ /SEG ₂₅	The pin function depends on bit PCR8 _n in PCR8 and bits SGS3 to SGS0 in LPCR.			
	(n = 3 to 0)			
	SGS3 to SGS0		000* or 0010	0011, 01** or 1***
	PCR8 _n	0	1	*
	Pin function	P8 _n input pin	P8 _n output pin	SEG _{n+25} output pin

Note: * Don't care

8.7.4 Pin States

Table 8-19 shows the port 8 pin states in each operating mode.

Table 8-19 Port 8 Pin States

Pins	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
P8 ₇ /SEG ₃₂ to P8 ₀ /SEG ₂₅	High-impedance	Retains previous state	Retains previous state	High-impedance	Retains previous state	Functional	Functional

8.8 Port 9

8.8.1 Overview

Port 9 is an 8-bit I/O port configured as shown in figure 8-7.

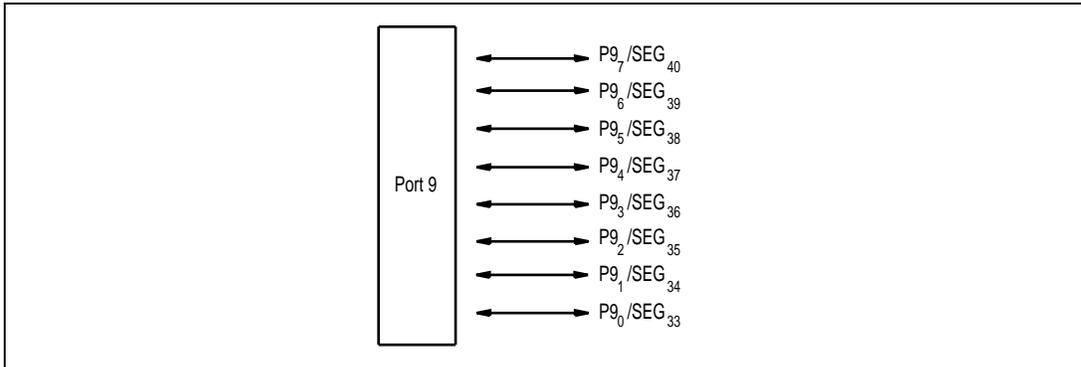


Figure 8-7 Port 9 Pin Configuration

8.8.2 Register Configuration and Description

Table 8-20 shows the port 9 register configuration.

Table 8-20 Port 9 Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register 9	PDR9	R/W	H'00	H'FFDC
Port control register 9	PCR9	W	H'00	H'FFEC

1. Port data register 9 (PDR9)

Bit	7	6	5	4	3	2	1	0
	P9 ₇	P9 ₆	P9 ₅	P9 ₄	P9 ₃	P9 ₂	P9 ₁	P9 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR9 is an 8-bit register that stores data for port 9 pins P9₇ to P9₀. If port 9 is read while PCR9 bits are set to 1, the values stored in PDR9 are read, regardless of the actual pin states. If port 9 is read while PCR9 bits are cleared to 0, the pin states are read.

Upon reset, PDR9 is initialized to H'00.

2. Port control register 9 (PCR9)

Bit	7	6	5	4	3	2	1	0
	PCR9 ₇	PCR9 ₆	PCR9 ₅	PCR9 ₄	PCR9 ₃	PCR9 ₂	PCR9 ₁	PCR9 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

PCR9 is an 8-bit register for controlling whether each of the port 9 pins P9₇ to P9₀ functions as an input or output pin. Setting a PCR9 bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCR9 and in PDR9 are valid only when the corresponding pin is designated in LPCR bits SGS3 to SGS0 as a general I/O pin.

Upon reset, PCR9 is initialized to H'00.

PCR9 is a write-only register. All bits are read as 1.

8.8.3 Pin Functions

Table 8-21 gives the port 9 pin functions.

Table 8-21 Port 9 Pin Functions

Pin	Pin Functions and Selection Method			
P9 ₇ /SEG ₄₀ to P9 ₀ /SEG ₃₃	The pin function depends on bits PCR9 _n in PCR9 and bits SGS3 to SGS0 in LPCR. (n = 7 to 0)			
	SGS3 to SGS0		0000	Not 0000
	PCR9 _n	0	1	*
	Pin function	P9 _n input pin	P9 _n output pin	SEG _{n+33} output pin

Note: * Don't care

8.8.4 Pin States

Table 8-22 shows the port 9 pin states in each operating mode.

Table 8-22 Port 9 Pin States

Pins	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
P9 ₇ /SEG ₄₀ to P9 ₀ /SEG ₃₃	High-impedance	Retains previous state	Retains previous state	High-impedance	Retains previous state	Functional	Functional

8.9 Port A

8.9.1 Overview

Port A is a 4-bit I/O port configured as shown in figure 8-8.

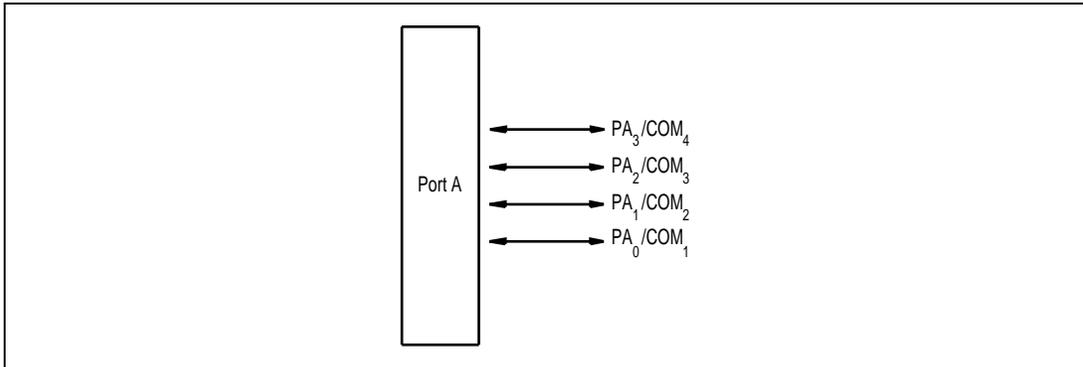


Figure 8-8 Port A Pin Configuration

8.9.2 Register Configuration and Description

Table 8-23 shows the port A register configuration.

Table 8-23 Port A Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register A	PDRA	R/W	H'F0	H'FFDD
Port control register A	PCRA	W	H'F0	H'FFED

1. Port data register A (PDRA)

Bit	7	6	5	4	3	2	1	0
	-	-	-	-	PA ₃	PA ₂	PA ₁	PA ₀
Initial value	1	1	1	1	0	0	0	0
Read/Write	-	-	-	-	R/W	R/W	R/W	R/W

PDRA is an 8-bit register that stores data for port A pins PA₃ to PA₀. If port A is read while PCRA bits are set to 1, the values stored in PDRA are read, regardless of the actual pin states. If port A is read while PCRA bits are cleared to 0, the pin states are read.

Upon reset, PDRA is initialized to H'F0.

2. Port control register A (PCRA)

Bit	7	6	5	4	3	2	1	0
	-	-	-	-	PCRA ₃	PCRA ₂	PCRA ₁	PCRA ₀
Initial value	1	1	1	1	0	0	0	0
Read/Write	-	-	-	-	W	W	W	W

PCRA is an 8-bit register for controlling whether each of the port A pins PA₃ to PA₀ functions as an input or output pin. Setting a PCRA bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCRA and in PDRA are valid only when the corresponding pin is designated in LPCR as a general I/O pin.

Upon reset, PCRA is initialized to H'F0.

PCRA is a write-only register. All bits are read as 1.

8.9.3 Pin Functions

Table 8-24 gives the port A pin functions.

Table 8-24 Port A Pin Functions

Pin	Pin Functions and Selection Method										
PA ₃ /COM ₄	The pin function depends on bit PCRA ₃ in PCRA and bits DTS1, DTS0, CMX, SGX, and SGS3 to SGS0 in LPCR.										
	CMX	*	0	*	0	1	*				
	DTS1,DTS0	*	Not 11	*	Not 11	Not 11			11		
	SGX	0	1	*	0	1	*	1	*	1	*
	SGS3 to SGS0	0000	Not 0000	0000	Not 0000	0000	Not 0000	0000	Not 0000	0000	Not 0000
	PCRA ₃		0		1					*	
	Pin function		PA ₃ input pin		PA ₃ output pin					COM ₄ output pin	
PA ₂ /COM ₃	The pin function depends on bit PCRA ₂ in PCRA and bits DTS1, DTS0, CMX, SGX, and SGS3 to SGS0 in LPCR.										
	CMX	*	0	*	0	1	*				
	DTS1,DTS0	*	00 or 01	*	00 or 01	00 or 01			Not 00 or 01		
	SGX	0	1	*	0	1	*	1	*	1	*
	SGS3 to SGS0	0000	Not 0000	0000	Not 0000	0000	Not 0000	0000	Not 0000	0000	Not 0000
	PCRA ₂		0		1					*	
	Pin function		PA ₃ input pin		PA ₃ output pin					COM ₄ output pin	
PA ₁ /COM ₂	The pin function depends on bit PCRA ₁ in PCRA and bits DTS1, DTS0, CMX, SGX, and SGS3 to SGS0 in LPCR.										
	CMX	*	0	*	0	1	*				
	DTS1,DTS0	*	00	*	00	00			Not 00		
	SGX	0	1	*	0	1	*	1	*	1	*
	SGS3 to SGS0	0000	Not 0000	0000	Not 0000	0000	Not 0000	0000	Not 0000	0000	Not 0000
	PCRA ₁		0		1					*	
	Pin function		PA ₃ input pin		PA ₃ output pin					COM ₄ output pin	

Note: * Don't care

Table 8-24 Port A Pin Functions (cont)

Pin	PinFunctions and Selection Method		
PA ₀ /COM ₁	The pin function depends on bit PCRA ₀ in PCRA, and bits SGX and SGS3 to SGS0 in LPCR.		
SGS3 to SGS0	0000	0000	Not 0000
SGX	0	1	*
PCRA ₀	0	1	*
Pin function	PA ₀ input pin	PA ₀ output pin	COM ₁ output pin

Note: * Don't care

8.9.4 Pin States

Table 8-25 shows the port A pin states in each operating mode.

Table 8-25 Port A Pin States

Pins	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
PA ₃ /COM ₄ PA ₂ /COM ₃ PA ₁ /COM ₂ PA ₀ /COM ₁	High-impedance	Retains previous state	Retains previous state	High-impedance	Retains previous state	Functional	Functional

8.10 Port B

8.10.1 Overview

Port B is an 8-bit input-only port configured as shown in figure 8-9.

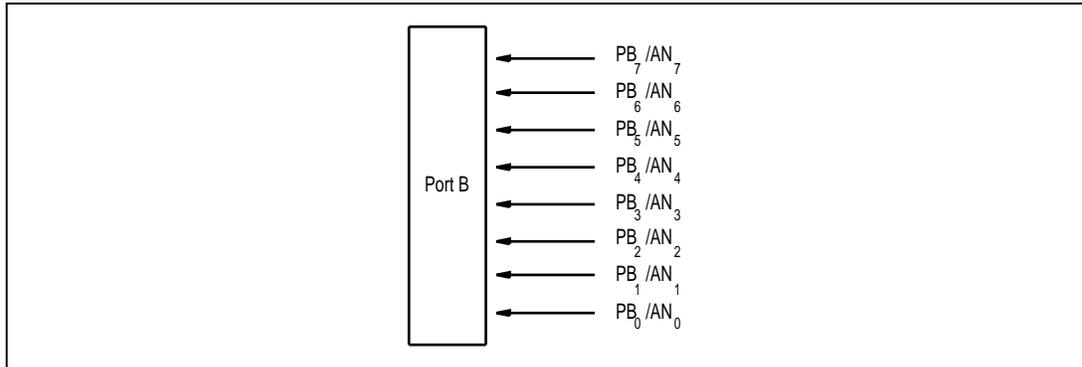


Figure 8-9 Port B Pin Configuration

8.10.2 Register Configuration and Description

Table 8-26 shows the port B register configuration.

Table 8-26 Port B Register

Name	Abbrev.	R/W	Address
Port data register B	PDRB	R	H'FFDE

Port Data Register B (PDRB)

Bit	7	6	5	4	3	2	1	0
	PB ₇	PB ₆	PB ₅	PB ₄	PB ₃	PB ₂	PB ₁	PB ₀
Read/Write	R	R	R	R	R	R	R	R

Reading PDRB always gives the pin states. However, if a port B pin is selected as an analog input channel for the A/D converter by AMR bits CH3 to CH0, that pin reads 0 regardless of the input voltage.

8.11 Port D

8.11.1 Overview

Port D is an 8-bit I/O port, configured as shown in figure 8-10.

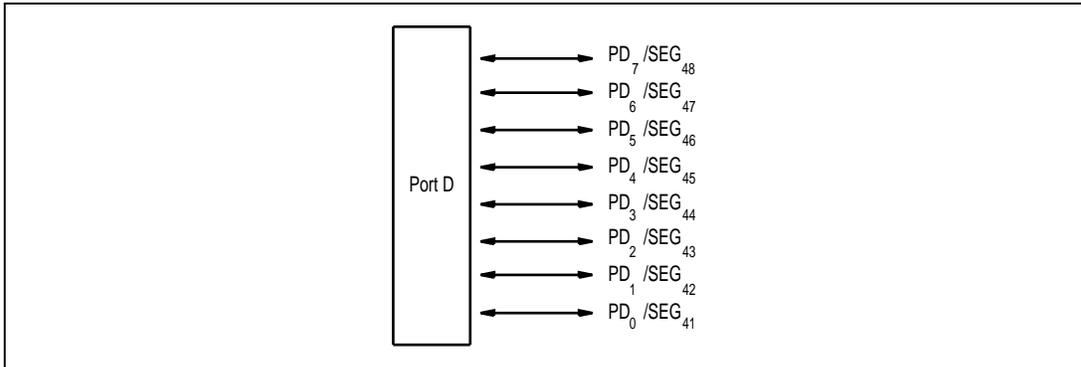


Figure 8-10 Port D Pin Configuration

8.11.2 Register Configuration and Description

Table 8-27 shows the port D register configuration.

Table 8-27 Port D Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register D	PDRD	R/W	H'00	H'FFD2
Port control register D	PDRD	W	H'00	H'FFE2

1. Port data register D (PDRD)

Bit	7	6	5	4	3	2	1	0
	PD ₇	PD ₆	PD ₅	PD ₄	PD ₃	PD ₂	PD ₁	PD ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDRD is an 8-bit register that stores data for port D pins PD₇ to PD₀. If port D is read while PCRD bits are set to 1, the values stored in PDRD are read, regardless of the actual pin states. If port D is read while PCRD bits are cleared to 0, the pin states are read.

Upon reset, PDRD is initialized to H'00.

2. Port control register D (PCRD)

Bit	7	6	5	4	3	2	1	0
	PCRD ₇	PCRD ₆	PCRD ₅	PCRD ₄	PCRD ₃	PCRD ₂	PCRD ₁	PCRD ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PCRD is an 8-bit register for controlling whether each of the port D pins PD₇ to PD₀ functions as an input pin or output pin. Setting a PCRD bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCRD and in PDRD are valid only when the corresponding pin is designated in LPCR bits SGS3 to SGS0 as a general I/O pin.

Upon reset, PCRD is initialized to H'00.

PCRD is a write-only register. All bits are read as 1.

8.11.3 Pin Functions

Table 8-28 shows the port D pin functions.

Table 8-28 Port D Pin Functions

Pin	Pin Functions and Selection Method		
D ₇ /SEG ₄₈ to PD ₀ /SEG ₄₁	The pin function depends on bit PCRD _n in PCRD and bits SGS3 to SGS0 in LPCR. (n = 7 to 0)		
	SGS3 to SGS0	0000	Not 0000
	PCRD _n	0	1
	Pin function	PD _n input pin	PD _n output pin
			SEG _{n+41} output pin

Note: * Don't care

8.11.4 Pin States

Table 8-29 shows the port D pin states in each operating mode.

Table 8-29 Port D Pin States

Pin	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
PD ₇ /SEG ₄₈ to PD ₀ /SEG ₄₁	High-impedance	Retains previous state	Retains previous state	High-impedance	Retains previous state	Functional	Functional

8.12 Port E

8.12.1 Overview

Port E is a 4-bit I/O port, configured as shown in figure 8-11.

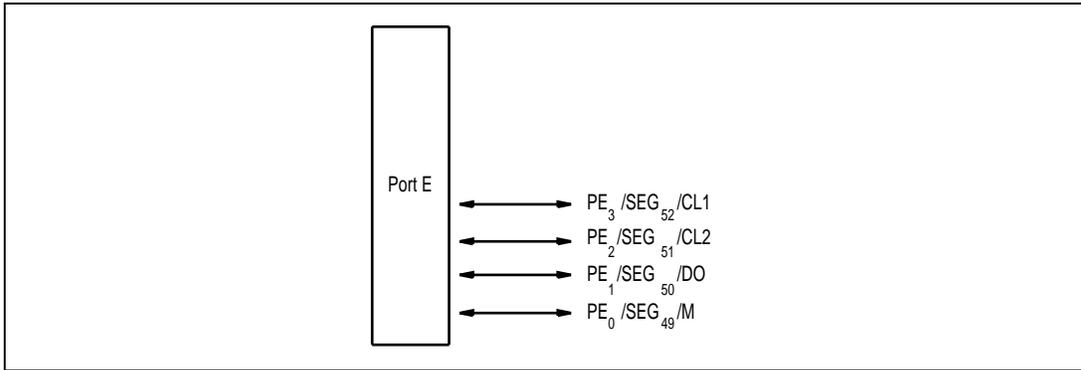


Figure 8-11 Port E Pin Configuration

8.12.2 Register Configuration and Description

Table 8-30 shows the port E register configuration.

Table 8-30 Port E Registers

Name	Abbrev.	R/W	Initial Value	Address
Port data register E	PDRE	R/W	H'F0	H'FFD3
Port control register E	PCRE	W	H'F0	H'FFE3

1. Port data register E (PDRE)

Bit	7	6	5	4	3	2	1	0
	-	-	-	-	PE ₃	PE ₂	PE ₁	PE ₀
Initial value	1	1	1	1	0	0	0	0
Read/Write	-	-	-	-	R/W	R/W	R/W	R/W

PDRE is a 4-bit register that stores data for port E pins PE₃ to PE₀. If port E is read while PCRE bits are set to 1, the values stored in PDRE are read, regardless of the actual pin states. If port E is read while PCRE bits are cleared to 0, the pin states are read.

Upon reset, PDRE is initialized to H'F0.

2. Port control register E (PCRE)

Bit	7	6	5	4	3	2	1	0
	-	-	-	-	PCRE ₃	PCRE₂	PCRE ₁	PCRE ₀
Initial value	1	1	1	1	0	0	0	0
Read/Write	-	-	-	-	W	W	W	W

PCRE is a 4-bit register for controlling whether each of the port E pins PE₃ to PE₀ functions as an input pin or output pin. Setting a PCRE bit to 1 makes the corresponding pin an output pin, while clearing the bit to 0 makes the pin an input pin. The settings in PCRE and in PDRE are valid only when the corresponding pin is designated in LPCR bits SGS3 to SGS0 as a general I/O pin.

Upon reset, PCRE is initialized to H'F0.

PCRE is a write-only register. All bits are read as 1.

8.12.3 Pin Functions

Table 8-31 shows the port E pin functions.

Table 8-31 Port E Pin Functions

Pin	Pin Functions and Selection Method				
PE ₃ /SEG ₅₂ /CL ₁	The pin function depends on bit PCRE ₃ in PCRE and bits SGX and SGS3 to SGS0 in LPCR.				
	SGS3 to SGS0	0000		Not 0000	*
	SGX	0		0	1
	PCRE ₃	0	1	*	*
	Pin function	PE ₃ input pin	PE ₃ output pin	SEG ₅₂ output pin	CL ₁ output pin
PE ₂ /SEG ₅₁ /CL ₂	The pin function depends on bit PCRE ₂ in PCRE, and bits SGX and SGS3 to SGS0 in LPCR.				
	SGS3 to SGS0	0000		Not 0000	*
	SGX	0	0	1	
	PCRE ₂	0	1	*	*
	Pin function	PE ₂ input pin	PE ₂ output pin	SEG ₅₁ output pin	CL ₂ output pin

Note: * Don't care

Table 8-31 Port E Pin Functions (cont)

Pin	Pin Functions and Selection Method			
PE ₁ /SEG ₅₀ /DO	The pin function depends on bit PCRE ₁ in PCRE and bits SGX and SGS3 to SGS0 in LPCR.			
	SGS3 to SGS0	0000	Not 0000	*
	SGX	0	0	1
	PCRE ₁	0	1	*
	Pin function	PE ₁ input pin	PE ₁ output pin	SEG ₅₀ output pin
PE ₀ /SEG ₄₉ /M	The pin function depends on bit PCRE ₀ in PCRE and bits SGX and SGS3 to SGS0 in LPCR.			
	SGS3 to SGS0	0000	Not 0000	*
	SGX	0	0	1
	PCRE ₀	0	1	*
	Pin function	PE ₀ input pin	PE ₀ output pin	SEG ₄₉ out pin

Note: * Don't care

8.12.4 Pin States

Table 8-32 shows the port E pin states in each operating mode.

Table 8-32 Port E Pin States

Pin	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
PE ₃ /SEG ₅₂ / CL ₁	High impedance	Retains previous state	Retains previous state	High impedance	Retains previous state	Functional	Functional
PE ₂ /SEG ₅₁ / CL ₂							
PE ₁ /SEG ₅₀ / DO							
PE ₀ /SEG ₄₉ / M							

Section 9 Timers

9.1 Overview

The H8/3877U Series provides three timers (timers A, F, and G) on-chip.

Table 9-1 outlines the functions of timers A, F, and G.

Table 9-1 Timer Functions

Name	Functions	Internal Clock	Event Input Pin	Waveform Output Pin	Remarks
Timer A	<ul style="list-style-type: none"> 8-bit timer Interval timer 	$\phi/8$ to $\phi/8192$ (8 choices)	--	--	
	<ul style="list-style-type: none"> 8-bit timer Time base 	$\phi W/128$ (choice of 4 overflow periods)	--	--	
	<ul style="list-style-type: none"> 8-bit timer Clock output 	$\phi/4$ to $\phi/32$, $\phi W/4$ to $\phi W/32$ (8 choices)	--	TMOW	
	<ul style="list-style-type: none"> 16-bit timer Event counter Can be used as two independent 8-bit timers Output compare 	$\phi/2$ to $\phi/32$ (4 choices)	TMIF TMOFH	TMOFL	
Timer G	<ul style="list-style-type: none"> 8-bit timer Input capture Interval timer 	$\phi/2$ to $\phi/64$, $\phi W/2$ (4 choices)	TMIG	-	<ul style="list-style-type: none"> Counter clear designation possible Built-in noise canceller circuit for input capture

9.2 Timer A

9.2.1 Overview

Timer A is an 8-bit timer with interval timing and real-time clock time-base functions. The clock time-base function is available when a 32.768-kHz crystal oscillator is connected. A clock signal divided from 32.768 kHz or from the system clock can be output at the TMOW pin.

1. Features

Features of timer A are given below.

- Choice of eight internal clock sources ($\phi/8192$, $\phi/4096$, $\phi/2048$, $\phi/512$, $\phi/256$, $\phi/128$, $\phi/32$, $\phi/8$).
- Choice of four overflow periods (1 s, 0.5 s, 0.25 s, 31.25 ms) when timer A is used as a clock time base (using a 32.768 kHz crystal oscillator).
- An interrupt is requested when the counter overflows.
- Any of eight clock signals can be output from pin TMOW: 32.768 kHz divided by 32, 16, 8, or 4 (1 kHz, 2 kHz, 4 kHz, 8 kHz), or the system clock divided by 32, 16, 8, or 4.

2. Block diagram

Figure 9-2-1 shows a block diagram of timer A.

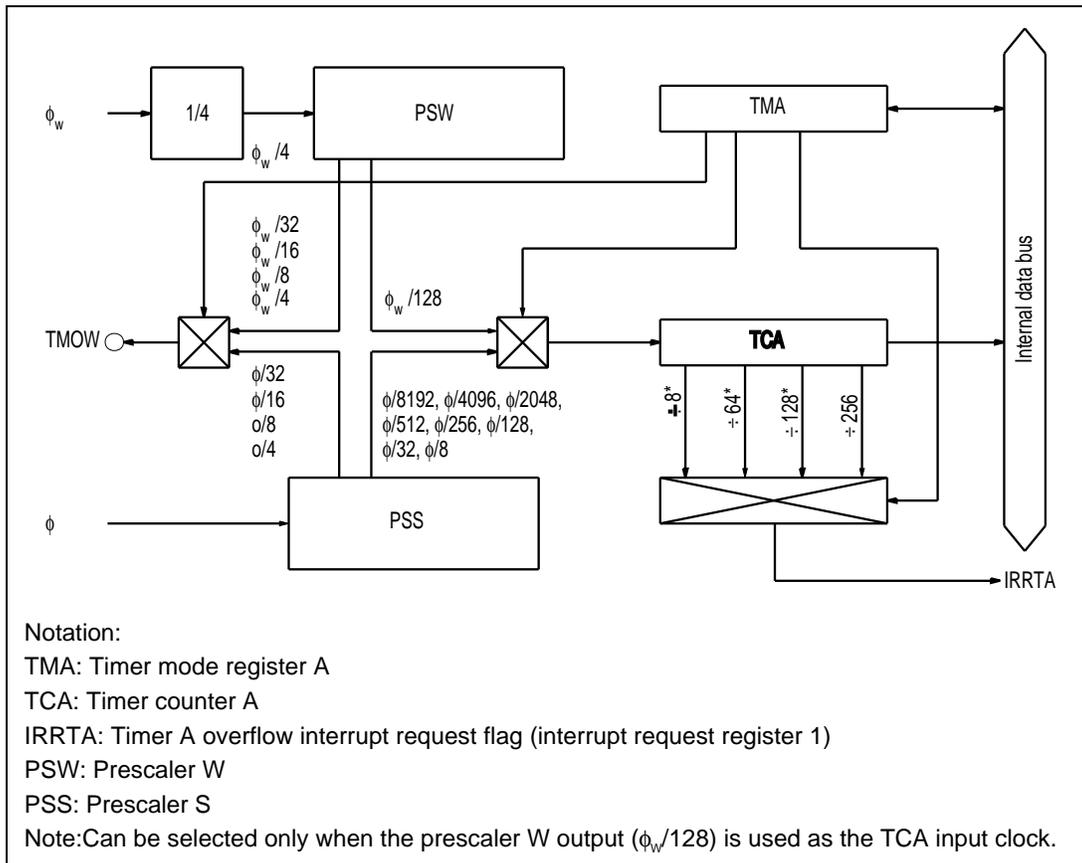


Figure 9-2-1 Block Diagram of Timer A

3. Pin configuration

Table 9-2-1 shows the timer A pin configuration.

Table 9-2-1 Pin Configuration

Name	Abbrev.	I/O	Function
Clock output	TMOw	Output	Output of waveform generated by timer A output circuit

4. Register configuration

Table 9-2-2 shows the register configuration of timer A.

Table 9-2-2 Timer A Registers

Name	Abbrev.	R/W	Initial Value	Address
Timer mode register A	TMA	R/W	H'10	H'FFB0
Timer counter A	TCA	R	H'00	H'FFB1

9.2.2 Register Descriptions

1. Timer mode register A (TMA)

Bit	7	6	5	4	3	2	1	0
	TMA7	TMA6	TMA5	-	TMA3	TMA2	TMA1	TMA0
Initial value	0	0	0	1	0	0	0	0
Read/Write	R/W	R/W	R/W	-	R/W	R/W	R/W	R/W

TMA is an 8-bit read/write register for selecting the prescaler, input clock, and output clock. Upon reset, TMA is initialized to H'10.

Bits 7 to 5: Clock output select (TMA7 to TMA5)

Bits 7 to 5 choose which of eight clock signals is output at the TMOW pin. The system clock divided by 32, 16, 8, or 4 can be output in active mode and sleep mode. A 32.768 kHz signal divided by 32, 16, 8, or 4 can be output in active mode, sleep mode, and subactive mode.

Bit 7 TMA7	Bit 6 TMA6	Bit 5 TMA5	Clock Output
0	0	0	$\phi/32$ (initial value)
		1	$\phi/16$
	1	0	$\phi/8$
		1	$\phi/4$
1	0	0	$\phi W/32$
		1	$\phi W/16$
	1	0	$\phi W/8$
		1	$\phi W/4$

Bit 4: Reserved bit

Bit 4 is reserved; it is always read as 1, and cannot be modified.

Bits 3 to 0: Internal clock select (TMA3 to TMA0)

Bits 3 to 0 select the clock input to TCA. The selection is made as follows.

				Description
Bit 3 TMA3	Bit 2 TMA2	Bit 1 TMA1	Bit 0 TMA0	Prescaler and Divider Ratio or Overflow PeriodFunction
0	0	0	0	PSS, $\phi/8192$ (initial value) Interval timer
			1	PSS, $\phi/4096$
		1	0	PSS, $\phi/2048$
			1	PSS, $\phi/512$
	1	0	0	PSS, $\phi/256$
			1	PSS, $\phi/128$
		1	0	PSS, $\phi/32$
			1	PSS, $\phi/8$
1	0	0	0	PSW, 1 s Clock time base
			1	PSW, 0.5 s
		1	0	PSW, 0.25 s
			1	PSW, 0.03125 s
	1	0	0	PSW and TCA are reset
			1	
		1	0	
			1	

2. Timer Counter A (TCA)

Bit	7	6	5	4	3	2	1	0
	TCA7	TCA6	TCA5	TCA4	TCA3	TCA2	TCA1	TCA0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R	R	R	R	R	R	R	R

TCA is an 8-bit read-only up-counter, which is incremented by internal clock input. The clock source for input to this counter is selected by bits TMA3 to TMA0 in timer mode register A (TMA). TCA values can be read by the CPU in active mode, but cannot be read in subactive mode. When TCA overflows, the IRRTA bit in interrupt request register 1 (IRR1) is set to 1.

TCA is cleared by setting bits TMA3 and TMA2 of TMA to 11.

Upon reset, TCA is initialized to H'00.

9.2.3 Timer Operation

1. Interval timer operation

When bit TMA3 in timer mode register A (TMA) is cleared to 0, timer A functions as an 8-bit interval timer.

Upon reset, TCA is cleared to H'00 and bit TMA3 is cleared to 0, so up-counting and interval timing resume immediately. The clock input to timer A is selected by bits TMA2 to TMA0 in TMA; any of eight internal clock signals output by prescaler S can be selected.

After the count value in TCA reaches H'FF, the next clock signal input causes timer A to overflow, setting bit IRRTA to 1 in interrupt request register 1 (IRR1). If IENTA = 1 in interrupt enable register 1 (IENR1), a CPU interrupt is requested.*

At overflow, TCA returns to H'00 and starts counting up again. In this mode timer A functions as an interval timer that generates an overflow output at intervals of 256 input clock pulses.

Note: * For details on interrupts, see 3.3, Interrupts.

2. Real-time clock time base operation

When bit TMA3 in TMA is set to 1, timer A functions as a real-time clock time base by counting clock signals output by prescaler W.

The overflow period of timer A is set by bits TMA1 and TMA0 in TMA. A choice of four periods is available. In time base operation (TMA3=1), setting bit TMA2 to 1 clears both TCA and prescaler W to their initial values of H'00.

3. Clock output

Setting bit TMOW in port mode register 1 (PMR1) to 1 causes a clock signal to be output at pin TMOW. Eight different clock output signals can be selected by means of bits TMA7 to TMA5 in TMA. The system clock divided by 32, 16, 8, or 4 can be output in active mode and sleep mode. A 32.768kHz signal divided by 32, 16, 8, or 4 can be output in active mode, sleep mode, and subactive mode.

9.2.4 Timer A Operation States

Table 9-2-3 summarizes the timer A operation states.

Table 9-2-3 Timer A Operation States

Operation Mode	Reset	Active	Sleep	Watch	Subactive	Subsleep	Standby
TCA Interval	Reset	Functions	Functions	Halted	Halted	Halted	Halted
Clock time base	Reset	Functions	Functions	Functions	Functions	Functions	Halted
TMA	Reset	Functions	Retained	Retained	Functions	Retained	Retained

Note: When real-time clock time-base functions are selected as the internal clock of TCA in active mode or sleep mode, the internal clock is not synchronous with the system clock, so it is synchronized by a synchronizing circuit. This may result in a maximum error of $1/\phi(s)$ in the count cycle.

9.3 Timer F

9.3.1 Overview

Timer F is a 16-bit timer with an output compare function. Compare match signals can be used to reset the counter, request an interrupt, or toggle the output. Timer F can also be used for external event counting, and can operate as two independent 8-bit timers, timer FH and timer FL.

1. Features

Features of timer F are given below.

φ Choice of four internal clock sources ($\phi/32$, $\phi/16$, $\phi/4$, $\phi/2$) or an external clock (can be used as an external event counter).

φ Output from pin TMOFH is toggled by one compare match signal (the initial value of the toggle output can be set).

φ Counter can be reset by the compare match signal.

φ Two interrupt sources: counter overflow and compare match.

φ Can operate as two independent 8-bit timers (timer FH and timer FL) in 8-bit mode.

Timer FH

— 8-bit timer (clocked by timer FL overflow signals when timer F operates as a 16-bit timer).

— Choice of four internal clocks ($\phi/32$, $\phi/16$, $\phi/4$, $\phi/2$).

— Output from pin TMOFH is toggled by one compare match signal (the initial value of the toggle output can be set).

— Counter can be reset by the compare match signal.

— Two interrupt sources: counter overflow and compare match.

Timer FL

— 8-bit timer/event counter

— Choice of four internal clocks ($\phi/32$, $\phi/16$, $\phi/4$, $\phi/2$) or event input at pin TMIF.

— Output from pin TMOFL is toggled by one compare match signal (the initial value of the toggle output can be set).

— Counter can be reset by the compare match signal.

— Two interrupt sources: counter overflow and compare match.

2. Block diagram

Figure 9-3-1 shows a block diagram of timer F.

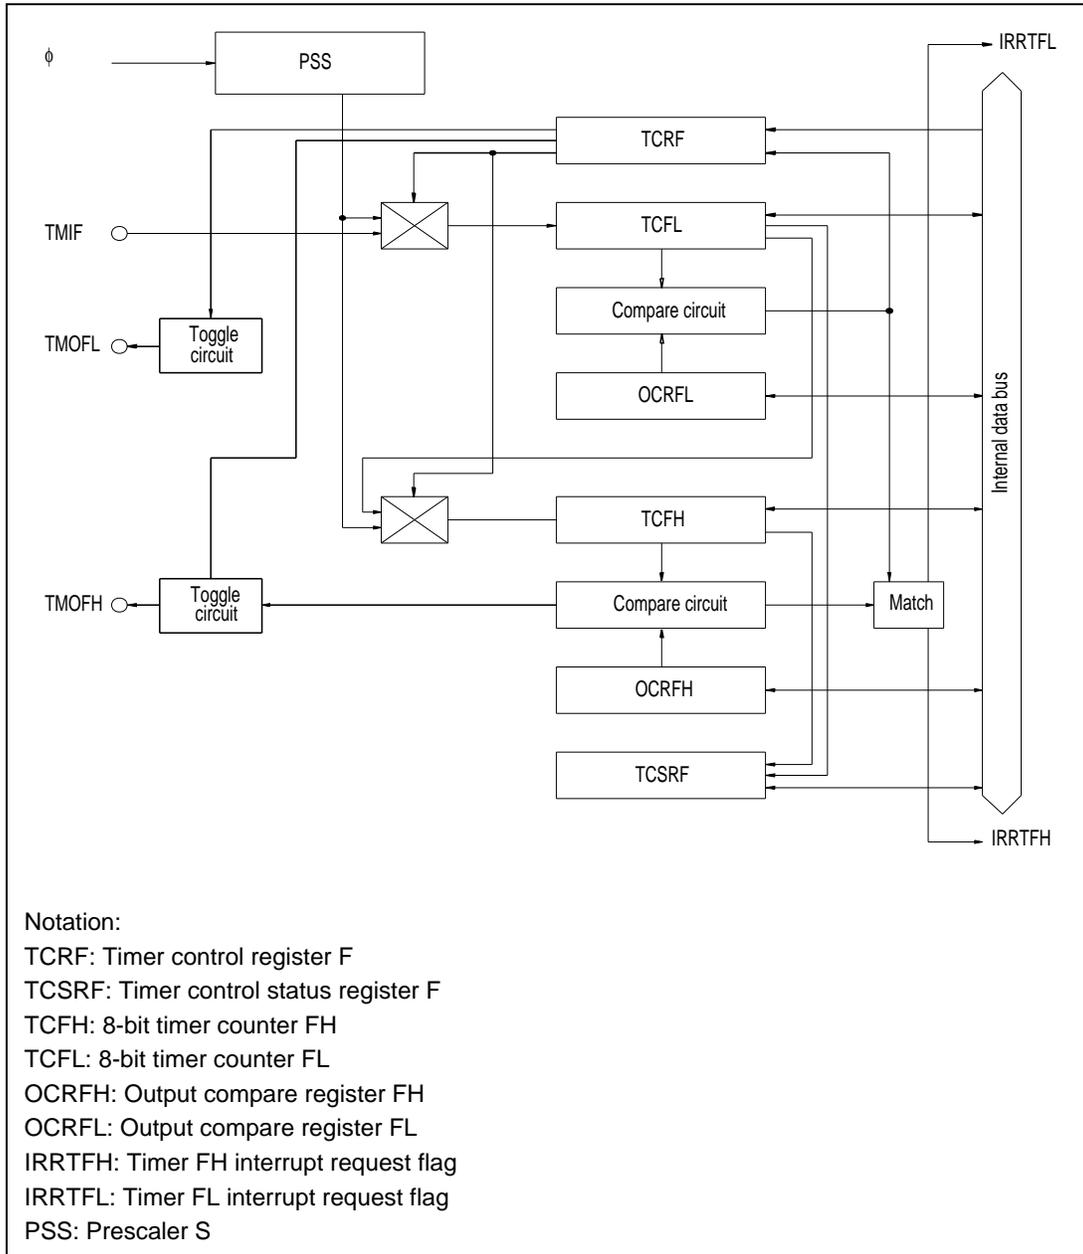


Figure 9-3-1 Block Diagram of Timer F

TCF is a 16-bit read/write up-counter consisting of two cascaded 8-bit timer counters, TCFH and TCFL. TCF can be used as a 16-bit counter, with TCFH as the upper 8 bits and TCFL as the lower 8 bits of the counter, or TCFH and TCFL can be used as independent 8-bit counters.

TCFH and TCFL can be read and written by the CPU, but in 16-bit mode, data transfer with the CPU takes place via a temporary register (TEMP). For details see 9.3.3, Interface with the CPU.

Upon reset, TCFH and TCFL are each initialized to H'00.

— 16-bit mode (TCF)

16-bit mode is selected by clearing bit CKSH2 to 0 in timer control register F (TCRF). The TCF input clock is selected by TCRF bits CKSL2 to CKSL0.

Timer control status register F (TCSRf) can be set so that counter TCF will be cleared by compare match.

When TCF overflows from H'FFFF to H'0000, the overflow flag (OVFH) in TCSRf is set to 1. If bit OVIEH in TCSRf is set to 1 when an overflow occurs, bit IRRTFH in interrupt request register 2 (IRR2) will be set to 1; and if bit IENTFH in interrupt enable register 2 (IENR 2) is set to 1, a CPU interrupt will be requested.

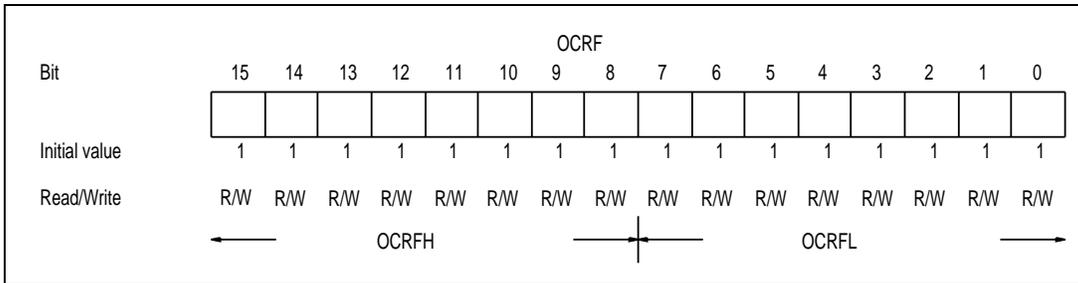
— 8-bit mode (TCFH, TCFL)

When bit CKSH2 in timer control register F (TCRF) is set to 1, timer F functions as two separate 8-bit counters, TCFH and TCFL. The TCFH (TCFL) input clock is selected by TCRF bits CKSH2 to CKSH0 (CKSL2 to CKSL0).

TCFH (TCFL) can be cleared by a compare match signal. This designation is made in bit CCLR_H (CCLR_L) in TCSRf.

When TCFH (TCFL) overflows from H'FF to H'00, the overflow flag OVF_H (OVFL) in TCSRf is set to 1. If bit OVIE_H (OVIEL) in TCSRf is set to 1 when an overflow occurs, bit IRRTF_H (IRRTHL) in interrupt request register 2 (IRR2) will be set to 1; and if bit IENTF_H (IENTFL) in interrupt enable register 2 (IENR2) is set to 1, a CPU interrupt will be requested.

- 2. 16-bit output compare register (OCRF)
 - 8-bit output compare register (OCRFH)
 - 8-bit output compare register (OCRFL)



OCRF is a 16-bit read/write output compare register consisting of two 8-bit read/write registers OCRFH and OCRFL. It can be used as a 16-bit output compare register, with OCRFH as the upper 8 bits and OCRFL as the lower 8 bits of the register, or OCRFH and OCRFL can be used as independent 8-bit registers.

OCRFH and OCRFL can be read and written by the CPU, but in 16-bit mode, data transfer with the CPU takes place via a temporary register (TEMP). For details see 9.3.3, Interface with the CPU.

Upon reset, OCRFH and OCRFL are each initialized to H'FF.

— 16-bit mode (OCRF)

16-bit mode is selected by clearing bit CKSH2 to 0 in timer control register F (TCRF).

The OCRF contents are always compared with the 16-bit timer counter (TCF). When the contents match, the compare match flag (CMFH) in TCSR is set to 1. Also, IRRTFH in interrupt request register 2 (IRR2) is set to 1. If bit IENTFH in interrupt enable register 2 (IENR2) is set to 1, a CPU interrupt is requested.

Output for pin TMOFH can be toggled by compare match. The output level can also be set to high or low by bit TOLH of timer control register F (TCRF).

— 8-bit mode (OCRFH, OCRFL)

Setting bit CKSH2 in TCRF to 1 result in two independent output compare registers, OCRFH and OCRFL.

The OCRFH contents are always compared with TCFH, and the OCRFL contents are always compared with TCFL. When the contents match, the compare match flag (CMFH or CMFL) in TCSR is set to 1. Also, bit IRRTFH (IRRTFL) in interrupt request register 2 (IRR2) set to 1. If bit IENTFH (IENTFL) in interrupt enable register 2 (IENR2) is set to 1 at this time, a CPU interrupt is requested.

The output at pin TMOFH (TMOFL) can be toggled by compare match. The output level can also be set to high or low by bit TOLH (TOLL) of the timer control register (TCRF).

3. Timer control register F (TCRF)

Bit	7	6	5	4	3	2	1	0
	TOLH	CKSH2	CKSH1	CKSH0	TOLL	CKSL2	CKSL1	CKSL0
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

TCRF is an 8-bit write-only register. It is used to switch between 16-bit mode and 8-bit mode, to select among four internal clocks and an external event, and to select the output level at pins TMOFH and TMOFL.

Upon reset, TCRF is initialized to H'00.

Bit 7:Toggle output level H (TOLH)

Bit 7 sets the output level at pin TMOFH. The setting goes into effect immediately after this bit is written.

Bit 7 TOLH	Description
0	Low level (initial value)
1	High level

Bits 6 to 4: Clock select H (CKSH2 to CKSH0)

Bits 6 to 4 select the input to TCFH from four internal clock signals or the overflow of TCFL.

Bit 6 CKSH2	Bit 5 CKSH1	Bit 4 CKSH0	Description
0	*	*	16-bit mode selected. TCFL overflow signals are counted. (initial value)
1	0	0	Internal clock: $\phi/32$
1	0	1	Internal clock: $\phi/16$
1	1	0	Internal clock: $\phi/4$
1	1	1	Internal clock: $\phi/2$

Note: * Don't care

Bit 3: Toggle output level L (TOLL)

Bit 3 sets the output level at pin TMOFL. The setting goes into effect immediately after this bit is written.

Bit 3 TOLL	Description
0	Low level (initial value)
1	High level

Bits 2 to 0: Clock select L (CKSL2 to CKSL0)

Bits 2 to 0 select the input to TCFL from four internal clock signals or external event input.

Bit 2 CKSL2	Bit 1 CKSL1	Bit 0 CKSL0	Description
0	*	*	External event (TMIF). Rising or falling edge is counted (see note). (initial value)
1	0	0	Internal clock: $\phi/32$
1	0	1	Internal clock: $\phi/16$
1	1	0	Internal clock: $\phi/4$
1	1	1	Internal clock: $\phi/2$

* Don't care

Note: The edge of the external event signal is selected by bit IEG3 in the IRQ edge select register (IEGR). See 3.3.2, Interrupt Control Registers, for details on the IRQ edge select register. Note that switching the TMIF pin function by changing bit IRQ3 in port mode register 1 (PMR1) from 0 to 1 or from 1 to 0 while the TMIF pin is at the low level may cause the timer F counter to be incremented.

4. Timer control/status register F (TCSR F)

Bit	7	6	5	4	3	2	1	0
	OVFH	CMFH	OVIEH	CCLR H	OVFL	CMFL	OVIEL	CCLR L
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

TCSR F is an 8-bit read/write register. It is used for counter clear selection, overflow and compare match indication, and enabling of interrupts caused by timer overflow.

Upon reset or in standby mode, TCSR F is initialized to H'00.

Bit 7: Timer overflow flag H (OVFH)

Bit 7 is a status flag indicating TCFH overflow (H'FF to H'00). This flag is set by hardware and cleared by software. It cannot be set by software.

Bit 7 OVFH	Description
0	Clearing conditions: (initial value) After reading OVFH=1, cleared by writing 0 to OVFH
1	Setting conditions: Set when the value of TCFH goes from H'FF to H'00

Bit 6: Compare match flag H (CMFH)

Bit 6 is a status flag indicating a compare match between TCFH and OCRFH. This flag is set by hardware and cleared by software. It cannot be set by software.

Bit 6 CMFH	Description
0	Clearing conditions: (initial value) After reading CMFH=1, cleared by writing 0 to CMFH
1	Setting conditions: Set when the TCFH value matches OCRFH value

Bit 5: Timer overflow interrupt enable H (OVIEH)

Bit 5 enables or disables TCFH overflow interrupts.

Bit 5 OVIEH	Description
0	TCFH overflow interrupt disabled (initial value)
1	TCFH overflow interrupt enabled

Bit 4: Counter clear H (CCLRH)

In 16-bit mode, bit 4 selects whether or not TCF is cleared when a compare match occurs between TCF and OCRF.

In 8-bit mode, bit 4 selects whether or not TCFH is cleared when a compare match occurs between TCFH and OCRFH.

Bit 4	Description	
CCLRH		
0	16-bit mode: TCF clearing by compare match disabled 8-bit mode: TCFH clearing by compare match disabled	(initial value)
1	16-bit mode: TCF clearing by compare match enabled 8-bit mode: TCFH clearing by compare match enabled	

Bit 3: Timer overflow flag L (OVFL)

Bit 3 is a status flag indicating TCFL overflow (H'FF to H'00). This flag is set by hardware and cleared by software. It cannot be set by software.

Bit 3	Description	
OVFL		
0	Clearing conditions: After reading OVFL = 1, cleared by writing 0 to OVFL	(initial value)
1	Setting conditions: Set when the value of TCFL goes from H'FF to H'00	

Bit 2: Compare match flag L (CMFL)

Bit 2 is a status flag indicating a compare match between TCFL and OCRFL. This flag is set by hardware and cleared by software. It cannot be set by software.

Bit 2	Description	
CMFL		
0	Clearing conditions: After reading CMFL = 1, cleared by writing 0 to CMFL	(initial value)
1	Setting conditions: Set when the TCFL value matches the OCRFL value	

Bit 1: Timer overflow interrupt enable L (OVIEL)
Bit 1 enables or disables TCFL overflow interrupts.

Bit 1	Description	
OVIEL		
0	TCFL overflow interrupt disabled	(initial value)
1	TCFL overflow interrupt enabled	

Bit 0: Counter clear L (CCLRL)
Bit 0 selects whether or not TCFL is cleared when a compare match occurs between TCFL and OCRFL.

Bit 0	Description	
CCLRL		
0	TCFL clearing by compare match disabled	(initial value)
1	TCFL clearing by compare match enabled	

9.3.3 Interface with the CPU

TCF and OCRF are 16-bit read/write registers, whereas the data bus between the CPU and on-chip peripheral modules has an 8-bit width. For this reason, when the CPU accesses TCF or OCRF, it makes use of an 8-bit temporary register (TEMP).

In 16-bit mode, when reading or writing TCF or writing OCRF, always use two consecutive byte size MOV instructions, and always access the upper byte first. Data will not be transferred properly if only the upper byte or only the lower byte is accessed. In 8-bit mode there is no such restriction on the order of access.

- Write access

When the upper byte is written, the upper-byte data is loaded into the TEMP register. Next when the lower byte is written, the data in TEMP goes to the upper byte of the register, and the lower-byte data goes directly to the lower byte of the register. Figure 9-3-2 shows a TCF write operation when H'AA55 is written to TCF.

- Read access

When the upper byte of TCF is read, the upper-byte data is sent directly to the CPU, and the lower byte is loaded into TEMP. Next when the lower byte is read, the lower byte in TEMP is sent to the CPU.

When the upper byte of OCRF is read, the upper-byte data is sent directly to the CPU. Next when the lower byte is read, the lower-byte data is sent directly to the CPU.

Figure 9-3-3 shows a TCF read operation when H'AAFF is read from TCF.

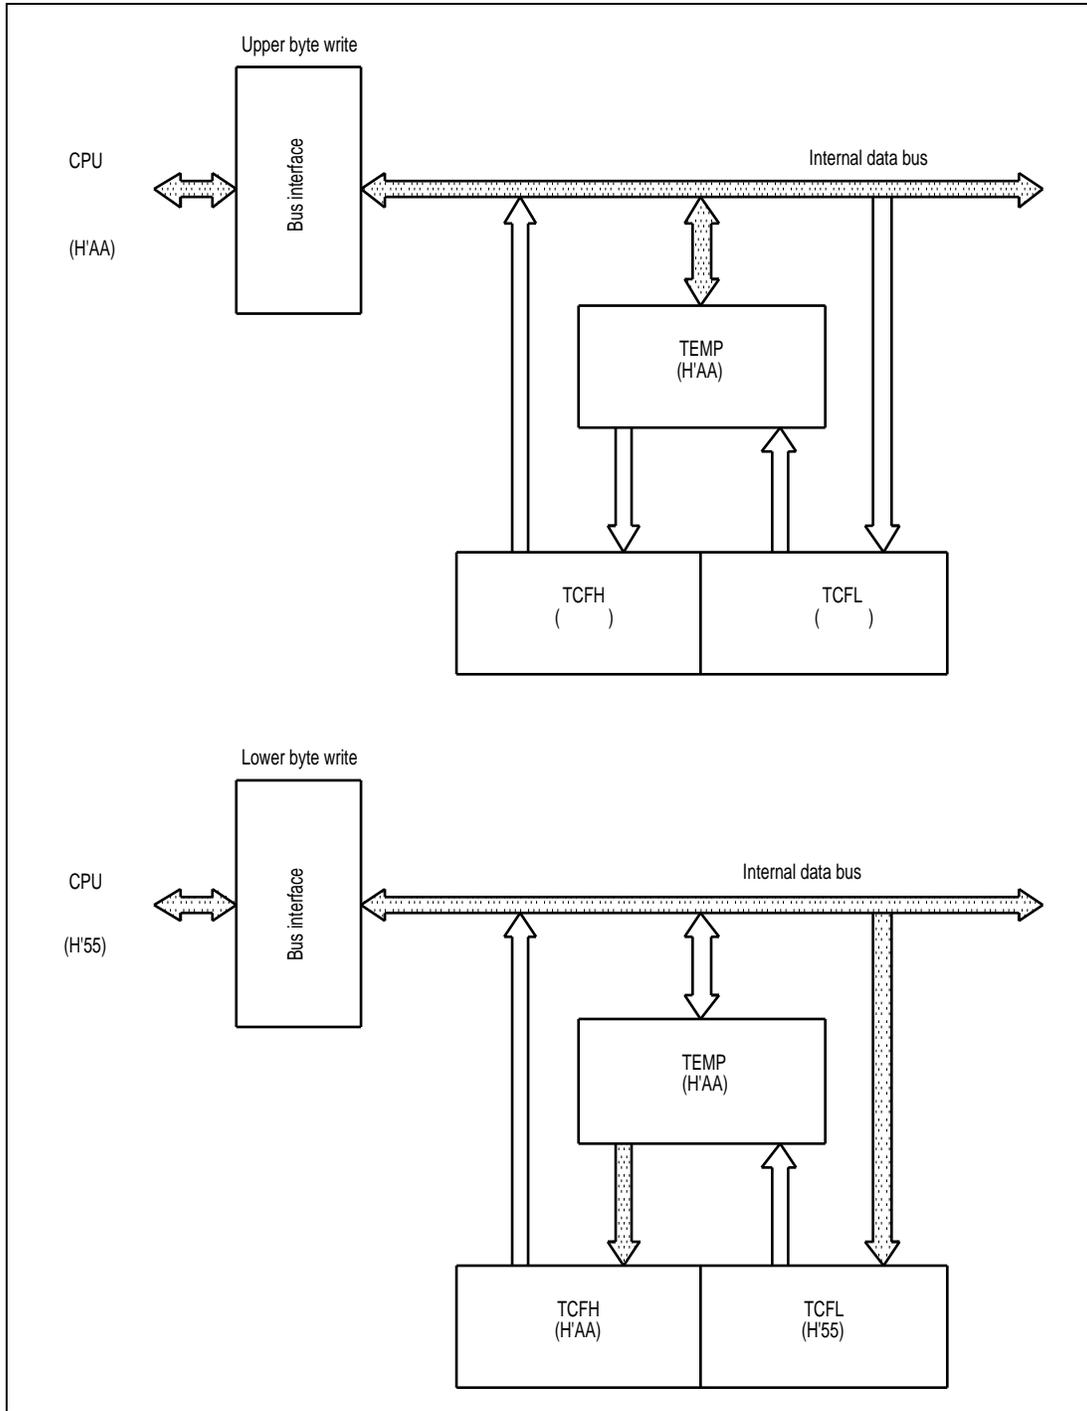


Figure 9-3-2 TCF Write Operation (CPU→TCF)

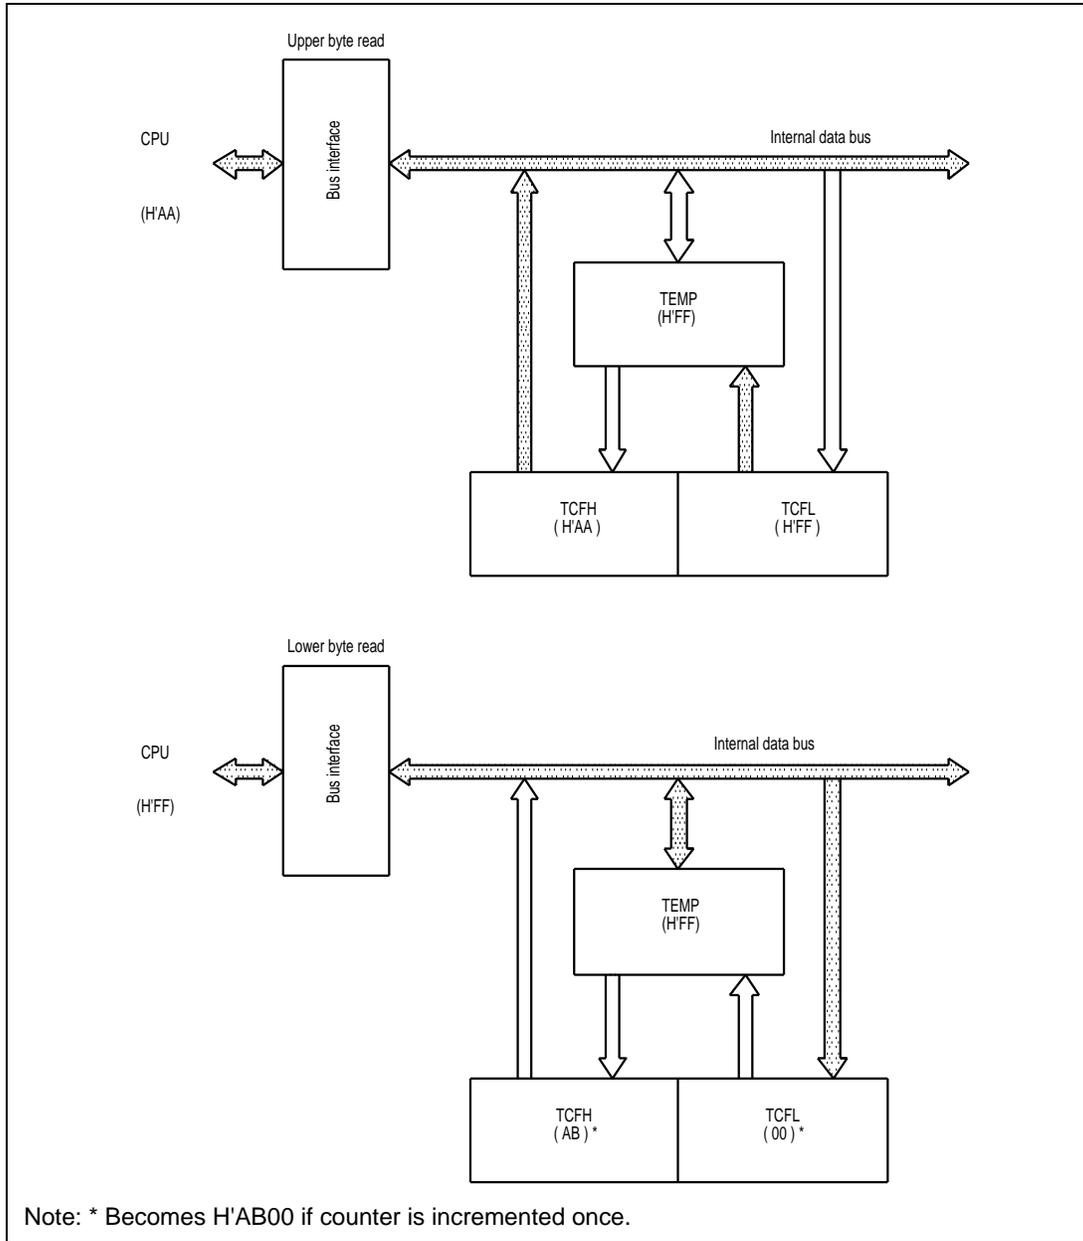


Figure 9-3-3 TCF Read Operation (TCF→CPU)

9.3.4 Timer Operation

Timer F is a 16-bit timer/counter that increments with each input clock. When the value set in output compare register F matches the count in timer F, the timer can be cleared, an interrupt can be requested, and the port output can be toggled. Timer F can also be used as two independent 8-bit timers.

1. Timer F operation

Timer F can operate in either 16-bit timer mode or 8-bit timer mode. These modes are described below.

— 16-bit timer mode

Timer F operates in 16-bit timer mode when the CKSH2 bit in timer control register F (TCRF) is cleared to 0.

A reset initializes timer counter F (TCF) to H'0000, output compare register F (OCRF) to H'FFFF, and timer control register F (TCRF) and timer control status register F (TCSRFB) to H'00. Timer F begins counting external event input signals (TMIF). The edge of the external event signal is selected by the IEG3 bit in the IRQ edge select register (IEGR).

Instead of counting external events, timer F can be switched by bits CKSL2 to CKSL0 in TCRF to count one of four internal clocks output by prescaler S.

TCF is continuously compared with the contents of OCRF. When these two values match, the CMFH bit in TCSRFB is set to 1. At this time if IENTFH of IENR2 is 1, a CPU interrupt is requested and the output at pin TMOFH is toggled. If the CCLRHB bit in TCSRFB is 1, TCF is cleared. The output at pin TMOFH can also be set by the TOLH bit in TCRF.

If timer F overflows (from H'FFFF to H'0000), the OVFB bit in TCSRFB is set to 1. At this time, if the OVIEH bit in TCSRFB and the IENTFH bit in IENR2 are both, 1, CPU interrupt is requested.

— 8-bit timer mode

When the CKSH2 bit in TCRF is set to 1, timer F operates as two independent 8-bit timers, TCFH and TCFL. The input clock of TCFH/TCFL is selected by bits CKSH2 to CKSH0/CKSL2 to CKSL0 in TCRF.

When TCFH/TCFL and the contents of OCRFH/OCRFL match, the CMFH/CMFL bit in TCSRFB is set to 1. If the IENTFH/IENTFL bit in IENR2 is 1, a CPU interrupt is requested and the output at pin TMOFH/TMOFL is toggled. If the CCLRHC/CCLRL bit in TCRF is 1, TCFH/TCFL is cleared. The output at pin TMOFH/TMOFL can also be set by the TOLH/TOLL bit in TCRF.

When TCFH/TCFL overflows from H'FF to H'00, the OVFH/OVFL bit in TCSRFB is set to 1. At this time, if the OVIEHC/OVIEL bit in TCSRFB and the IENTFH/IENTFL bit in IENR2 are both 1, a CPU interrupt is requested.

2. TCF count timing

TCF is incremented by each pulse of the input clock (internal clock or external event).

— Internal clock

The settings of bits CKSH2 to CKSH0 or bits CKSL2 to CKSL0 in TCRF select one of four internal clock signals divided from the system clock (ϕ), namely, $\phi/32$, $\phi/16$, $\phi/4$, or $\phi/2$.

— External event

External event input is selected by clearing bit CKSL2 to 0 in TCRF. Either rising or falling edges of the clock input can be counted. The edge is selected by bit IEG3 in IEGR. An external clock pulse width of at least two system clock cycles (ϕ) is necessary; otherwise the counter will not operate properly.

3. TMOFH and TMOFL output timing

The outputs at pins TMOFH and TMOFL are the values set in bits TOLH and TOLL in TCRF. When a compare match occurs, the output value is inverted. Figure 9-3-4 shows the output timing.

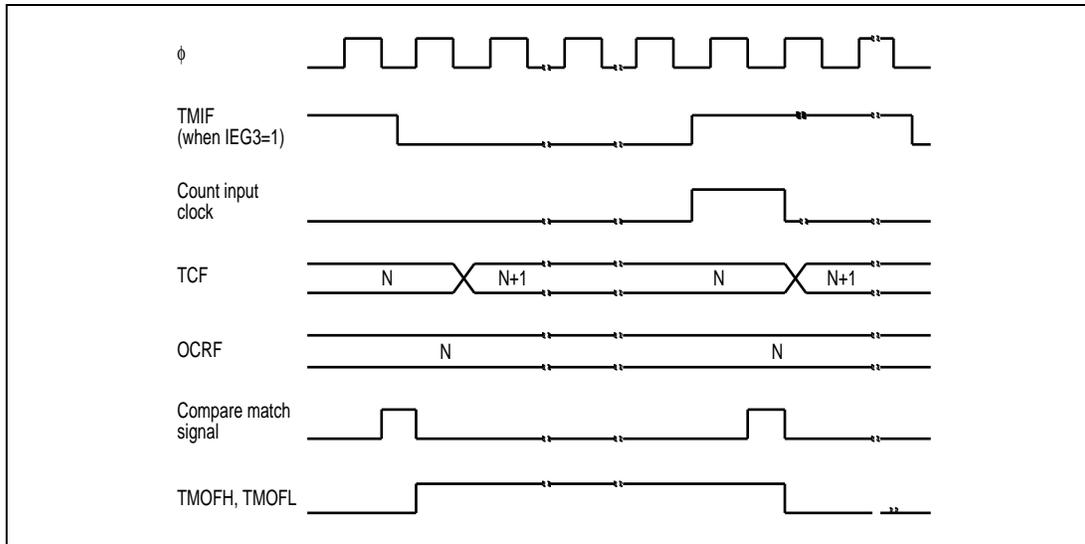


Figure 9-3-4 TMOFH, TMOFL Output Timing

4. TCF clear timing

TCF can be cleared at compare match with OCRF.

5. Timer overflow flag (OVF) set timing

OVF is set to 1 when TCF overflows (goes from H'FFFF to H'0000).

6. Compare match flag set timing

The compare match flags (CMFH or CMFL) are set to 1 when a compare match occurs between TCF and OCRF. A compare match signal is generated in the final state in which the values match (when TCF changes from the matching count value to the next value). When TCF and OCRF match, a compare match signal is not generated until the next counter clock pulse.

7. Timer F operation states

Table 9-3-3 summarizes the timer F operation states.

Table 9-3-3 Timer F Operation States

Operation Mode	Reset	Active	Sleep	Watch	Subactive	Subsleep	Standby
TCF	Reset	Functions	Functions	Halted	Halted	Halted	Halted
OCRf	Reset	Functions	Retained	Retained	Retained	Retained	Retained
TCRF	Reset	Functions	Retained	Retained	Retained	Retained	Retained
TCSRf	Reset	Functions	Retained	Retained	Retained	Retained	Retained

9.3.5 Application Notes

The following conflicts can arise in timer F operation.

1. 16-bit timer mode

The output at pin TMOFH toggles when all 16 bits match and a compare match signal is generated. If the compare match signal occurs at the same time as new data is written in TCRF by a MOV instruction, however, the new value written in bit TOLH will be output at pin TMOFH. The TMOFL output in 16-bit mode is indeterminate, so this output should not be used. Use the pin as a general input or output port.

If an OCRFL write occurs at the same time as a compare match signal, the compare match signal is inhibited. If a compare match occurs between the written data and the counter value, however, a compare match signal will be generated at that point. The compare match signal is output in synchronization with the TCFL clock, so if this clock is stopped no compare match signal will be generated, even if a compare match occurs.

Compare match flag CMFH is set when all 16 bits match and a compare match signal is generated; bit CMFL is set when the setting conditions are met for the lower 8 bits.

The overflow flag (OVFH) is set when TCF overflows; bit OVFL is set if the setting conditions are met when the lower 8 bits overflow. If a write to TCFL occurs at the same time as an overflow signal, the overflow signal is not output.

2. 8-bit timer mode

TCFH and OCRFH

The output at pin TMOFH toggles when there is a compare match. If the compare match signal occurs at the same time as new data is written in TCRF by a MOV instruction, however, the new value written in bit TOLH will be output at pin TMOFH.

If an OCRFH write occurs at the same time as a compare match signal, the compare match signal is inhibited. If a compare match occurs between the written data and the counter value, however, a compare match signal will be generated at that point. The compare match signal is output in synchronization with the TCFH clock.

If a TCFH write occurs at the same time as an overflow signal, the overflow signal is not output.

TCFL and OCRFL

The output at pin TMOFL toggles when there is a compare match. If the compare match signal occurs at the same time as new data is written in TCRF by a MOV instruction, however, the new value written in bit TOLL will be output at pin TMOFL.

If an OCRFL write occurs at the same time as a compare match signal, the compare match signal is inhibited. If a compare match occurs between the written data and the counter value, however, a compare match signal will be generated at that point. The compare match signal is output in synchronization with the TCFL clock, so if this clock is stopped no compare match signal will be generated, even if a compare match occurs.

If a TCFL write occurs at the same time as an overflow signal, the overflow signal is not output.

9.4 Timer G

9.4.1 Overview

Timer G is an 8-bit timer, with input capture functions for separately capturing the rising edge and falling edge of pulses input at the input capture pin (input capture input signal). Timer G has a built-in noise canceller circuit that can eliminate high-frequency noise from the input capture signal, enabling accurate measurement of its duty cycle. When timer G is not used for input capture, it functions as an 8-bit interval timer.

1. Features

Features of timer G are given below.

- Choice of four internal clock sources ($\phi/64$, $\phi/32$, $\phi/2$, $\phi W/2$)
- Input capture function
 - Separate input capture registers are provided for the rising and falling edges.
- Counter overflow detection
 - Can detect whether overflow occurred when the input capture signal was high or low.
- Choice of counter clear triggers
 - The counter can be cleared at the rising edge, falling edge, or both edges of the input capture signal.
- Two interrupt sources
 - Interrupts can be requested by input capture and by overflow. For input capture, the rising or falling edge can be selected.
- Built-in noise-canceller circuit
 - The noise canceller circuit can eliminate high-frequency noise in the input capture signal.
- Operates in subactive and subsleep modes
 - When $\phi_w/2$ is selected as the internal clock source, timer G can operate in the subactive and subsleep modes.

2. Block diagram

Figure 9-4-1 shows a block diagram of timer G.

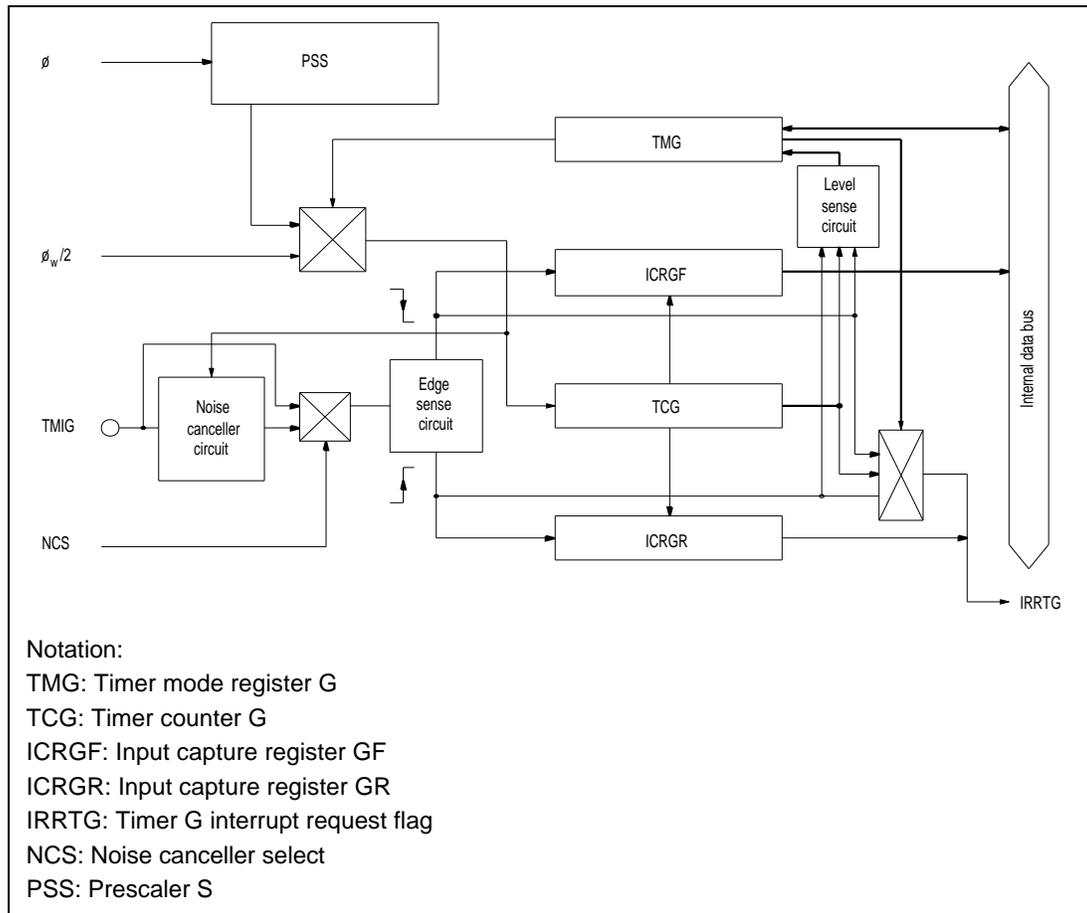


Figure 9-4-1 Block Diagram of Timer G

3. Pin configuration

Table 9-4-1 shows the timer G pin configuration.

Table 9-4-1 Pin Configuration

Name	Abbrev.	I/O	Function
Input capture input pin	TMIG	Input	Input capture

4. Register configuration

Table 9-4-2 shows the register configuration of timer G.

Table 9-4-2 Timer G Registers

Name	Abbrev.	R/W	Initial Value	Address
Timer mode register G	TMG	R/W	H'00	H'FFBC
Timer counter G	TCG	--	H'00	--
Input capture register GF	ICRGF	R	H'00	H'FFBD
Input capture register GR	ICRGR	R	H'00	H'FFBE

9.4.2 Register Descriptions

1. Timer counter G (TCG)

Bit	7	6	5	4	3	2	1	0
	TCG7	TCG6	TCG5	TCG4	TCG3	TCG2	TCG1	TCG0
Initial value	0	0	0	0	0	0	0	0
Read/Write	-	-	-	-	-	-	-	-

Timer counter G (TCG) is an 8-bit up-counter which is incremented by an input clock. The input clock signal is selected by bits CKS1 and CKS0 in timer mode register G (TMG).

To use TCG as an input capture timer, set bit TMIG to 1 in PMR1; to use TCG as an interval timer, clear bit TMIG to 0.* When TCG is used as an input capture timer, the TCG value can be cleared at the rising edge, falling edge, or both edges of the input capture signal, depending on settings in TMG.

When TCG overflows (goes from H'FF to H'00), if the timer overflow interrupt enable bit (OVIE) is set to 1 in TMG, bit IRRTG in interrupt request register 2 (IRR2) is set to 1. If in addition bit IENTG in interrupt enable register 2 (IENR2) is set to 1, a CPU interrupt is requested. Details on interrupts are given in 3.3, Interrupts.

TCG cannot be read or written by the CPU.

Upon reset, TCG is initialized to H'00.

Note: * An input capture signal may be generated when TMIG is rewritten.

2. Input capture register GF (ICRGF)

Bit	7	6	5	4	3	2	1	0
	ICRGF7	ICRGF6	ICRGF5	ICRGF4	ICRGF3	ICRGF2	ICRGF1	ICRGF0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R	R	R	R	R	R	R	R

ICRGF is an 8-bit read-only register. When the falling edge of the input capture signal is detected, the TCG value at that time is transferred to ICRGF. If the input capture interrupt select bit (IIEGS) is set to 1 in TMG, bit IRRTG in interrupt request register 2 (IRR2) is set to 1. If in addition bit IENTG in interrupt enable register 2 (IENR2) is set to 1, a CPU interrupt is requested. Details on interrupts are given in 3.3, Interrupts.

To ensure proper input capture when the noise canceller is not used, the pulse width of the input capture signal should be at least 2ϕ or $2\phi_{SUB}$.

Upon reset, ICRGF is initialized to H'00.

3. Input capture register GR (ICRGR)

Bit	7	6	5	4	3	2	1	0
	ICRGR7	ICRGR6	ICRGR5	ICRGR4	ICRGR3	ICRGR2	ICRGR1	ICRGR0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R	R	R	R	R	R	R	R

ICRGR is an 8-bit read-only register. When the rising edge of the input capture signal is detected, the TCG value at that time is sent to ICRGR. If the IIEGS bit is cleared to 0 in TMG, bit IRRTG in interrupt request register 2 (IRR2) is set to 1. If in addition bit IENTG in interrupt enable register 2 (IENR2) is set to 1, a CPU interrupt is requested. Details on interrupts are given in 3.3, Interrupts.

To ensure proper input capture when the noise canceller is not used, the pulse width of the input capture signal should be at least 2ϕ or $2\phi_{SUB}$.

Upon reset, ICRGR is initialized to H'00.

4. Timer mode register G (TMG)

Bit	7	6	5	4	3	2	1	0
	OVFH	OVFL	OVIE	IIEGS	CCLR1	CCLR0	CKS1	CKS0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W*	R/W*	R/W	R/W	R/W	R/W	R/W	R/W

Note: * Only 0 can be written, to clear flag.

TMG is an 8-bit read/write register. It controls the choice of four input clocks, counter clear selection, and edge selection for input capture interrupt requests. It also indicates overflow status and enables or disables overflow interrupt requests.

Upon reset, TMG is initialized to H'00.

Bit 7: Timer overflow flag H (OVFH)

Bit 7 is a status flag indicating that TCG overflowed (from H'FF to H'00) when the input capture signal was high. This flag is set by hardware and cleared by software. It cannot be set by software.

Bit 7 OVFH	Description
0	Clearing conditions: After reading OVFH=1, cleared by writing 0 to OVFH (initial value)
1	Setting conditions: Set when the value of TCG overflows from H'FF to H'00

Bit 6: Timer overflow flag L (OVFL)

Bit 6 is a status flag indicating that TCG overflowed (from H'FF to H'00) when the input capture signal was low, or in interval timer operation. This flag is set by hardware and cleared by software. It cannot be set by software.

Bit 6 OVFL	Description
0	Clearing conditions: After reading OVFL=1, cleared by writing 0 to OVFL (initial value)
1	Setting conditions: Set when the value of TCG overflows from H'FF to H'00

Bit 5: Timer overflow interrupt enable (OVIE)

Bit 5 enables or disables TCG overflow interrupts.

Bit 5 OVIE	Description	
0	TCG overflow interrupt disabled	(initial value)
1	TCG overflow interrupt enabled	

Bit 4: Input capture interrupt edge select (IIEGS)

Bit 4 selects the input signal edge at which input capture interrupts are requested.

Bit 4 IIEGS	Description	
0	Interrupts are requested at the rising edge of the input capture signal	(initial value)
1	Interrupts are requested at the falling edge of the input capture signal	

Bits 3, 2: Counter clear 1, 0 (CCLR1, CCLR0)

Bits 3 and 2 designate whether TCG is cleared at the rising, falling, or both edges of the input capture signal, or is not cleared.

Bit 3 CCLR1	Bit 2 CCLR0	Description	
0	0	TCG is not cleared	(initial value)
0	1	TCG is cleared at the falling edge of the input capture signal	
1	0	TCG is cleared at the rising edge of the input capture signal	
1	1	TCG is cleared at both edges of the input capture signal	

Bits 1, 0: Clock select (CKS1, CKS0)

Bits 1 and 0 select the clock input to TCG from four internal clock signals.

Bit 1 CKS1	Bit 0 CKS0	Description	
0	0	Internal clock: $\phi/64$	(initial value)
0	1	Internal clock: $\phi/32$	
1	0	Internal clock: $\phi/2$	
1	1	Internal clock: $\phi W/2$	

9.4.3 Noise Canceller Circuit

The noise canceller circuit built into the H8/3877U Series is a digital low-pass filter that rejects high-frequency pulse noise in the input at the capture pin. The noise canceller circuit is enabled by the noise canceller select (NCS) bit in port mode register 2 (PMR2)*.

Figure 9-4-2 shows a block diagram of the noise canceller circuit.

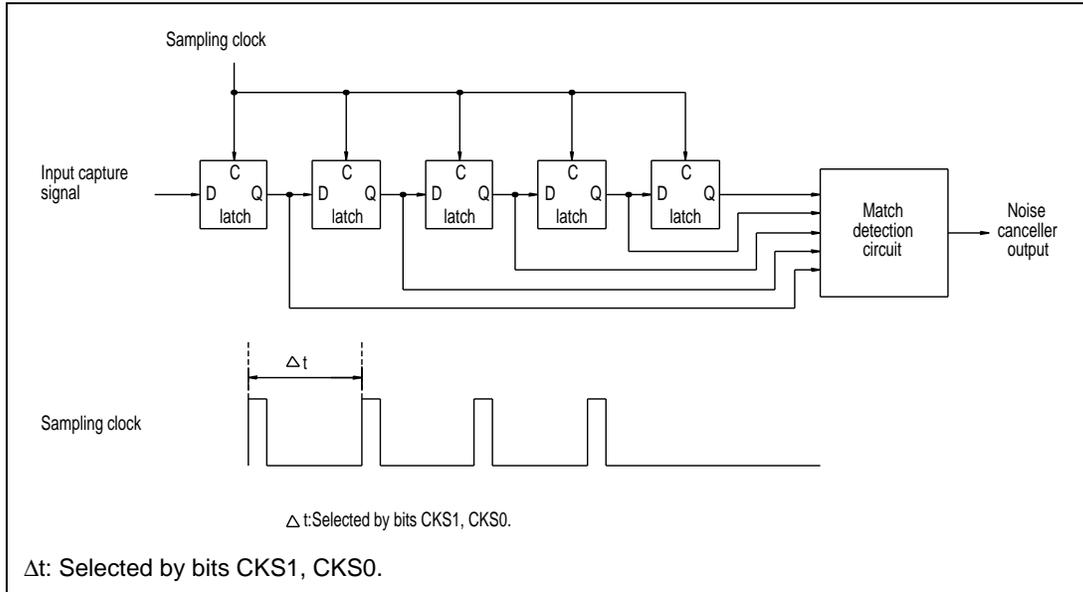


Figure 9-4-2 Block Diagram of Noise Canceller Circuit

The noise canceller consists of five latch circuits connected in series, and a match detection circuit. When the noise canceller function is disabled (NCS=0), the system clock is selected as the sampling clock. When the noise canceller is enabled (NCS=1), the internal clock selected by bits CKS1 and CKS0 in TMG becomes the sampling clock. The input signal is sampled at the rising edge of this clock pulse. Data is considered correct when the outputs of all five latch circuits match. If they do not match, the previous value is retained. Upon reset, the noise canceller output is initialized after the falling edge of the input capture signal has been sampled five times. Accordingly, after the noise canceller function is enabled, pulses that have a pulse width five times greater than the sampling clock will be recognized as input capture signals.

If the noise canceller circuit is not used, the input capture signal pulse width must be at least 2ϕ or $2\phi_{SUB}$ in order to ensure proper input capture operation.

Note: Rewriting the NCS bit may cause an internal input capture signal to be generated.

Figure 9-4-3 shows a typical timing diagram for the noise canceller circuit. In this example, a high-level input at the input capture pin is rejected as noise because its pulse width is less than five sampling clock ϕ cycles.

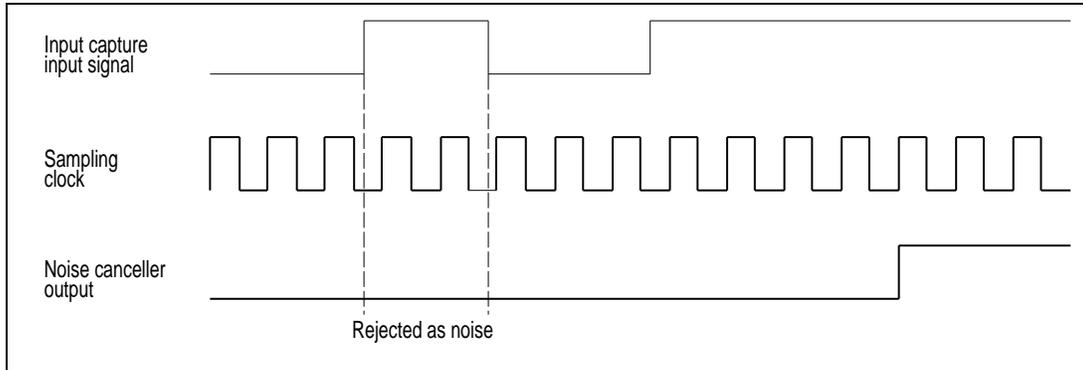


Figure 9-4-3 Noise Canceller Circuit Timing (Example)

9.4.4 Timer Operation

Timer G is an 8-bit timer with input capture and interval timer functions.

1. Timer G functions

Timer G is an 8-bit timer/counter that functions as an input capture timer or an interval timer. These two functions are described below.

— Input capture timer operation

Timer G functions as an input capture timer when bit TMIG of port mode register 1 (PMR1) is set to 1.*

At reset, timer mode register G (TMG), timer counter G (TCG), input capture register GF (ICRGF), and input capture register GR (ICRGR) are all initialized to H'00.

Immediately after reset, TCG begins counting an internal clock with a frequency of ϕ divided by 64 ($\phi/64$). Three other internal clocks can be selected using bits CKS1 and CKS0 of TMG.

At the rising edge/falling edge of the input capture signal input to pin TMIG, the value of TCG is copied into ICRGR/ICRGF. If the input edge is the same as the edge selected by the IIEGS bit of TMG, then bit IRRTG is set to 1 in IRR2. If bit IENTG is also set to 1 in IENR2, a CPU interrupt is requested. For details on interrupts, see section 3.3, Interrupts.

TCG can be cleared to 0 at the rising edge, falling edge, or both edges of the input capture signal as determined with bits CCLR1 and CCLR0 of TMG. If TCG overflows while the input capture signal is high, bit OVFH of TMG is set. If TCG overflows while the input capture signal is low, bit OVIE of TMG is set. When either of these bits is set, if bit OVIE of TMG is currently set to 1, then bit IRRTG is set to 1 in IRR2. If bit IENTG is also set to 1 in IENR2, then timer G requests a CPU interrupt. For further details see 3.3, Interrupts.

Timer G has a noise canceller circuit that rejects high-frequency pulse noise in the input to pin TMIG. See 9.4.3, Noise Canceller Circuit, for details.

Note:* Rewriting the TMIG bit may cause an internal input capture signal to be generated.

— Interval timer operation

Timer G functions as an interval timer when bit TMIG is cleared to 0 in PMR1.

Following a reset, TCG starts counting cycles of the $\phi/64$ internal clock. This is one of four internal clock sources that can be selected by bits CKS1 and CKS0 of TMG. TCG counts up according to the selected clock source. When it overflows from H'ff to H'00, bit OVFL of TMG is set to 1. If bit OVIE of TMG is currently set to 1, then bit IRRTG is set to 1 in IRR2. If bit IENTG is also set to 1 in IENR2, then timer G requests a CPU interrupt. For further details see 3.3, Interrupts.

2. Count timing

TCG is incremented by input pulses from an internal clock. TMG bits CKS1 and CKS0 select one of four internal clocks ($\phi/64$, $\phi/32$, $\phi/2$, $\phi W/2$) derived by dividing the system clock (ϕ) or the watch clock (ϕW).

3. Timing of internal input capture signals

— Timing with noise canceller function disabled

Separate internal input capture signals are generated from the rising and falling edges of the external input signal.

Figure 9-4-4 shows the timing of these signals.

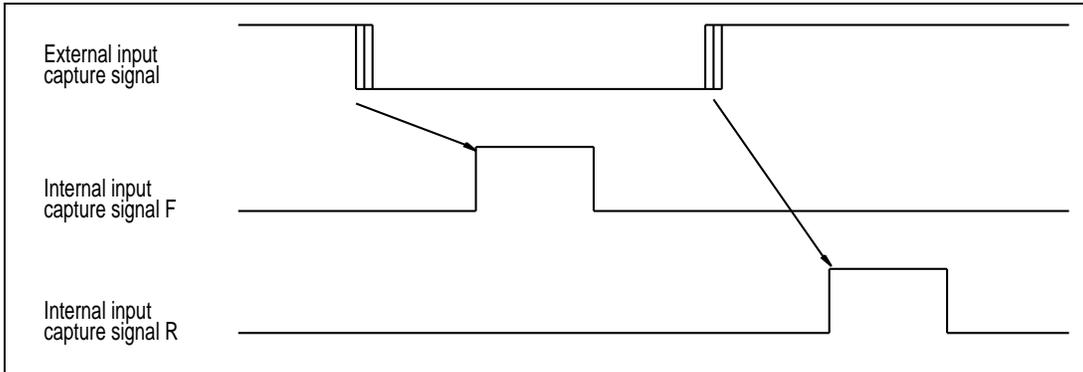


Figure 9-4-4 Input Capture Signal Timing (Noise Canceller Function Disabled)

— Timing with noise canceller function enabled

When input capture noise cancelling is enabled, the external input capture signal is routed via the noise canceller circuit, so the internal signals are delayed from the input edge by five sampling clock cycles. Figure 9-4-5 shows the timing.

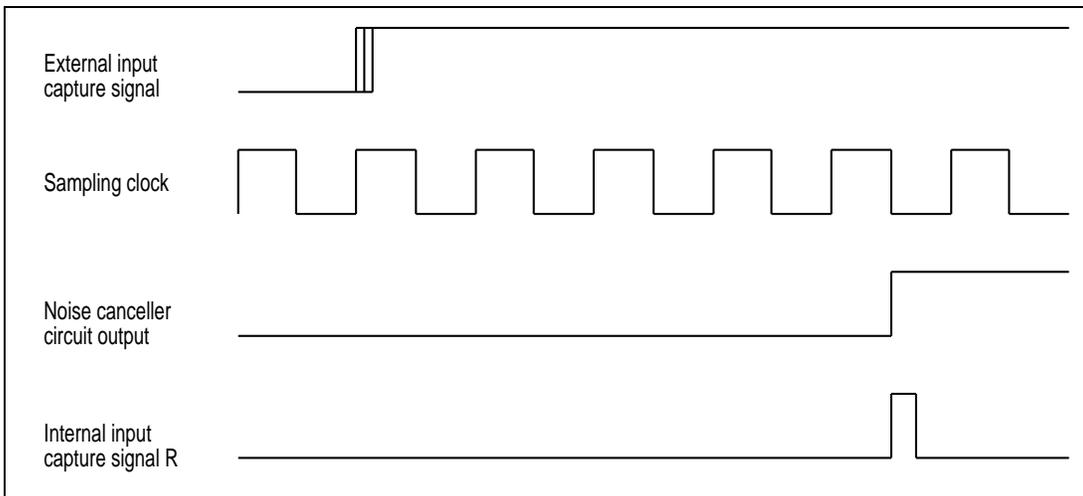


Figure 9-4-5 Input Capture Signal Timing (Noise Canceller Function Enabled)

4. Timing of input capture

Figure 9-4-6 shows the input capture timing in relation to the internal input capture signal.

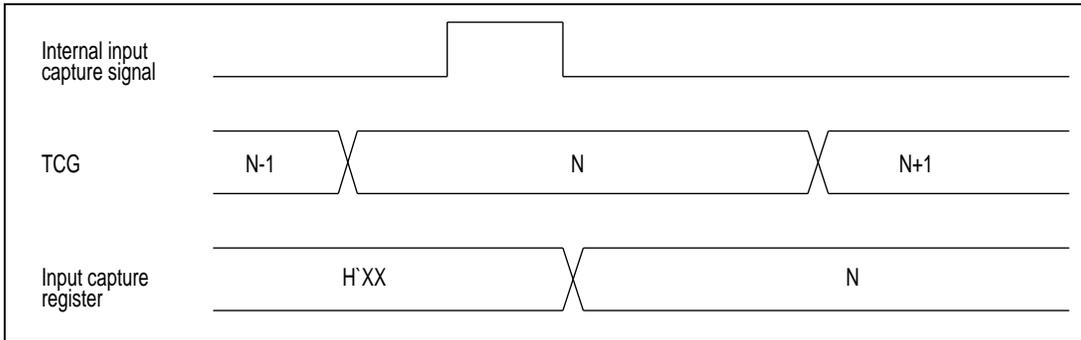


Figure 9-4-6 Input Capture Timing

5. TCG clear timing

TCG can be cleared at the rising edge, falling edge, or both edges of the external input capture signal. Figure 9-4-7 shows the timing for clearing at both edges.

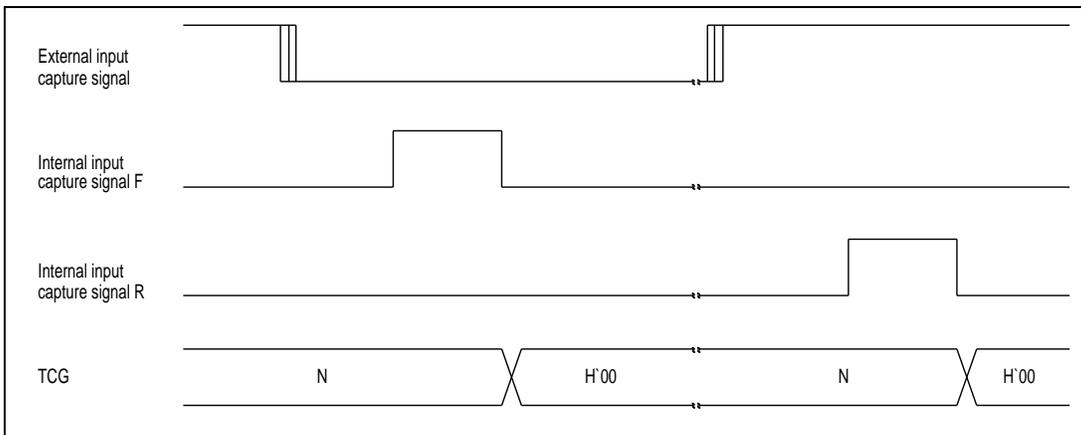


Figure 9-4-7 TCD Clear Timing

6. Timer G operation states

Table 9-4-3 summarizes the timer G operation states.

Table 9-4-3 Timer G Operation States

Operation Mode	Reset	Active	Sleep	Watch	Subactive	Subsleep	Standby
TCG	Input capture	Reset	Functions*	Functions*	Halted	Functions/ Halted* Functions/ Halted*	Halted
Interval	Reset	Functions*	Functions*	Retained	Functions/ Halted*	Functions/ Halted	Halted*
ICRGF	Reset	Functions*	Functions*	Retained	Functions/ Halted*	Functions/ Halted	Retained
ICRGR	Reset	Functions*	Functions*	Retained	Functions/ Halted*	Functions/ Halted*	Retained
TMG	Reset	Functions	Retained	Retained	Functions	Retained	Retained

Note: * In active mode and sleep mode, if $\phi W/2$ is selected as the TCG internal clock, since the system clock and internal clock are not synchronized with each other, a synchronization circuit is used. This may result in a count cycle error of up to $1/\phi$ (s). In subactive mode and subsleep mode, if $\phi W/2$ is selected as the TCG internal clock, regardless of the subclock ϕ/SUB ($\phi W/2$, $\phi W/4$, $\phi W/8$) TCG and the noise canceller circuit run on an internal clock of $\phi W/2$. If any other internal clock is chosen, TCG and the noise canceller circuit will not run, and the input capture function will not operate.


9.4.5 Application Notes

1. Input clock switching and TCG operation


Depending on when the input clock is switched, there will be cases in which TCG is incremented in the process. Table 9-4-4 shows the relation between internal clock switchover timing (selected in bits CKS1 and CKS0) and TCG operation. If an internal clock (derived from the system clock ϕ or subclock ϕ_{SUB}) is used, an increment pulse is generated when a falling edge of the internal clock is detected. For this reason, in a case like No. 3 in table 9-4-4, where the clock is switched at a time such that the clock signal goes from high level before switching to low level after switching, the switchover is seen as a falling edge of the clock pulse, causing TCG to be incremented.

Table 9-4-4 Internal Clock Switching and TCG Operation

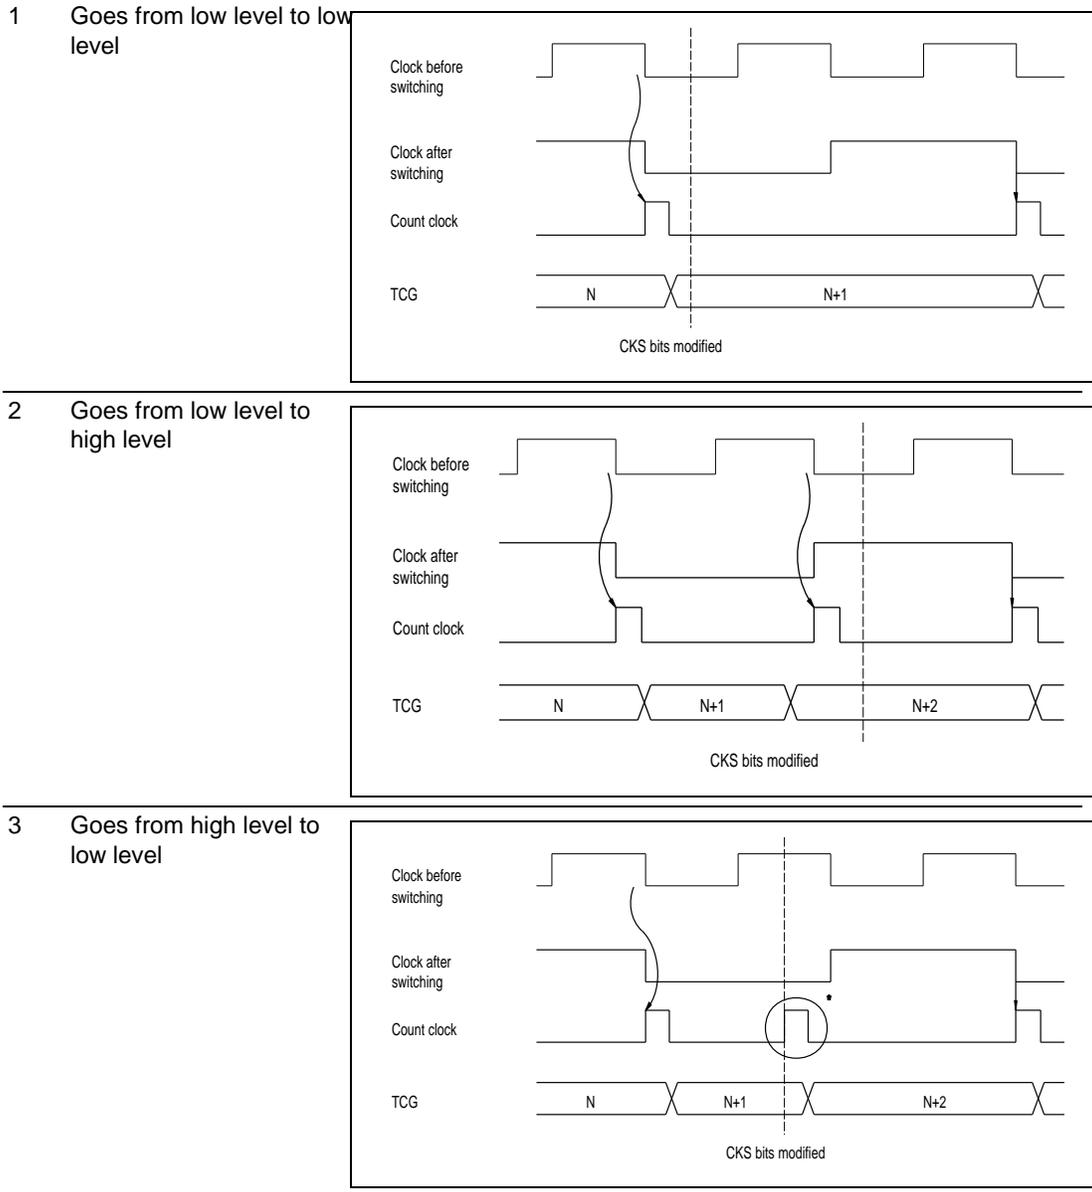No Clock Level Before and After Modifying Bits CKS1 and CKSOTCG Operation



4 Goes from high level to high level

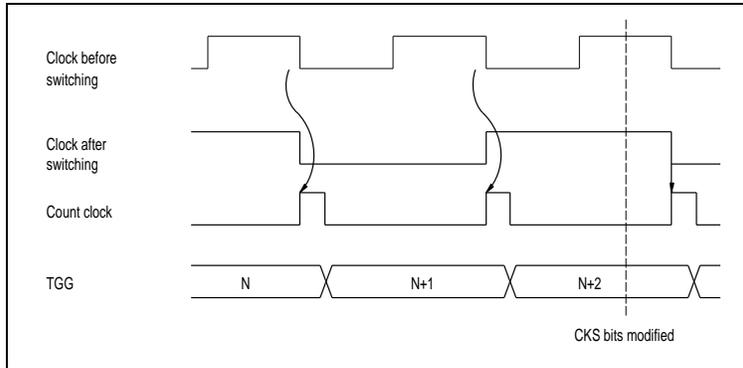

Note: * The switchover is seen as a falling edge of the clock pulse, and TCG is incremented.

2. Note on rewriting port mode registers

When a port mode register setting is modified to enable or disable the input capture function or input capture noise canceling function, note the following points.

— Switching the function of the input capture pin

When the function of the input capture pin is switched by modifying port mode register 1 bit 3 (the TMIG bit), an input capture edge may be recognized even though no valid signal edge has been input. This occurs under the conditions listed in table 9-4-5.

Table 9-4-5 False Input Capture Edges Generating by Switching of Input Capture Pin Function

Input Capture Edge	Conditions
Rising edge recognized	TMIG pin level is high, and TMIG bit is changed from 0 to 1
	TMIG pin level is high and NCS bit is changed from 0 to 1, then TMIG bit is changed from 0 to 1 before noise canceller circuit completes five samples
Falling edge recognized	TMIG pin level is high, and TMIG bit is changed from 1 to 0
	TMIG pin level is low and NCS bit is changed from 0 to 1, then TMIG bit is changed from 0 to 1 before noise canceller circuit completes five samples
	TMIG pin level is high and NCS bit is changed from 0 to 1, then TMIG bit is changed from 1 to 0 before noise canceller circuit completes five samples

Note: When pin P1 3 is not used for input capture, the input capture signal input to timer G is low.

— Switching the input capture noise canceling function

When modifying port mode register 2 bit 4 (the NCS bit) to enable or disable the input capture noise canceling function, first clear the TMIG bit to 0. Otherwise an input capture edge may be recognized even though no valid signal edge has been input. This occurs under the conditions listed in table 9-4-6.

Table 9-4-6 False Input Capture Edges Generating by Switching of Noise Canceling Function

Input Capture Edge	Conditions
Rising edge recognized	TMIG bit is set to 1 and TMIG pin level changes from low to high, then NCS bit is changed from 1 to 0 before noise canceller circuit completes five samples
Falling edge recognized	TMIG bit is set to 1 and TMIG pin level changes from high to low, then NCS bit is changed from 1 to 0 before noise canceller circuit completes five samples

If switching of the pin function generates a false input capture edge matching the edge selected by the input capture interrupt edge select bit (IIEGS), the interrupt request flag will be set to 1, making it necessary to clear this flag to 0 before using the interrupt function. Figure 9-4-8 shows the procedure for modifying port mode register settings and clearing the interrupt request flag. The first step is to mask interrupts before modifying the port mode register. After modifying the port mode register setting, wait long enough for an input capture edge to be recognized (at least two system clocks when noise canceling is disabled; at least five sampling clocks when noise canceling is enabled), then clear the interrupt request flag to 0 (assuming it has been set to 1). An alternative procedure is to avoid having the interrupt request flag set when the pin function is switched, either by controlling the level of the input capture pin so that it does not satisfy the conditions in tables 9-4-5 and 9-4-6, or by setting the IIEGS bit of TMG to select the edge opposite to the falsely generated edge.

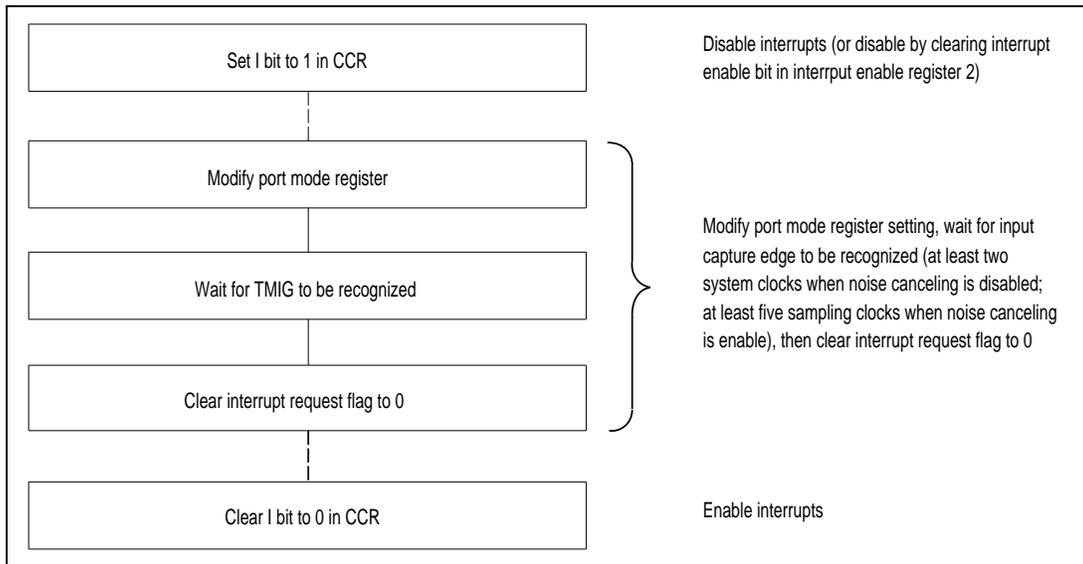


Figure 9-4-8 Procedure for Modifying Port Mode Register and Clearing Interrupt Request Flag

9.4.6 Sample Timer G Application

The absolute values of the high and low widths of the input capture signal can be measured by using timer G. The CCLR1 and CCLR0 bits of TMG should be set to 1. Figure 9-4-9 shows an example of this operation.

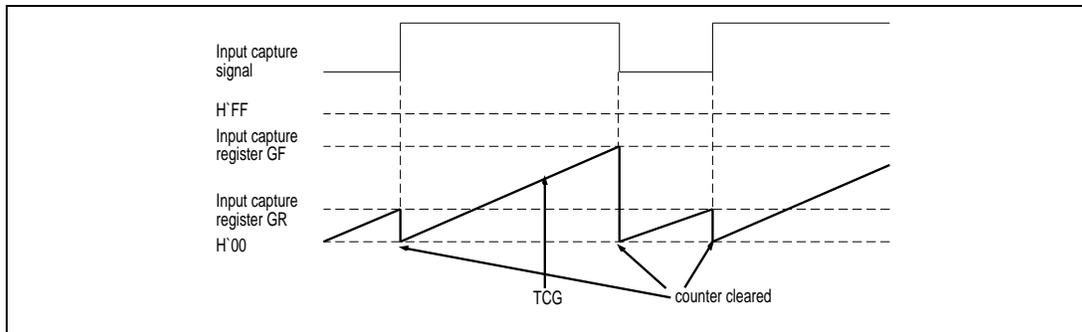


Figure 9-4-9 Sample Timer G Application

Section 10 Serial Communication Interface

10.1 Overview

The H8/3877U Series is provided with a two-channel serial communication interface (SCI).

Table 10-1-1 summarizes the functions and features of the two SCI channels.

Table 10-1-1 Serial Communication Interface Functions

Channel	Functions	Features
SCI1	Synchronous serial transfer <ul style="list-style-type: none">• Choice of 8-bit or 16-bit data length• Continuous clock output	Choice of 8 internal clocks ($\phi/1024$ to $\phi/2$) or external clock Open drain output possible Interrupt requested at completion of transfer
SCI3	Synchronous serial transfer <ul style="list-style-type: none">• 8-bit data transfer• Send, receive, or simultaneous send/receive• Asynchronous serial transfer• Multiprocessor communication function• Choice of 7-bit or 8-bit data length• Choice of 1-bit or 2-bit stop bit length• Odd or even parity	Built-in baud rate generator Receive error detection Break detection Interrupt requested at completion of transfer or error

10.2 SCI1

10.2.1 Overview

Serial communication interface 1 (SCI1) performs synchronous serial transfer of 8-bit or 16-bit data.

1. Features

- Choice of 8-bit or 16-bit data length
- Choice of eight internal clock sources ($\phi/1024$, $\phi/256$, $\phi/64$, $\phi/32$, $\phi/16$, $\phi/8$, $\phi/4$, $\phi/2$) or an external clock
- Interrupt requested at completion of transfer

2. Block diagram

- Figure 10-2-1 shows a block diagram of SCI1.

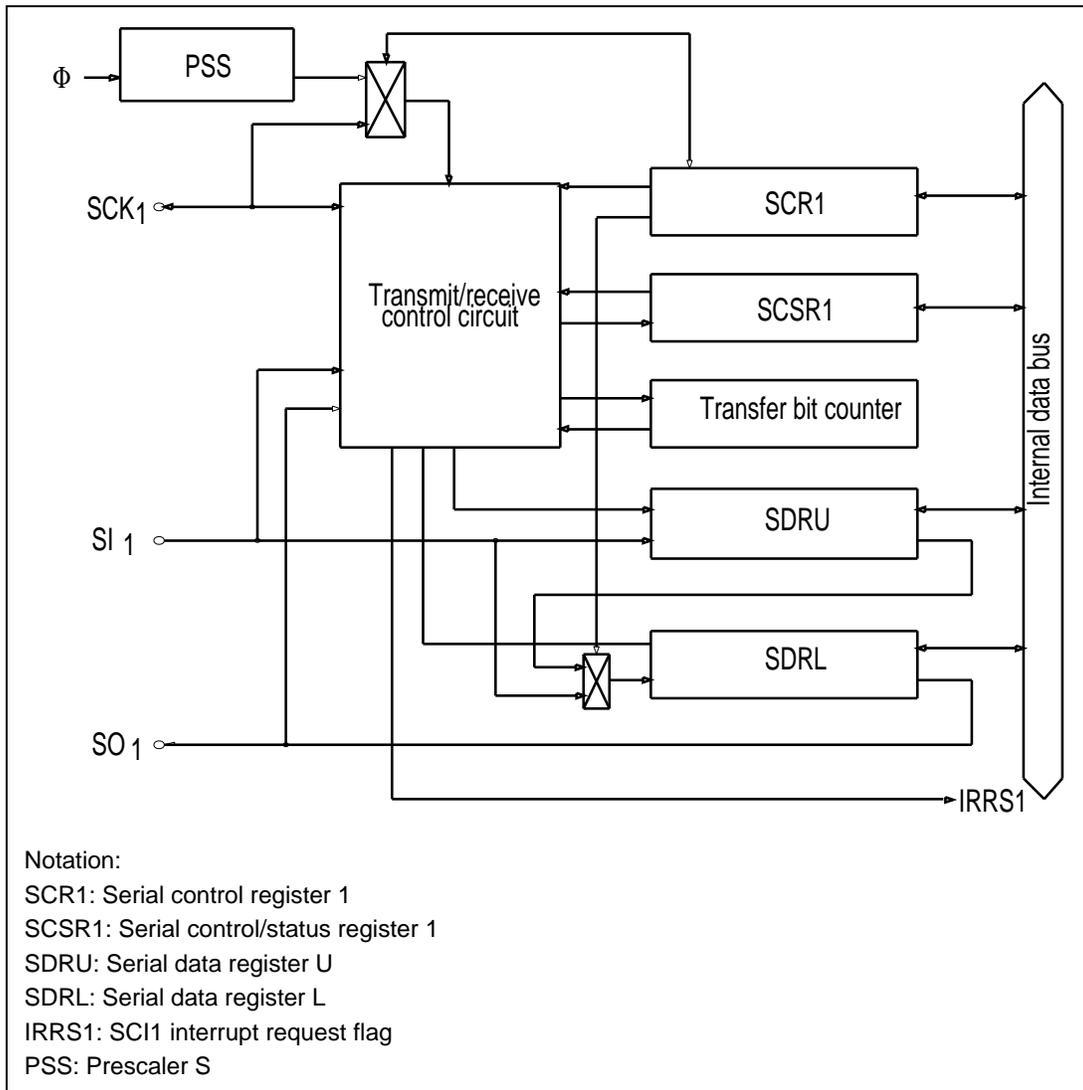


Figure 10-2-1 SCI1 Block Diagram

3. Pin configuration

Table 10-2-1 shows the SCI1 pin configuration.

Table 10-2-1 Pin Configuration

Name	Abbrev.	I/O	Function
SCI1 clock pin	SCK ₁	I/O	SCI1 clock input or output
SCI1 data input pin	SI ₁	Input	SCI1 receive data input
SCI1 data output pin	SO ₁	Output	SCI1 transmit data output

4. Register configuration

Table 10-2-2 shows the SCI1 register configuration.

Table 10-2-2 SCI1 Registers

Name	Abbrev.	R/W	Initial Value	Address
Serial control register 1	SCR1	R/W	H'00	H'FFA0
Serial control status register 1	SCSR1	R/W	H'80	H'FFA1
Serial data register U	SDRU	R/W	Not fixed	H'FFA2
Serial data register L	SDRL	R/W	Not fixed	H'FFA3

10.2.2 Register Descriptions

1. Serial control register 1 (SCR1)

Bit	7	6	5	4	3	2	1	0
	SNC1	SNC0	-	-	CKS3	CKS2	CKS1	CKS0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

SCR1 is an 8-bit read/write register for selecting the operation mode, the transfer clock source, and the prescaler division ratio.

Upon reset, SCR1 is initialized to H'00. Writing to this register during a transfer stops the transfer.

Bits 7 and 6: Operation mode select 1, 0 (SNC1, SNC0)

Bits 7 and 6 select the operation mode.

Bit 7 SNC1	Bit 6 SNC0	Description	
0	0	8-bit synchronous transfer mode	(initial value)
0	1	16-bit synchronous transfer mode	
1	0	Continuous clock output mode* ¹	
1	1	Reserved* ²	

Notes: 1. Pins SI1 and SO1 should be used as general input or output ports.

2. Don't set bits SNC1 and SNC0 to 11.

Bits 5 and 4: Reserved bits

Bits 5 and 4 are reserved, but they can be written and read.

Bit 3: Clock source select (CKS3)

Bit 3 selects the clock source and sets pin SCK₁ as an input or output pin.

Bit 3 CKS3	Description	
0	Clock source is prescaler S, and pin SCK ₁ is output pin	(initial value)
1	Clock source is external clock, and pin SCK ₁ is input pin	

Bits 2 to 0: Clock select (CKS2 to CKS 0)

When CKS3 = 0, bits 2 to 0 select the prescaler division ratio and the serial clock cycle.

Serial Clock Cycle						
Bit 2 CKS2	Bit 1 CKS1	Bit 0 CKS0	Prescaler Division	$\phi=5$ MHz	$\phi=2.5$ MHz	
0	0	0	$\phi/1024$ (initial value)	204.8 μ s	409.6 μ s	
0	0	1	$\phi/256$	51.2 μ s	102.4 μ s	
0	1	0	$\phi/64$	12.8 μ s	25.6 μ s	
0	1	1	$\phi/32$	6.4 μ s	12.8 μ s	
1	0	0	$\phi/16$	3.2 μ s	6.4 μ s	
1	0	1	$\phi/8$	1.6 μ s	3.2 μ s	
1	1	0	$\phi/4$	0.8 μ s	1.6 μ s	
1	1	1	$\phi/2$	--	0.8 μ s	

2. Serial control/status register 1 (SCSR1)

Bit	7	6	5	4	3	2	1	0
	-	SOL	ORER	-	-	-	-	STF
Initial value	1	0	0	0	0	0	0	0
Read/Write	-	R/W	R/(W)*	-	-	-	R/W	R/W

Note: * Only of 0 for flag clearing possible.

Note: * Only a write of 0 for flag clearing is possible.

SCSR1 is an 8-bit read/write register indicating operation status and error status.

Upon reset, SCSR1 is initialized to H'80.

Bit 7: Reserved bit

Bit 7 is reserved; it is always read as 1, and cannot be modified.

Bit 6: Extended data bit (SOL)

Bit 6 sets the SO₁ output level. When read, SOL returns the output level at the SO₁ pin. After completion of a transmission, SO₁ continues to output the value of the last bit of transmitted data. The SO₁ output can be changed by writing to SOL before or after a transmission. The SOL bit setting remains valid only until the start of the next transmission. To control the level of the SO₁ pin after transmission ends, it is necessary to write to the SOL bit at the end of each transmission. Do not write to this register while transmission is in progress, because that may cause a malfunction.

Bit 6 SOL	Description	
0	Read	SO ₁ pin output level is low (initial value)
	Write	SO ₁ pin output level changes to low
1	Read	SO ₁ pin output level is high
	Write	SO ₁ pin output level changes to high

Bit 5: Overrun error flag (ORER)

When an external clock is used, bit 5 indicates the occurrence of an overrun error. If a clock pulse is input after transfer completion, this bit is set to 1 indicating an overrun. If noise occurs during a transfer, causing an extraneous pulse to be superimposed on the normal serial clock, incorrect data may be transferred.

Bit 5 ORER	Description	
0	Clearing conditions: After reading ORER = 1, cleared by writing 0 to ORER (initial value)	
	Setting conditions: Set if a clock pulse is input after transfer is complete, when an external clock is used	

Bits 4 to 2: Reserved bits

Bits 4 to 2 are reserved. They are always read as 0, and cannot be modified.

Bit 1: Reserved bit

Bit 1 is reserved; it should always be cleared to 0.

Bit 0: Start flag (STF)

Bit 0 controls the start of a transfer. Setting this bit to 1 causes SCII to start transferring data.

During the transfer or while waiting for the first clock pulse, this bit remains set to 1. It is cleared to 0 upon completion of the transfer. It can therefore be used as a busy flag.

Bit 0 STF	Description
0	Read: Indicates that transfer is stopped (initial value) Write: Invalid
1	Read: Indicates transfer in progress Write: Starts a transfer operation

3. Serial data register U (SDRU)

Bit	7	6	5	4	3	2	1	0
	SDRU7	SDRU6	SDRU5	SDRU4	SDRU3	SDRU2	SDRU1	SDRU0
Initial value	Not fixed							
Read/Write	R/W							

SDRU is an 8-bit read/write register. It is used as the data register for the upper 8 bits in 16-bit transfer (SDRL is used for the lower 8 bits).

Data written to SDRU is output to SDRL starting from the least significant bit (LSB). This data is then replaced by LSB-first data input at pin SII, which is shifted in the direction from the most significant bit (MSB) toward the LSB.

SDRU must be written or read only after data transmission or reception is complete. If this register is written or read while a data transfer is in progress, the data contents are not guaranteed.

The SDRU value upon reset is not fixed.

4. Serial data register L (SDRL)

Bit	7	6	5	4	3	2	1	0
	SDRL7	SDRL6	SDRL5	SDRL4	SDRL3	SDRL2	SDRL1	SDRL0
Initial value	Not fixed							
Read/Write	R/W							

SDRL is an 8-bit read/write register. It is used as the data register in 8-bit transfer, and as the data register for the lower 8 bits in 16-bit transfer (SDRU is used for the upper 8 bits).

In 8-bit transfer, data written to SDRL is output from pin SO_1 starting from the least significant bit (LSB). This data is then replaced by LSB-first data input at pin SI_1 , which is shifted in the direction from the most significant bit (MSB) toward the LSB.

In 16-bit transfer, operation is the same as for 8-bit transfer, except that input data is fed in via SDRU.

SDRL must be written or read only after data transmission or reception is complete. If this register is read or written while a data transfer is in progress, the data contents are not guaranteed.

The SDRL value upon reset is not fixed.

10.2.3 Operation


Data can be sent and received in an 8-bit or 16-bit format, synchronized to an internal or external serial clock. Overrun errors can be detected when an external clock is used.

1. Clock

The serial clock can be selected from a choice of eight internal clocks and an external clock. When an internal clock source is selected, pin SCK_1 becomes the clock output pin. When continuous clock output mode is selected (SCR1 bits SNC1 and SNC0 are set to 10), the clock signal ($\phi/1024$ to $\phi/2$) selected in bits CKS2 to CKS0 is output continuously from pin SCK_1 . When an external clock is used, pin SCK_1 is the clock input pin.

2. Data transfer format

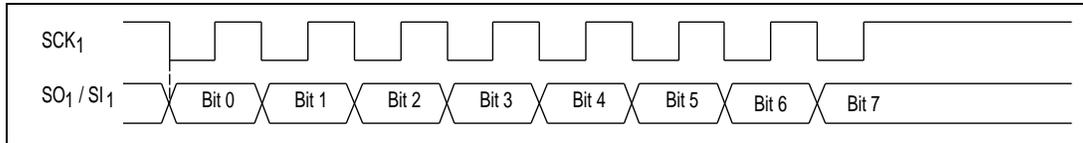Figure 10-2-2 shows the data transfer format. Data is sent and received starting from the least significant bit, in LSB-first format. Transmit data is output from one falling edge of the serial clock until the next falling edge. Receive data is latched at the rising edge of the serial clock.



3. Data transfer operations

— Transmitting

A transmit operation is carried out as follows.

- Set bit SO₁ in port mode register 2 (PMR2) to 1, making pin P2₃/SO₁ the SO₁ output pin. Also set bit SCK1 in PMR2 to 1, making pin P2₁/SCK₁ the SCK₁ I/O pin. If necessary, set bit POF1 in PMR2 for NMOS open drain output at pin SO₁.
- Clear bit SNC1 in SCR1 to 0, and set bit SNC0 to 1 or 0, designating 8-or 16-bit synchronous transfer mode. Select the serial clock in bits CKS3 to CKS0. Writing data to SCR1 initializes the internal state of SCI1.
- Write transmit data in SDRL and SDRU as follows.
8-bit transfer mode: SDRL
16-bit transfer mode: Upper byte in SDRU, lower byte in SDRL
- Set the SCSR1 start flag (STF) to 1. SCI1 starts operating and outputs transmit data at pin SO₁.
- After data transmission is complete, bit IRRS1 in interrupt request register 1 (IRR1) is set to 1.

When an internal clock is used, a serial clock is output from pin SCK₁ in synchronization with the transmit data. After data transmission is complete, the serial clock is not output until the next time the start flag is set to 1. During this time, pin SO₁ continues to output the value of the last bit transmitted.

When an external clock is used, data is transmitted in synchronization with the serial clock input at pin SCK_1 . After data transmission is complete, an overrun occurs if the serial clock continues to be input; no data is transmitted and the SCSR1 overrun error flag (bit ORER) is set to 1.

While transmission is stopped, the output value of pin SO_1 can be changed by rewriting bit SOL in SCSR1.

— Receiving

A receive operation is carried out as follows.

- Set bit SII in port mode register 2 (PMR2) to 1, making pin $P2_2/SI_1$ the SI_1 input pin. Also set bit SCK1 in PMR2 to 1, making pin $P2_1/SCK_1$ the SCK_1 I/O pin.
- Clear bit SNC1 in SCR1 to 0, and set bit SNC0 to 1 or 0, designating 8-or 16-bit synchronous transfer mode. Select the serial clock in bits CKS3 to CKS0. Writing data to SCR1 initializes the internal state of SCI1.
- Set the SCSR1 start flag (STF) to 1. SCI1 starts operating and receives data at pin SI_1 .
- After data reception is complete, bit IRRS1 in interrupt request register 1 (IRR1) is set to 1.
- Read the received data from SDRL and SDRU, as follows.
8-bit transfer mode: SDRL
16-bit transfer mode: Upper byte in SDRU, lower byte in SDRL
- After data reception is complete, an overrun occurs if the serial clock continues to be input; no data is received and the SCSR1 overrun error flag (bit ORER) is set to 1.

— Simultaneous transmit/receive

A simultaneous transmit/receive operation is carried out as follows.

- Set bits SO_1 , SI_1 , and $SCK1$ in $PMR2$ to 1, making pin $P2_3/SO_1$ the SO_1 output pin, pin $P2_2/SI_1$ the SI_1 input pin, and pin $P2_1/SCK_1$ the SCK_1 I/O pin. If necessary, set bit $POF1$ in $PMR2$ for NMOS open drain output at pin SO_1 .
- Clear bit $SNC1$ in $SCR1$ to 0, and set bit $SNC0$ to 1 or 0, designating 8-or
- 16-bit synchronous transfer mode. Select the serial clock in bits $CKS3$ to $CKS0$. Writing data to $SCR1$ initializes the internal state of $SCI1$.
- Write transmit data in $SDRL$ and $SDRU$, as follows.
8-bit transfer mode: $SDRL$
16-bit transfer mode: Upper byte in $SDRU$, lower byte in $SDRL$
- Set the $SCSR1$ start flag (STF) to 1. $SCI1$ starts operating. Transmit data is output at pin SO_1 . Receive data is input at pin SI_1 .
- After data transmission and reception are complete, bit $IRRS1$ in $IRR1$ is set to 1.
- Read the received data from $SDRL$ and $SDRU$, as follows.
8-bit transfer mode: $SDRL$
16-bit transfer mode: Upper byte in $SDRU$, lower byte in $SDRL$

When an internal clock is used, a serial clock is output from pin SCK_1 in synchronization with the transmit data. After data transmission is complete, the serial clock is not output until the next time the start flag is set to 1. During this time, pin SO_1 continues to output the value of the last bit transmitted.

When an external clock is used, data is transmitted and received in synchronization with the serial clock input at pin SCK_1 . After data transmission and reception are complete, an overrun occurs if the serial clock continues to be input; no data is transmitted or received and the $SCSR1$ overrun error flag (bit $ORER$) is set to 1.

While transmission is stopped, the output value of pin SO_1 can be changed by rewriting bit SOL in $SCSR1$.

10.2.4 Interrupts

SCI1 can generate an interrupt at the end of a data transfer.

When an SCI1 transfer is complete, bit IRRS1 in interrupt request register 1 (IRR1) is set to 1. SCI1 interrupt requests can be enabled or disabled by bit IENS1 of interrupt enable register 1 (IENR1).

For further details, see 3.3, Interrupts.

10.3 SCI3

10.3.1 Overview

Serial communication interface 3 (SCI3) has both synchronous and asynchronous serial data communication capabilities. It also has a multiprocessor communication function for serial data communication among two or more processors.

1. Features

SCI3 features are listed below.

— Selection of asynchronous or synchronous mode

a. Asynchronous mode

SCI3 can communicate with a UART (universal asynchronous receiver/transmitter), ACIA (asynchronous communication interface adapter), or other chip that employs standard asynchronous serial communication. It can also communicate with two or more other processors using the multiprocessor communication function. There are twelve selectable serial data communication formats.

Data length: seven or eight obits

Stop bit length: one or two bits

Parity: even, odd, or none

Multiprocessor bit: one or none

Receive error detection: parity, overrun, and framing errors

Break detection: by reading the RXD level directly when a framing error occurs

b. Synchronous mode

Serial data communication is synchronized with a clock signal. SCI3 can communicate with other chips having a clocked synchronous communication function.

Data length: eight bits

Receive error detection: overrun errors

— Full duplex communication

The transmitting and receiving sections are independent, so SCI3 can transmit and receive simultaneously. Both sections use double buffering, so continuous data transfer is possible in both the transmit and receive directions.

- Built-in baud rate generator with selectable bit rates.
- Internal or external clock may be selected as the transfer clock source.
- There are six interrupt sources: transmit end, transmit data register empty, receive data register full, overrun error, framing error, and parity error.

2. Block diagram

Figure 10-3-1 shows a block diagram of SCI3.

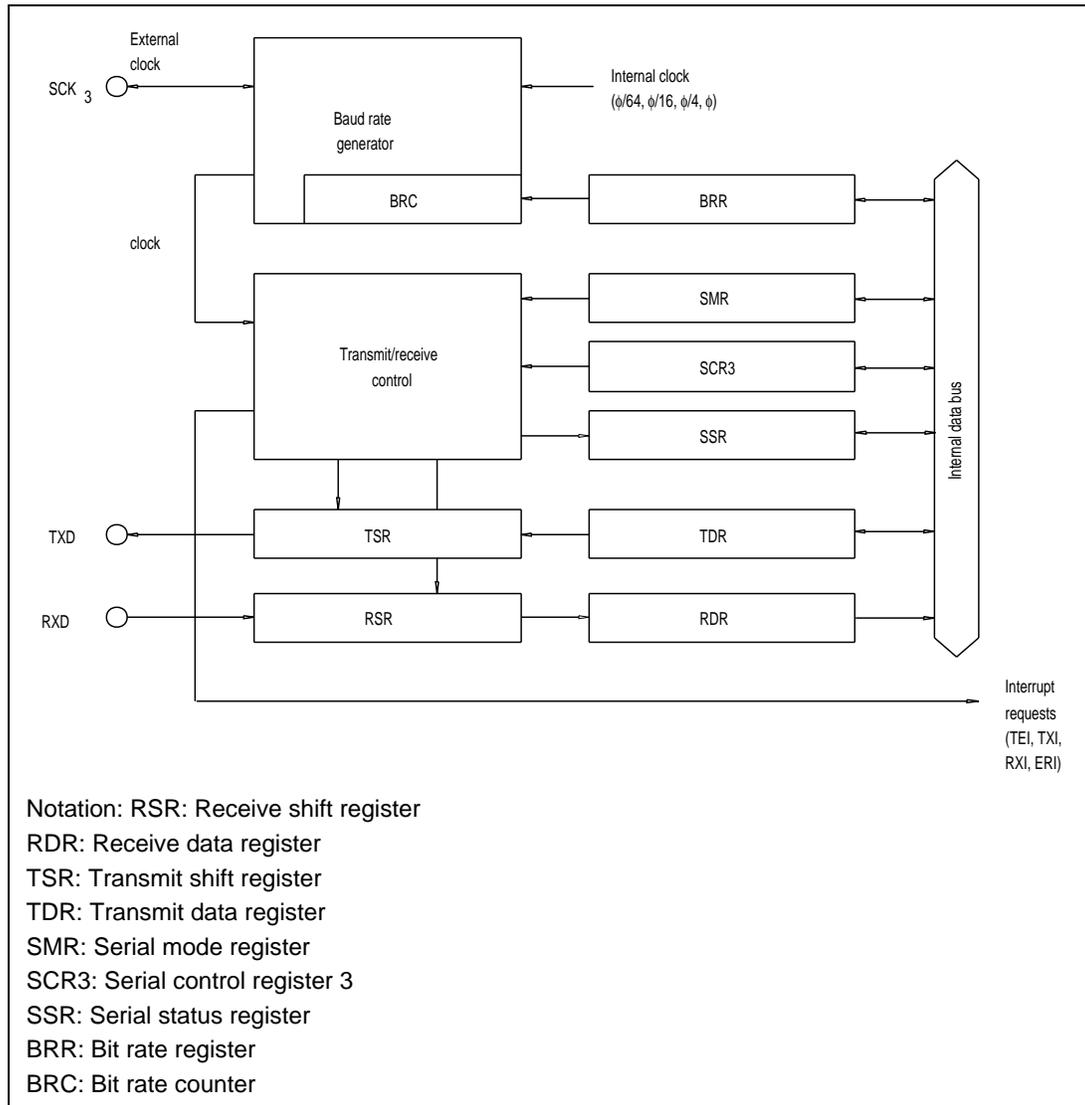


Figure 10-3-1 SCI3 Block Diagram

3. Pin configuration

Table 10-3-1 shows the SCI3 pin configuration.

Table 10-3-1 Pin Configuration

Name	Abbrev.	I/O	Function
SCI3 clock	SCK ₃	I/O	SCI3 clock input/output
SCI3 receive data input	RXD	Input	SCI3 receive data input
SCI3 transmit data output	TXD	Output	SCI3 transmit data output

4. Register configuration

Table 10-3-2 shows the SCI3 internal register configuration.

Table 10-3-2 SCI3 Registers

Name	Abbrev.	R/W	Initial Value	Address
Serial mode register	SMR	R/W	H'00	H'FFA8
Bit rate register	BRR	R/W	H'FF	H'FFA9
Serial control register 3	SCR3	R/W	H'00	H'FFAA
Transmit data register	TDR	R/W	H'FF	H'FFAB
Serial status register	SSR	R/W	H'84	H'FFAC
Receive data register	RDR	R	H'00	H'FFAD
Transmit shift register	TSR	--	--	--
Receive shift register	RSR	--	--	--
Bit rate counter	BRC	--	--	--

10.3.2 Register Descriptions

1. Receive shift register (RSR)

Bit	7	6	5	4	3	2	1	0
Read/Write	-	-	-	-	-	-	-	-

The receive shift register (RSR) is for receiving serial data.

Serial data is input in LSB-first order into RSR from pin RXD, converting it to parallel data. After each byte of data has been received, the byte is automatically transferred to the receive data register (RDR).

RSR cannot be read or written directly by the CPU.

2. Receive data register (RDR)

Bit	7	6	5	4	3	2	1	0
	RDR7	RDR6	RDR5	RDR4	RDR3	RDR2	RDR1	RDR0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R	R	R	R	R	R	R	R

The receive data register (RDR) is an 8-bit register for storing received serial data.

Each time a byte of data is received, the received data is transferred from the receive shift register (RSR) to RDR, completing a receive operation. Thereafter RSR again becomes ready to receive new data. RSR and RDR form a double buffer mechanism that allows data to be received continuously.

RDR is exclusively for receiving data and cannot be written by the CPU.

RDR is initialized to H'00 upon reset or in standby mode, watch mode, subactive mode, or subsleep mode.

3. Transmit shift register (TSR)

Bit	7	6	5	4	3	2	1	0									
	<table border="1" style="width: 100%; height: 15px;"> <tr> <td style="width: 12.5%;"></td> </tr> </table>																
Read/Write	-	-	-	-	-	-	-	-									

The transmit shift register (TSR) is for transmitting serial data.

Transmit data is first transferred from the transmit data register (TDR) to TSR, then is transmitted from pin TXD, starting from the LSB (bit 0).

After one byte of data has been sent, the next byte is automatically transferred from TDR to TSR, and the next transmission begins. If no data has been written to TDR (1 is set in TDRE), there is no data transfer from TDR to TSR.

TSR cannot be read or written directly by the CPU.

4. Transmit data register (TDR)

Bit	7	6	5	4	3	2	1	0								
	<table border="1" style="width: 100%; height: 15px;"> <tr> <td style="width: 12.5%; text-align: center;">TDR7</td> <td style="width: 12.5%; text-align: center;">TDR6</td> <td style="width: 12.5%; text-align: center;">TDR5</td> <td style="width: 12.5%; text-align: center;">TDR4</td> <td style="width: 12.5%; text-align: center;">TDR3</td> <td style="width: 12.5%; text-align: center;">TDR2</td> <td style="width: 12.5%; text-align: center;">TDR1</td> <td style="width: 12.5%; text-align: center;">TDR0</td> </tr> </table>								TDR7	TDR6	TDR5	TDR4	TDR3	TDR2	TDR1	TDR0
TDR7	TDR6	TDR5	TDR4	TDR3	TDR2	TDR1	TDR0									
Initial value	1	1	1	1	1	1	1	1								
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W								

The transmit data register (TDR) is an 8-bit register for holding transmit data.

When SCI3 detects that the transmit shift register (TSR) is empty, it shifts transmit data written in TDR to TSR and starts serial data transmission. While TSR is transmitting serial data, the next byte to be transmitted can be written to TDR, realizing continuous transmission.

TDR can be read or written by the CPU at all times.

TDR is initialized to H'FF upon reset or in standby mode, watch mode, subactive mode, or subsleep mode.

5. Serial mode register (SMR)

Bit	7	6	5	4	3	2	1	0
	COM	CHR	PE	PM	STOP	MP	CKS1	CKS0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

The serial mode register (SMR) is an 8-bit register for setting the serial data communication format and for selecting the clock source of the baud rate generator. SMR can be read and written by the CPU at any time.

SMR is initialized to H'00 upon reset or in standby mode, watch mode, subactive mode, or subsleep mode.

Bit 7: Communication mode (COM)

Bit 7 selects asynchronous mode or synchronous mode as the serial data communication mode.

Bit 7 COM	Description
0	Asynchronous mode (initial value)
1	Synchronous mode

Bit 6: Character length (CHR)

Bit 6 selects either 7 bits or 8 bits as the data length in asynchronous mode. In synchronous mode the data length is always 8 bits regardless of the setting here.

Bit 6 CHR	Description
0	8-bit data (initial value)
1	7-bit data*

Note: * When 7-bit data is selected as the character length in asynchronous mode, the MSB (bit 7) in the transmit data register is not transmitted.

Bit 5: Parity enable (PE)

In asynchronous mode, bit 5 selects whether or not a parity bit is to be added to transmitted data and checked in received data. In synchronous mode there is no adding or checking of parity regardless of the setting here.

Bit 5 PE	Description
0	Parity bit adding and checking disabled (initial value)
1	Parity bit adding and checking enabled*

Note: * When PE is set to 1, then either odd or even parity is added to transmit data, depending on the setting of the parity mode bit (PM). When data is received, it is checked for odd or even parity as designated in bit PM.

Bit 4: Parity mode (PM)

In asynchronous mode, bit 4 selects whether odd or even parity is to be added to transmitted data and checked in received data. The setting here is valid only if parity adding/checking is enabled in bit PE. In synchronous mode, or if parity adding/checking is disabled in bit PE, bit PM is ignored.

Bit 4 PM	Description
0	Even Parity* ¹ (initial value)
1	Odd Parity* ²

Notes: 1 When even parity is designated, a parity bit is added to the transmitted data so that the sum of 1s in the resulting data is an even number. When data is received, the sum of 1s in the data plus parity bit is checked to see if the result is an even number.

2. When odd parity is designated, a parity bit is added to the transmitted data so that the sum of 1s in the resulting data is an odd number. When data is received, the sum of 1s in the data plus parity bit is checked to see if the result is an odd number.

Bit 3: Stop bit length (STOP)

Bit 3 selects 1 bit or 2 bits as the stop bit length in asynchronous mode. This setting is valid only in asynchronous mode. In synchronous mode a stop bit is not added, so this bit is ignored.

Bit 3 STOP Description

0	1 stop bit* ¹	(initial value)
1	2 stop bits* ²	

Notes: 1. When data is transmitted, one "1" bit is added at the end of the each transmitted character as the stop bit.

2. When data is transmitted, two "1" bits are added at the end of each transmitted character as the stop bits.

When data is received, only the first stop bit is checked regardless of the stop bit length. If the second stop bit value is 1 it is treated as a stop bit; if it is 0, it is treated as the start bit of the next character.

Bit 2: Multiprocessor mode (MP)

Bit 2 enables or disables the multiprocessor communication function. When the multiprocessor communication function is enabled, the parity enable (PE) and parity mode (PM) settings are ignored. The MP bit is valid only in asynchronous mode; it should be cleared to 0 in synchronous mode.

See 10.3.6, for details on the multiprocessor communication function.

Bit 2 MP Description

0	Multiprocessor communication function disabled	(initial value)
1	Multiprocessor communication function enabled	

Bits 1 and 0: Clock select 1, 0 (CKS1, CKS0)

Bits 1 and 0 select the clock source for the built-in baud rate generator. A choice of $\phi/64$, $\phi/16$, $\phi/4$, or ϕ is made in these bits.

See 8, Bit rate register, below for information on the clock source and bit rate register settings, and their relation to the baud rate.

Bit 1 CKS1	Bit 0 CKS0	Description
0	0	ϕ clock (initial value)
0	1	$\phi/4$ clock
1	0	$\phi/16$ clock
1	1	$\phi/64$ clock

6. Serial control register 3 (SCR3)

Bit	7	6	5	4	3	2	1	0
	TIE	RIE	TE	RE	MPIE	TEIE	CKE1	CKE0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Serial control register 3 (SCR3) is an 8-bit register that controls SCI3 transmit and receive operations, enables or disables serial clock output in asynchronous mode, enables or disables interrupts, and selects the serial clock source. SCR3 can be read and written by the CPU at any time.

SCR3 is initialized to H'00 upon reset or in standby mode, watch mode, subactive mode, or subsleep mode.

Bit 7: Transmit interrupt enable (TIE)

Bit 7 enables or disables the transmit data empty interrupt request (TXI) when data is transferred from TDR to TSR and the transmit data register empty bit (TDRE) in the serial status register (SSR) is set to 1. The TXI interrupt can be cleared by clearing bit TDRE to 0, or by clearing bit TIE to 0.

Bit 7 TIE	Description	
0	Transmit data empty interrupt request (TXI) disabled	(initial value)
1	Transmit data empty interrupt request (TXI) enabled	

Bit 6: Receive interrupt enable (RIE)

Bit 6 enables or disables the receive error interrupt request (ERI), and the receive data full interrupt request (RXI) when data is transferred from RSR to RDR and the receive data register full bit (RDRF) in the serial status register (SSR) is set to 1. Receive errors include overrun errors, framing errors, and parity errors. RXI and ERI interrupts can be cleared by clearing SSR flag RDRF, or flags FER, PER, and OER to 0, or by clearing bit RIE to 0.

Bit 6 RIE	Description	
0	Receive data full interrupt request (RXI) and receive error interrupt request (ERI) disabled	(initial value)
1	Receive data full interrupt request (RXI) and receive error interrupt request (ERI) enabled	

Bit 5: Transmit enable (TE)

Bit 5 enables or disables the start of a transmit operation.

Bit 5 TE	Description	
0	Transmit operation disabled* ¹ (TXD is a general I/O port)	(initial value)
1	Transmit operation enabled* ² (TXD is the transmit data pin)	

- Notes: 1. The transmit data register empty bit (TDRE) in the serial status register (SSR) is fixed at 1.
 2. In this state, writing transmit data in TDR clears bit TDRE in SSR to 0 and starts serial data transmission.
 Before setting TE to 1 it is necessary to set the transmit format in SMR.

Bit 4: Receive enable (RE)

Bit 4 enables or disables the start of a receive operation.

Bit 4 RE Description

0	Receive operation disabled* ¹ (RXD is a general I/O port)	(initial value)
1	Receive operation enabled* ² (RXD is the receive data pin)	

Notes: 1. When RE is cleared to 0, this has no effect on the SSR flags RDRF, FER, PER, and OER, which retain their states.
 2. Serial data receiving begins when, in this state, a start bit is detected in asynchronous mode, or serial clock input is detected in synchronous mode.
 Before setting RE to 1 it is necessary to set the receive format in SMR.

Bit 3: Multiprocessor interrupt enable (MPIE)

Bit 3 enables or disables multiprocessor interrupt requests. This setting is valid only in asynchronous mode, and only when the multiprocessor mode bit (MP) in the serial mode register (SMR) is set to 1. It applies only to data receiving. This bit is ignored when COM is set to 1 or when bit MP is cleared to 0.

Bit 3 MPIE Description

0	Multiprocessor interrupt request disabled (ordinary receive operation)	(initial value)
	Clearing condition: Multiprocessor bit receives a data value of 1	
1	Multiprocessor interrupt request enabled*	

Note: * SCI3 does not transfer receive data from RSR to RDR, does not detect receive errors, and does not set status flags RDRF, FER, and OER in SSR. Until a multiprocessor bit value of 1 is received, the receive data full interrupt (RXI) and receive error interrupt (ERI) are disabled and serial status register (SSR) flags RDRF, FER, and OER are not set. When the multiprocessor bit receives a "1", the MPBR bit of SSR is set to 1, MPIE is automatically cleared to 0, RXI and ERI interrupts are enabled (provided bits TIE and RIE in SCR3 are set to 1), and setting of the RDRF, FER, and OER flags is enabled.

Bit 2: Transmit end interrupt enable (TEIE)

Bit 2 enables or disables the transmit end interrupt (TEI) requested if there is no valid transmit data in TDR when the MSB is transmitted.

Bit 2 TEIE	Description
0	Transmit end interrupt (TEI) disabled (initial value)
1	Transmit end interrupt (TEI) enabled*

Note: * A TEI interrupt can be cleared by clearing the SSR bit TDRE to 0 and clearing the transmit end bit (TEND) to 0, or by clearing bit TEIE to 0.

Bits 1 and 0: Clock enable 1, 0 (CKE1, CKE0)

Bits 1 and 0 select the clock source and enable or disable clock output at pin SCK₃. The combination of bits CKE1 and CKE0 determines whether pin SCK₃ is a general I/O port, a clock output pin, or a clock input pin.

Note that the CKE0 setting is valid only when operation is in asynchronous mode using an internal clock (CKE1 = 0). This bit is invalid in synchronous mode or when using an external clock (CKE1 = 1). In synchronous mode and in external clock mode, clear CKE0 to 0. After setting bits CKE1 and CKE0, the operation mode must first be set in the serial mode register (SMR).

See table 10-3-7 in 10.3.3, Operation, for details on clock source selection.

Bit 1 CKE1	Bit 0 CKE0	Communication Mode	Clock Source	SCK ₃ Pin Function
0	0	Asynchronous	Internal clock	I/O port* ¹
		Synchronous	Internal clock	Serial clock output* ¹
0	1	Asynchronous	Internal clock	Clock output* ²
		Synchronous	Reserved	Reserved
1	0	Asynchronous	External clock	Clock input* ³
		Synchronous	External clock	Serial clock input
1	1	Asynchronous	Reserved	Reserved
		Synchronous	Reserved	Reserved

- Notes: 1. Initial value
 2. A clock is output with the same frequency as the bit rate.
 3. Input a clock with a frequency 16 times the bit rate.

7. Serial status register (SSR)

Bit	7	6	5	4	3	2	1	0
	TDRE	RDRF	OER	FER	PER	TEND	MPBR	MPBT
Initial value	1	0	0	0	0	1	0	0
Read/Write	R/(W)*	R/(W)*	R/(W)*	R/(W)*	R/(W)*	R	R	R/W

Note: * Only 0 can be written for flag clearing.

The serial status register (SSR) is an 8-bit register containing status flags for indicating SCI3 states, and containing the multiprocessor bits.

SSR can be read and written by the CPU at any time, but the CPU cannot write a 1 to the status flags TDRE, RDRF, OER, PER, and FER. To clear these flags to 0 it is first necessary to read a 1. Bit 2 (TEND) and bit 1 (MPBR) are read-only bits and cannot be modified.

SSR is initialized to H'84 upon reset or in standby mode, watch mode, subactive mode, or subsleep mode.

Bit 7: Transmit data register empty (TDRE)

Bit 7 is a status flag indicating that data has been transferred from TDR to TSR.

Bit 7	Description
TDRE	

0	Indicates that transmit data written to TDR has not been transferred to TSR Clearing conditions: After reading TDRE = 1, cleared by writing 0 to TDRE. When data is written to TDR by an instruction.
1	Indicates that no transmit data has been written to TDR, (initial value) or the transmit data written to TDR has been transferred to TSR Setting conditions: When bit TE in SCR3 is cleared to 0. When data is transferred from TDR to TSR.

Bit 6: Receive data register full (RDRF)

Bit 6 is a status flag indicating whether there is receive data in RDR.

Bit 6 Description
RDRF

0	Indicates there is no receive data in RDR (initial value)
Clearing conditions: After reading RDRF = 1, cleared by writing 0 to RDRF. When data is read from RDR by an instruction.	

1	Indicates that there is receive data in RDR
Setting condition: When receiving ends normally, with receive data transferred from RSR to RDR	

Note: If a receive error is detected at the end of receiving, or if bit RE in serial control register 3 (SCR3) is cleared to 0, RDR and RDRF are unaffected and keep their previous states. An overrun error (OER) occurs if receiving of data is completed while bit RDRF remains set to 1. If this happens, receive data will be lost.

Bit 5: Overrun error (OER)

Bit 5 is a status flag indicating that an overrun error has occurred during data receiving.

Bit 5 Description
OER

0	Indicates that data receiving is in progress or has been completed* ¹ (initial value)
Clearing condition: After reading OER = 1, cleared by writing 0 to OER	

1	Indicates that an overrun error occurred in data receiving* ²
Setting condition: When data receiving is completed while RDRF is set to 1	

Notes: 1. When bit RE in serial control register 3 (SCR3) is cleared to 0, OER is unaffected and keeps its previous state.
 2. RDR keeps the data received prior to the overrun; data received after that is lost. While OER is set to 1, data receiving cannot be continued. In synchronous mode, data transmitting cannot be continued either.

Bit 4: Framing error (FER)

Bit 4 is a status flag indicating that a framing error has occurred during asynchronous receiving.

Bit 4	Description
FER	
0	Indicates that data receiving is in progress or has been completed* ¹ (initial value) Clearing condition: After reading FER = 1, cleared by writing 0 to FER
1	Indicates that a framing error occurred in data receiving Setting condition: The stop bit at the end of receive data is checked and found to be 0* ²

- Notes:
1. When bit RE in serial control register 3 (SCR3) is cleared to 0, FER is unaffected and keeps its previous state.
 2. When two stop bits are used only the first stop bit is checked, not the second. When a framing error occurs, receive data is transferred to RDR but RDRF is not set. While FER is set to 1, data receiving cannot be continued. In synchronous mode, data transmitting cannot be continued either.

Bit 3: Parity error (PER)

Bit 3 is a status flag indicating that a parity error has occurred during asynchronous receiving.

Bit 3	Description
PER	
0	Indicates that data receiving is in progress or has been completed* ¹ (initial value) Clearing condition: After reading FER = 1, cleared by writing 0 to FER
1	Indicates that a parity error occurred in data receiving Setting condition: When the sum of 1s in received data plus the parity bit does not match the parity mode bit (PM) setting in the serial mode register (SMR)

- Notes:
1. When bit RE in serial control register 3 (SCR3) is cleared to 0, PER is unaffected and keeps its previous state.
 2. When a parity error occurs, receive data is transferred to RDR but RDRF is not set. While PER is set to 1, data receiving cannot be continued. While PER is set to 1 in synchronous mode, data transmitting cannot be continued either.

Bit 2: Transmit end (TEND)

Bit 2 is a status flag indicating that TDRE was set to 1 when the last bit of a transmitted character was sent. TEND is a read-only bit and cannot be modified.

Bit 2 Description
TEND

0	Indicates that transmission is in progress Clearing conditions: After reading TDRE = 1, cleared by writing 0 to TDRE. When data is written to TDR by an instruction.	
1	Indicates that a transmission has ended Setting conditions: When bit TE in SCR3 is cleared to 0. If TDRE is set to 1 when the last bit of a transmitted character is sent.	(initial value)

Bit 1: Multiprocessor bit receive (MPBR)

Bit 1 holds the multiprocessor bit in data received in asynchronous mode using a multiprocessor format. MPBR is a read-only bit and cannot be modified.

Bit 1 Description
MPBR

0	Indicates reception of data in which the multiprocessor bit is 0*	(initial value)
1	Indicates reception of data in which the multiprocessor bit is 1	

Note: * If bit RE is cleared to 0 while a multiprocessor format is in use, MPBR retains its previous state.

Bit 0: Multiprocessor bit transmit (MPBT)

Bit 0 holds the multiprocessor bit to be added to transmitted data when a multiprocessor format is used in asynchronous mode. Bit MPBT is ignored when synchronous mode is chosen, when the multiprocessor communication function is disabled, or when data transmission is disabled.

Bit 0 Description
MPBT

0	The multiprocessor bit in transmit data is 0	(initial value)
1	The multiprocessor bit in transmit data is 1	

8. Bit rate register (BRR)

Bit	7	6	5	4	3	2	1	0
	BRR7	BRR6	BRR5	BRR4	BRR3	BRR2	BRR1	BRR0
Initial value	1	1	1	1	1	1	1	1
Read/Write	R/W							

The bit rate register (BRR) is an 8-bit register which, together with the baud rate generator clock selected by bits CKS1 and CKS0 in the serial mode register (SMR), sets the transmit-receive bit rate.

BRR can be read or written by the CPU at any time.

BRR is initialized to H'FF upon reset or in standby mode, watch mode, subactive mode, or subsleep mode.

Table 10-3-3 gives examples of how BRR is set in asynchronous mode. The values in table 10-3-3 are for active (high-speed) mode.

Table 10-3-3 BRR Setting and Bit Rates in Asynchronous Mode (3)

Bit Rate (bits/s)	OSC (MHz)					
	9.8304			10		
	n	N	Error (%)	n	N	Error (%)
110	2	86	+0.31	2	88	-0.25
150	1	255	0	2	64	+0.16
300	1	127	0	1	129	+0.16
600	0	255	0	1	64	+0.16
1200	0	127	0	0	129	+0.16
2400	0	63	0	0	64	+0.16
4800	0	31	0	0	32	-1.36
9600	0	15	0	0	15	+1.73
19200	0	7	0	0	7	+1.73
31250	0	4	-1.70	0	4	0
38400	0	3	0	0	3	+1.73

- Notes: 1. Settings should be made so that error is within 1%.
 2. BRR setting values are derived by the following equation.

OSC

$$N = \frac{\text{OSC}}{64 \times 2^{2n} \times B} \times 10^6 - 1$$

B: Bit rate (bits/s)

N: BRR baud rate generator setting ($0 \leq N \leq 255$)

OSC: Value of ϕ_{OSC} (MHz)

n: Baud rate generator input clock number ($n = 0, 1, 2, 3$)

3. The error values in table 10-3-3 were derived by performing the following calculation and rounding off to two decimal places.

B - R

$$\text{Error (\%)} = \frac{B - R}{R} \times 100$$

R

B: Bit rate found from n, N, and OSC

R: Bit rate listed in left column of table 10-3-3

The meaning of n is shown in table 10-3-4.

Table 10-3-4 Relation between n and Clock

n	Clock	SMR Setting	
		CKS1	CKS0
0	ϕ	0	0
1	$\phi/4$	0	1
2	$\phi/16$	1	0
3	$\phi/64$	1	1

Table 10-3-5 shows the maximum bit rate for selected frequencies in asynchronous mode. Values in table 10-3-5 are for active (high-speed) mode.

Table 10-3-5 Maximum Bit Rate at Selected Frequencies (Asynchronous Mode)

OSC (MHz)	Maximum Bit Rate (bits/s)	Setting	
		n	N
2	31250	0	0
2.4576	38400	0	0
4	62500	0	0
4.194304	65536	0	0
4.9152	76800	0	0
6	93750	0	0
7.3728	115200	0	0
8	125000	0	0
9.8304	153600	0	0
10	156250	0	0

Table 10-3-6 shows typical BRR settings in synchronous mode. Values in table 10-3-6 are for active (high-speed) mode.

Table 10-3-6 Typical BRR Setting and Bit Rates (Synchronous Mode)

Bit Rate (bits/s)	OSC (MHz)							
	2		4		8		10	
	n	N	n	N	n	N	n	N
110	--	--	--	--	--	--	--	--
250	1	249	2	124	2	249	--	--
500	1	124	1	249	2	124	--	--
1K	0	249	1	124	1	249	--	--
2.5K	0	99	0	199	1	99	1	124
5K	0	49	0	99	0	199	0	249
10K	0	24	0	49	0	99	0	124
25K	0	9	0	19	0	39	0	49
50K	0	4	0	9	0	19	0	24
100K	--	--	0	4	0	9	--	--
250K	0	0*	0	1	0	3	0	4
500K			0	0*	0	1	--	--
1M					0	0*	--	--
2.5M								

Notes: Blank: Cannot be set

--: Can be set, but error will result

*: Continuous transfer not possible at this setting

BRR setting values are derived by the following equation.

$$N = \frac{OSC}{8 \times 2^{2n} \times B} \times 10^6 - 1$$

B: Bit rate (bits/s)

N: BRR baud rate generator setting ($0 \leq n \leq 255$)

OSC: Value of ϕ_{osc} (MHz)

n: Baud rate generator input clock number (n = 0, 1, 2, 3)

The meaning of n is shown in table 10-3-7.

Table 10-3-7 Relation between n and Clock

n	SMR Setting		
	Clock	CKS1	CKS0
0	ϕ	0	0
1	$\phi/4$	0	1
2	$\phi/16$	1	0
3	$\phi/64$	1	1

10.3.3 Operation

SCI13 supports serial data communication in both asynchronous mode, where each character transferred is synchronized separately, and synchronous mode, where transfer is synchronized by clock pulses.

The choice of asynchronous mode or synchronous mode, and the communication format, is made in the serial mode register (SMR), as shown in table 10-3-8. The SCI13 clock source is determined by bit COM in SMR and bits CKE1 and CKE0 in serial control register 3 (SCR3), as shown in table 10-3-9.

1. Asynchronous mode

- Data length: choice of 7 bits or 8 bits
- Transmit/receive format options include addition of parity bit, multiprocessor bit, and one or two stop bits (character length depends on this combination of options).
- Framing error (FER), parity error (PER), overrun error (OER), and line breaks can be detected when data is received.
- Clock source: Choice of internal clocks or an external clock

When an internal clock is selected: Operates on baud rate generator clock. A clock can be output with the same frequency as the bit rate.

When an external clock is selected: A clock input with a frequency 16 times the bit rate is required (internal baud rate generator is not used).

2. Synchronous mode

- Transfer format: 8 bits
- Overrun errors can be detected when data is received.
- Clock source: Choice of internal clocks or an external clock

When an internal clock is selected: Operates on baud rate generator clock, and outputs a serial clock.

When an external clock is selected: The internal baud rate generator is not used. Operation is synchronous with the input clock.

Table 10-3-8 SMR Settings and SCI13 Communication Format

SMR Setting					Communication Format						
Bit 7 COM	Bit 6 CHR	Bit 2 MP	Bit 5 PE	Bit 3 STOP	Mode	Data Length	Multipro- cessor Bit	Parity Bit	Stop Bit Length		
0	0	0	0	0	Asynchronous mode	8-bit data	None	None	1 bit		
				1					2 bits		
				1	0				Yes	1 bit	
				1					2 bits		
	1	0	0	0	0		7-bit data		None	1 bit	
					1					2 bits	
					1	0				Yes	1 bit
					1					2 bits	
0	1	*	0	0	Asynchronous mode	8-bit data	Yes	None	1 bit		
				1	(multiprocessor format)				2 bits		
				1	0					1 bit	
				1	1					2 bits	
1	*	0	*	*	Synchronous mode	8-bit data	None	None			

Note: * Don't care

Table 10-3-9 SMR and SCR3 Settings and Clock Source Selection

SMR Bit 7 COM	SCR3		Mode	Clock Source	Transmit/Receive Clock
	Bit 1 CKE1	Bit 0 CKE0			Pin SCK ₃ Function
0	0	0	Asynchronous mode	Internal	I/O port (SCK ₃ function not used)
		1			Outputs clock with same frequency as bit rate
	1	0	External	Clock should be input with frequency 16 times the desired bit rate	
1	0	0	Synchronous mode	Internal	Outputs a serial clock
	1	0		External	Inputs a serial clock
0	1	1	Reserved	(illegal settings)	
1	0	1			
1	1	1			

3. Continuous transmit/receive operation using interrupts

Continuous transmit and receive operations are possible with SC13, using the RXI or TXI interrupts. Table 10-3-10 explains this use of these interrupts.

Table 10-3-10 Transmit/Receive Interrupts

Interrupt	Flag	Interrupt Conditions	Remarks
RXI	RDRF RIE	When serial data is received normally and receive data is transferred from RSR to RDR, RDRF is set to 1. If RIE is 1 at this time, RXI is enabled and an interrupt occurs. (See figure 10-3-2 (a).)	The RXI interrupt handler routine should read the receive data from RDR and clear RDRF to 0. Continuous receiving is possible if these operations are completed before the next data has been completely received in RSR.
TXI	TDRE TIE	When TSR empty (previous transmission complete) is detected and the transmit data set in TDR is transferred to TSR, TDRE is set to 1. If TIE is 1 at this time, TXI is enabled and an interrupt occurs. (See figure 10-3-2 (b).)	The TXI interrupt handler routine should write the next transmit data to TDR and clear TDRE to 0. Continuous transmission is possible if these operations are completed before the data transferred to TSR has been completely transmitted.
TEI	TEND TEIE	When the last bit of the TSR transmit character has been sent, if TDRE is 1, then 1 is set in TEND. If TEIE is 1 at this time, TEI is enabled and an interrupt occurs. (See figure 10-3-2 (c).)	TEI indicates that, when the last bit of the TSR transmit character was sent, the next transmit data had not been written to TDR.

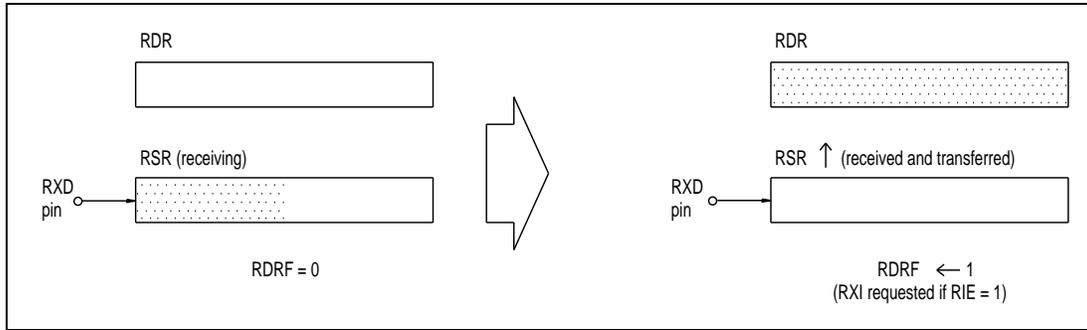


Figure 10-3-2 (a) RDRF Setting and RXI Interrupt

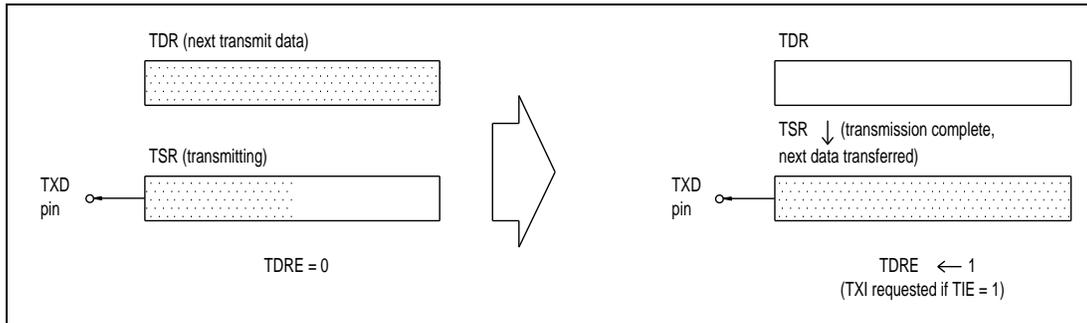


Figure 10-3-2 (b) TDRE Setting and TXI Interrupt

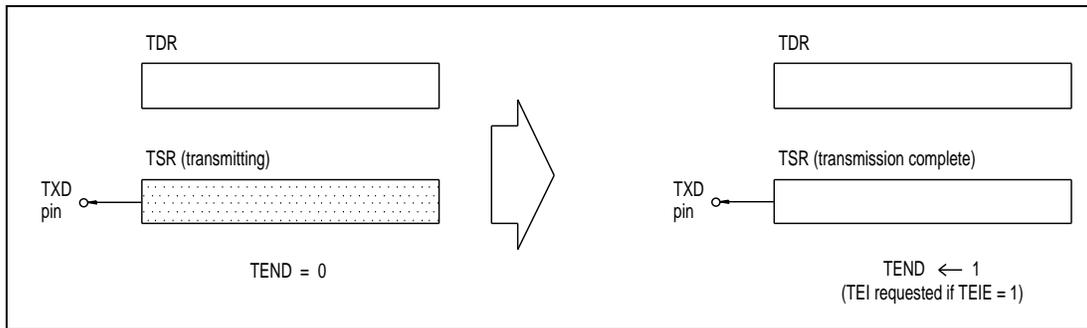


Figure 10-3-2 (c) TEND Setting and TEI Interrupt

10.3.4 Operation in Asynchronous Mode

In asynchronous communication mode, a start bit indicating the start of communication and a stop bit (1 or 2 bits) indicating the end of communication are added to each character that is sent. In this way synchronization is achieved for each character as a self-contained unit.

SCI3 consists of independent transmit and receive modules, giving it the capability of full duplex communication. Both the transmit and receive modules have a double-buffer configuration, allowing data to be read or written during communication operations so that data can be transmitted and received continuously.

1. Transmit/receive formats

Figure 10-3-3 shows the general format for asynchronous serial communication.

The communication line in asynchronous communication mode normally stays at the high level, in the "mark" state. SCI3 monitors the communication line, and begins serial data communication when it detects a "space" (low-level signal), which is regarded as a start bit. One character consists of a start bit (low level), transmit/receive data (in LSB-first order), a parity bit (high or low level), and finally a stop bit (high level), in this order.

In asynchronous data receiving, synchronization is with the falling edge of the start bit. SCI3 samples data on the 8th pulse of a clock that has 16 times the frequency of the bit rate, so each bit of data is latched at its center.

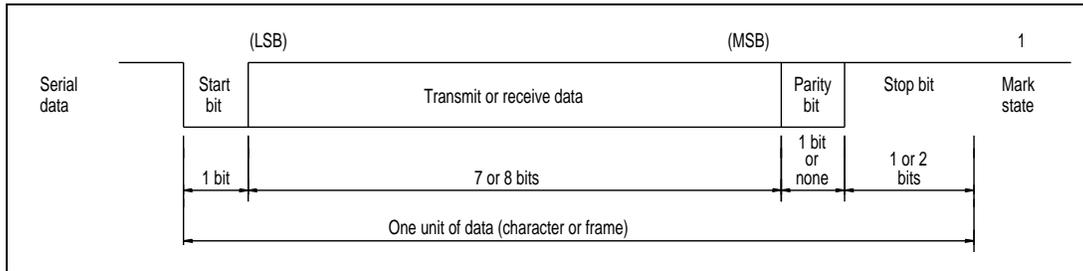


Figure 10-3-3 Data Format in Asynchronous Serial Communication Mode

Table 10-3-11 shows the 12 formats that can be selected in asynchronous mode. The format is selected in the serial mode register (SMR).

Table 10-3-11 Serial Communication Formats in Asynchronous Mode

SMR Setting				Serial Communication Format and Frame Length												
CHR	PE	MP	STOP	1	2	3	4	5	6	7	8	9	10	11	12	
0	0	0	0	S	8-bit data								STOP			
0	0	0	1	S	8-bit data								STOP	STOP		
0	1	0	0	S	8-bit data								P	STOP		
0	1	0	1	S	8-bit data								P	STOP	STOP	
1	0	0	0	S	7-bit data							STOP				
1	0	0	1	S	7-bit data							STOP	STOP			
1	1	0	0	S	7-bit data							P	STOP			
1	1	0	1	S	7-bit data							P	STOP	STOP		
0	*	1	0	S	8-bit data								MPB	STOP		
0	*	1	1	S	8-bit data								MPB	STOP	STOP	
1	*	1	0	S	7-bit data							MPB	STOP			
1	*	1	1	S	7-bit data							MPB	STOP	STOP		

Notation: S: Start bit

STOP: Stop bit

P: Parity bit

MPB: Multiprocessor bit

Note: * Don't care

2. Clock

The clock source is determined by bit COM in SMR and bits CKE1 and CKE0 in serial control register 3 (SCR3). See table 10-3-9 for the settings. Either an internal clock source can be used to run the built-in baud rate generator, or an external clock source can be input at pin SCK₃.

When an external clock source is input, it should have a frequency 16 times the desired bit rate.

When an internal clock source is used, SCK₃ can be used as the clock output pin. The clock output has the same frequency as the serial bit rate, and is synchronized as in figure 10-3-4 so that the rising edge of the clock occurs in the center of each bit of transmit/receive data.

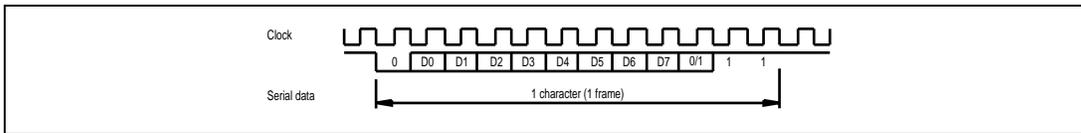


Figure 10-3-4 Phase Relation of Output Clock and Communication Data in Asynchronous Mode (8-Bit Data, Parity Bit Added, and 2 Stop Bits)

3. Data transmit/receive operations

— SCI3 initialization

Before data is sent or received, bits TE and RE in serial control register 3 (SCR3) must be cleared to 0, after which initialization can be performed using the procedure shown in figure 10-3-4.

Note:

When modifying the operation mode, transfer format or other settings, always be sure to clear bits TE and RE first. When TE is cleared to 0, bit TDRE will be set to 1. Clearing RE does not clear the status flags RDRF, PER, FER, or OER, or alter the contents of the receive data register (RDR).

When an external clock is used in asynchronous mode, do not stop the clock during operation, including during initialization. When an external clock is used in synchronous mode, do not supply the clock during initialization.

Figure 10-3-5 shows a typical flow chart for SCI3 initialization.

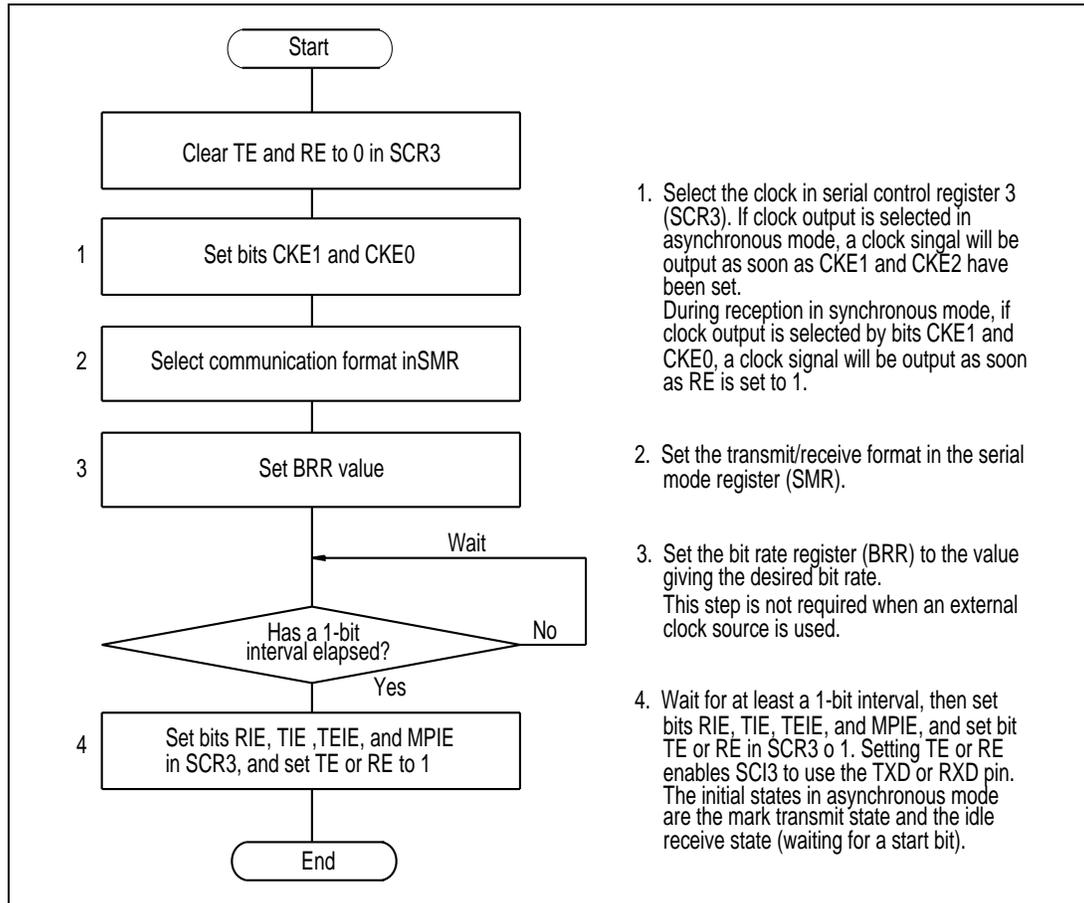


Figure 10-3-5 Typical Flow Chart when SCI3 Is Initialized

— Transmitting

Figure 10-3-6 shows a typical flow chart for data transmission. After SCI3 initialization, follow the procedure below.

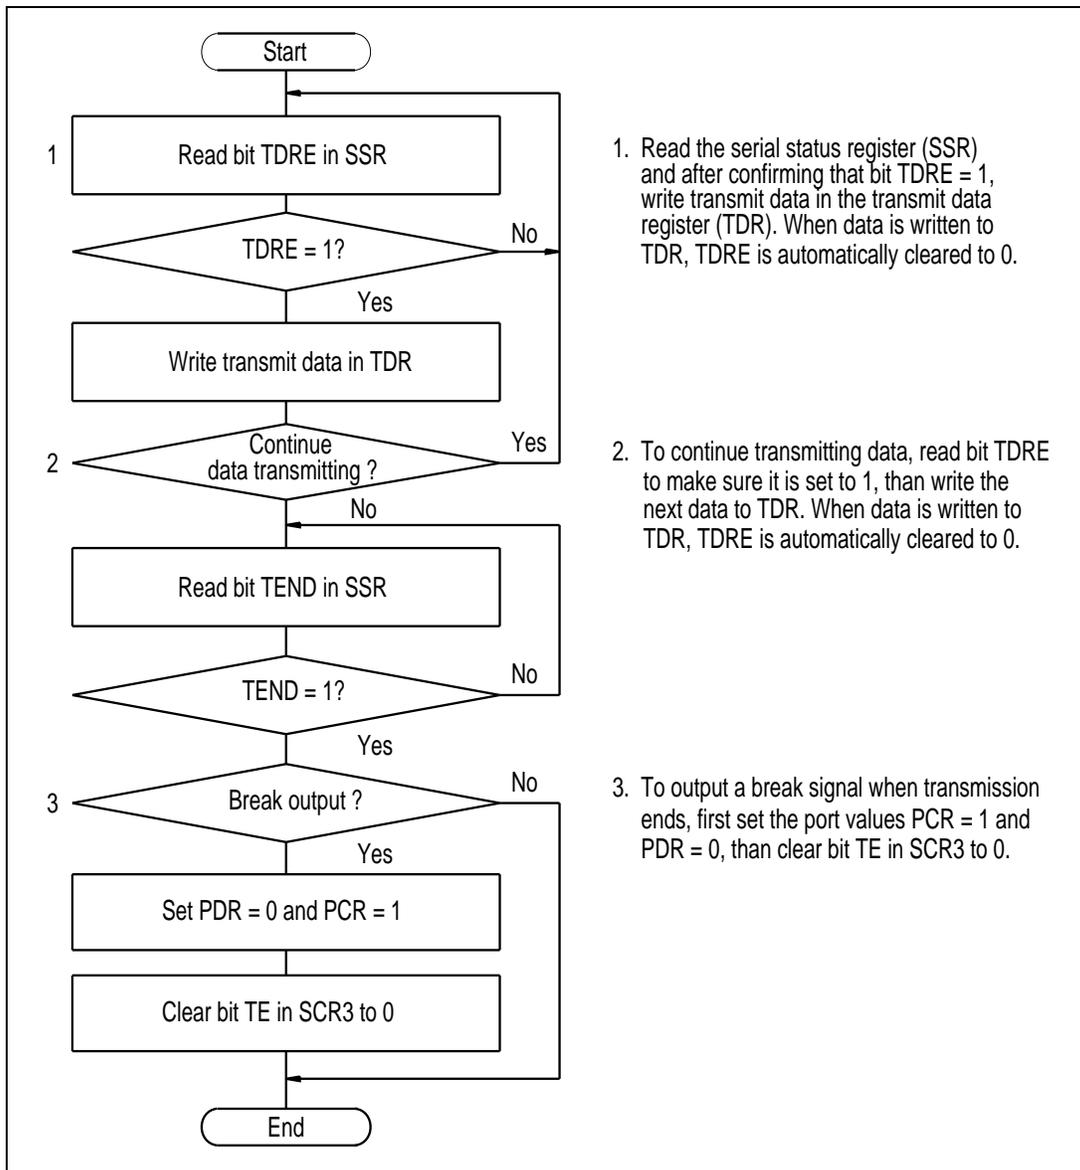


Figure 10-3-6 Typical Data Transmission Flow Chart (Asynchronous Mode)

SCI3 operates as follows during data transmission in asynchronous mode.

SCI3 monitors bit TDRE in SSR. When this bit is cleared to 0, SCI3 recognizes that there is data written in the transmit data register (TDR), which it transfers to the transmit shift register (TSR). Then TDRE is set to 1 and transmission starts. If bit TIE in SCR3 is set to 1, a TXI interrupt is requested.

Serial data is transmitted from pin TXD using the communication format outlined in table 10-3-11. Next, TDRE is checked as the stop bit is being transmitted.

If TDRE is 0, data is transferred from TDR to TSR, and after the stop bit is sent, transmission of the next frame starts. If TDRE is 1, the TEND bit in SSR is set to 1, and after the stop bit is sent the output remains at 1 (mark state). A TEI interrupt is requested in this state if bit TEIE in SCR3 is set to 1.

Figure 10-3-7 shows a typical operation in asynchronous transmission mode.


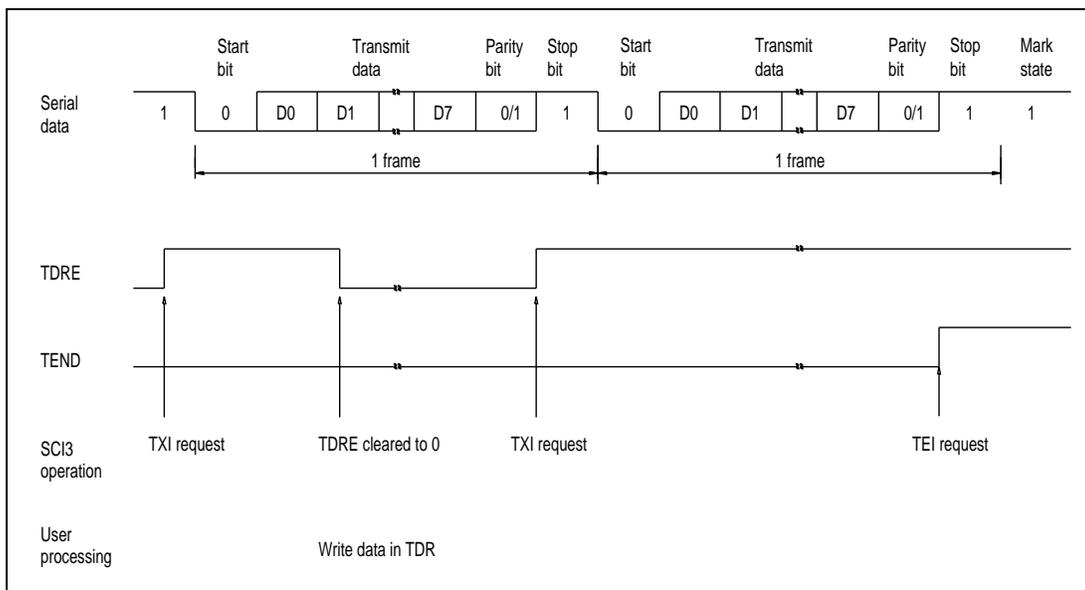


Figure 10-3-7 Typical Transmit Operation in Asynchronous Mode (8-Bit Data, Parity Bit Added, and 1 Stop Bit)

— Receiving

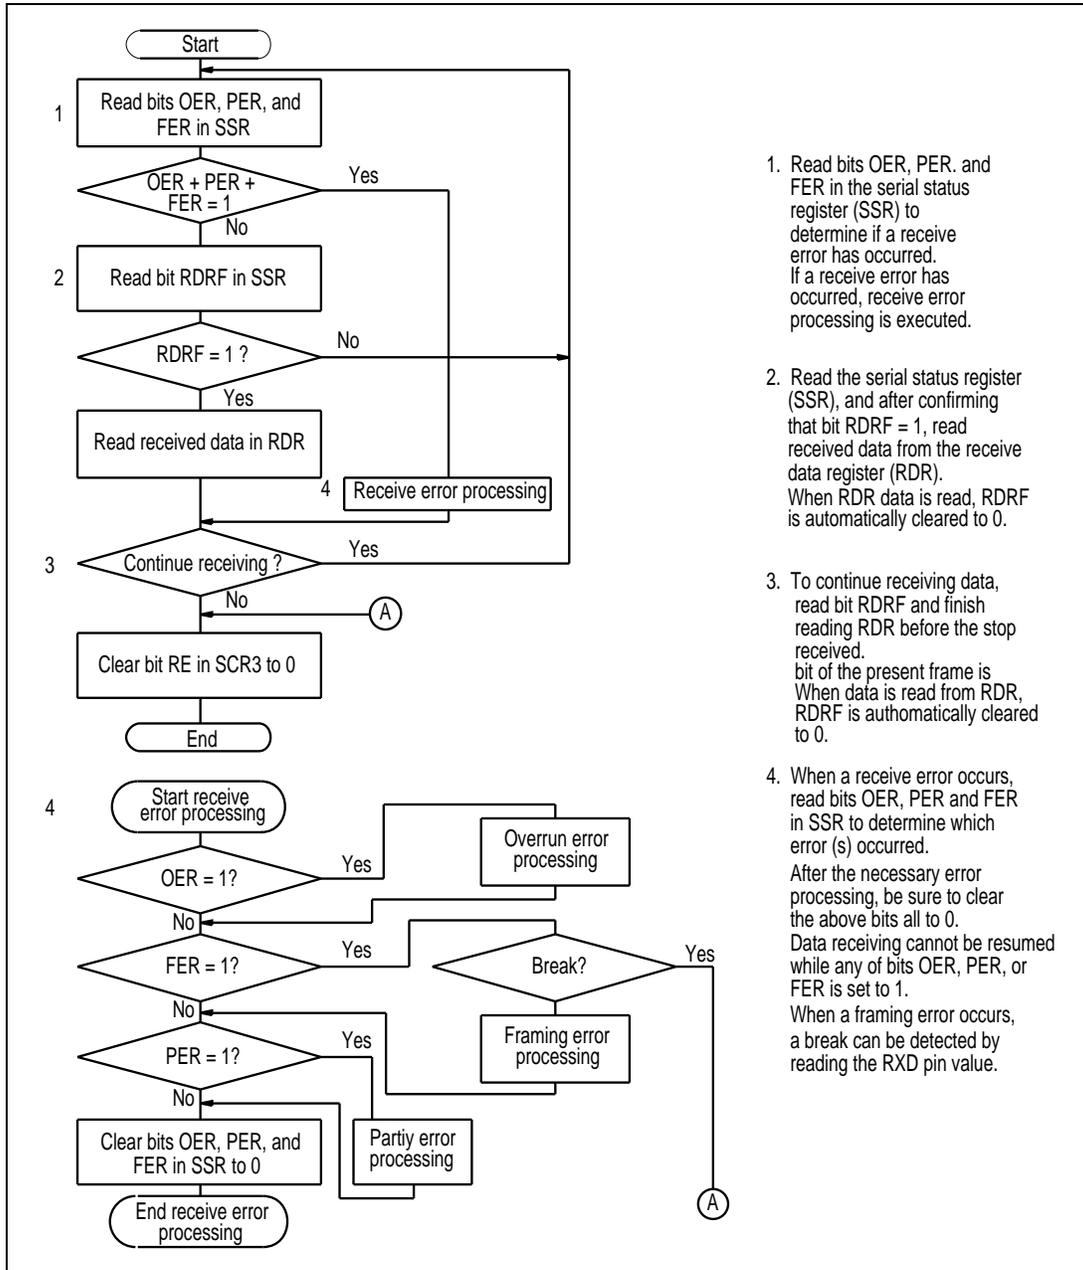Figure 10-3-8 shows a typical flow chart for receiving serial data. After SCI3 initialization, follow the procedure below.



1. Read bits OER, PER, and FER in the serial status register (SSR) to determine if a receive error has occurred. If a receive error has occurred, receive error processing is executed.
2. Read the serial status register (SSR), and after confirming that bit RDRF = 1, read received data from the receive data register (RDR). When RDR data is read, RDRF is automatically cleared to 0.
3. To continue receiving data, read bit RDRF and finish reading RDR before the stop received bit of the present frame is received. When data is read from RDR, RDRF is automatically cleared to 0.
4. When a receive error occurs, read bits OER, PER and FER in SSR to determine which error (s) occurred. After the necessary error processing, be sure to clear the above bits all to 0. Data receiving cannot be resumed while any of bits OER, PER, or FER is set to 1. When a framing error occurs, a break can be detected by reading the RXD pin value.

Figure 10-3-8 Typical Serial Data Receiving Flow Chart in Asynchronous Mode

SCI3 operates as follows when receiving serial data in asynchronous mode.

SCI3 monitors the communication line, and when a start bit (0) is detected it performs internal synchronization and starts receiving. The communication format for data receiving is as outlined in table 10-3-11. Received data is set in RSR from LSB to MSB, then the parity bit and stop bit(s) are received. After receiving the data, SCI3 performs the following checks:

- Parity check: The number of 1s received is checked to see if it matches the odd or even parity selected in bit PM of SMR.
- Stop bit check: The stop bit is checked for a value of 1. If there are two stop bits, only the first bit is checked.
- Status check: The RDRF bit is checked for a value of 0 to make sure received data can be transferred from RSR to RDR.

If no receive error is detected by the above checks, bit RDRF is set to 1 and the received data is stored in RDR. At that time, if bit RIE in SCR3 is set to 1, an RXI interrupt is requested. If the error check detects a receive error, the appropriate error flag (OER, PER, or FER) is set to 1. RDRF retains the same value as before the data was received. If at this time bit RIE in SCR3 is set to 1, an ERI interrupt is requested.

Table 10-3-12 gives the receive error detection conditions and the processing of received data in each case.

Note: Data receiving cannot be continued while a receive error flag is set. Before continuing the receive operation it is necessary to clear the OER, FER, PER, and RDRF flags to 0.

Table 10-3-12 Receive Error conditions and Received Data Processing

Receive Error	Abbrev.	Detection Conditions	Received Data Processing
Overrun error	OER	Receiving of the next data ends while bit RDRF in SSR is still set to 1	Received data is not transferred from RSR to RDR
Framing error	FER	Stop bit is 0	Received data is transferred from RSR to RDR
Parity error	PER	Received data does not match the parity (odd/even) set in SMR	Received data is not transferred from RSR to RDR

Figure 10-3-9 shows a typical SCI3 data receive operation in asynchronous mode.

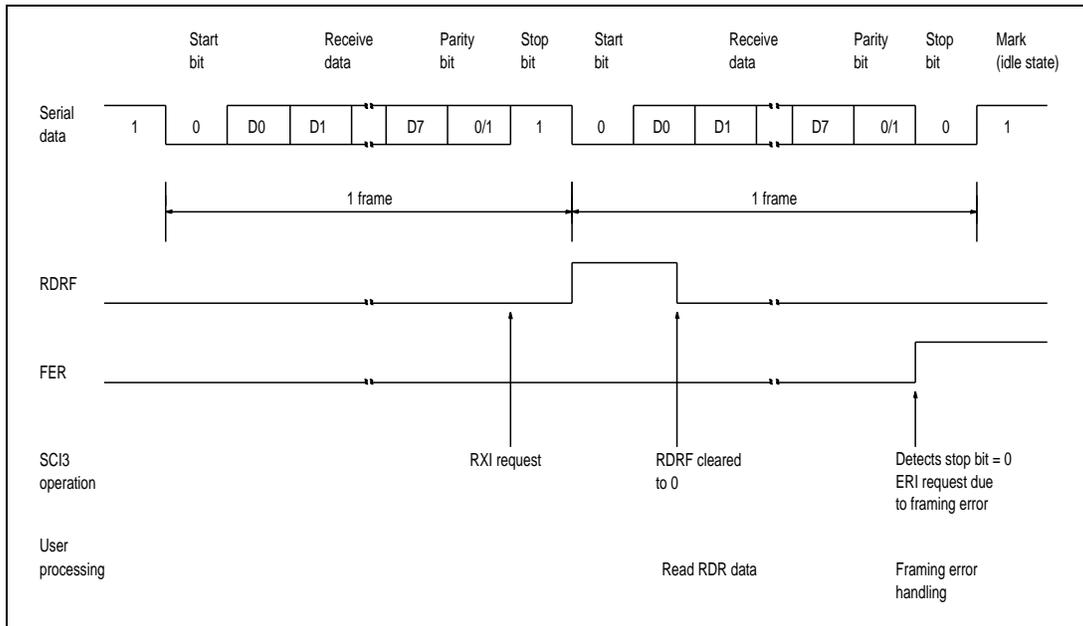


Figure 10-3-9 Typical Receive Operation in Asynchronous Mode (8-Bit Data, Parity Bit Added, and 1 Stop Bit)

10.3.5 Operation in Synchronous Mode

In synchronous mode, data is sent or received in synchronization with clock pulses. This mode is suited to high-speed serial communication.

SCI3 consists of independent transmit and receive modules, so full duplex communication is possible, sharing the same clock between both modules. Both the transmit and receive modules have a double-buffer configuration. This allows data to be read during a transmit operation so that data can be transmitted continuously, and enables data to be written during a receive operation so that data can be received continuously.

1. Transmit/receive format

Figure 10-3-10 shows the general communication data format for synchronous communication.

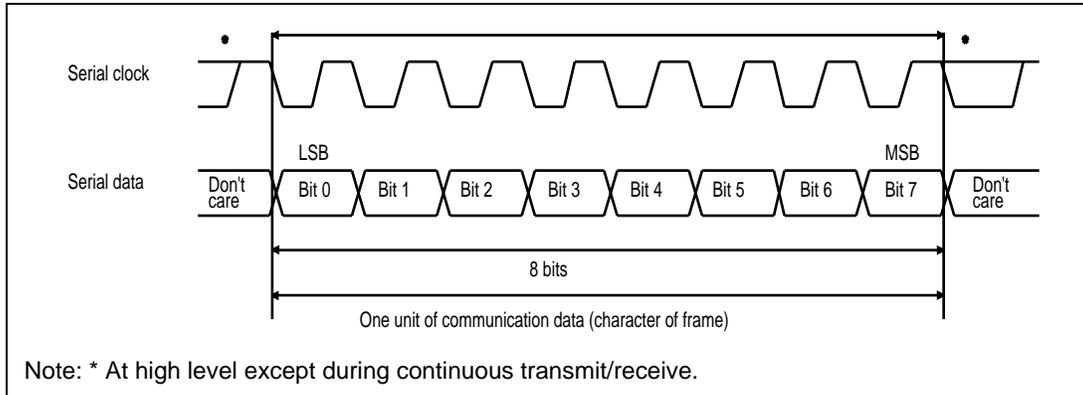


Figure 10-3-10 Data Format in Synchronous Communication Mode

In synchronous communication, data on the communication line is output from one falling edge of the serial clock until the next falling edge. Data is guaranteed valid at the rising edge of the serial clock.

One character of data starts from the LSB and ends with the MSB. The communication line retains the MSB state after the MSB is output.

In synchronous receive mode, SCI3 latches receive data in synchronization with the rising edge of the serial clock.

The transmit/receive format is fixed at 8-bit data. No parity bit or multiprocessor bit is added in this mode.

2. Clock

Either an internal clock from the built-in baud rate generator is used, or an external clock is input at pin SCK_3 . The choice of clock sources is designated by bit COM in SMR and bits CKE1 and CKE0 in serial control register 3 (SCR3). See table 10-3-9 for details on selecting the clock source.

When operation is based on an internal clock, a serial clock is output at pin SCK_3 . Eight clock pulses are output per character of transmit/receive data. When no transmit or receive operation is being performed, the pin is held at the high level.

3. Data transmit/receive operations

— SCI3 initialization

Before transmitting or receiving data, follow the SCI3 initialization procedure explained under 10.3.4, SCI3 Initialization, and illustrated in figure 10-3-5.

— Transmitting

Figure 10-3-11 shows a typical flow chart for data transmission. After SCI3 initialization, follow the procedure below.

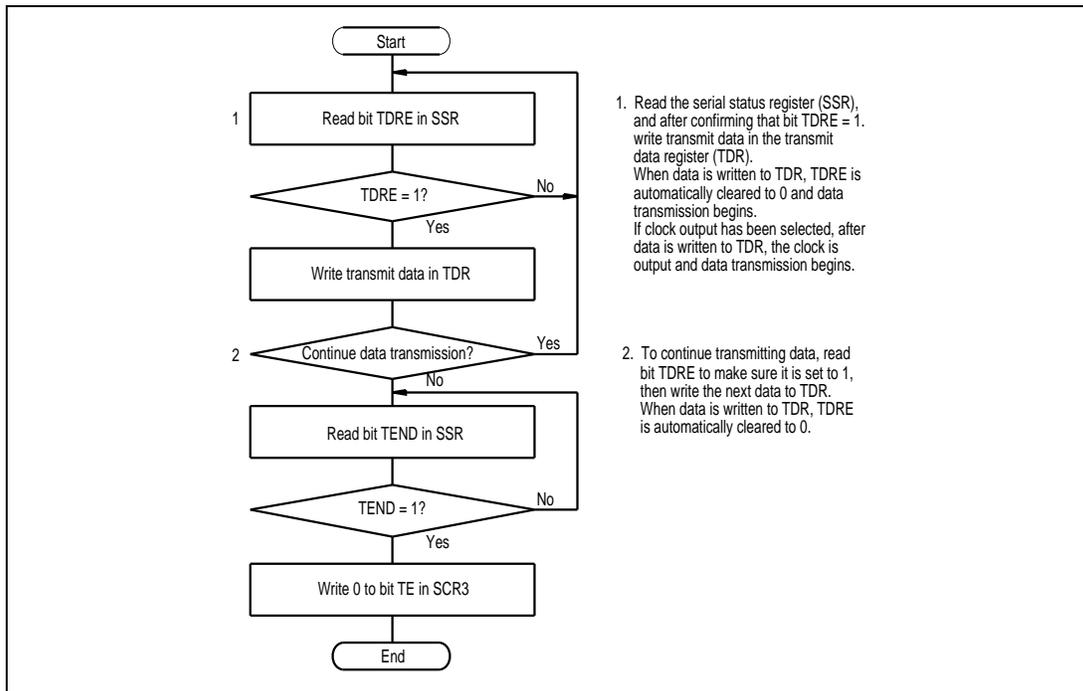


Figure 10-3-11 Typical Data Transmission Flow Chart in Synchronous Mode

SCI3 operates as follows during data transmission in synchronous mode.

SCI3 monitors bit TDRE in SSR. When this bit is cleared to 0, SCI3 recognizes that there is data written in the transmit data register (TDR), which it transfers to the transmit shift register (TSR). Then TDRE is set to 1 and transmission starts. If bit TIE in SCR3 is set to 1, a TXI interrupt is requested.

If clock output is selected, SCI3 outputs eight serial clock pulses. If an external clock is used, data is output in synchronization with the clock input.

Serial data is transmitted from pin TXD in order from LSB (bit 0) to MSB (bit 7).

Then TDRE is checked as the MSB (bit 7) is being transmitted. If TDRE is 0, data is transferred from TDR to TSR, and after the MSB (bit 7) is sent, transmission of the next frame starts. If TDRE is 1, the TEND bit in SSR is set to 1, and after the MSB (bit 7) has been sent, the MSB state is maintained. A TEI interrupt is requested in this state if bit TEIE in SCR3 is set to 1.

After data transmission ends, pin SCK₃ is held at the high level.

Note: Data transmission cannot take place while any of the receive error flags (OER, FER, PER) is set to 1. Be sure to confirm that these error flags are cleared to 0 before starting transmission.

Figure 10-3-12 shows a typical SCI3 transmit operation in synchronous mode.

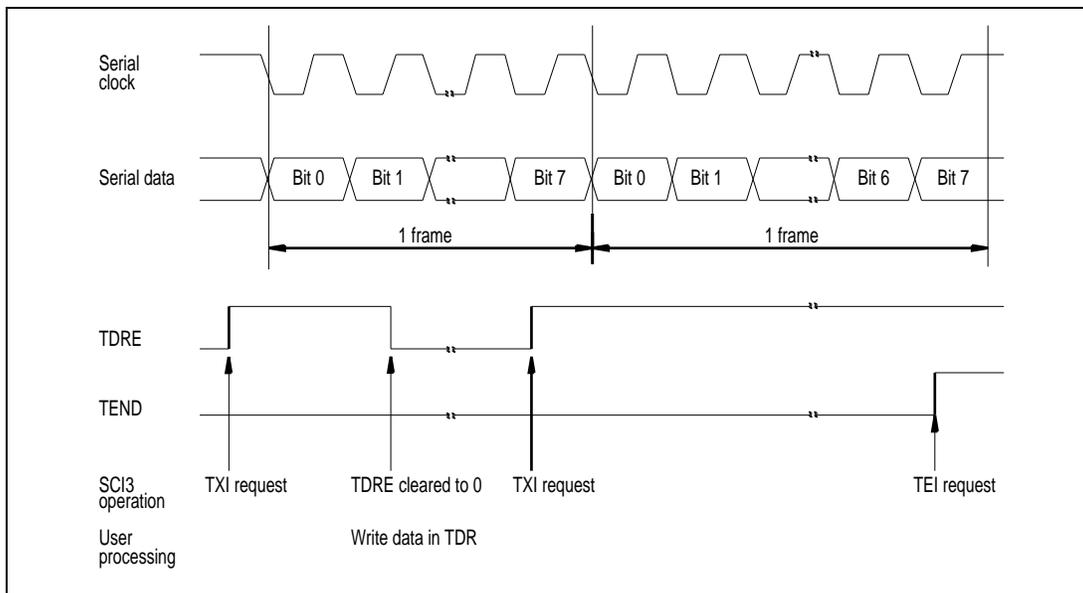


Figure 10-3-12 Typical SCI3 Transmit Operation in Synchronous Mode

— Receiving

10-3-13 shows a typical flow chart for receiving data. After SCI3 initialization, follow the procedure below.

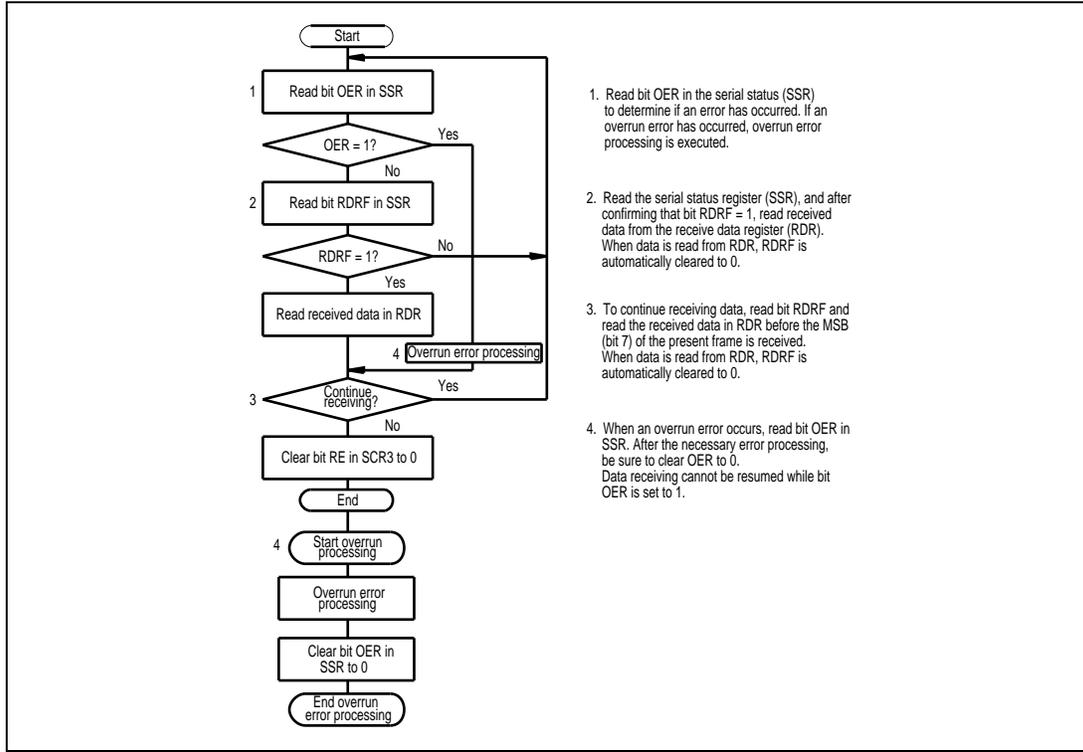


Figure 10-3-13 Typical Data Receiving Flow Chart in Synchronous Mode

SCI3 operates as follows when receiving serial data in synchronous mode.

In synchronization with the input or output of the serial clock, SCI3 initializes internally and starts receiving. Received data is set in RSR from LSB to MSB.

After data has been received, SCI3 checks to confirm that the value of bit RDRF is 0 indicating that received data can be transferred from RSR to RDR. If this check passes, RDRF is set to 1 and the received data is stored in RDR. At this time, if bit RIE in SCR3 is set to 1, an RXI interrupt is requested. If an overrun error is detected, OER is set to 1 and RDRF remains set to 1. Then if bit RIE in SCR3 is set to 1, an ERI interrupt is requested.

For the overrun error detection conditions and receive data processing, see table 10-3-12.

Note: Data receiving cannot be continued while a receive error flag is set. Before continuing the receive operation it is necessary to clear the OER, FER, PER, and RDRF flags to 0.

Figure 10-3-14 shows a typical receive operation in synchronous mode.


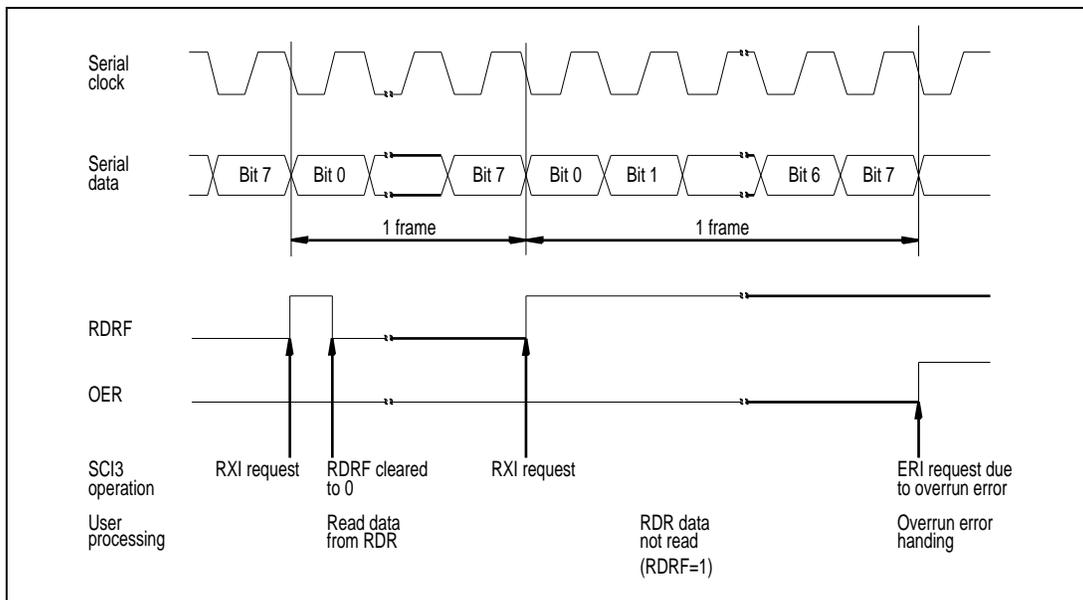


Figure 10-3-14 Typical Receive Operation in Synchronous Mode

— Simultaneous transmit/receive

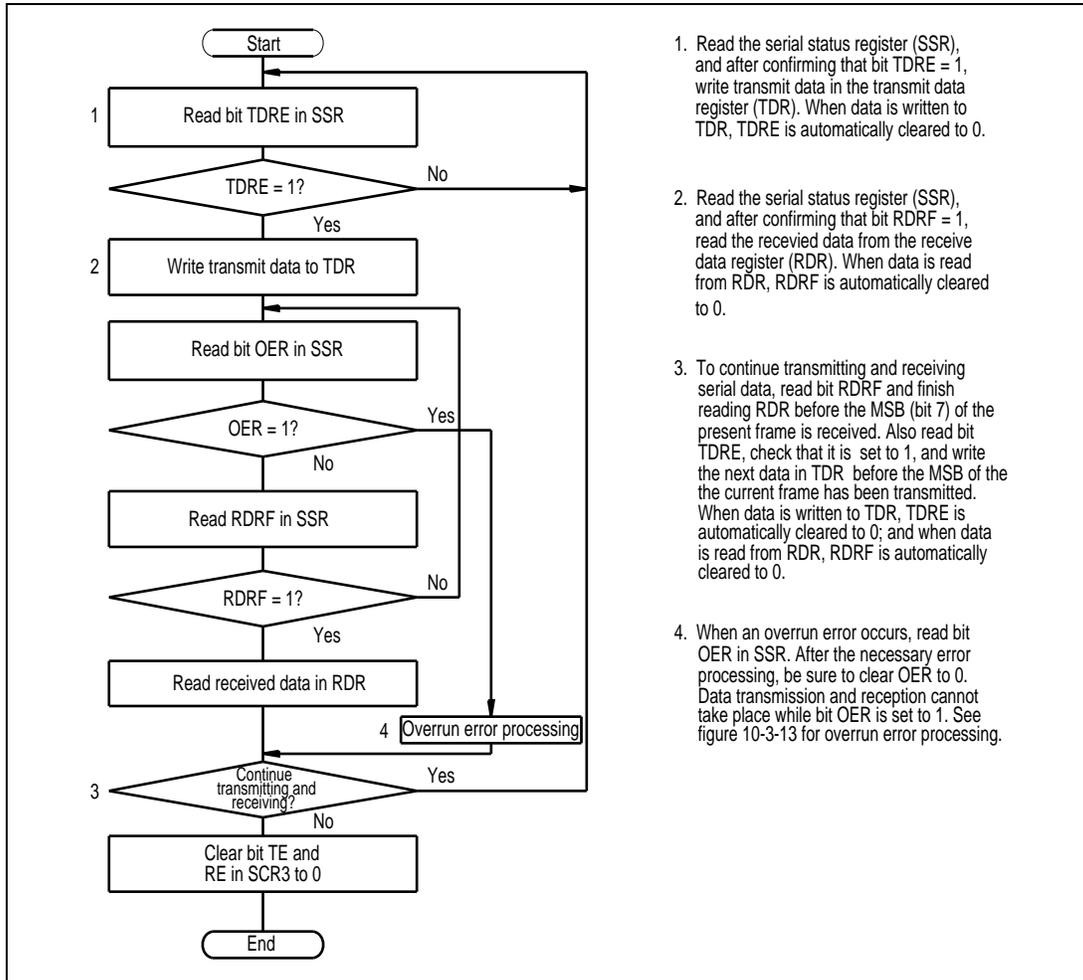Figure 10-3-15 shows a typical flow chart for transmitting and receiving simultaneously. After SCI3 synchronization, follow the procedure below.



1. Read the serial status register (SSR), and after confirming that bit TDRE = 1, write transmit data in the transmit data register (TDR). When data is written to TDR, TDRE is automatically cleared to 0.
2. Read the serial status register (SSR), and after confirming that bit RDRF = 1, read the received data from the receive data register (RDR). When data is read from RDR, RDRF is automatically cleared to 0.
3. To continue transmitting and receiving serial data, read bit RDRF and finish reading RDR before the MSB (bit 7) of the present frame is received. Also read bit TDRE, check that it is set to 1, and write the next data in TDR before the MSB of the current frame has been transmitted. When data is written to TDR, TDRE is automatically cleared to 0; and when data is read from RDR, RDRF is automatically cleared to 0.
4. When an overrun error occurs, read bit OER in SSR. After the necessary error processing, be sure to clear OER to 0. Data transmission and reception cannot take place while bit OER is set to 1. See figure 10-3-13 for overrun error processing.

Figure 10-3-15 Simultaneous Transmit/Receive Flow Chart in Synchronous Mode

- Notes: 1. To switch from transmitting to simultaneous transmitting and receiving, use the following procedure.
- First confirm that TDRE and TEND are both set to 1 and that SCI3 has finished transmitting. Next clear TE to 0. Then set both TE and RE to 1.
2. To switch from receiving to simultaneous transmitting and receiving, use the following procedure.
- After confirming that SCI3 has finished receiving, clear RE to 0. Next, after confirming that RDRF and the error flags (OER FER, PER) are all 0, set both TE and RE to 1.

10.3.6 Multiprocessor Communication Function

The multiprocessor communication function enables several processors to share a single serial communication line. The processors communicate in asynchronous mode using a format with an additional multiprocessor bit (multiprocessor format).

In multiprocessor communication, each receiving processor is addressed by an ID code. A serial communication cycle consists of two cycles: an ID-sending cycle that identifies the receiving processor, and a data-sending cycle. The multiprocessor bit is 1 in an ID-sending cycle, and 0 in a data-sending cycle.

The transmitting processor starts by sending the ID of the receiving processor with which it wants to communicate as data with the multiprocessor bit set to 1. Next the transmitting processor sends transmit data with the multiprocessor bit cleared to 0. When a receiving processor receives data with the multiprocessor bit set to 1, it compares the data with its own ID. If the data matches its ID, the receiving processor continues to receive incoming data. If the data does not match its ID, the receiving processor skips further incoming data until it again receives data with the multiprocessor bit set to 1. Multiple processors can send and receive data in this way.

Figure 10-3-16 shows an example of communication among different processors using a multiprocessor format.

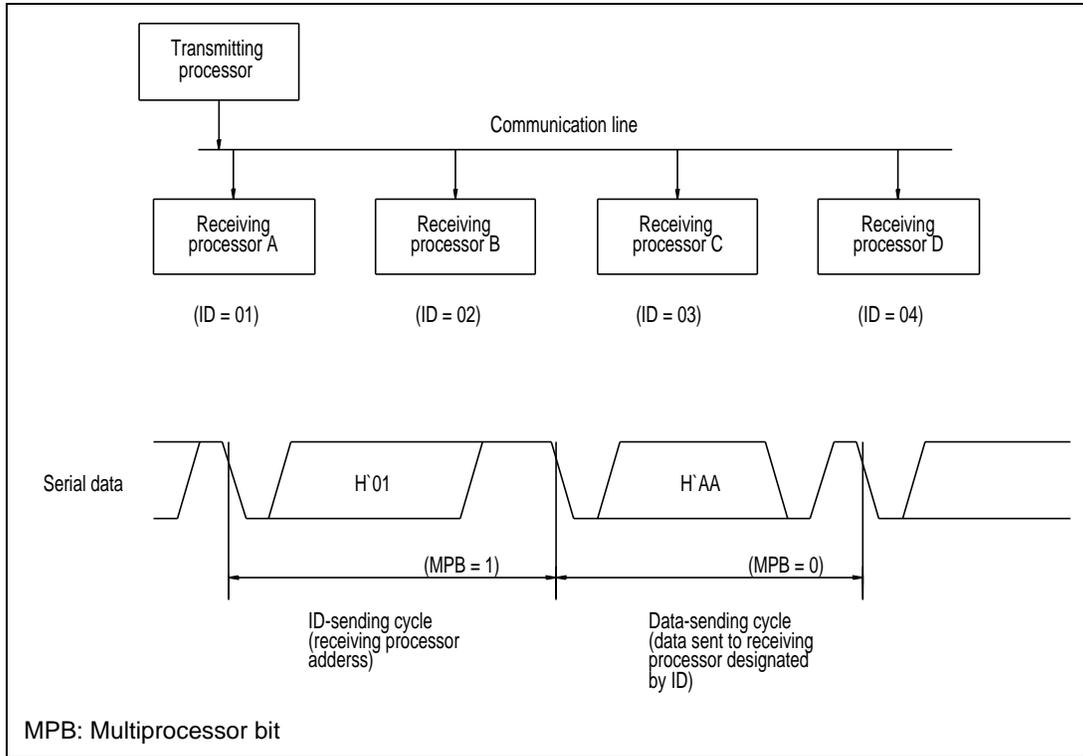


Figure 10-3-16 Example of Interprocessor Communication Using Multiprocessor Format (Data H'AA Sent to Receiving Processor A)

Four communication formats are available. Parity-bit settings are ignored when a multiprocessor format is selected. For details see table 10-3-11.

For a description of the clock used in multiprocessor communication, see 10.3.4, Operation in Asynchronous Mode.

SCI3 operates as follows during data transmission using a multiprocessor format.

SCI3 monitors bit TDRE in SSR. When this bit is cleared to 0, SCI3 recognizes that there is data written in the transmit data register (TDR), which it transfers to the transmit shift register (TSR). Then TDRE is set to 1 and transmission starts. If bit TIE in SCR3 is set to 1, a TXI interrupt is requested.

Serial data is transmitted from pin TXD using the communication format outlined in table 10-3-11.

Next, TDRE is checked as the stop bit is being transmitted. If TDRE is 0, data is transferred from TDR to TSR, and after the stop bit is sent, transmission of the next frame starts. If TDRE is 1, the TEND bit in SSR is set to 1, and after the stop bit is sent the output remains at 1 (mark state). A TEI interrupt is requested in this state if bit TEIE (transmit end interrupt enable) in SCR3 is set to 1.

Figure 10-3-18 shows a typical SCI3 operation in multiprocessor communication mode.

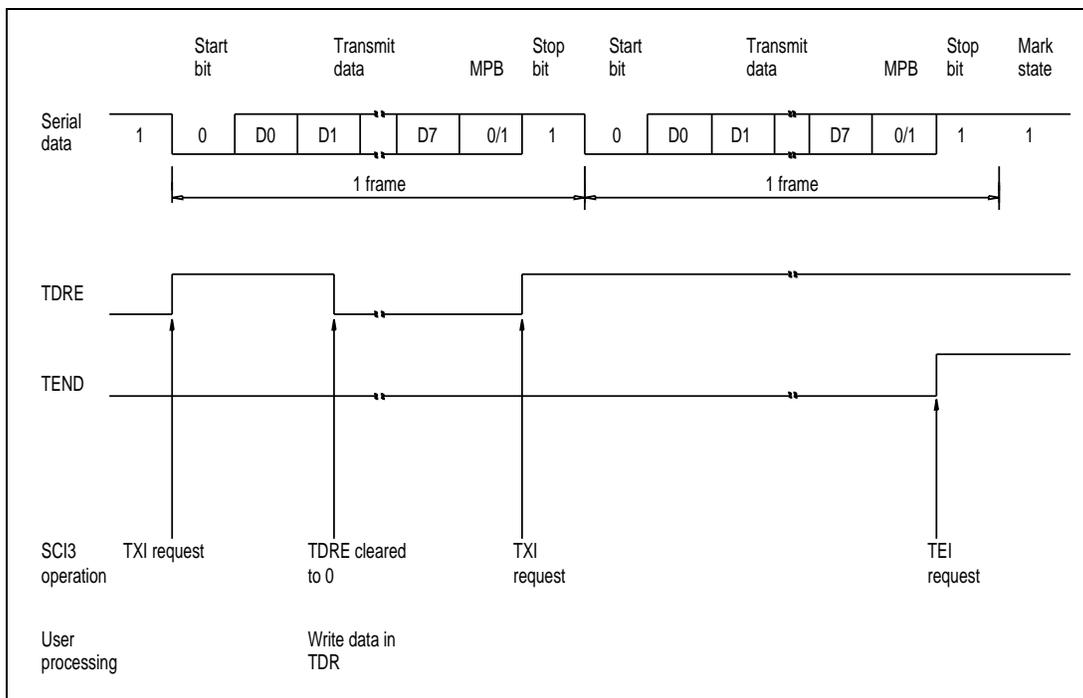


Figure 10-3-18 Typical Multiprocessor Format Transmit Operation (8-Bit Data, Multiprocessor Bit Added, and 1 Stop Bit)

- Receiving multiprocessor data

Figure 10-3-19 shows a typical flow chart for receiving data using a multiprocessor format. After SCI3 initialization, follow the procedure below.

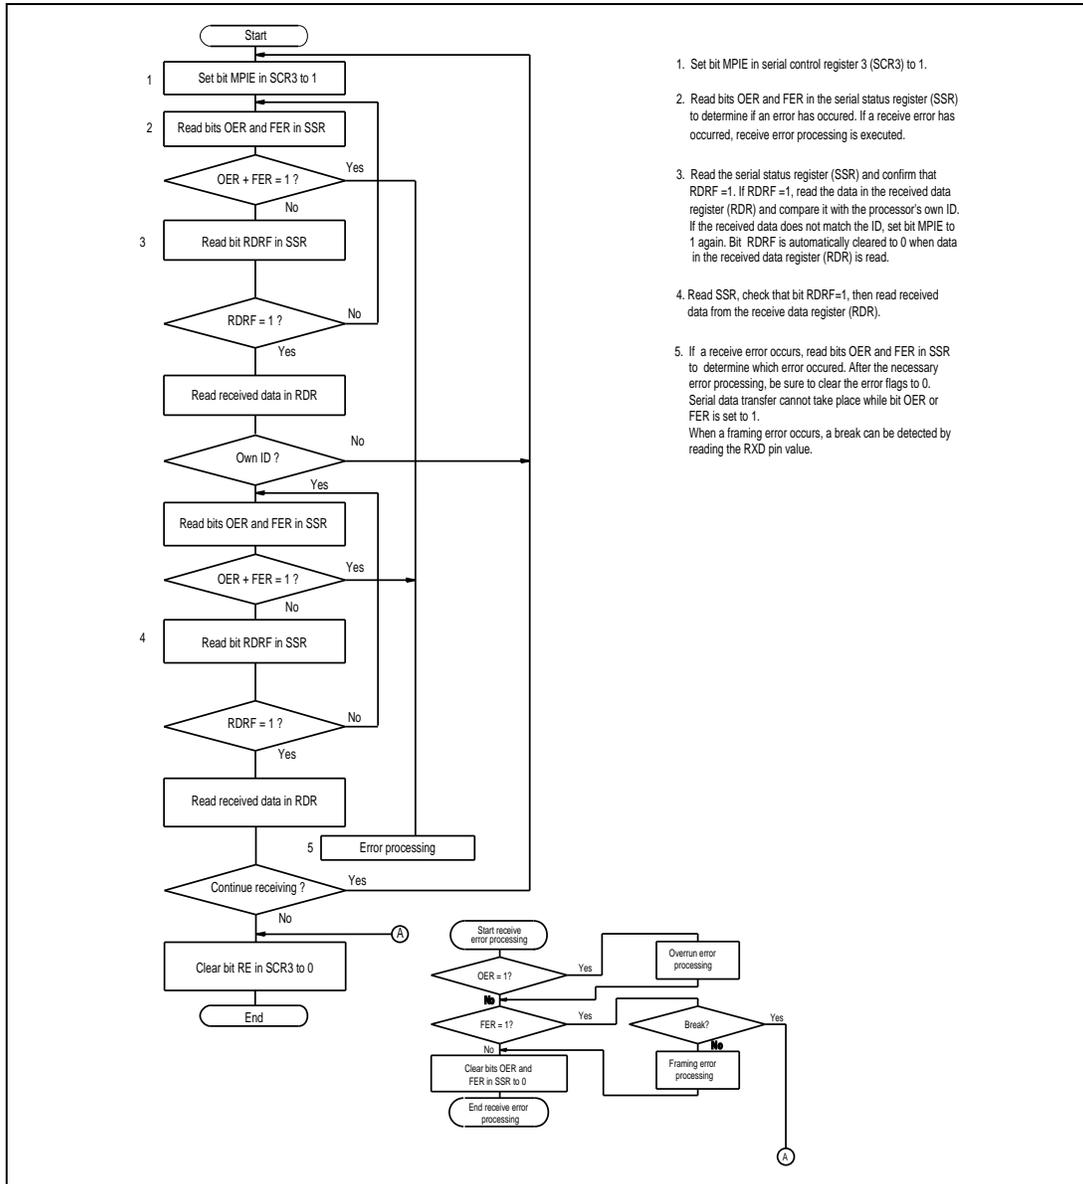


Figure 10-3-19 Typical Flow Chart for Receiving Serial Data Using Multiprocessor Format

Figure 10-3-20 gives an example of data reception using a multiprocessor format.

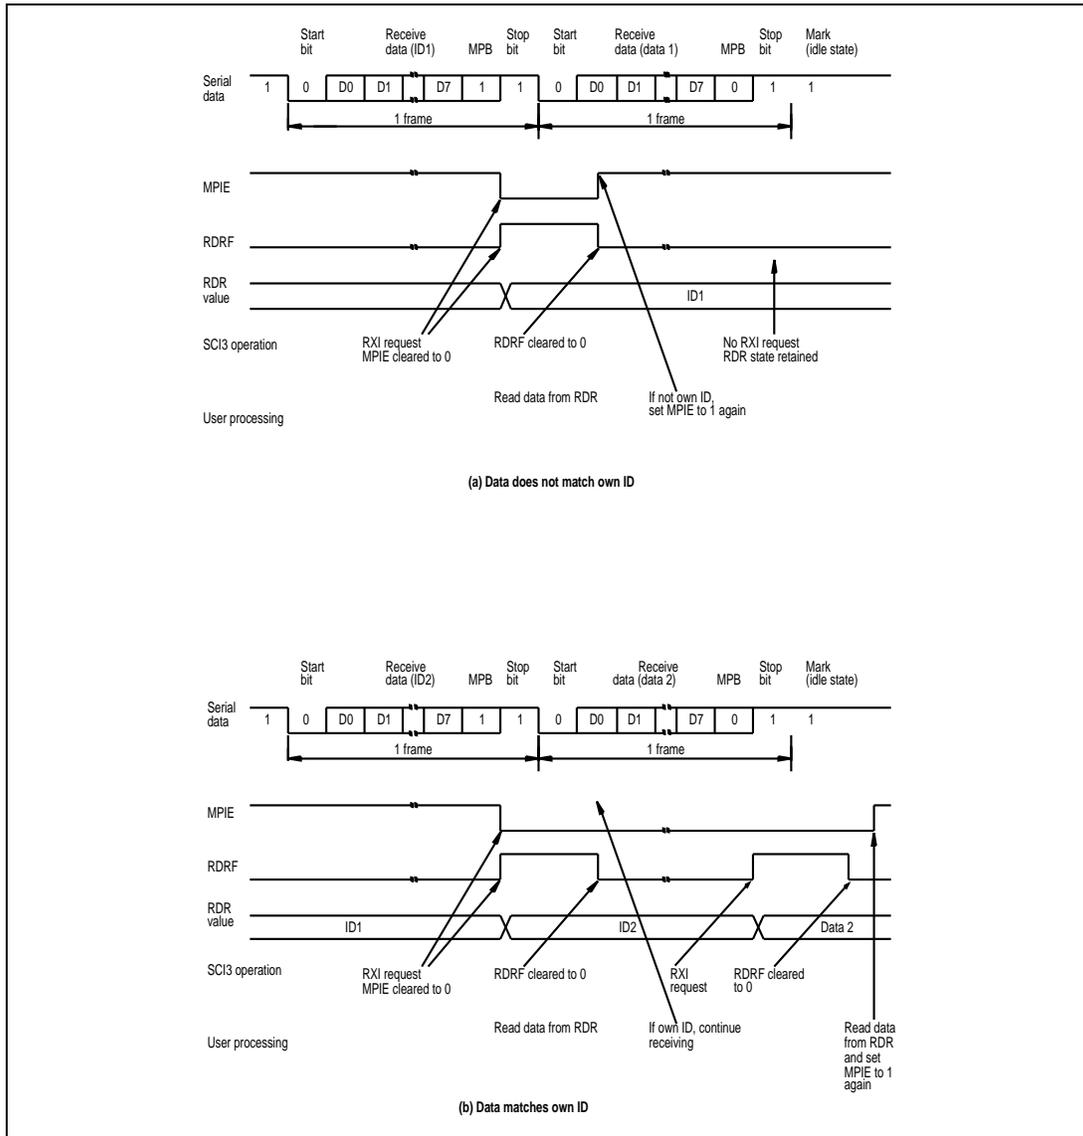


Figure 10-3-20 Example of Multiprocessor Format Receive Operation (8-Bit Data, Multiprocessor Bit Added, and 1 Stop Bit)

10.3.7 Interrupts

SCI3 has six interrupt sources: transmit end, transmit data empty, receive data full, and the three receive error interrupts (overrun error, framing error, and parity error). All share a common interrupt vector. Table 10-3-13 describes each interrupt.

Table 10-3-13 SCI3 Interrupts

Interrupt	Description	Vector Address
RXI	Interrupt request due to receive data register full (RDRF)	H'0024
TXI	Interrupt request due to transmit data register empty (TDRE)	
TEI	Interrupt request due to transmit end (TEND)	
ERI	Interrupt request due to receive error (OER, FER, or PER)	

The interrupt requests are enabled and disabled by bits TIE and RIE of SCR3.

When bit TDRE in SSR is set to 1, TXI is requested. When bit TEND in SSR is set to 1, TEI is requested. These two interrupt requests occur during data transmission.

The initial value of bit TDRE is 1. Accordingly, if the transmit data empty interrupt request (TXI) is enabled by setting bit TIE to 1 in SCR3 before placing transmit data in TDR, TXI will be requested even though no data has been readied.

Likewise, the initial value of bit TEND is 1. Accordingly, if the transmit end interrupt request (TEI) is enabled by setting bit TEIE to 1 in SCR3 before placing transmit data in TDR, TEI will be requested even though no data has been transmitted.

These interrupt features can be used to advantage by programming the interrupt handler to move the transmit data into TDR. When this technique is not used, the interrupt enable bits (TIE and TEIE) should not be set to 1 until after TDR has been loaded with transmit data, to avoid unwanted TXI and TEI interrupts.

When bit RDRF in SSR is set to 1, RXI is requested. When any of SSR bits OER, FER, or PER is set to 1, ERI is requested. These two interrupt requests occur during the receiving of data.

Details on interrupts are given in 3.3, Interrupts.

10.3.8 Application Notes

When using SCI3, attention should be paid to the following matters.

1. Relation between bit TDRE and writing data to TDR

Bit TDRE in the serial status register (SSR) is a status flag indicating that TDR does not contain new transmit data. TDRE is automatically cleared to 0 when data is written to TDR. When SCI3 transfers data from TDR to TSR, bit TDRE is set to 1.

Data can be written to TDR regardless of the status of bit TDRE. However, if new data is written to TDRE while TDRE is cleared to 0, assuming the data held in TDR has not yet been shifted to TSR, it will be lost. For this reason it is advisable to confirm that bit TDRE is set to 1 before each write to TDR and not write to TDR more than once without checking TDRE in between.

2. Operation when multiple receive errors occur at the same time

When two or more receive errors occur at the same time, the status flags in SSR are set as shown in table 10-3-14. If an overrun error occurs, data is not transferred from RSR to RDR, and receive data is lost.

Table 10-3-14 SSR Status Flag States and Transfer of Receive Data

SSR Status Flags				Receive Data Transfer	
RDRF*	OER	FER	PER	(RSR→RDR)	Receive Error Status
1	1	0	0	x	Overrun error
0	0	1	0	0	Framing error
0	0	0	1	0	Parity error
1	1	1	0	x	Overrun error + framing error
1	1	0	1	x	Overrun error + parity error
0	0	1	1	0	Framing error + parity error
1	1	1	1	x	Overrun error + framing error + parity error

Notation: 0:Receive data transferred from RSR to RDR

x:Receive data not transferred from RSR to RDR

Note: * RDRF keeps the same state as before the data was received.

3. Break detection and processing

Break signals can be detected by reading the RXD pin directly when a framing error (FER) is detected. In the break state the input from the RXD pin consists of all 0s, so FER is set and the parity error flag (PER) may also be set. In the break state SCI3 continues to receive, so if the FER bit is cleared to 0 it will be set to 1 again.

4. Sending a mark or break signal

When TE is cleared to 0 the TXD pin becomes an I/O port, the level and direction (input or output) of which are determined by the PDR and PCR bits. This feature can be used to place the TXD pin in the mark state or send a break signal.

To place the serial communication line in the mark (1) state before TE is set to 1, set the PDR and PCR bits both to 1. Since TE is cleared to 0, TXD becomes a general output port outputting the value 1.

To send a break signal during data transmission, set the PCR bit to 1 and clear the PDR bit to 0, then clear TE to 0. When TE is cleared to 0 the transmitter is initialized, regardless of its current state, so the TXD pin becomes an output port outputting the value 0.

5. Receive error flags and transmit operation (synchronous mode only)

When a receive error flag (ORER, PER, or FER) is set to 1, SCI3 will not start transmitting even if TDRE is cleared to 0. Be sure to clear the receive error flags to 0 when starting to transmit. Note that clearing RE to 0 does not clear the receive error flags.

6. Receive data sampling timing and receive margin in asynchronous mode

In asynchronous mode SCI3 operates on a base clock with 16 times the bit rate frequency. In receiving, SCI3 synchronizes internally with the falling edge of the start bit, which it samples on the base clock. Receive data is latched at the rising edge of the eight base clock pulse. See figure 10-3-21.

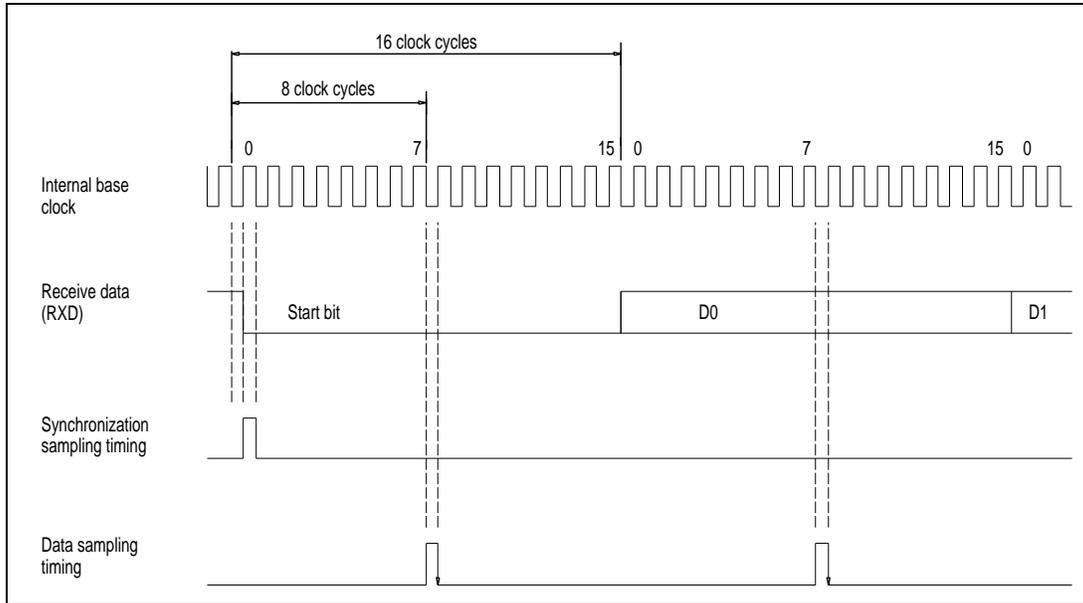


Figure 10-3-21 Receive Data Sampling Timing in Asynchronous Mode

The receive margin in asynchronous mode can therefore be derived from the following equation.

$$M = \{(0.5 - 1/2N) - (D - 0.5)/N - (L - 0.5) F\} \times 100\% \dots\dots\dots\text{Equation (1)}$$

M: Receive margin (%)

N: Ratio of clock frequency to bit rate (N = 16)

D: Clock duty cycle (D = 0.5 to 1)

L: Frame length (L = 9 to 12)

F: Absolute value of clock frequency error

In equation (1), if F (absolute value of clock frequency error) = 0 and D (clock duty cycle) = 0.5, the receive margin is 46.875% as given by equation (2) below.

When D = 0.5 and F = 0,

$$M = \{0.5 - 1/(2 \times 16)\} \times 100\% = 46.875\% \dots\dots\dots\text{Equation (2)}$$

This value is theoretical. In actual system designs a margin of from 20 to 30 percent should be allowed.

7. Relationship between bit RDRF and reading RDR

While SCI3 is receiving, it checks the RDRF flag. When a frame of data has been received, if the RDRF flag is cleared to 0, data receiving ends normally. If RDRF is set to 1, an overrun error occurs.

RDRF is automatically cleared to 0 when the contents of RDR are read. If RDR is read more than once, the second and later reads will be performed with RDRF cleared to 0. While RDRF is 0, if RDR is read when reception of the next frame is just ending, data from the next frame may be read. This is illustrated in figure 10-3-22.

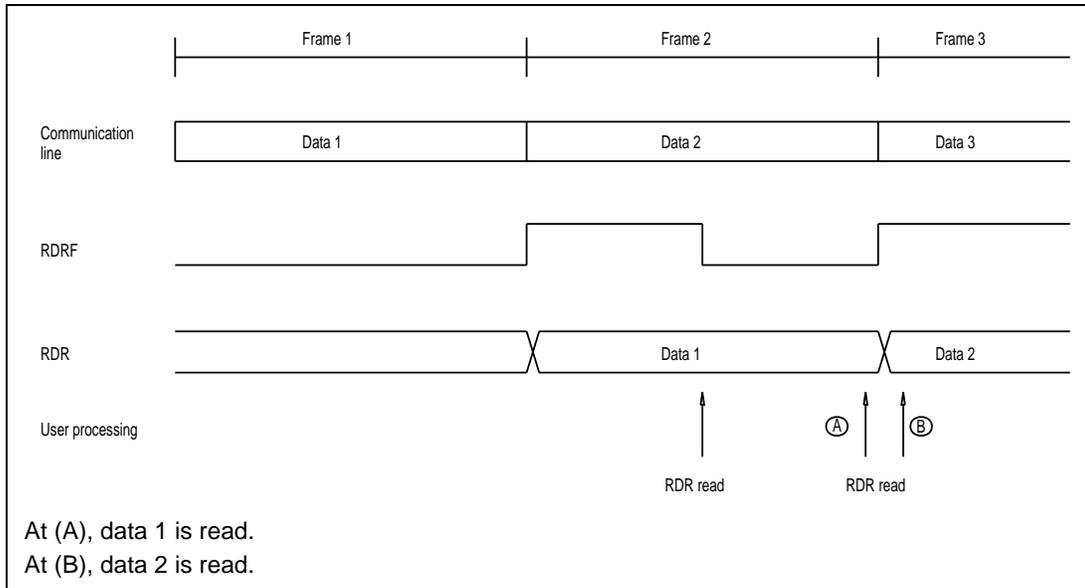


Figure 10-3-22 Relationship between Data and RDR Read Timing

To avoid the situation described above, after RDRF is confirmed to be 1, RDR should only be read once and should not be read twice or more.

When the same data must be read more than once, the data read the first time should be copied to RAM, for example, and the copied data should be used. An alternative is to read RDR but leave a safe margin of time before reception of the next frame is completed. In synchronous mode, all reads of RDR should be completed before bit 7 is received. In asynchronous mode, all reads of RDR should be completed before the stop bit is received.

8. Switching SCK₃ function

If pin SCK₃ is used as a clock output pin by SCI3 in synchronous mode and is then switched to a general input/output pin (a pin with a different function), the pin outputs a low level signal for half a system clock (ϕ) cycle immediately after it is switched.

This can be prevented by either of the following methods according to the situation.

a. When an SCK3 function is switched from clock output to non clock-output

When stopping data transfer, issue one instruction to clear bits TE and RE to 0 and to set bits CKE1 and CKE0 in SCR3 to 1 and 0, respectively. In this case, bit COM in SMR should be left 1. The above prevents SCK₃ from being used as a general input/output pin. To avoid an intermediate level of voltage from being applied to SCK₃, the line connected to SCK₃ should be pulled up to the Vcc level via a resistor, or supplied with output from an external device.

b. When an SCK₃ function is switched from clock output to general input/output When stopping data transfer,

(i) Issue one instruction to clear bits TE and RE to 0 and to set bits CKE1 and CKE0 in SCR3 to 1 and 0, respectively.

(ii) Clear bit COM in SCR3 to 0

(iii) Clear bits CKE1 and CKE0 in SCR3 to 0

Note that special care is also needed here to avoid an intermediate level of voltage from being applied to SCK₃.

9. Switching TXD function

If pin TXD is used as a data output pin by SCI3 in synchronous mode and is then switched to a general input/output pin (a pin with a different function), the pin outputs a high level signal for one system clock (ϕ) cycle immediately after it is switched.

Section 11 DTMF Generator

11.1 Overview

The H8/3877U Series has an on-chip dual-tone multifrequency (DTMF) generator that can generate DTMF signals.

A DTMF signal accesses a telephone switching system by a pair of sine waves. Figure 11-1 shows the frequency matrix. The DTMF generator generates frequencies corresponding to the numbers and symbols on the keypad of a telephone set or facsimile machine.

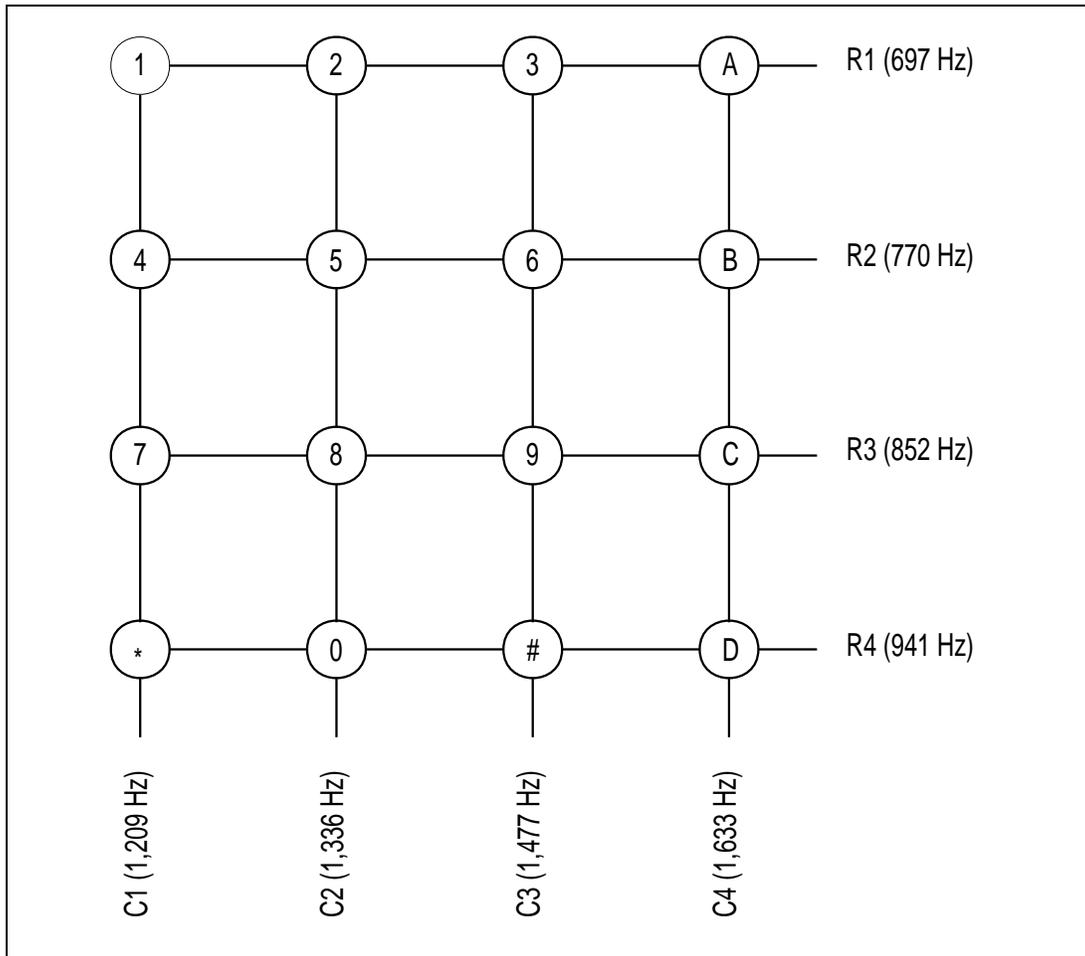


Figure 11-1 DTMF Frequencies

11.1.1 Features

Features of the DTMF generator are as follows.

- Generates sine waves with DTMF frequencies from the system clock input at the OSC pins (fOSC)
The OSC frequency (1.2 MHz to 10 MHz, selectable in 400-kHz steps) is divided to generate a 400-kHz clock. Input to a feedback loop with a modified programmable divider and sine-wave counter, this clock is used to generate sine waves with the DTMF frequencies.
- Stable sine-wave output with low distortion
Sine waves are output from a high-precision resistor-ladder-type D/A converter. Each cycle is divided into 32 segments to give a stable waveform with low distortion.
Register settings can select combined row-and-column-group output, or independent row-group or column-group output.

11.1.2 Block Diagram

Figure 11-2 shows a block diagram of the DTMF generator.

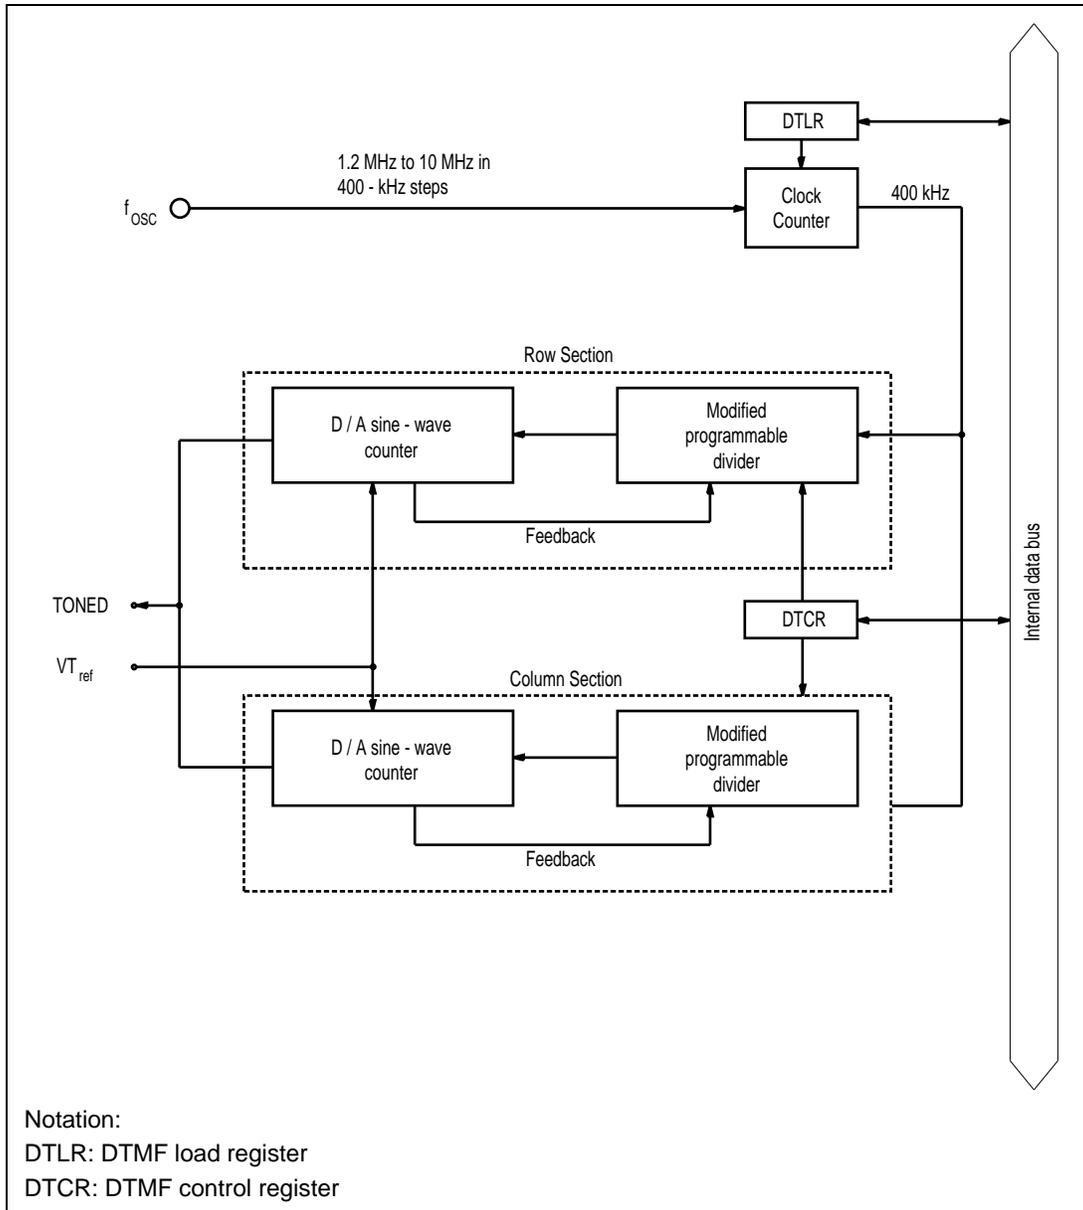


Figure 11-2 DTMF Generator Block Diagram

11.1.3 Pin Configuration

Table 11-1 shows the pins assigned to the DTMF generator.

Table 11-1 Pin Configuration

Name	Abbrev.	I/O	Function
DTMF output reference level power supply pin	$V_{t_{ref}}$	--	Reference level for DTMF output
DTMF signal output pin	TONED	Output	DTMF signal output

11.1.4 Register Configuration

Table 11-2 shows the register configuration of the DTMF generator

Table 11-2 Register Configuration

Name	Abbrev.	R/W	Initial Value	Address
DTMF control register	DTCR	R/W	H'40	H'FFB2
DTMF load register	DTLR	R/W	H'E0	H'FFB3

11.2 Register Descriptions

11.2.1 DTMF Control Register (DTCR)

Bit	7	6	5	4	3	2	1	0
	DTEN	–	CLOE	RWOE	CLF1	CLF0	RWF1	RWF0
Initial value	0	1	0	0	0	0	0	0
Read/Write	R/W	–	R/W	R/W	R/W	R/W	R/W	R/W

DTCR is an 8-bit read/write register that enables the DTMF generator, enables row and column output, and selects the output frequencies.

Upon reset, DTCR is initialized to H'40.

Bit 7: DTMF generator enable (DTEN)

Bit 7 enables or disables the DTMF generator.

Bit 7	Description	
DTEN		
0	DTMF generator is halted	(initial value)
1	DTMF generator operates	

Bit 6: Reserved bit

Bit 6 is reserved: it is always read as 1, and cannot be modified.

Bit 5: Column output enable (CLOE)

Bit 5 enables or disables DTMF column signal output.

Bit 5	Description	
CLOE		
0	DTMF column signal output is disabled (high-impedance)	initial value
1	DTMF column signal output is enabled	

Bit 4: Row output enable (RWOE)

Bit 4 enables or disables DTMF row signal output.

Bit 4 RWOE	Description
0	DTMF row signal output is disabled (high-impedance) (initial value)
1	DTMF row signal output is enabled

Bits 3 and 2: DTMF column signal output frequency 1 and 0 (CLF1, CLF0)

Bits 3 and 2 select the DTMF column signal frequency (C1 to C4).

Bit 3 CLF1	Bit 2 CLF0	Description
0	0	DTMF column signal output frequency: 1209 Hz (C1) (initial value)
0	1	DTMF column signal output frequency: 1336 Hz (C2)
1	0	DTMF column signal output frequency: 1447 Hz (C3)
1	1	DTMF column signal output frequency: 1633 Hz (C4)

Bits 1 and 0: DTMF row signal output frequency 1 and 0 (RWF1, RWF0)

Bits 1 and 0 select the DTMF row signal frequency (R1 to R4).

Bit 1 RWF1	Bit 0 RWF0	Description
0	0	DTMF row signal output frequency: 697 Hz (R1) (initial value)
0	1	DTMF row signal output frequency: 770 Hz (R2)
1	0	DTMF row signal output frequency: 852 Hz (R3)
1	1	DTMF row signal output frequency: 941 Hz (R4)

11.2.2 DTMF Load Register (DTLR)

Bit	7	6	5	4	3	2	1	0
	-	-	-	DTL4	DTL3	DTL2	DTL1	DTL0
Initial value	1	1	1	0	0	0	0	0
Read/Write	-	-	-	R/W	R/W	R/W	R/W	R/W

DTLR is an 8-bit read/write register that specifies the ratio by which the clock frequency at the OSC pins is divided for input to the DTMF generator.

Upon reset, DTLR is initialized to H'E0.

Bits 7 to 5: Reserved bits

Bits 7 to 5 are reserved: they are always read as 1, and cannot be modified.

Bits 4 to 0: OSC clock division ration 4 to 0 (DTL4 to DTL0)

Bits 4 to 0 specify a division ratio of the OSC clock frequency which will generate a 400-kHz clock for input to the DTMF generator. The ratio is set as a counter value from 3 to 25, corresponding to OSC clock frequencies of 1.2 to 10 MHz (in 400-kHz steps).

					Description	
Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Division Ratio	OSC Clock Frequency
DTL4	DTL3	DTL2	DTL1	DTL0		
0	0	0	0	0	Illegal setting	(initial value)
0	0	0	0	1	Illegal setting	
0	0	0	1	0	Illegal setting	
0	0	0	1	1	3	1.2 MHz
0	0	1	0	0	4	1.6 MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮
1	1	0	0	1	25	10 MHz
1	1	0	1	*	Illegal setting	
1	1	1	*	*	Illegal setting	

Note: * Don't care

These bits must be set to the correct value. Normal DTMF signal output frequencies will not be obtained if these bits are set to a value not matching the clock input at the OSC pins. Operation is not guaranteed if these bits are set to a value other than 3 to 25.

11.3 Operation

11.3.1 Output Waveform

The DTMF generator outputs a row-group or column-group sine wave (DTMF signal) or a combined row-column waveform at the TONED pin. These signals are generated by a high-precision resistor-ladder-type D/A converter circuit. The output frequency is selected by DTCR.

Figure 11-3 shows an equivalent circuit for the TONED output. Figure 11-4 shows the output waveform of an independent row-group or column-group signal. One cycle of the output is divided into 32 segments, giving a stable output with low distortion.

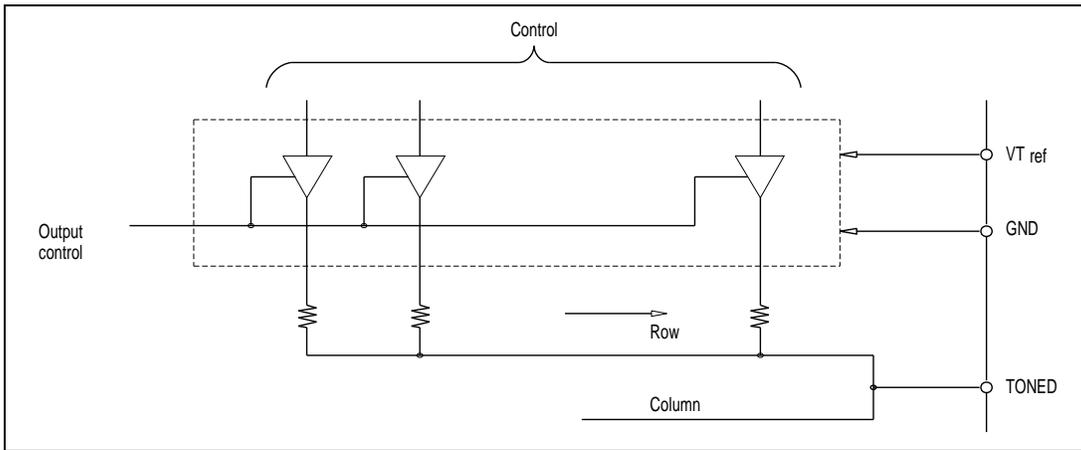


Figure 11-3 Equivalent circuit for TONED Output

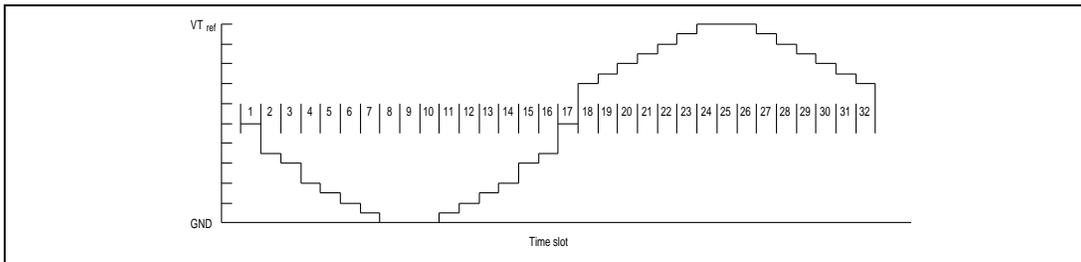


Figure 11-4 TONED Output Waveform (Independent Row - or Column-Group Output)

Table 11-3 indicates the frequency deviation between the DTMF signals output by the DTMF generator and the nominal (standard) signal values.

Table 11-3 Frequency Deviation of DTMF Signals from Nominal Signals

Symbol	Standard Signal Frequency (Hz)	DTMF Signal Design Value Hz	Frequency Deviation (%)
R1	697	694.44	-0.37
R2	770	769.23	-0.10
R3	852	851.06	-0.11
R4	941	938.97	-0.22
C1	1209	1212.12	0.26
C2	1336	1333.33	-0.20
C3	1477	1481.48	0.30
C4	1633	1639.34	0.39

11.3.2 Programming

The procedure for using the DTMF generator is given below.

1. Set the OSC clock division ratio in DTLR to match the frequency of the connected system clock oscillator (1.2 MHz to 10 MHz in 400-kHz steps).
2. Select a row (R1 to R4) and/or column (C1 to C4) frequency with bits CLF1, CLF0, RWF1, and RWF0 in DTCR.
3. Select row and/or column output with the CLOE and RWOE bits in DTCR, and set the DTEN bit to 1 to enable the DTMF generator.

This procedure outputs the selected DTMF signal from the TONED pin.

11.4 Typical Use

Figure 11-5 shows an example of the use of the DTMF generator.

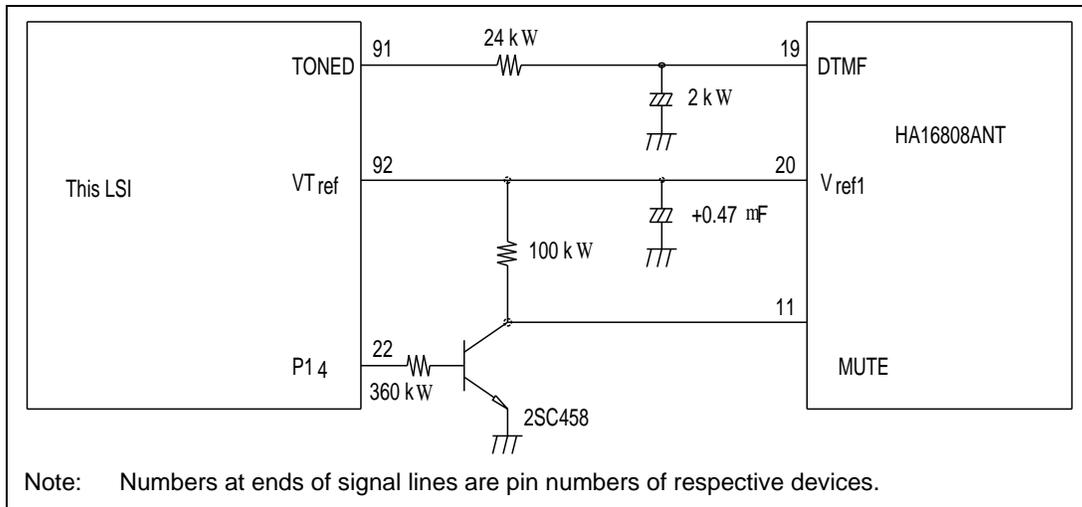


Figure 11-5 Connection of H8/3877U/H8/3876U/H8/3875U to HA16808 ANT

11.5 Application Notes

When using the DTMF generator, note the following point:

Be sure that the DTLR setting (DTL4 to DTL0) matches the system clock frequency at the OSC pins. Normal DTMF signal output frequencies will not be obtained unless the DTLR setting matches the OSC frequency.

Section 12 A/D Converter

12.1 Overview

The H8/3877U Series includes on-chip a resistance-ladder-based successive-approximation analog-to-digital converter, and can convert up to eight channels of analog input.

12.1.1 Features

The A/D converter has the following features.

- 8-bit resolution
- 8 input channels
- Conversion time: approx. 12.4 μ s per channel (at 5 MHz operation)
- Built-in sample-and-hold function
- Interrupt requested on completion of A/D conversion
- A/D conversion can be started by external trigger input
- Full-scale voltage range programmable at AV_{ref} pin

12.1.2 Block Diagram

Figure 12-1 shows a block diagram of the A/D converter.

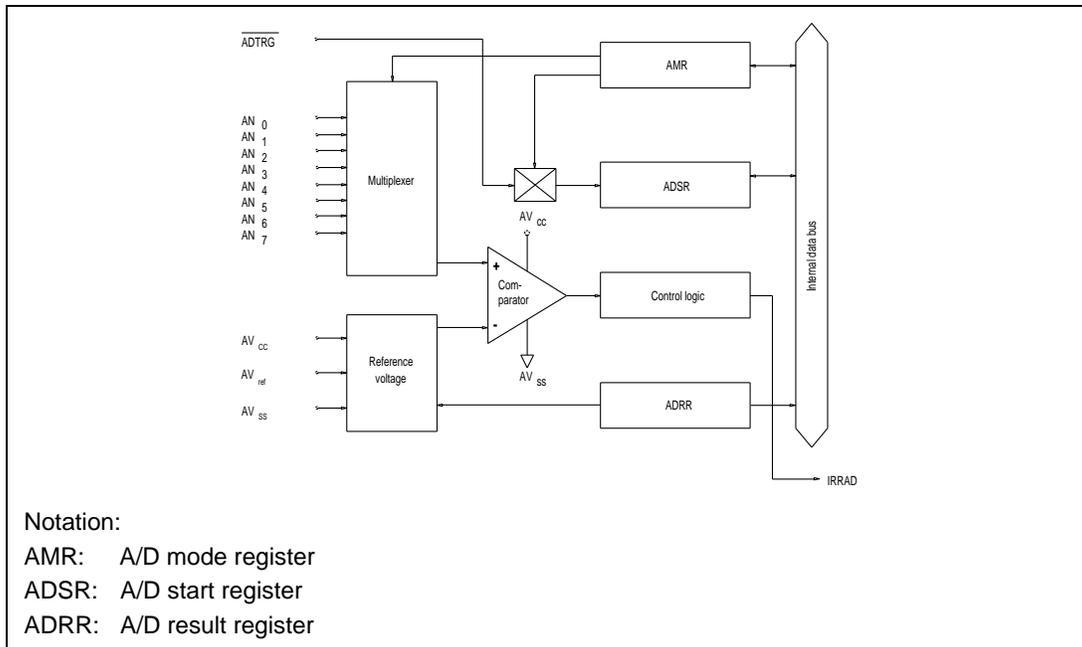


Figure 12-1 Block Diagram of the A/D Converter

12.1.3 Pin Configuration

Table 12-1 shows the A/D converter pin configuration.

Table 12-1 Pin Configuration

Name	Abbrev.	I/O	Function
Analog power supply pin	AV_{cc}	Input	Power supply of analog part
Analog ground pin	AV_{ss}	Input	Ground and reference voltage of analog part
Reference voltage pin	AV_{ref}	Input	Analog reference voltage
Analog input pin 0	AN_0	Input	Analog input channel 0
Analog input pin 1	AN_1	Input	Analog input channel 1
Analog input pin 2	AN_2	Input	Analog input channel 2
Analog input pin 3	AN_3	Input	Analog input channel 3
Analog input pin 4	AN_4	Input	Analog input channel 4
Analog input pin 5	AN_5	Input	Analog input channel 5
Analog input pin 6	AN_6	Input	Analog input channel 6
Analog input pin 7	AN_7	Input	Analog input channel 7
External trigger input pin	ADTRG	Input	External trigger input for starting A/D conversion

12.1.4 Register Configuration

Table 12-2 shows the A/D converter register configuration.

Table 12-2 Register Configuration

Name	Abbrev.	R/W	Initial Value	Address
A/D mode register	AMR	R/W	H'10	H'FFC4
A/D start register	ADSR	R/W	H'7F	H'FFC6
A/D result register	ADRR	R	Not fixed	H'FFC5

12.2 Register Descriptions

12.2.1 A/D Result Register (ADRR)

Bit	7	6	5	4	3	2	1	0
	ADR7	ADR6	ADR5	ADR4	ADR3	ADR2	ADR1	ADR0
Initial value	Not fixed							
Read/Write	R	R	R	R	R	R	R	R

The A/D result register (ADRR) is an 8-bit read-only register for holding the results of analog-to-digital conversion.

ADRR can be read by the CPU at any time, but the ADRR values during A/D conversion are not fixed.

After A/D conversion is complete, the conversion result is stored in ADRR as 8-bit data; this data is held in ADRR until the next conversion operation starts.

ADRR is not cleared on reset.

12.2.2 A/D Mode Register (AMR)

Bit	7	6	5	4	3	2	1	0
	CKS	TRGE	CKS1	—	CH3	CH2	CH1	CH0
Initial value	0	0	0	1	0	0	0	0
Read/Write	R/W	R/W	R/W	—	R/W	R/W	R/W	R/W

AMR is an 8-bit read/write register for specifying the A/D conversion speed, external trigger option, and the analog input pins.

Upon reset, AMR is initialized to H'10.

Bit 7: Clock select (CKS)

Bits CKS and CKS1 select the A/D conversion speed.

Bit 5 CKS1	Bit 7 CKS	Conversion Period	Conversion Time	
			$\phi = 2 \text{ MHz}$	$\phi = 5 \text{ MHz}$
0	0	Reserved (initial value)	-	-
0	1	$124/\phi$	62 μs	24.8 μs
1	0	$62/\phi$	31 μs	12.4 μs
1	1	$31/\phi$	15.5 μs	--*

Note: *Operation is not guaranteed if the conversion time is less than 12.4 μs . Set the bits to get a value of at least 12.4 μs .

Bit 6: External trigger select (TRGE)

Bit 6 enables or disables the start of A/D conversion by external trigger input.

Bit 6 Description
TRGE

0	Disables start of A/D conversion by external trigger	(initial value)
1	Enables start of A/D conversion by rising or falling edge of external trigger at pin ADTRG*	

Note: *The external trigger (ADTRG) edge is selected by bit IEG4 of the interrupt edge select register (IEGR). See 3.3.2 for details.

Bit 5: Clock select 1 (CKS1)

Bits CKS and CKS1 select the A/D conversion speed. See bit 7 (CKS) for details.

Bit 4: Reserved bit

Bit 4 is reserved; it is always read as 1, and cannot be modified.

Bits 3 to 0: Channel select (CH3 to CH0)

Bits 3 to 0 select the analog input channel.

The channel selection should be made while bit ADSF is cleared to 0.

Bit 3 CH3	Bit 2 CH2	Bit 1 CH1	Bit 0 CH0	Analog Input Channel	
0	0	*	*	No channel selected	(initial value)
0	1	0	0	AN ₀	
0	1	0	1	AN ₁	
0	1	1	0	AN ₂	
0	1	1	1	AN ₃	
1	0	0	0	AN ₄	
1	0	0	1	AN ₅	
1	0	1	0	AN ₆	
1	0	1	1	AN ₇	
1	1	*	*	Reserved	

Note: *Don't care

12.2.3 A/D Start Register (ADSR)

Bit	7	6	5	4	3	2	1	0
	ADSF	—	—	—	—	—	—	—
Initial value	0	1	1	1	1	1	1	1
Read/Write	R/W	—	—	—	—	—	—	—

The A/D start register (ADSR) is an 8-bit read/write register for starting and stopping A/D conversion.

A/D conversion is started by writing 1 to the A/D start flag (ADSF) or by input of the designated edge of the external trigger signal, which also sets ADSF to 1. When conversion is complete, the converted data is set in the A/D result register (ADRR), and at the same time ADSF is cleared to 0.

Bit 7: A/D start flag (ADSF)

Bit 7 controls and indicates the start and end of A/D conversion.

Bit 7 ADSF	Description	
0	[Read access] Indicates the completion of A/D conversion. [Write access] Stops A/D conversion.	(initial value)
1	[Read access] Indicates A/D conversion in progress. [Write access] Starts A/D conversion.	

Bit 6 to 0: Reserved bits

Bits 6 to 0 are reserved; they are always read as 1, and cannot be modified.

12.3 Operation

12.3.1 A/D Conversion Operation

The A/D converter operates by successive approximations, and yields its conversion result as 8-bit data.

A/D conversion begins when software sets the A/D start flag (bit ADSF) to 1. Bit ADSF keeps a value of 1 during A/D conversion, and is cleared to 0 automatically when conversion is complete.

The completion of conversion also sets bit IRRAD in interrupt request register 2 (IRR2) to 1. An A/D conversion end interrupt is requested if bit IENAD in interrupt enable register 2 (IENR2) is set to 1.

If the conversion time or input channel needs to be changed in the A/D mode register (AMR) during A/D conversion, bit ADSF should first be cleared to 0, stopping the conversion operation, in order to avoid malfunction.

12.3.2 Start of A/D Conversion by External Trigger Input

The A/D converter can be made to start A/D conversion by input of an external trigger signal. External trigger input is enabled at pin ADTRG when bit IRQ4 in port mode register 2 (PMR2) is set to 1, and bit TRGE in AMR is set to 1. Then when the input signal edge designated in bit IEG4 of the IRQ edge select register (IEGR) is detected at pin ADTRG, bit ADSF in ADSR will be set to 1, starting A/D conversion.

Figure 12-2 shows the timing.

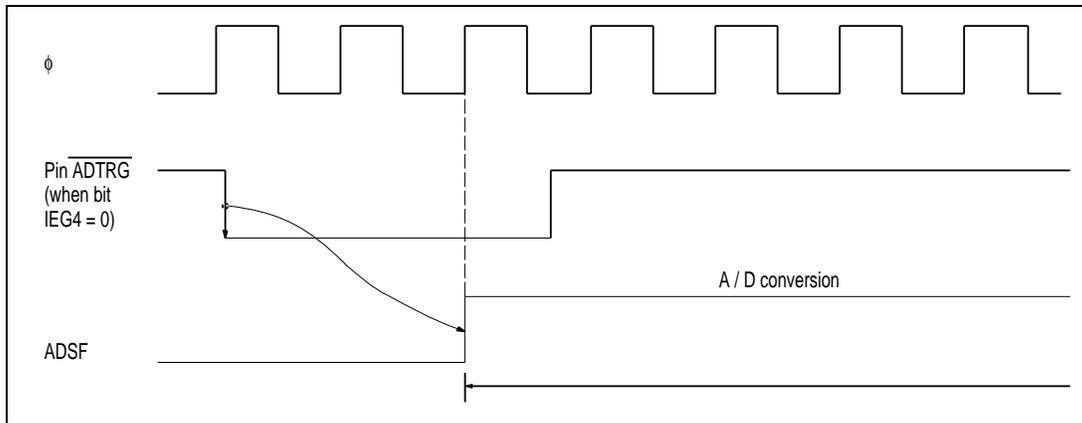


Figure 12-2 External Trigger Input Timing

12.4 Interrupts

When A/D conversion ends (ADSF changes from 1 to 0), bit IRRAD in interrupt request register 2 (IRR2) is set to 1.

A/D conversion end interrupts can be enabled or disabled by means of bit IENAD in interrupt enable register 2 (IENR2).

For further details see 3.3, Interrupts.

12.5 Typical Use

An example of how the A/D converter can be used is given below, using channel 1 (pin AN_1) as the analog input channel. Figure 12-3 shows the operation timing.

Bits CH3 to CH0 of the A/D mode register (AMR) are set to 0101, making pin AN_1 the analog input channel. A/D interrupts are enabled by setting bit IENAD to 1, and A/D conversion is started by setting bit ADSF to 1.

- When A/D conversion is complete, bit IRRAD is set to 1, and the A/D conversion result is stored in the A/D result register (ADRR). At the same time ADSF is cleared to 0, and the A/D converter goes to the idle state.
- Bit IENAD = 1, so an A/D conversion end interrupt is requested.
- The A/D interrupt handling routine starts.
- The A/D conversion result is read and processed.
- The A/D interrupt handling routine ends.

If ADSF is set to 1 again afterward, A/D conversion starts and steps 2 through 6 take place.

Figures 12-4 and 12-5 show flow charts of procedures for using the A/D converter.

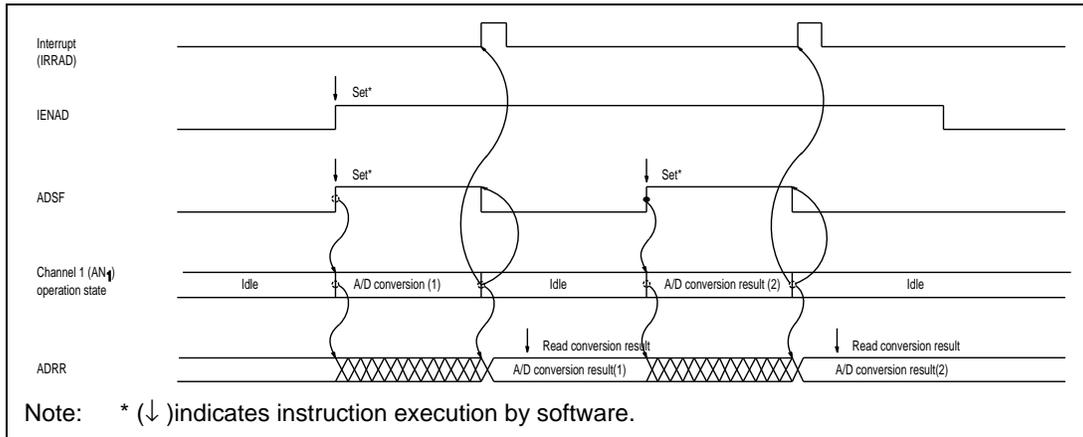


Figure 12-3 Typical A/D Converter Operation Timing

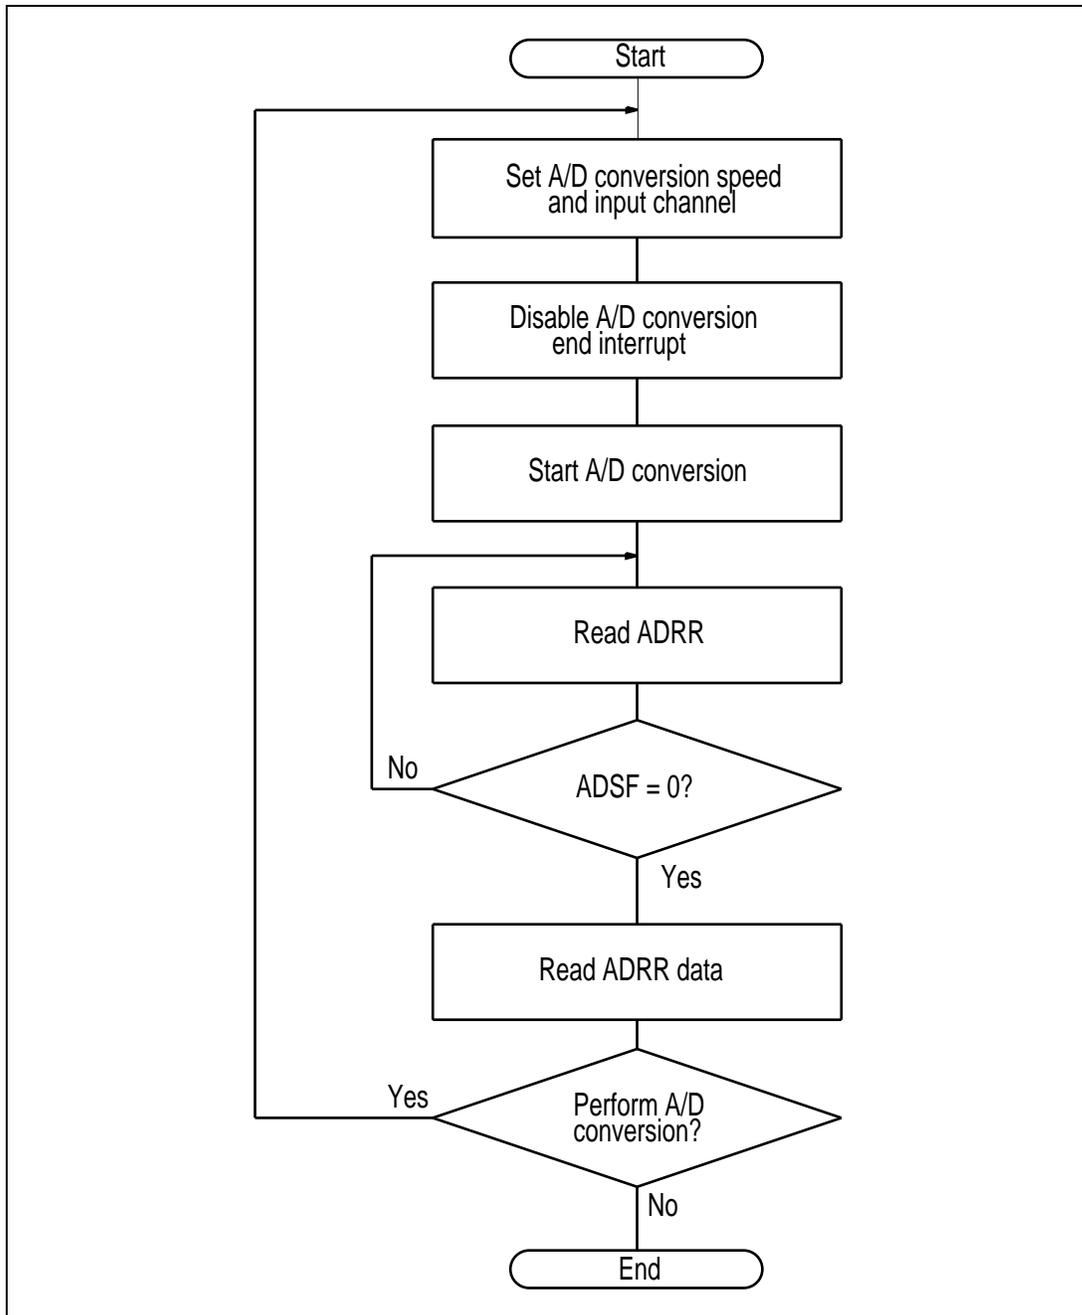


Figure 12-4 Flow Chart of Procedure for Using A/D Converter (1) (Polling by Software)

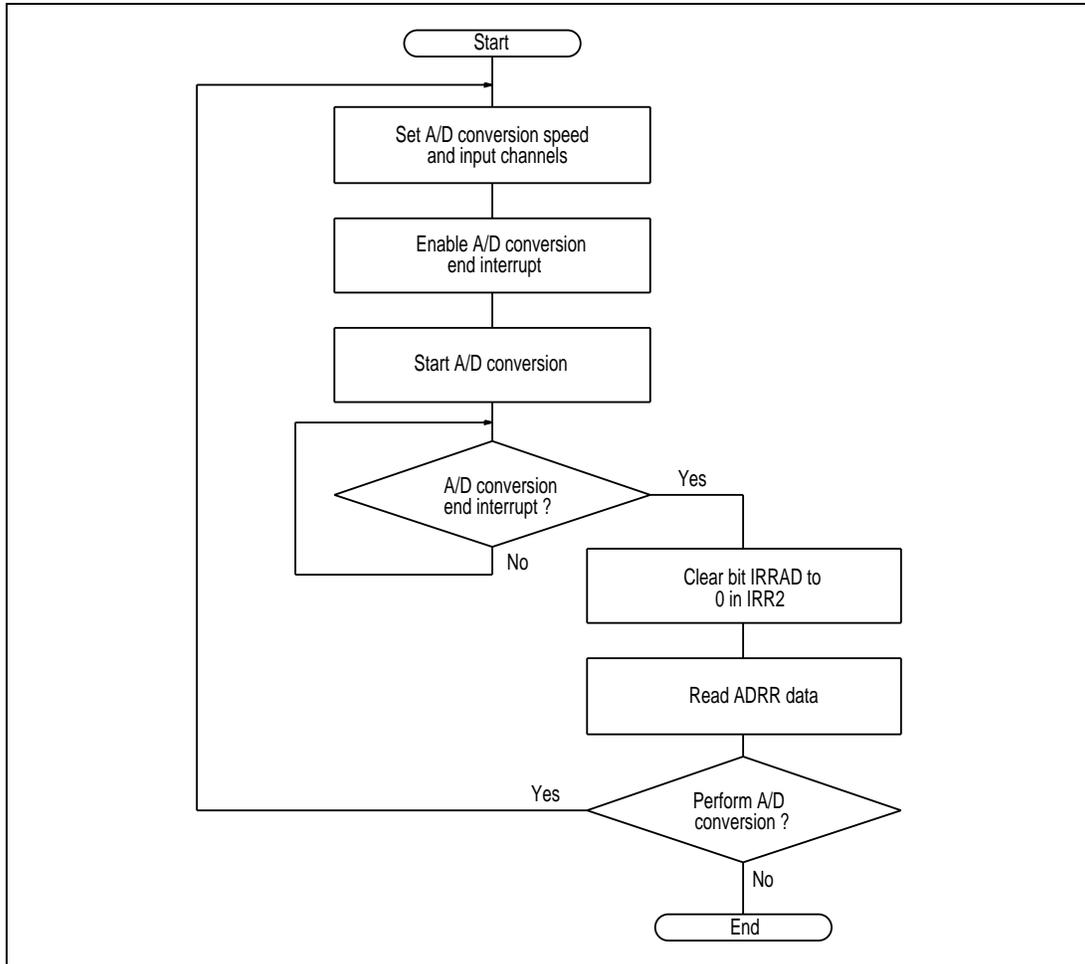


Figure 12-5 Flow Chart of Procedure for Using A/D Converter (2) (Interrupts Used)

12.6 Application Notes

- Data in the A/D result register (ADRR) should be read only when the A/D start flag (ADSF) in the A/D start register (ADSR) is cleared to 0.
- Changing the digital input signal at an adjacent pin during A/D conversion may adversely affect conversion accuracy.

Section 13 LCD Controller/Driver

13.1 Overview

The H8/3877U Series has an on-chip segment-type LCD controller circuit, LCD driver, and power supply circuit, for direct driving of an LCD panel.

13.1.1 Features

Features of the LCD controller/driver are as follows.

- Display capacity

	External Segment		
	Duty	Internal Driver	Expansion Driver
On-chip driver only	--	52 segments	0
Use with external segment expansion driver	Static	48 segments	208 segments
	1/2	48 segments	80 segments
	1/3	48 segments	-
	1/4	48 segments	-

The HD66100 can be used for external expansion of the number of segments.

- LCD RAM capacity
- 8 bits x 32 bytes (256 bits)
- Word access to LCD RAM
- Segment output pins can be switched to general-purpose ports in groups of 4
- Unused common output pins can be used either for boosting common output (by parallel connection) or as ports.
- Displays in all operation modes except standby mode.
- Choice of 11 frame frequencies
- Internal voltage divider for liquid crystal driver power supply

13.1.3 Pin Configuration

Table 13-1 shows the LCD controller/driver pin configuration.

Table 13-1 Pin Configuration

Name	Abbrev.	I/O	Function
Segment output pins	SEG ₅₂ to SEG ₁	Output	Liquid crystal segment driver pins. All pins can be programmed also as ports.
Common output pins	COM ₄ to COM ₁	Output	Liquid crystal common driver pins. Parallel connection is possible at static and 1/2 duty.
External segment expansion signal pins	CL ₁	Output	Display data latch clock; doubles as SEG ₅₂
	CL ₂	Output	Display data shift clock; doubles as SEG ₅₁
	M	Output	LCD alternated signal; doubles as SEG ₄₉
	DO	Output	Serial display data; doubles as SEG ₅₀
LCD power supply	V ₁ , V ₂ , V ₃	Input	For external connection to personal computer or for use of external power supply circuit

13.1.4 Register Configuration

Table 13-2 shows the register configuration of the LCD controller/driver.

Table 13-2 Register Configuration

Name	Abbrev.	R/W	Initial Value	Address
LCD port control register	LPCR	R/W	H'00	H'FFC0
LCD control register	LCR	R/W	H'80	H'FFC1
LCD RAM	--	R/W	Not fixed	H'F760 to H'F77F

13.2 Register Descriptions

13.2.1 LCD Port Control Register (LPCR)

Bit	7	6	5	4	3	2	1	0
	DTS1	DTS0	CMX	SGX	SGS3	SGS2	SGS1	SGS0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

The LCD port control register is an 8-bit read/write register, used for selecting the duty cycle and the LCD driver and pin functions. Upon reset, LPCR is initialized to H'00.

Bits 7 to 5: Duty cycle select and common function select (DTS1, DTS0, CMX)

Bits 7 to 6 select a driver duty of static, 1/2, 1/3, or 1/4. Bit 5 determines whether the common pins not used at a given duty are to be used as ports or, in order to increase the common driving capacity, as multiple pins outputting the same waveform.

Bit 7 DTS1	Bit 6 DTS0	Bit 5 CMX	Duty	Common Driver* ¹	Remarks
0	0	0	Static	COM ₁ (initial value)	COM ₄ , COM ₃ and usable as ports
		1		COM ₄ to COM ₁	COM ₄ , COM ₃ and COM ₂ output the same waveform as COM ₁
0	1	0	1/2 duty	COM ₂ to COM ₁	COM ₄ and COM ₃ usable as ports
		1		COM ₄ to COM ₁	COM ₄ outputs the same waveform as COM ₃ , and COM ₂ the same waveform as COM ₁
1	0	0	1/3 duty	COM ₃ to COM ₁	COM ₄ usable as port
		1		COM ₄ to COM ₁	COM ₄ outputs a non-select waveform* ²
1	1	0	1/4 duty	COM ₄ to COM ₁	--
		1			

Notes: 1. Pins COM₄to COM₁become ports when bit SGX = 0 and bits SGS3 to SGS0 = 0000. Otherwise the common drivers are as indicated in the table above.

2. A non-select waveform is always output at pin COM₄, which therefore should not be used.

Bit 4: Expansion signal select (SGX)

Bit 4 selects whether pins SEG_{52}/CL_1 ,

SEG_{51}/CL_2 , SEG_{50}/DO , and SEG_{49}/M are used as segment pins (SEG_{52} to SEG_{49}) or as external segment expansion pins (CL_1 , CL_2 , DO , M).

Bit 4 Description
SGX

0	Pins SEG_{52} to SEG_{49} *	(initial value)
1	Pins CL_1 , CL_2 , DO , M	

Note: * Selected as ports when bits $SGS3$ to $SGS0 = 0000$.

Bits 3 to 0: Segment driver select ($SGS3$ to $SGS0$)

Bits 3 to 0 select the pins to be used as segment drivers.

Functions of Pins SEG₂₄ to SEG₁

Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	SEG ₂₄ to	SEG ₁₈ to	SEG ₁₂ to	SEG ₆ to	SEG ₀ to	SEG ₂₄ to	SEG ₁₈ to	SEG ₁₂ to	SEG ₆ to	SEG ₀ to	Remarks
SGX	SGS3	SGS2	SGS1	SGS0	SEG ₂₄	SEG ₁₈	SEG ₁₂	SEG ₆	SEG ₀	SEG ₂₄	SEG ₁₈	SEG ₁₂	SEG ₆	SEG ₀	
0	0	0	0	0	Port	Port	Port	Port	Port	Port	Port	Port	Port	Port	(initial value)
0	0	0	1	0	SEG	SEG	Port	Port	Port	Port	Port	Port	Port	Port	
0	0	1	0	0	SEG	SEG	SEG	Port	Port	Port	Port	Port	Port	Port	
0	0	1	1	0	SEG	SEG	SEG	SEG	Port	Port	Port	Port	Port	Port	
0	1	0	0	0	SEG	SEG	SEG	SEG	SEG	Port	Port	Port	Port	Port	
0	1	0	1	0	SEG	SEG	SEG	SEG	SEG	SEG	Port	Port	Port	Port	
0	1	1	0	0	SEG	SEG	SEG	SEG	SEG	SEG	SEG	Port	Port	Port	
0	1	1	1	0	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	Port	Port	
1	*	*	0	0	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	Port	
1	*	*	1	0	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	
1	0	0	0	0	External segment expansio n	Port	Port	Port	Port	Port	Port	Port	Port	Port	
0	0	0	1	0	External segment expansio n	SEG	Port	Port	Port	Port	Port	Port	Port	Port	
0	0	1	0	0	External segment expansio n	SEG	SEG	Port	Port	Port	Port	Port	Port	Port	
0	0	1	1	0	External segment expansio n	SEG	SEG	SEG	Port	Port	Port	Port	Port	Port	
0	1	0	0	0	External segment expansio n	SEG	SEG	SEG	SEG	Port	Port	Port	Port	Port	
0	1	0	1	0	External segment expansio n	SEG	SEG	SEG	SEG	SEG	Port	Port	Port	Port	
0	1	1	0	0	External segment expansio n	SEG	SEG	SEG	SEG	SEG	SEG	Port	Port	Port	

Functions of Pins SEG₃₁ to SEG₁

Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	SEG ₃₁ to	SEG ₂₈	SEG ₃₁ to	SEG ₂₈	SEG ₂₄	SEG ₂₈ to	SEG ₁₆ to	SEG ₁₂ to	SEG ₈ to	SEG ₄ to	Remarks
SGX	SGS3	SGS2	SGS1	SGS0	SEG ₂₉ to	SEG ₂₈	SEG ₂₉ to	SEG ₂₅	SEG ₂₄	SEG ₁₇ to	SEG ₁₃ to	SEG ₉ to	SEG ₅ to	SEG ₁ to	
0	1	1	1		External segment expansion	SEG	SEG	SEG	SEG	SEG	SEG	SEG	Port	Port	
1	*	*	0		External segment expansion	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	Port	
1	*	*	1		External segment expansion	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	SEG	

Note: * Don't care

13.2.2 LCD Control Register (LCR)

Bit	7	6	5	4	3	2	1	0
	—	PSW	ACT	DISP	CKS3	CKS2	CKS1	CKS0
Initial value	1	0	0	0	0	0	0	0
Read/Write	—	R/W	R/W	R/W	R/W	R/W	R/W	R/W

The LCD control register is an 8-bit read/write register for on/off control of the resistive voltage divider used as the LCD driver power supply, for display data control, and for frame frequency selection. Upon reset, LCR is initialized to H'80.

Bit 7: Reserved bit

Bit 7 is reserved; it is always read as 1, and cannot be modified.

Bit 6: Power switch (PSW)

Bit 6 switches the resistive voltage divider provided to power the LCD driver on/off. In low-power modes when the LCD display is not used, or when an external power supply is used for the LCD, the resistive voltage divider can be switched off. When bit ACT = 0, or in standby mode, the resistive voltage divider is in the off state regardless of the bit 6 setting.

Bit 6 Description PSW

0	LCD power supply resistor ladder off	(initial value)
1	LCD power supply resistor ladder on	

Bit 5: Display active (ACT)

Bit 5 selects whether the LCD controller/driver is used or not. When this bit is cleared to 0, the LCD controller/driver module halts operation, and the resistive voltage divider provided for the LCD driver power supply goes to the off state regardless of the PSW setting. However, register contents are retained.

Bit 5 Description ACT

0	LCD controller/driver operation stopped	(initial value)
1	LCD controller/driver operational	

Bit 4: Display data control (DISP)

Bit 4 selects whether the LCD RAM contents are displayed or blank data is displayed regardless of the LCD RAM contents. This bit is valid also when the HD66100 is used for external segment expansion.

Bit 4	Description
DISP	

0	Blank data displayed	(initial value)
1	LCD RAM data displayed	

Bits 3 to 0: Frame frequency select (CKS3 to CKS0)

Bits 3 to 0 select the clock used by the LCD controller/driver, and the frame frequency. In subactive, watch, and subsleep modes the system clock (ϕ) is stopped, so there will be no display in these modes if $\phi/2$ to $\phi/256$ is chosen as the clock source. For display in these modes, clock ϕ_w , $\phi_w/2$, or $\phi_w/4$ must be selected.

Bit 3 CKS3	Bit 2 CKS2	Bit 1 CKS1	Bit 0 CKS0	Clock	Frame Frequency*2		
					$\phi = 5 \text{ MHz}$	$\phi = 625 \text{ kHz}^{*1}$	
0	*	0	0	ϕ_w	128 Hz	128 Hz	(initial value)
0	*	0	1	$\phi_w/2$	64 Hz	64 Hz	
0	*	1	*	$\phi_w/4$	32 Hz	32 Hz	
1	0	0	0	$\phi/2$	--	610 Hz	
1	0	0	1	$\phi/4$	--	305 Hz	
1	0	1	0	$\phi/8$	--	153 Hz	
1	0	1	1	$\phi/16$	610 Hz	76.3 Hz	
1	1	0	0	$\phi/32$	305 Hz	38.1 Hz	
1	1	0	1	$\phi/64$	153 Hz	--	
1	1	1	0	$\phi/128$	76.3 Hz	--	
1	1	1	1	$\phi/256$	38.1 Hz	--	

Notes: * Don't care

1. Frame frequency in active (medium-speed) mode
2. When a duty cycle of 1/3 is chosen, the frame frequency will be 4/3 times the frequencies shown in the above table.

13.3 Operation

13.3.1 Settings Prior to LCD Display

Various decisions related to hardware and software must be made before using the LCD controller/driver with an LCD display. The settings are described below.

1. Hardware settings

- Use at 1/2 duty

To use at 1/2 duty, connect pins V2 and V3 as shown in figure 13-2.

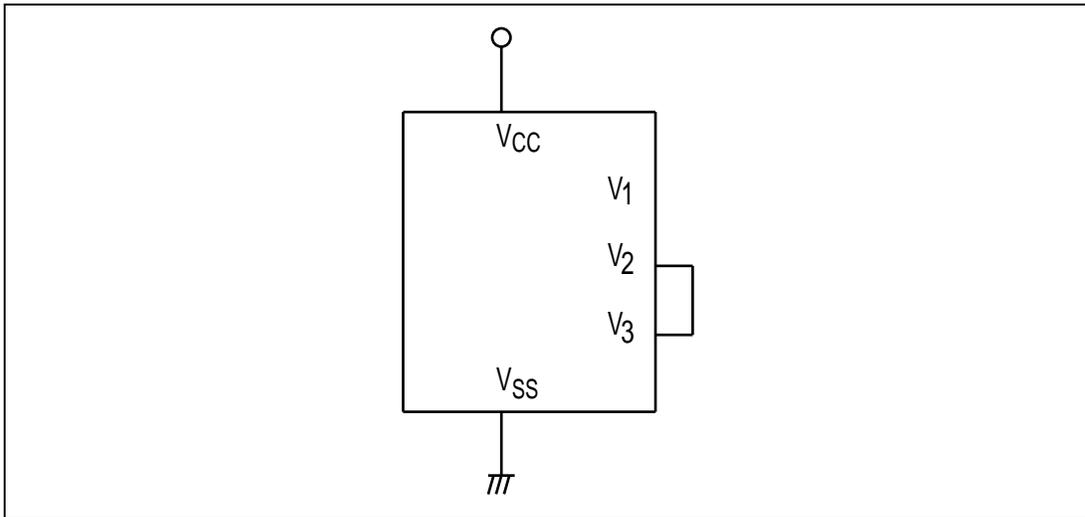


Figure 13-2 LCD Driver Power Supply Processing at 1/2 Duty

- Large-panel display

Because of the large impedance of the built-in resistive voltage divider, the H8/3877U Series LCD controller/driver is not well suited to driving large-panel displays. If a large display is to be used, refer to 13.3.5 on boosting the LCD driver power supply. At static and 1/2 duty it is possible to boost the common output driving capacity. Set bit CMX to 1 when selecting the duty cycle. In this mode, at static duty pins COM₂ to COM₁ output the same waveform, while at 1/2 duty pins COM₂ and COM₁ output the COM₁ waveform and pins COM₄ and COM₃ output the COM₂ waveform.

- Segment expansion
The HD66100 can be connected externally to expand the number of segments. See 13.3.3, Connection to HD66100.
- 2. Software settings
 - Duty cycle selection
The duty cycle is selected in bits DTS1 and DTSS0, with a choice of static, 1/2, 1/3, or 1/4 duty.
 - Segment driver selection
The segment drivers to be used are selected in bits SGS3 to SGS0.
 - Frame frequency selection
The frame frequency is selected in bits CKS3 to CKS0. The frame frequency should be selected depending on the specification of the LCD panel to be used. Refer to 13.3.4, Operation in Power-Down Modes, for information on clock selection in watch mode, subactive mode, and subsleep mode.

13.3.2 Relation of LCD RAM to Display

The relation of the LCD RAM to segments depends on the duty cycle. LCD RAM memory maps for each duty cycle when segments are not expanded externally are shown in figures 13-3 to 13-6. When segments are expanded externally, the LCD RAM memory maps for each duty cycle are as shown in figures 13-7 and 13-8. It is also possible to use only external segments and not use the segment pins on this chip, in which case the LCD RAM memory map is as shown in figure 13-9.

After setting the registers that control the LCD display, write data to the area corresponding to the duty cycle selected, using the same instructions as for the ordinary RAM. If the display is switched on, the data will be displayed automatically. Both word and byte access instructions can be used for writing to the LCD RAM.

13.3.3 Connection to HD66100

To expand the number of segments externally, connect the HD66100 segment chip. One HD66100 chip provides an additional 80 segments. When external segments are used, set bit SGX in LPCR for use of pins SEG_{52} to SEG_{49} , as external segment expansion signal pins. Data will be output starting from LCD RAM pin SEG_{49} . When bits SGS3 to SGS0 in LPCR are set to 0000, data will be output starting from LCD RAM pin SEG_1 .

Figure 13-10 shows typical connections to the HD66100. The output level is determined by the combination of data pins and pin M; but that combination differs from the HD66100. Table 13-3 shows the output level of the LCD driver power supply.

Figure 13-11 shows the common and segment waveforms at each duty.

If bit ACT = 0, then if $CL_2 = 0$, $CL_1 = 0$, and M = 0, DO stops with the data output at that moment (1 or 0). In standby mode the expansion pins are in the high-impedance (floating) state.

External expansion increases the load on the LCD panel, as a result of which the internal power supply may not have sufficient capacity. In that case refer to 13.3.5 on boosting the LCD driver power supply.

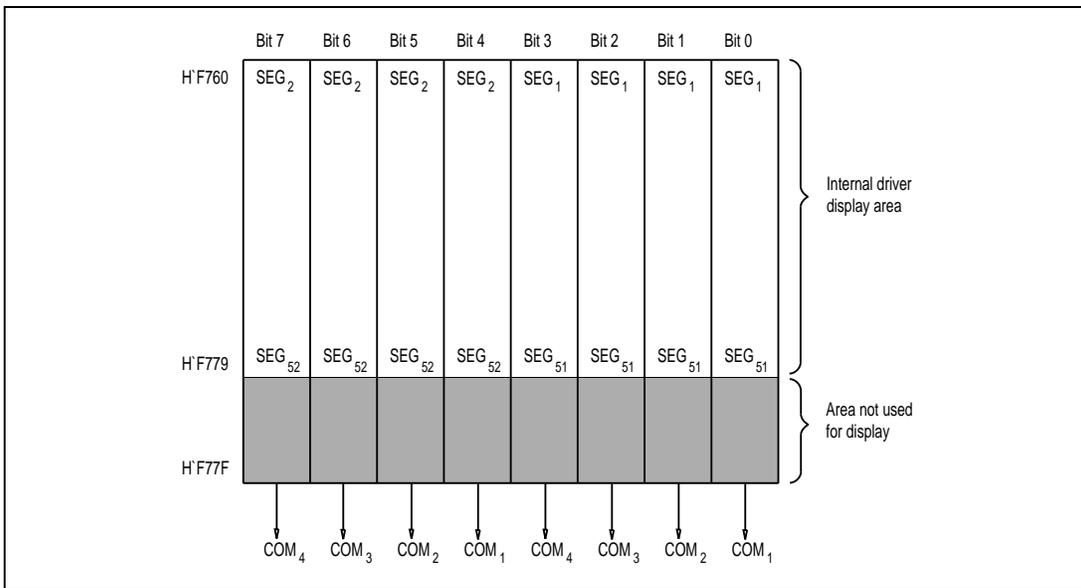


Figure 13-3 LCD RAM Map 1: No External Segment Expansion (1/4 Duty)

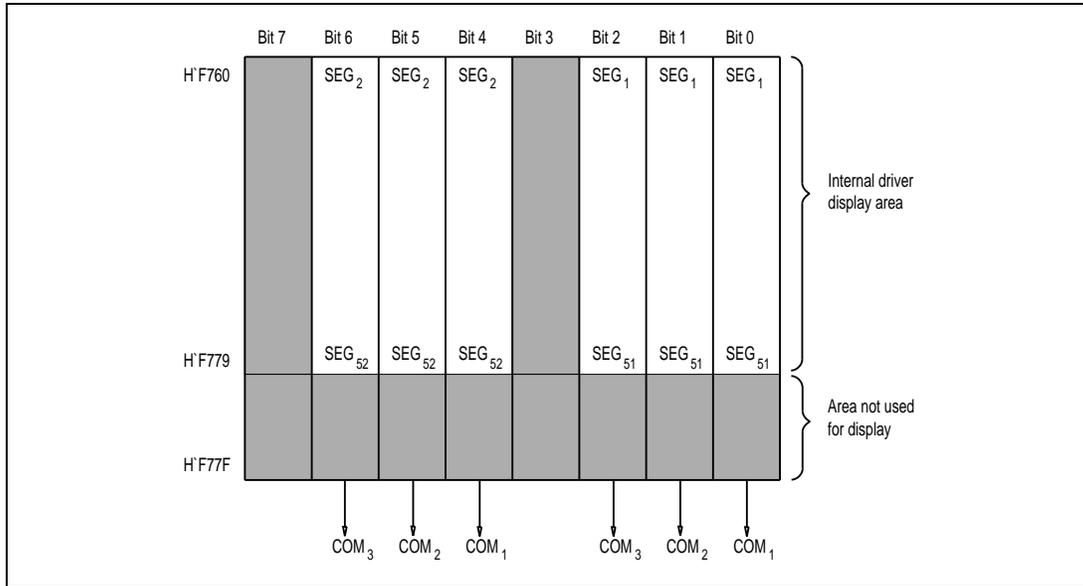


Figure 13-4 LCD RAM Map 2: No External Segment Expansion (1/3 Duty)

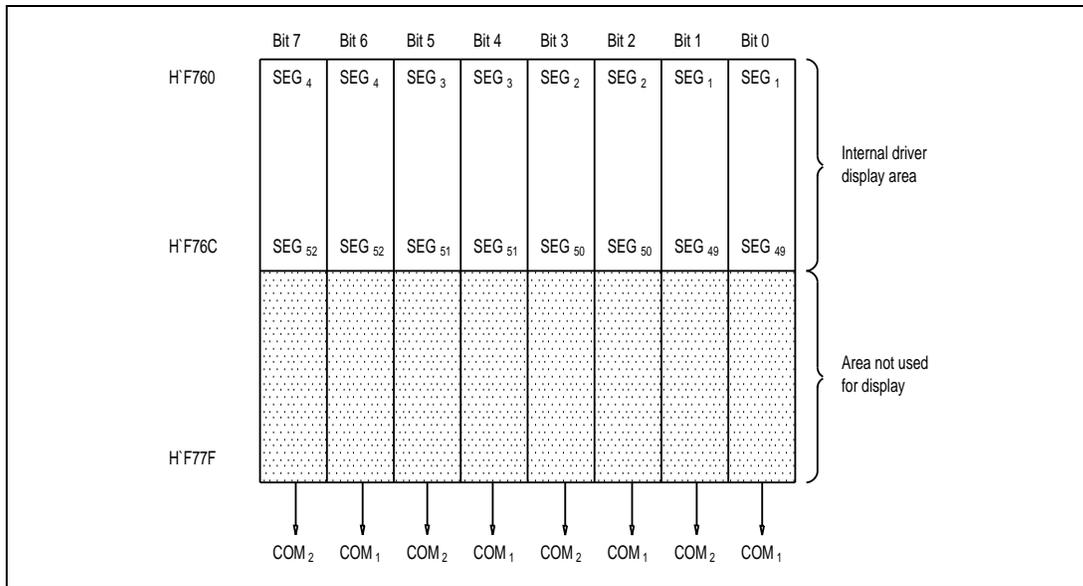


Figure 13-5 LCD RAM Map 3: No External Segment Expansion (1/2 Duty)

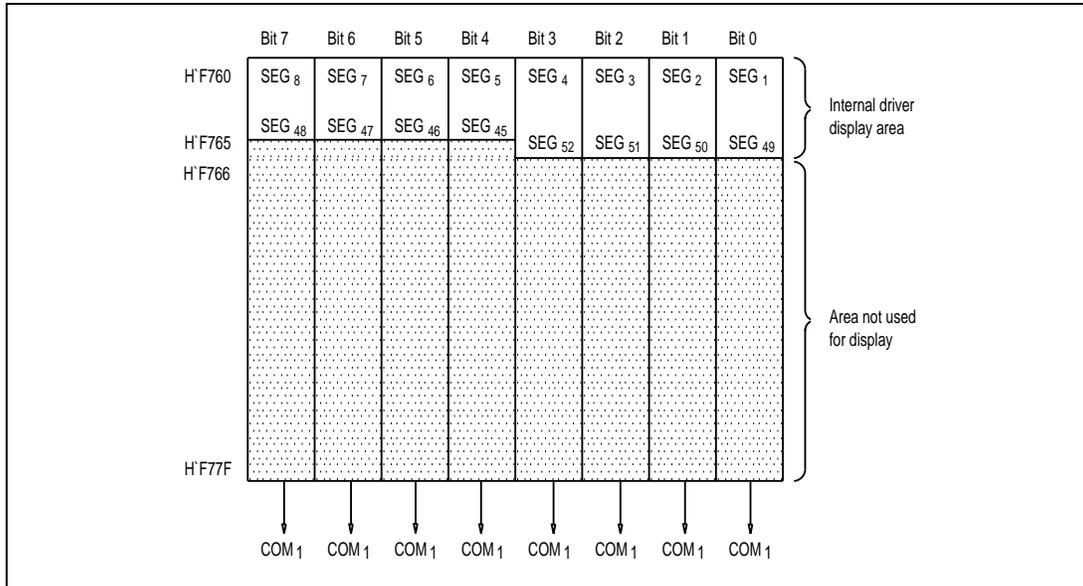


Figure 13-6 LCD RAM Map 4: No External Segment Expansion (Static Duty)

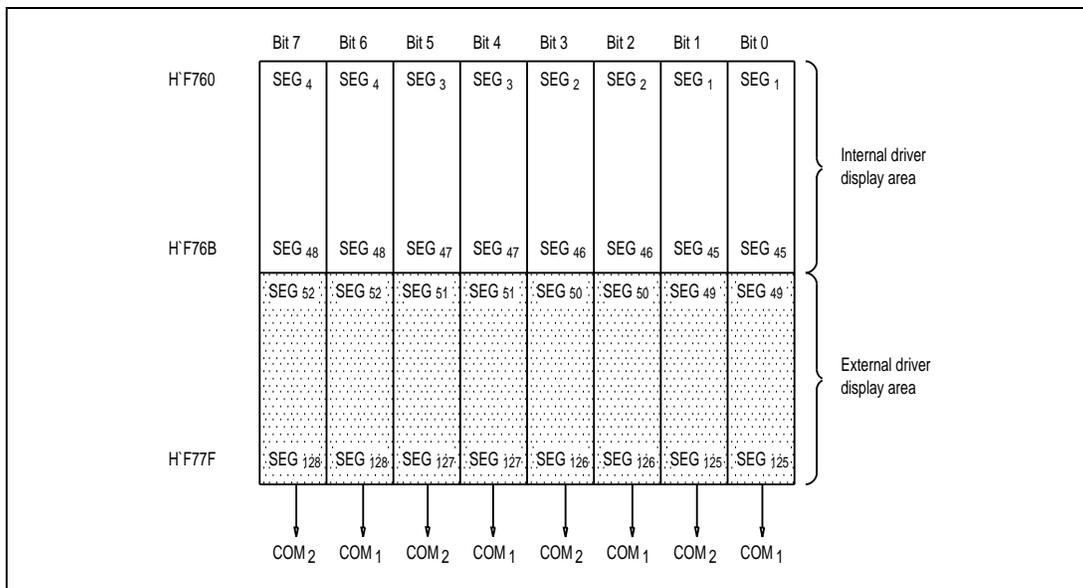


Figure 13-7 LCD RAM Map 1: External Segment Expansion (1/2 Duty)

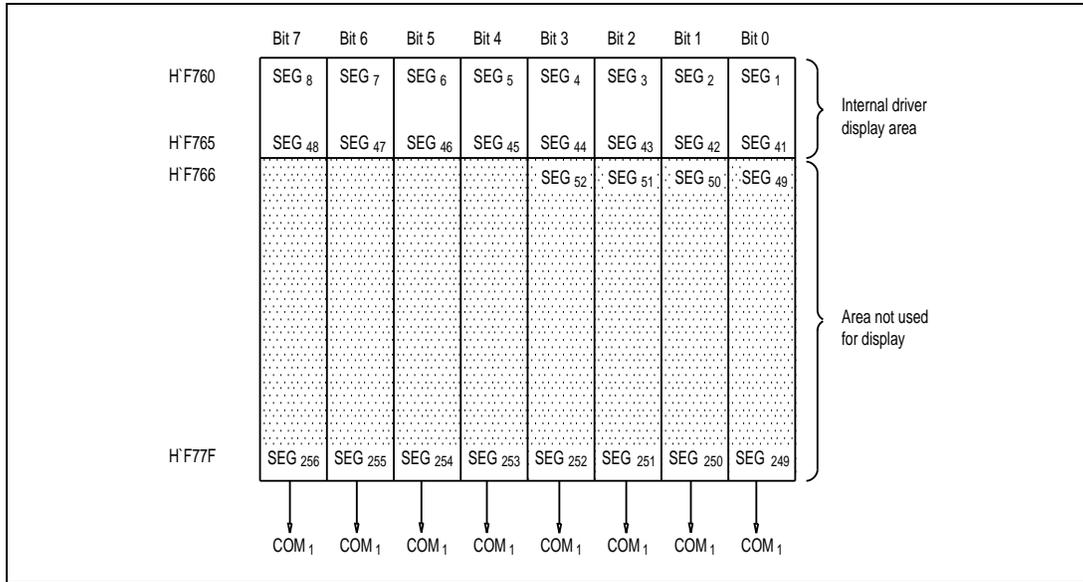


Figure 13-8 LCD RAM Map 2: External Segment Expansion (Static Duty)

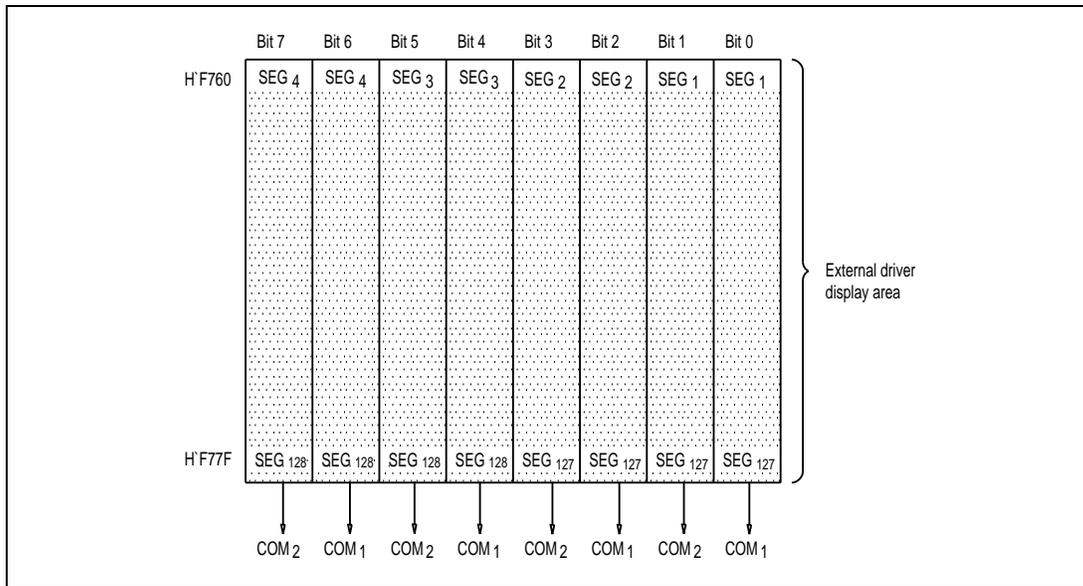


Figure 13-9 LCD RAM Map When All External Segments are Used (Example: SGX = 1, SGS3 to SGS0 = 0000, 1/2 Duty)

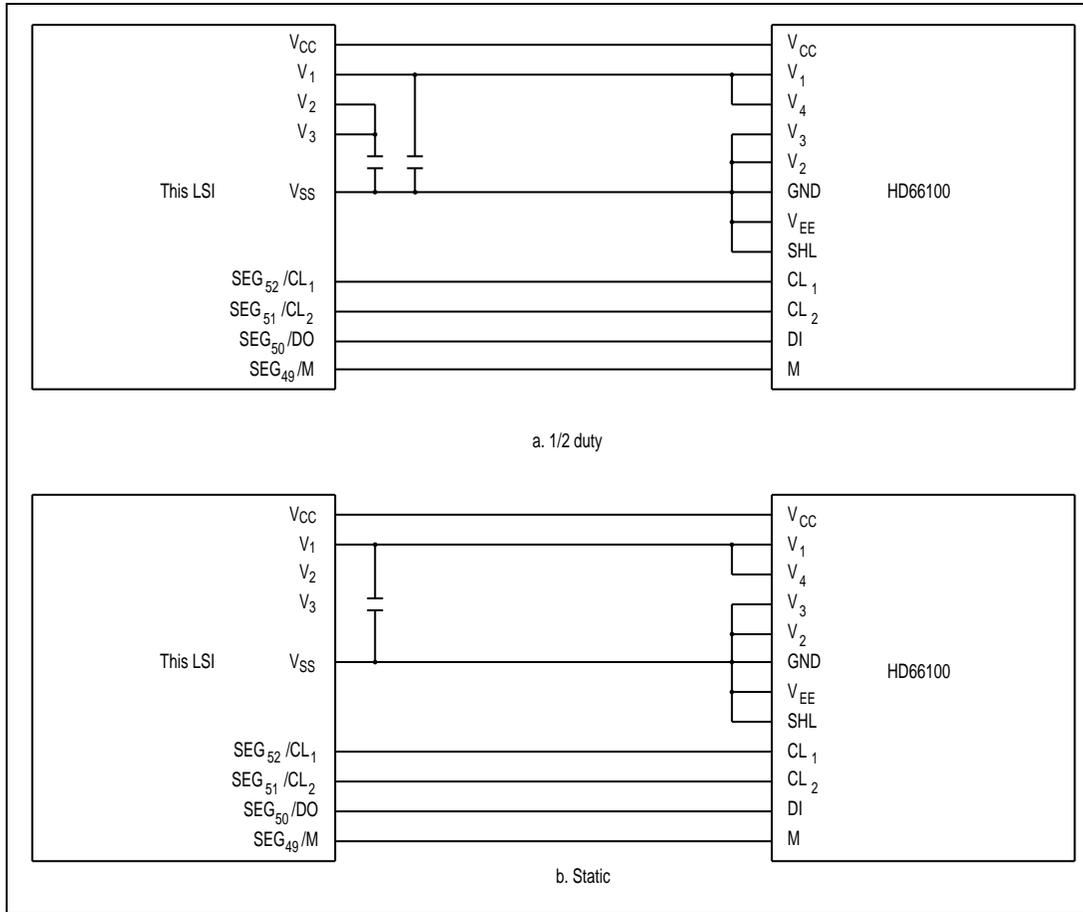


Figure 13-10 Connection to HD66100

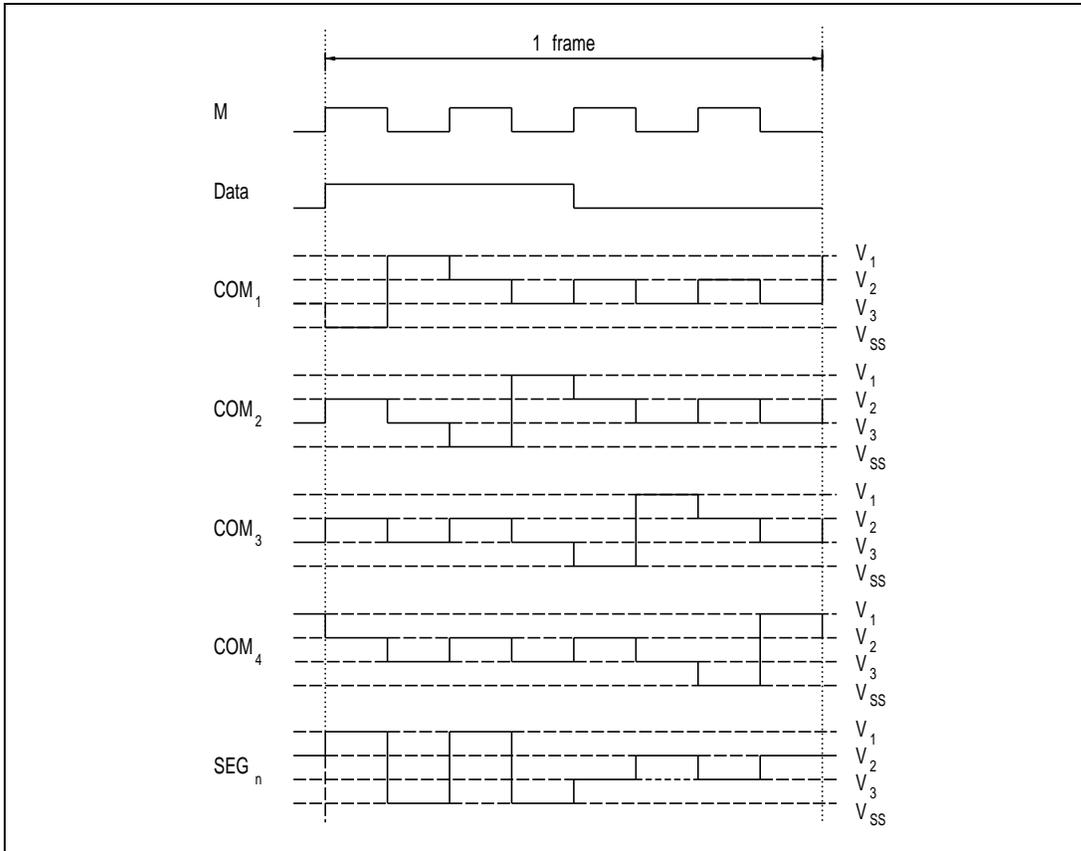


Figure 13-11 (a) Waveforms at 1/4 Duty

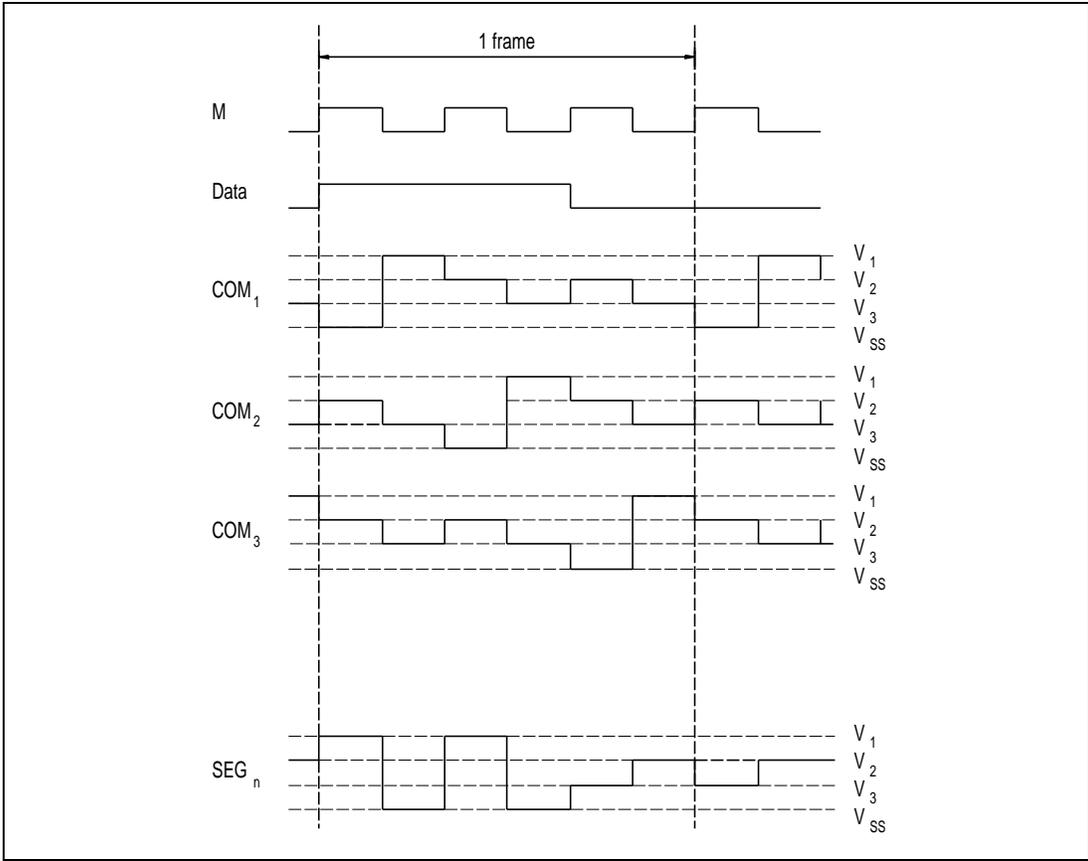


Figure 13-11 (b) Waveforms at 1/3 Duty

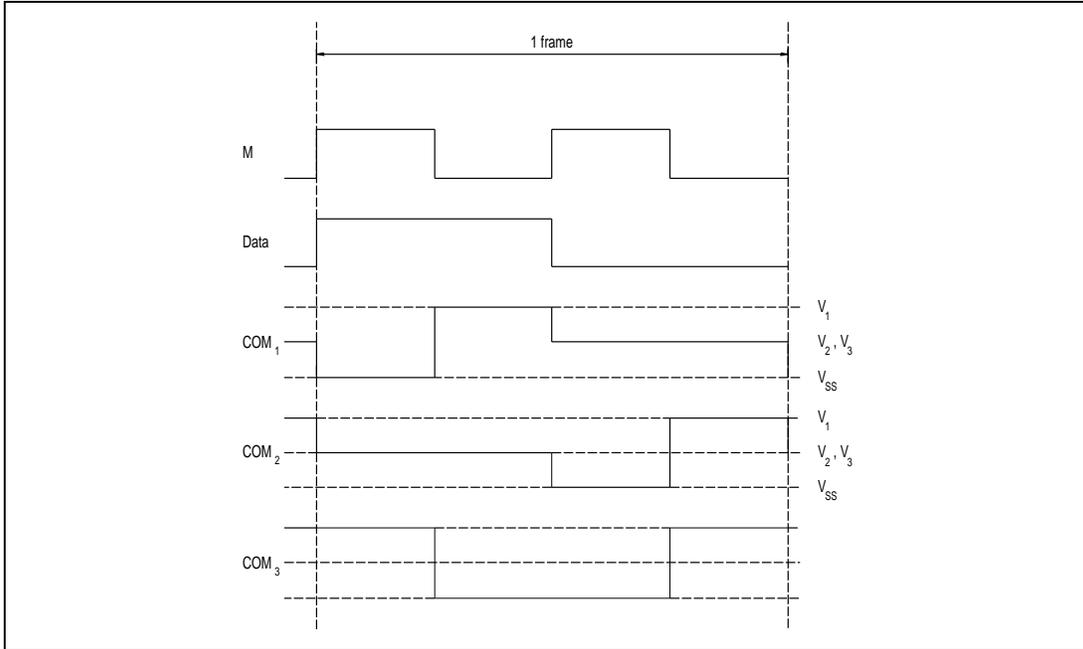


Figure 13-11 (c) Waveforms at 1/2 Duty

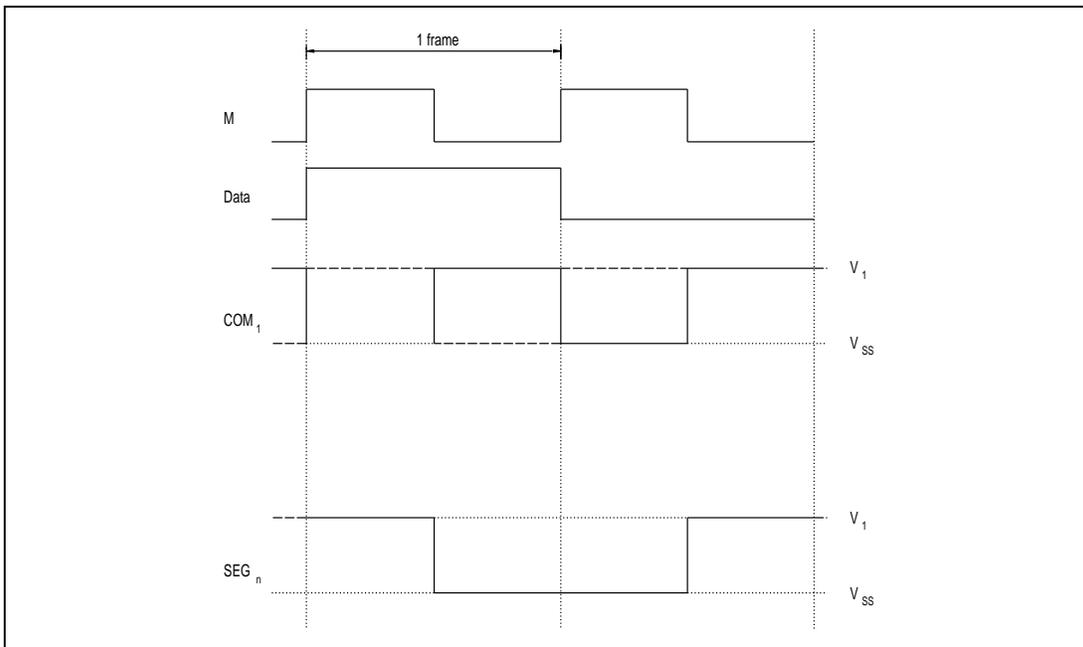


Figure 13-11 (d) Waveforms at Static Duty

Table 13-3 Output Levels

Data		0	0	1	1
M		0	1	0	1
Static	Common output	V_1	V_{ss}	V_1	V_{ss}
	Segment output	V_1	V_{ss}	V_{ss}	V_1
1/2 duty	Common output	V_2, V_3	V_2, V_3	V_1	V_{ss}
	Segment output	V_1	V_{ss}	V_{ss}	V_1
1/3 duty	Common output	V_3	V_2	V_1	V_{ss}
	Segment output	V_2	V_3	V_{ss}	V_1
1/4 duty	Common output	V_3	V_2	V_1	V_{ss}
	Segment output	V_2	V_3	V_{ss}	V_1

13.3.4 Operation in Power-Down Modes

The LCD controller/driver can be operated in the low-power modes, as shown in table 13-4.

In the subactive, watch, and subsleep modes, the system clock pulse generator stops running, so no clock signal will be supplied and the display will be stopped, unless ϕ_w , $\phi_w/2$, or $\phi_w/4$ was selected when setting bits CKS3 to CKS0 in LCR. Since this may result in a direct current being applied to the LCD panel, be sure to select ϕ_w , $\phi_w/2$, or $\phi_w/4$ as the clock if these modes are used. In active (medium-speed) mode the system clock is changed, making it necessary to adjust the frame frequency setting (in bits CKS3 to CKS0) to avoid a change in frame frequency.

Table 13-4 LCD Controller/Driver Operation in Power-Down Modes

Mode		Reset	Active	Sleep	Watch	Subactive	Subslee p	Standby
Clock	ϕ	Running	Running	Running	Stopped	Stopped	Stopped	Stopped
	ϕ_w	Running	Running	Running	Running	Running	Running	Stopped* ¹
Display	ACT = 0	Stopped	Stopped	Stopped	Stopped	Stopped	Stopped	Stopped* ²
	ACT = 1	Stopped	On	On	On* ³	On* ³	On* ³	Stopped* ²

- Notes:
1. The subclock pulse generator does not stop, but clock supply is stopped.
 2. The LCD driver power supply resistor ladder resistance is off regardless of bit PSW.
 3. The display will not function unless ϕ_w , $\phi_w/2$, or $\phi_w/4$ is selected as the clock.

13.3.5 Boosting the LCD Driver Power Supply

When a large LCD panel is driven, or if segments are expanded externally, the built-in power supply capacity may be insufficient, making it necessary to lower the power supply impedance. One method, shown in figure 13-10, is to connect a bypass capacitor of around $0.1\ \mu\text{F}$ to $0.3\ \mu\text{F}$ to pins V_1 , V_2 , and V_3 . Another approach, shown in figure 13-12 below, is to connect a resistive voltage divider externally.

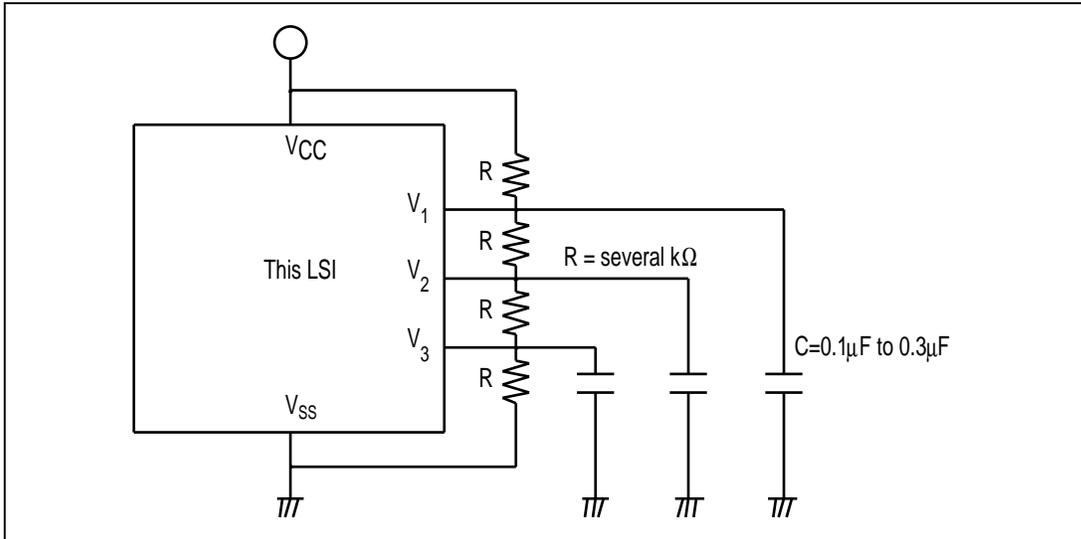


Figure 13-12 Connecting an External Resistive Voltage Divider

Section 14 Multitone Generator

14.1 Overview

The H8/3877U Series has an on-chip multitone generator that can output an arbitrary waveform at an arbitrary frequency.

14.1.1 Features

Features of the multitone generator are as follows.

- Arbitrary frequencies can be selected in the range from 40 Hz to 4000 Hz (when the clock frequency f_{osc} at the OSC pins is 10 MHz).

Output Frequency Range	Step	Error
40 HZ to 1000 Hz	0.1 Hz and above	± 0.05 Hz or less
1000 Hz to 3000 Hz	1 Hz and above	± 0.5 Hz or less
3000 Hz to 4000 Hz	2 Hz and above	± 1 Hz or less

The output frequency is generated by using a frame counter and fine-tuning counter to divide the OSC clock frequency (f_{osc}).

- A stable waveform can be output with low distortion.
- The waveform is output by an R - 2R D/A converter circuit with 5-bit resolution. One cycle can be divided into up to 128 segments for a stable waveform with low distortion.
- Arbitrary waveform patterns can be created by setting bit patterns in MTG RAM (maximum 128 bits).
- An interrupt request is generated at half-cycle points in the multitone waveform.

14.1.2 Block Diagram

Figure 14-1 shows a block diagram of the multitone generator.

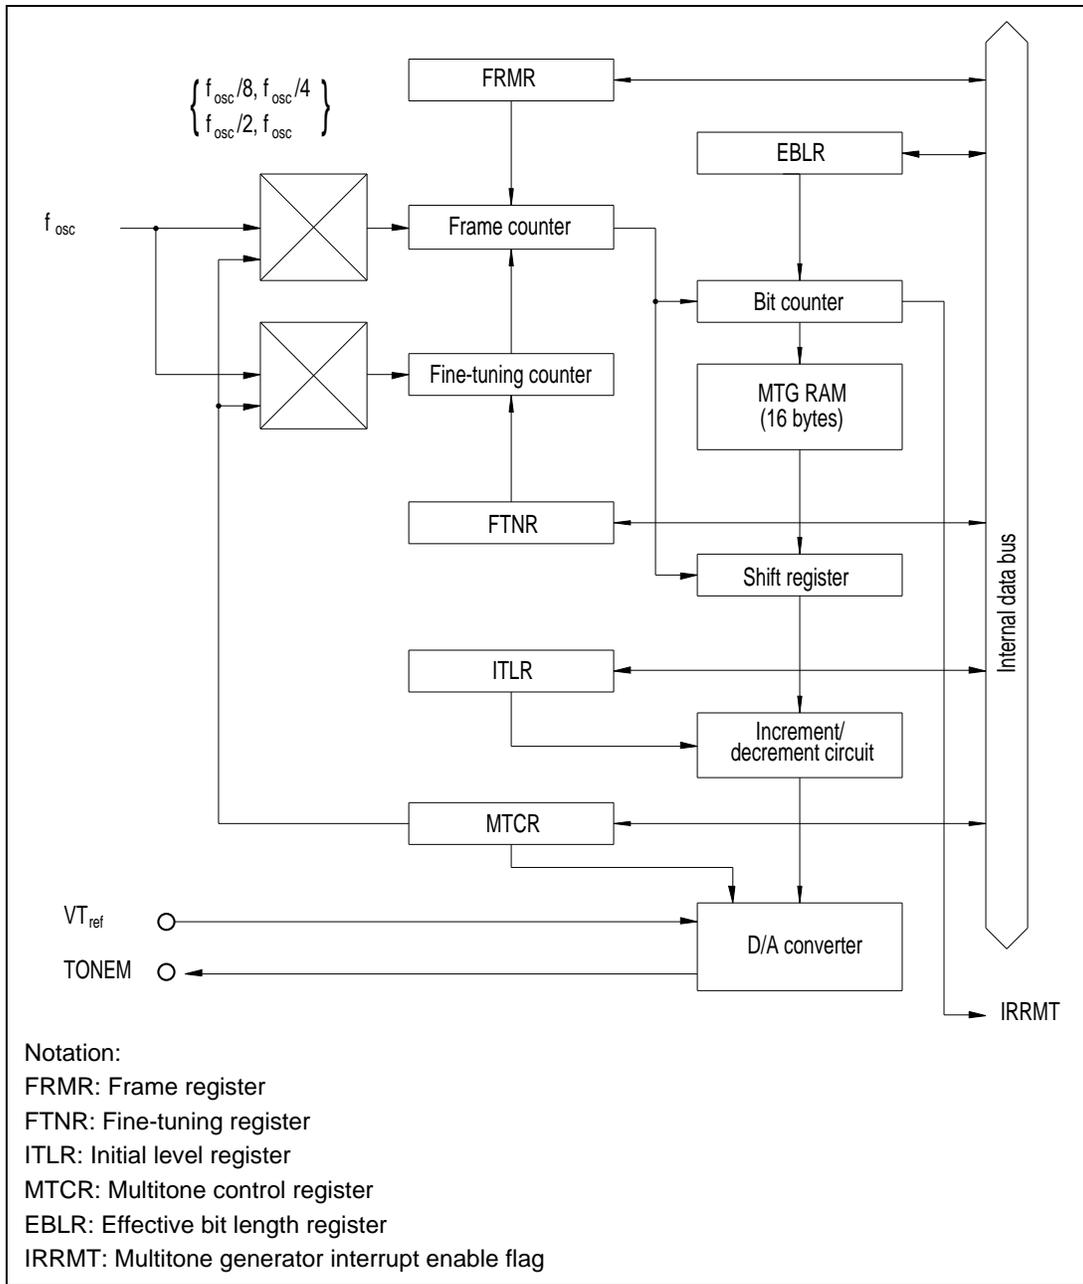


Figure 14-1 Multitone Generator Block Diagram

14.1.3 Pin Configuration

Table 14-1 shows the pin configuration of the multitone generator.

Table 14-1 Pin Configuration

Name	Abbrev.	I/O	Function
Multitone output reference level power supply pin	VT_{ref}	--	Reference-level voltage for multitone output
Multitone signal output pin	TONEM	Output	Multitone signal output

14.1.4 Register Configuration

Table 14-2 shows the register configuration of the multitone generator.

Table 14-2 Multitone Generator Registers

Name	Abbrev.	R/W	Initial Value	Address
Multitone control register	MTCR	R/W	H'10	H'FF90
Effective bit length register	EBLR	R/W	H'80	H'FF91
Frame register	FRMR	R/W	H'00	H'FF92
Fine-tuning register	FTNR	R/W	H'00	H'FF93
Initial level register	ITLR	R/W	H'E0	H'FF94
MTG RAM	--	R/W	Undefined	H'FF80 to H'FF8F

14.2 Register Descriptions

14.2.1 Multitone Control Register (MTCR)

Bit	7	6	5	4	3	2	1	0
	DAOE	MTEN	DIR	-	FR1	FR0	FT1	FT0
Initial value	0	0	0	1	0	0	0	0
Read/Write	R/W	R/W	R/W	-	R/W	R/W	R/W	R/W

MTCR is an 8-bit read/write register that enables D/A output, enables operation of the multitone generator, specifies the initial direction of change of the output level, and selects the clock sources of the frame counter and fine-tuning counter.

Upon reset, MTCR is initialized to H'10.

Bit 7: D/A output enable (DAOE)

Bit 7 enables or disables analog output at the TONEM pin.

Bit 7	Description
DAOE	

0	Analog output is disabled (high impedance)	(initial value)
1	Analog output is enabled	

Bit 6: Multitone generator enable (MTEN)

Bit 6 enables or disables operation of the multitone generator.

Bit 6	Description
MTEN	

0	The multitone generator is halted	(initial value)
1	The multitone generator operates	

Bit 5: Initial direction (DIR)

Bit 5 specifies the initial direction of change (increment or decrement) of the analog output level from the TONEM pin when the multitone generator starts operating.

Bit 5	Description
DIR	

0	The level is initially incremented	(initial value)
1	The level is initially decremented	

A setting of DIR = 0 is invalid if bits 4 to 0 in the initial level register are set to 11111. A setting of DIR = 1 is invalid if these bits are set to 00000.

Bit 4: Reserved bit

Bit 4 is reserved; it is always read as 1, and cannot be modified.

Bits 3 and 2: Frame counter clock source select 1 and 0 (FR1, FR0)

Bits 3 and 2 select the frame counter clock source. That is, they select the division ratio of the OSC clock (f_{osc}). The clock source should be changed only when MTEN = 0.

Bit 3	Bit 2	Description
FR1	FR0	

0	0	Division ratio = t_{osc} (counter clock = f_{osc})
0	1	Division ratio = $2t_{osc}$ (counter clock = $f_{osc}/2$)
1	0	Division ratio = $4t_{osc}$ (counter clock = $f_{osc}/4$)
1	1	Division ratio = $8t_{osc}$ (counter clock = $f_{osc}/8$)

Bits 1 and 0: Fine-tuning counter clock source select 1 and 0 (FT1, FT0)

Bits 1 and 0 select the fine-tuning counter clock source. That is, they select the division ratio of the OSC clock (f_{osc}). The clock source should be changed only when MTEN = 0.

Bit 1	Bit 0	Description
FT1	FT0	

0	0	Division ratio = t_{osc} (counter clock = f_{osc})
0	1	Division ratio = $2t_{osc}$ (counter clock = $f_{osc}/2$)
1	0	Division ratio = $4t_{osc}$ (counter clock = $f_{osc}/4$)
1	1	Division ratio = $8t_{osc}$ (counter clock = $f_{osc}/8$)

14.2.2 Effective Bit Length Register (EBLR)

Bit	7	6	5	4	3	2	1	0
	-	EBL6	EBL5	EBL4	EBL3	EBL2	EBL1	EBL0
Initial value	1	0	0	0	0	0	0	0
Read/Write	-	R/W						

EBLR is an 8-bit read/write register that specifies the effective bit length (position of the last bit) on MTG RAM.

Upon reset, EBLR is initialized to H'80.

Bit 7: Reserved bit

Bit 7 is reserved; it is always read as 1, and cannot be modified.

Bits 6 to 0: Effective bit length 6 to 0 (EBL6 to EBL0)

Bits 6 to 0 specify the effective bit length (position of the last bit) of the bit pattern set on MTG RAM. The register setting is the effective bit length minus 1. EBLR should be set to a value of H'83 or greater.

The effective bit length should be changed only when MTEN = 0 in MTCR.

14.2.3 Frame Register (FRMR)

Bit	7	6	5	4	3	2	1	0
	FRM7	FRM6	FRM5	FRM4	FRM3	FRM2	FRM1	FRM0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

FRMR is an 8-bit read/write register that specifies the reload value of the frame counter (the period of 1 bit frame in the bit pattern).

The reload value is automatically reloaded into the frame counter. The frame counter starts counting down from that value. When the counter value reaches H'01, the frame counter is reloaded with the reload value, and starts counting down from that value again. FRMR should be set to a value of H'02 or greater.

The frame counter reload value should be changed only when MTEN = 0 in MTCR.

Upon reset, FRMR is initialized to H'00.

14.2.4 Fine-Tuning Register (FTNR)

Bit	7	6	5	4	3	2	1	0
	FTN7	FTN6	FTN5	FTN4	FTN3	FTN2	FTN1	FTN0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

FTNR is an 8-bit read/write register that specifies the reload value of the fine-tuning counter.

The reload value is automatically reloaded into the fine-tuning counter. The fine-tuning counter starts counting down from that value. When the counter value reaches H'01, the fine-tuning counter is reloaded with the reload value, and starts counting down from that value again.

The fine-tuning counter reload value should be changed only when MTEN=0 in MTCR.

Upon reset, FTNR is initialized to H'00.

14.2.5 Initial Level Register (ITLR)

Bit	7	6	5	4	3	2	1	0
	-	-	-	ITL4	ITL3	ITL2	ITL1	ITL0
Initial value	1	1	1	0	0	0	0	0
Read/Write	-	-	-	R/W	R/W	R/W	R/W	R/W

ITLR is an 8-bit read/write register that specifies the analog output level when the multitone generator starts operating.

Upon reset, ITLR is initialized to H'E0.

Bits 7 to 5: Reserved bits

Bits 7 to 5 are reserved; they are always read as 1, and cannot be modified.

Bits 4 to 0: Initial level 4 to 0 (ITL4 to ITL0)

Bits 4 to 0 specify the initial analog level output from the TONEM pin when the multitone generator starts operating. The multitone generator commences output from this initial level, then changes the level according to the bit pattern.

14.3 Operation

14.3.1 Output Waveform

The multitone generator outputs a staircase approximation to a sine wave or other analog waveform (figure 14-2).

One step in the staircase waveform consists of one or more bit frames produced by dividing the OSC clock frequency (f_{osc}) in the frame counter. The EBLR setting determines the number of bit frames in one cycle of the waveform.

The output frequency is f_{osc} divided by the frame counter and by the effective bit length. The fine-tuning counter can also be used to fine-tune the output frequency.

The output level changes according to the bit pattern on MTG RAM. Any bit pattern can be set, to generate an arbitrary waveform.

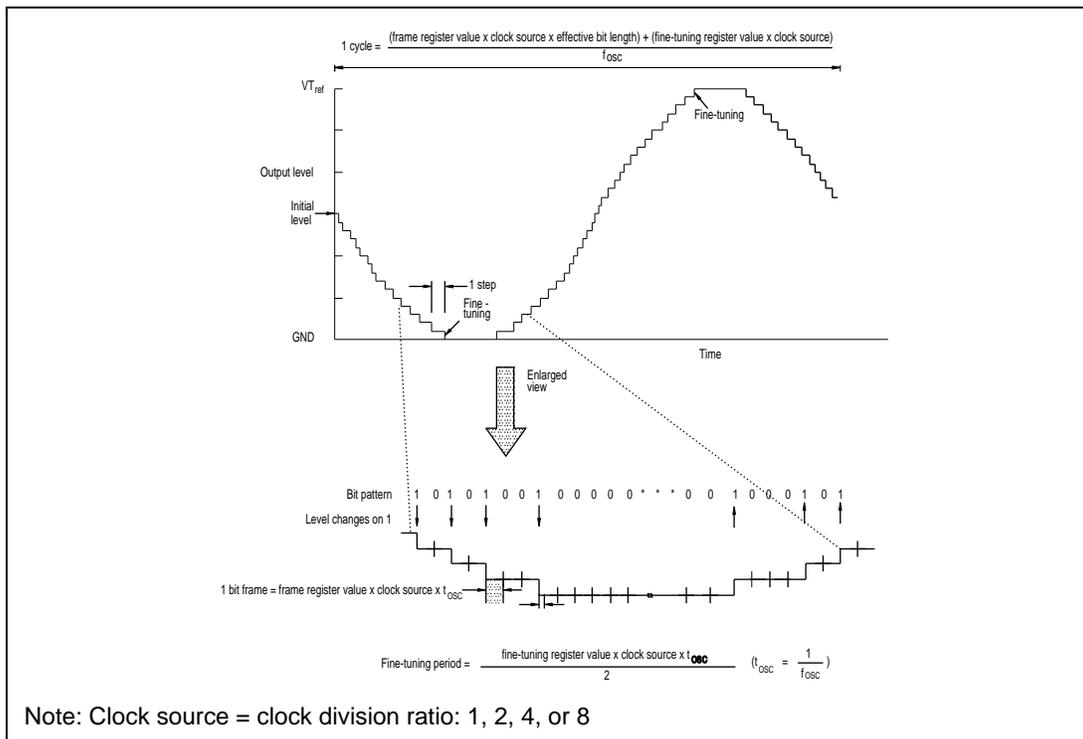


Figure 14-2 Multitone Generator Output Waveform

14.3.2 Flow of Operation

Figure 14-3 shows a flow chart of the operation of the multitone generator. The circled numbers in the flow chart correspond to the numbers of the steps below.

- 1 Initial setup: set desired values in the DIR, FR1, FR0, FT1, and FT0 bits in MTCR, and in EBLR, FRMR, FTNR, and ITLR, and write bit pattern data in MTG RAM.
- 2 Set the DAOE and MTEN bits to 1 in MTCR. The multitone generator starts operating at this point.
- 3 The initial output level set in ITLR is output from the TONEM pin. The level will start changing in the direction (increment or decrement) specified by the DIR bit in MTCR.
- 4 During each bit frame the output level is held constant. The length of a bit frame is the frame register value \times frame counter clock source (clock division ratio) $\times t_{osc}$.
- 5 The output level changes according to the bit pattern. Wherever a 1 occurs in the bit pattern the output level is incremented or decremented by $1/32$ of $V_{T_{ref}}$. Where a 0 occurs in the bit pattern the output level is held fixed.
- 6 The output level is checked when incremented or decremented. If the output level is at its maximum or minimum value, that level is output for one-half the fine-tuning interval to fine-tune the output frequency. One-half the fine-tuning interval is the fine-tuning register value \times fine-tuning counter clock source (clock division ratio) $\times t_{osc} \times 1/2$. If the value in the fine-tuning register is odd, fine-tuning is extended by one count at the minimum level. If the value in the fine-tuning register is even, fine-tuning is extended by one count at both the maximum and minimum levels.
- 7 The bit counter is incremented to move on to the next bit in the bit pattern. If this does not make the bit counter value equal to the effective bit length, the process returns to step (4). If the bit counter value equals the effective bit length (the end of one output cycle), the bit counter is cleared.
- 8 After the bit counter is cleared in step (7), the MTEN bit in MTCR is checked. If MTEN is 1, the multitone generator returns to step (4) and continues operating. If MTEN is 0, operation halts. MTEN can be set or cleared at any point in the output cycle. (The same applies to output from the TONEM pin and the setting or clearing of the DAOE bit in MTCR.)

Always clear MTEN to 0 to halt the multitone generator before changing the clock source of the frame counter or fine-tuning counter (bits FR1, FR0, FT1, and FT0 in MTCR), the effective bit length (EBLR), or the reload value of the frame counter or fine-tuning counter (FRMR, FTNR). Other parameters can be changed at any time.

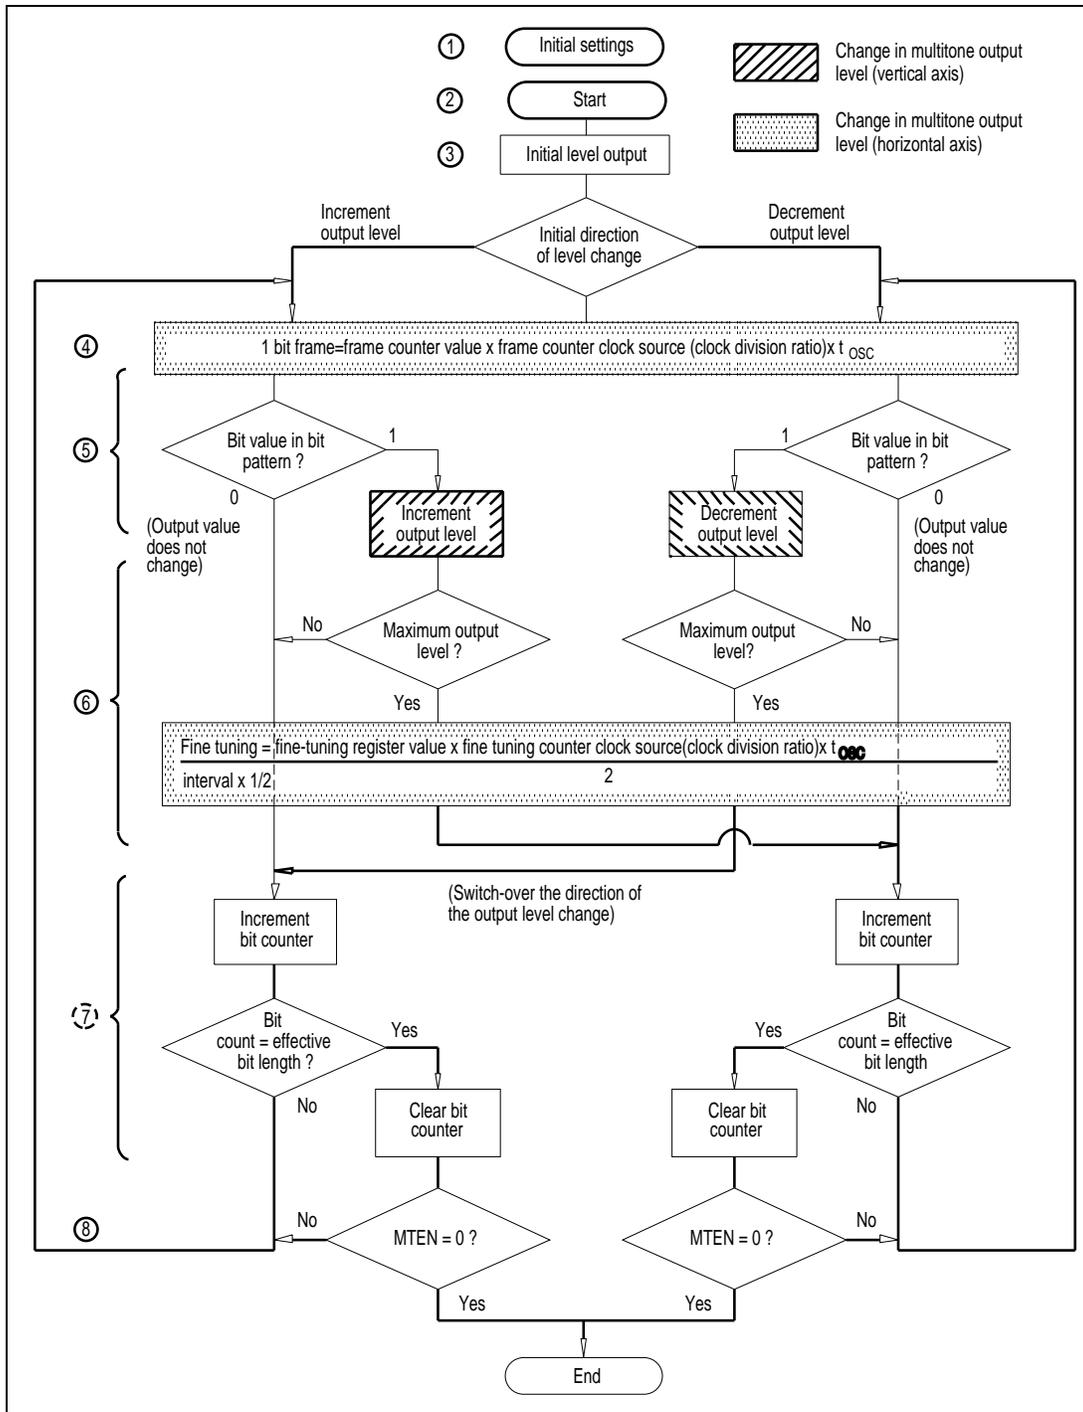


Figure 14-3 Flow Chart of Multitone Generator Operation

14.4 Register Settings

14.4.1 How to Calculate Register Settings

The settings of the frame register and fine-tuning register can be calculated as explained below from the OSC clock frequency (f_{osc}) and the desired output frequency (the set frequency). Symbols used in the explanation are defined as follows.

f_{osc} : OSC clock frequency

f: Set frequency

f_{out}: Output frequency

D1: Frame counter clock source (clock division ratio; 1, 2, 4, or 8)

D2: Fine-tuning counter clock source (clock division ratio; 1,2,4, or 8)

n: Total division ratio

BL: Effective bit length (4 to 128)

C1: Frame register value (frame counter reload value; 2 to 255)

C2: Fine-tuning register value (fine-tuning counter reload value; 0 to 255)

σ : Frequency deviation

Parameter relationships

The output frequency (f_{out}) is obtained by dividing the OSC clock frequency(f_{osc}) and is expressed as follows:

$$f_{out} = f_{osc} / (BL \cdot C1 \cdot D1 + C2 \cdot D2) (\approx f) \dots (1)$$

- 1 From the OSC clock frequency (f_{osc}) and set frequency (f), calculate the total division ratio (n), which is equivalent to the denominator in equation (1).

$$n \approx f_{osc} / f \quad (\text{round off } n \text{ to the nearest integer})$$

- 2 Divide the total division ratio (n) by the effective bit length (BL) and frame counter clock source (clock division ratio, D1) to obtain the frame register value (C1). If the result is greater than 255, increase D1 to obtain a result of 255 or less.

$$C1 \approx n / BL / D1 \quad (\text{round } C1 \text{ down to the nearest lower integer, since fine-tuning is always in the positive})$$

direction)

- 3 Subtract the effective bit time (BL.C1.D1) from the total division ratio (n) to obtain the fine-tuning time (C2.D2). If the result is greater than 255, increase D2 to obtain a result of 255 or less, as in step 2.

$$C2 \approx (n - \text{BL.C1.D1})/D2 \quad (\text{round off } C2 \text{ to the nearest integer})$$

- 4 Substitute the settings found in steps (1) to (3) into equation (1) to calculate the output frequency (f_{out}).
- 5 The frequency deviation (σ) can be calculated from the set frequency and output frequency.

$$\sigma = (f_{\text{out}} - f) / f \times 100(\%)$$

14.4.2 Typical Register Settings

Table 14-3 shows typical settings of the multitone generator registers. The setting of the effective bit length register (EBLR) should be the value shown in table 14-3 minus 1. The effective bit length in these settings been adjusted so that the fine-tuning interval does not exceed 1% of the cycle length.

Table 14-3 Typical Multitone Generator Register Settings (1)

OSC Clock (MHz)	Set Frequency (Hz)	Total Division Ratio	Effective Bit Length	Frame Counter		Fine Tuning Counter		Output Frequency(Hz)	Frequency Deviation (%)
				Reload Value ¹	Clock Source ²	Reload Value ³	Clock Source ⁴		
10	40.0	250000	125	250	8	0	1	40.0000	±0.0
	40.1	249377	125	249	8	188	2	40.1001	±0.0002
	1000	10000	125	80	1	0	1	1000.00	±0.0
	1001	9990	128	78	1	6	1	1001.00	±0.0001
	3998	2501	125	20	1	1	1	3998.40	±0.0100
	4000	2500	125	20	1	0	1	4000.00	±0.0
9.834	40.0	245760	128	240	8	0	1	40.0000	±0.0
	40.1	245147	124	247	8	123	1	40.1000	±0.0001
	1000	9830	126	78	1	2	1	1000.04	±0.0041
	1001	9821	109	90	1	11	1	1000.96	-0.0043
	3998	2459	117	21	1	2	1	3997.72	-0.0069
	4000	2458	117	21	1	1	1	3999.35	-0.0163
8	40.0	200000	125	200	8	0	1	40.0000	±0.0
	40.1	199501	107	233	8	53	1	40.1000	±0.0001
	1000	8000	125	64	1	0	1	1000.00	±0.0
	1001	7992	121	66	1	6	1	1001.00	±0.0001
	3998	2001	125	16	1	1	1	3998.00	±0.0000
	4000	2000	125	16	1	0	1	4000.00	±0.0
7.3723	40.0	184320	128	180	8	0	1	40.0000	±0.0
	40.1	183860	111	207	8	44	1	40.1001	±0.0002
	1000	7373	110	67	1	3	1	999.97	-0.0027
	1001	7365	115	64	1	5	1	1001.06	±0.0059
	3998	1844	115	16	1	4	1	3998.26	±0.0066
	4000	1843	115	16	1	3	1	4000.43	±0.0109
6	40.0	150000	125	150	8	0	1	40.0000	±0.0
	40.1	149626	110	170	8	26	1	40.10000	-0.0000
	1000	6000	125	48	1	0	1	1000.00	±0.0
	1001	5994	111	54	1	0	1	1001.00	±0.0001
	3998	1501	125	12	1	1	1	3997.34	-0.0166
	4000	1500	125	12	1	0	1	4000.00	±0.0

- Notes: 1. Set in register FRMR.
 2. Set in register MTCR (FR1, FR0).
 3. Set in register FTNR.
 4. Set in register MTCR (FT1, FT0).

Table 14-3 Typical Multitone Generator Register Settings (2)

OSC Clock (MHz)	Set Frequency (Hz)	Total Division Ratio	Effective Bit Length	Frame Counter		Fine Tuning Counter		Output Frequency (Hz)	Frequency Deviation (%)
				Reload Value ¹	Clock Source ²	Reload Value ³	Clock Source ⁴		
4.9152	40.0	122880	128	240	4	0	1	40.0000	±0.0
	40.1	122574	111	138	8	30	1	40.0999	-0.0004
	1000	4915	126	39	1	1	1	1000.04	±0.0041
	1001	4910	109	45	1	5	1	1001.06	±0.0059
	3998	1229	111	11	1	8	1	3999.35	±0.0337
	4000	1229	111	11	1	8	1	3999.35	-0.0163
4.19304	40.0	104826	123	213	4	30	1	40.0000	±0.0
	40.1	104565	121	216	4	21	1	40.0998	-0.0004
	1000	4193	127	33	1	2	1	1000.01	±0.0010
	1001	4189	123	34	1	7	1	1000.96	-0.0036
	3998	1049	116	9	1	5	1	3997.18	-0.0206
	4000	1048	116	9	1	4	1	4000.99	±0.0248
4	40.0	100000	125	200	4	0	1	40.0000	±0.0
	40.1	99751	107	233	4	27	1	40.0998	±0.0004
	1000	4000	125	32	1	0	1	1000.00	±0.0
	1001	3996	111	36	1	0	1	1001.00	±0.0001
	3998	1001	125	8	1	1	1	3996.00	-0.0499
	4000	1000	125	8	1	0	1	4000.00	±0.0
3.579545	40.0	89489	119	188	4	1	1	39.9998	-0.0004
	40.1	89265	111	201	4	21	1	40.1002	±0.0005
	1000	3580	119	30	1	10	1	999.87	-0.0127
	1001	3576	119	30	1	6	1	1000.99	-0.0009
	3998	895	127	7	1	6	1	3999.49	±0.0373
	4000	895	127	7	1	6	1	3999.49	-0.127
2.4576	40.0	61440	128	240	2	0	1	40.0000	±0.0
	40.1	61287	111	138	4	15	1	40.0999	-0.0004
	1000	2458	117	21	1	1	1	999.84	-0.0163
	1001	2455	98	25	1	5	1	1001.06	±0.0059
	3998	615	123	5	1	0	1	3996.10	-0.0476
	4000	614	102	6	1	2	1	4002.61	±0.0651
2	40.0	50000	125	200	2	0	1	40.0000	±0.0
	40.1	49875	107	233	2	13	1	40.1003	-0.0006
	1000	2000	125	16	1	0	1	1000.00	±0.0
	1001	1998	111	18	1	0	1	1001.00	±0.0001
	3998	500	125	4	1	0	1	4000.00	±0.0500
	4000	500	125	4	1	0	1	4000.00	±0.0
1	40.0	25000	125	200	1	0	1	40.0000	±0.0
	40.1	24938	107	233	1	7	1	40.0994	-0.0014
	1000	1000	125	8	1	0	1	1000.00	±0.0
	1001	999	111	9	1	0	1	1001.00	±0.0001

OSC Clock (MHz)	Set Frequency (Hz)	Total Division Ratio	Effective Bit Length	Frame Counter		Fine Tuning Counter		Output Frequency (Hz)	Frequency Deviation (%)
				Reload Value ¹	Clock Source ²	Reload Value ³	Clock Source ⁴		
	3998	250	83	3	1	1	1	4000.00	±0.0500
	4000	250	83	3	1	1	1	4000.00	±0.0

- Notes:
1. Set in register FRMR.
 2. Set in register MTCR (FR1, FR0).
 3. Set in register FTNR.
 4. Set in register MTCR (FT1, FT0).

14.5 Bit Pattern Setting on MTG RAM

14.5.1 Bit Pattern on MTG RAM

MTG RAM is a 16-byte area from address H'FF80 to address H'FF8F, which can hold a bit pattern of up to 128 bits. The bit pattern can be set to give a sine wave or other waveform, such as a triangle wave or a trapezoid wave with a variable duty cycle.

The MTG RAM data is sent to the increment/decrement circuit starting from bit 0 at address H'FF80 (figure 14-4).

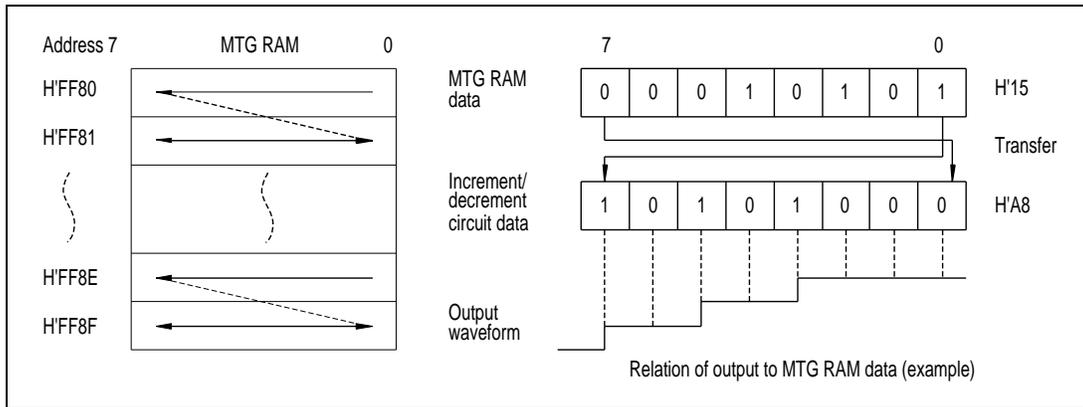


Figure 14-4 Bit Pattern on MTG RAM

14.5.2 Typical Bit Pattern Settings

Typical bit pattern settings for output of a sine wave, triangle wave, and trapezoid wave are shown below (figures 14-5 to 14-7).

1. Sine wave (starting at center point)

Initial level: OF

Effective bit length; 128

Initial direction: increment

The settings of individual bits can be found by the following integer approximation to the sine function.

$$V_{out}/V_{T_{ref}} = \text{INT}(\text{SIN}(\text{bit}/128 * 2\pi) + 1)/2 * 31/32$$

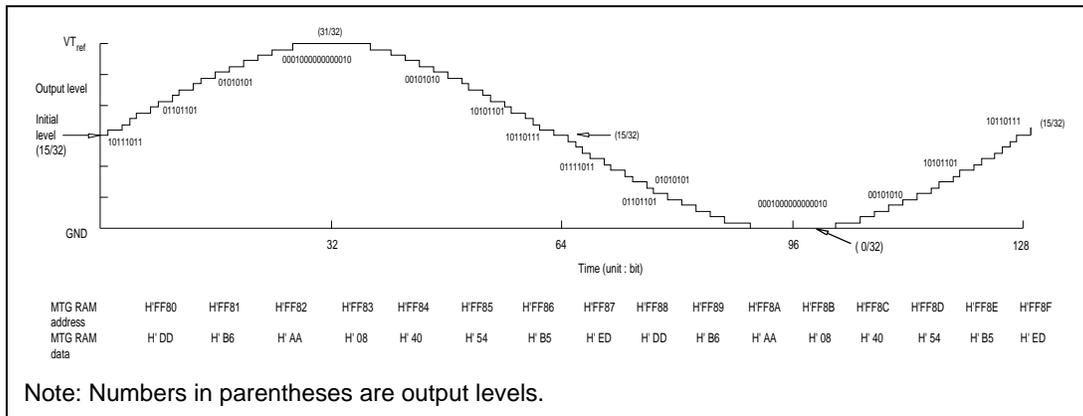


Figure 14-5 Typical Bit Pattern for Sine Wave

14.5.3 Modification of Bit Patterns

The multitone generator interrupt every half-cycle (when the bit count in the bit counter equals the value set in the effective bit length register or half that value). The output waveform can be controlled a cycle at a time by modifying half of the bit pattern (the half that has already been output) at every half-cycle. The effective bit length, frame register value, frame counter clock source, fine-tuning register, and fine-tuning counter clock source should be left unaltered.

Figure 14-8 shows the timing of the interrupts and the timing of modification of bit pattern data.

This figure shows two transmit waveforms. Waveforms (1) and (3) have the same bit pattern. The direction of level change depends on the direction of change in the previous interval.

In a waveform like (2) in which the direction of change in the output level reverses, set a bit pattern that will give an output level at the end of the cycle that complements the output level at the start of the cycle. (For example, if the starting level is 15/32, the ending level should be 16/32).

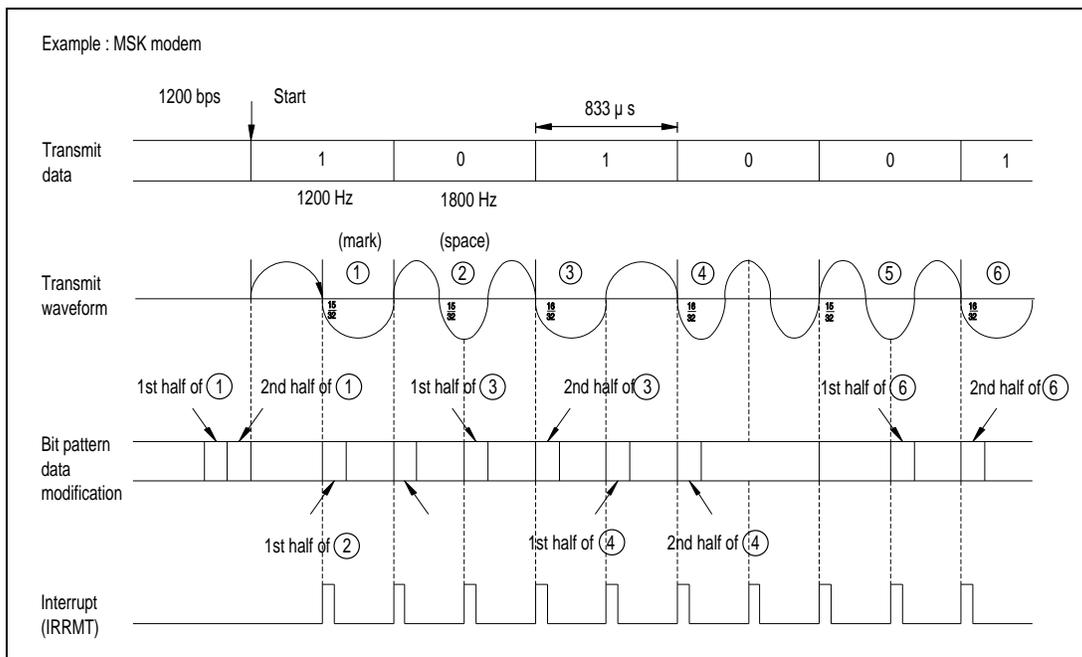


Figure 14-8 Timing of Interrupts and Bit Pattern Data Modification

14.6 Application Notes

- Make sure the effective bit length setting matches the length of the bit pattern.
- If a large amount of fine-tuning is necessary per cycle, make allowances for the fine-tuning when setting the bit pattern.
- Do not change the settings of bits FR1, FR0, FT1, and FT0 in MTCR, or of EBLR, FRMR, or FTNR, while the multitone generator is operating.
- The multitone generator can operate at any oscillator frequency, but if the DTMF generator is also used, the OSC clock frequency (ϕ_{osc}) should be an integer multiple of 400 kHz between 1.2 MHz and 10 MHz.
- The output level changes by $1/32 \cdot VT_{ref}$ at each bit having a value of 1 in the bit pattern, so it is not possible to output a steep waveform with changes of $2/32 \cdot VT_{ref}$ or more per bit. If a waveform has a steep portion, the bit pattern should be modified by adjusting the preceding and following parts to obtain a continuous output waveform.
- The multitone generator is in operation from stop control (MTEN = 0) til the end of the cycle being output. If an operation is to begin immediately following stop control, leave at least a one cycle gap in between operations.

Section 15 Electrical Characteristics

15.1 Absolute Maximum Ratings

Table 15-1 lists the absolute maximum ratings.

Table 15-1 Absolute Maximum Ratings

Item	Symbol	Value	Unit
Power supply voltage	V_{CC}	-0.3 to +7.0	V
Analog power supply voltage	AV_{CC}	-0.3 to +7.0	V
	AV_{ref}	-0.3 to $AV_{CC} + 0.3$	V
Reference level supply voltage	VT_{ref}	-0.3 to $V_{CC} + 0.3$	V
Programming voltage	V_{pp}	-0.3 to +13.0	V
Input voltage	Ports other than port B V_{in}	-0.3 to $V_{CC} + 0.3$	V
	Port B AV_{in}	-0.3 to $AV_{CC} + 0.3$	V
Operating temperature	T_{opr}	-20 to +75	°C
Storage temperature	T_{stg}	-55 to +125	°C

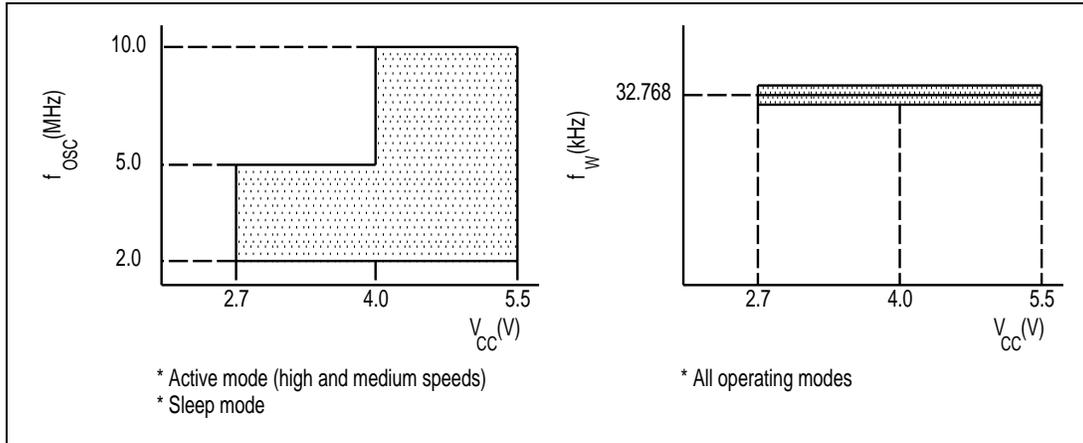
Note: Permanent damage may occur to the chip if maximum ratings are exceeded. Normal operation should be under the conditions specified in Electrical Characteristics. Exceeding these values can result in incorrect operation and reduced reliability.

15.2 Electrical Characteristics


15.2.1 Power Supply Voltage and operating Range

The power supply voltage and operating range are indicated by the shaded region in the figures below.


1. Power supply voltage vs. oscillator frequency range



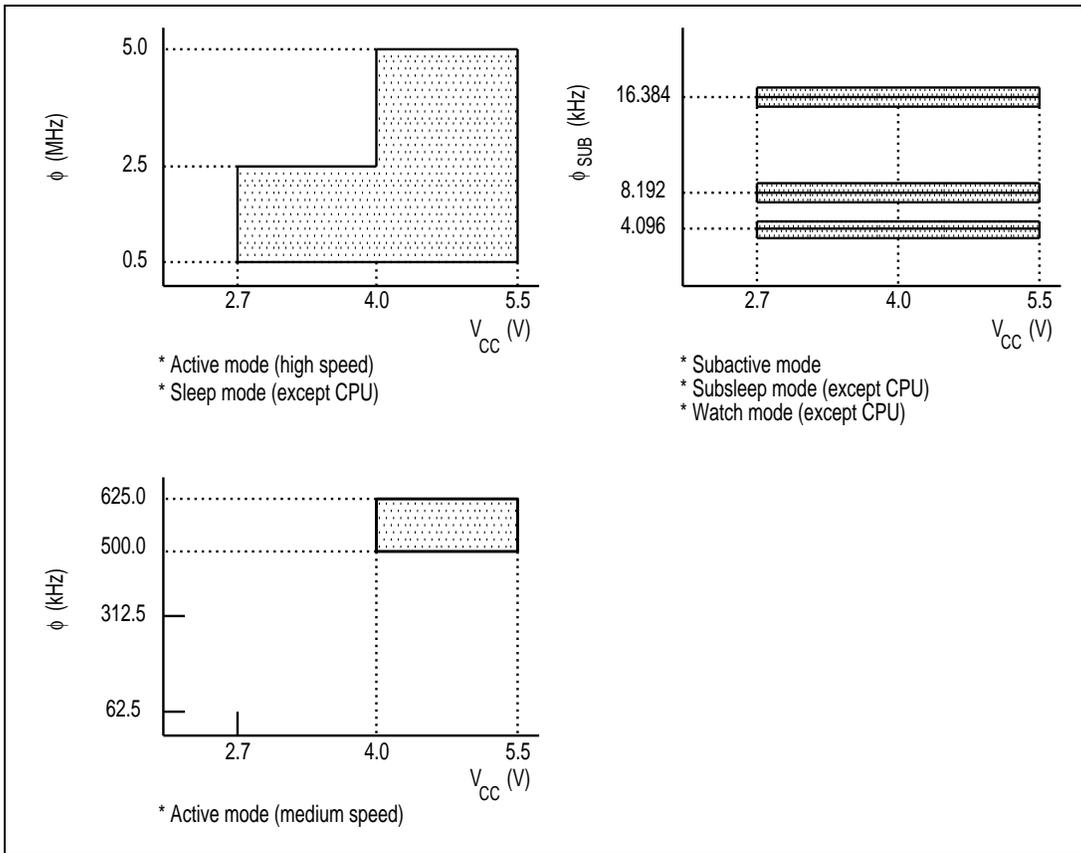2. Power supply voltage vs. clock frequency range



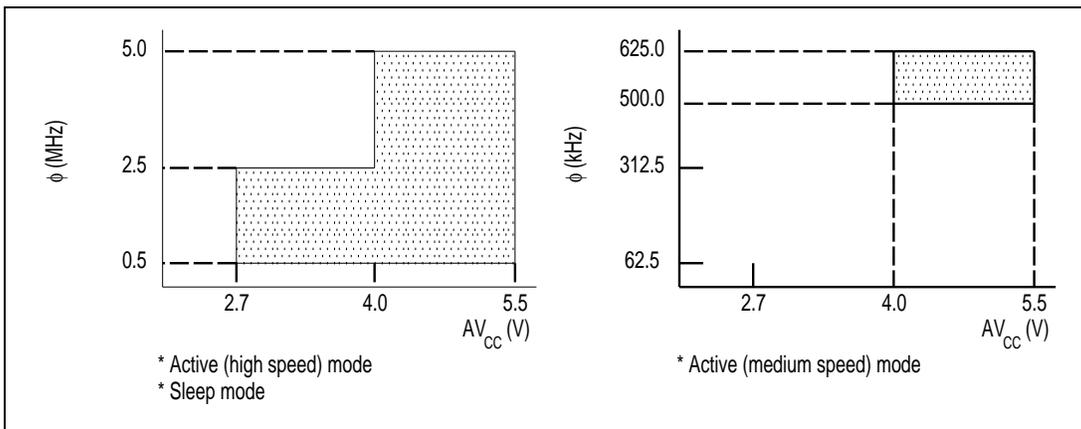3. Analog power supply voltage vs. A/D converter operating range



15.2.2 DC Characteristics

Table 15-2 lists the DC characteristics.

Table 15-2 DC Characteristics

$V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_a = -20^\circ\text{C to } +75^\circ\text{C}$, including subactive mode, unless otherwise indicated.

Item	Symbol	Applicable Pins	Min	Typ	Max	Unit	Test Condition	Note		
Input high voltage	V_{IH}	RES, NMI, WKP ₀ to WKP ₇ , IRQ ₀ to IRQ ₄ , TMIF, TMIG, SCK ₁ , SCK ₃ , ADTRG	0.8 V_{CC}	--	$V_{CC}+0.3$	V	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$			
		SI ₁ , RXD	0.7 V_{CC}	--	$V_{CC}+0.3$	V	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$			
			0.8 V_{CC}	--	$V_{CC}+0.3$					
		OSC ₁	$V_{CC}-0.5$	--	$V_{CC} +0.3$	V	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$			
			$V_{CC}-0.3$	--	$V_{CC}+0.3$					
		P1 ₀ to P1 ₇ , P2 ₀ to P2 ₇ , P5 ₀ to P5 ₇ , P6 ₀ to P6 ₇ , P7 ₀ to P7 ₇	0.7 V_{CC}	--	$V_{CC} +0.3$	V	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$			
		P8 ₀ to P8 ₇ , P9 ₀ to P9 ₇ , PA ₀ to PA ₃ , PD ₀ to PD ₇ , PE ₀ to PE ₃	0.8 V_{CC}	--	$V_{CC} +0.3$					
		PB ₀ to PB ₇	0.7 V_{CC}	--	$A V_{CC} +0.3$	V	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$			
			0.8 V_{CC}	--	$A V_{CC} +0.3$					
		Input low voltage	V_{IL}	RES, NMI, WKP ₀ to WKP ₇ , IRQ ₀ to IRQ ₄ , TMIF, TMIG, SCK ₁ , SCK ₃ , ADTRG	-0.3	--	0.2 V_{CC}	V	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$	
				SI ₁ , RXD	-0.3	--	0.3 V_{CC}	V	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$	
					-0.3	--	0.2 V_{CC}			
				OSC ₁	-0.3	--	0.5	V	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$	
					-0.3	-	0.3			

Note: Connect pin TEST to V_{SS} .

Table 15-2 DC Characteristics (cont)

$V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_a = -20^\circ\text{C to } +75^\circ\text{C}$, including subactive mode, unless otherwise indicated.

Item	Symbol	Applicable Pins	Min	Typ	Max	Unit	Test Condition	Note	
Input low voltage	V_{IL}	P1 ₀ to P1 ₇	-0.3	--	0.3 V _{CC}	V	V _{CC} = 4.0 V to 5.5 V		
		P2 ₀ to P2 ₇							
		P5 ₀ to P5 ₇							
		P6 ₀ to P6 ₇							
		P7 ₀ to P7 ₇							
		P8 ₀ to P8 ₇							
		P9 ₀ to P9 ₇	0.3	--	0.2 V _{CC}				
		PA ₀ to PA ₃							
		PB ₀ to PB ₇							
		PD ₀ to PD ₇							
PE ₀ to PE ₃									
Output high voltage	V_{OH}	P1 ₀ to P1 ₇	V _{CC} -1.0	--	--	V	V _{CC} = 4.0 V to 5.5 V		
		P2 ₀ to P2 ₇					--I _{OH} = 1.0 mA		
		P5 ₀ to P5 ₇							
		P6 ₀ to P6 ₇	V _{CC} -0.5	--	--			V _{CC} = 4.0 V to 5.5 V	
		P7 ₀ to P7 ₇						-I _{OH} = 0.5 mA	
		P8 ₀ to P8 ₇							
		P9 ₀ to P9 ₇	V _{CC} -0.5	--	--			-I _{OH} = 0.1 mA	
		PA ₀ to PA ₃							
		PD ₀ to PD ₇							
		PE ₀ to PE ₃							
Output low voltage	V_{OL}	P5 ₀ to P5 ₇	--	--	0.5			I _{OL} = 0.4 mA	
		P6 ₀ to P6 ₇							
		P7 ₀ to P7 ₇							
		P8 ₀ to P8 ₇							
		P9 ₀ to P9 ₇							
		PA ₀ to PA ₃							
		PD ₀ to PD ₇							
		PE ₀ to PE ₃							
		P1 ₀ to P1 ₇	--	--	1.5			V _{CC} = 4.0 V to 5.5 V	
		P2 ₀ to P2 ₇						--I _{OL} = 10 mA	
	--	--	0.6			V _{CC} = 4.0 V to 5.5 V			
						--I _{OL} = 1.6 mA			
	--	--	0.5			I _{OL} = 0.4 mA			

Note: Connect pin TEST to Vss.

HITACHI

Table 15-2 DC Characteristics (cont)

$V_{CC} = 2.7\text{ V to }5.5\text{ V}$, $AV_{CC} = 2.7\text{ V to }5.5\text{ V}$, $V_{SS} = AV_{SS} = 0.0\text{ V}$, $T_a = -20^\circ\text{C to }+75^\circ\text{C}$, Including subactive mode, unless otherwise indicated.

Item	Symbol	Applicable Pins	Min	Typ	Max	Unit	Test Condition	Note	
Input leakage current	[I_{i1}]	RES, NMI	--	--	20	μA	$V_{IN} = 0.5\text{ V to}$	2	
			--	--	1		$V_{CC}-0.5\text{ V}$	1	
	OSC ₁		--	--	1	μA	$V_{IN} = 0.5\text{ V to}$ $V_{CC}-0.5\text{ V}$		
		P1 ₀ to P1 ₇ , P2 ₀ to P2 ₇ , P5 ₀ to P5 ₇ , P6 ₀ to P6 ₇ , P7 ₀ to P7 ₇ , P8 ₀ to P8 ₇ , P9 ₀ to P9 ₇ , PA ₀ to PA ₃ , PD ₀ to PD ₇ , PE ₀ to PE ₃							
		PB ₀ to PB ₇	--	--	1		$V_{IN} = 0.5\text{ V to}$ $AV_{CC}-0.5\text{ V}$		
	Pull-up MOS current	- I_b	P1 ₀ to P1 ₇ , P2 ₀ to P2 ₇	50	--	300	μA	$V_{CC} = 5\text{ V}$, $V_{IN} = 0\text{ V}$	
			P5 ₀ to P5 ₇ , P6 ₀ to P6 ₇	--	35	--	μA	$V_{CC} = 2.7\text{ V}$, $V_{IN} = 0\text{ V}$	Reference value
	Input capacitance	C_{IN}	All input pins except power supply pins	--	--	15	pF	$f = 1\text{ MHz}$, $V_{IN} = 0\text{ V}$	
			RES	--	--	60		$T_a = 25^\circ\text{C}$	2
			NMI	--	--	30			

Notes: 1 Applies to HD6433875U, HD6433876U, and HD6433877U.
2 Applies to HD6473877U.

Table 15-2 DC Characteristics (cont)

$V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_a = -20^\circ\text{C to } +75^\circ\text{C}$, including subactive mode, unless otherwise indicated.

Item	Symbol	Applicable Pins	Min	Typ	Max	Unit	Test Condition	Notes
Active mode current dissipation	I_{OPE1}	V_{CC}	--	12	24	mA	Active mode (high speed), $V_{CC} = 5 V$, $f_{OSC} = 10 MHz$	1,2
	I_{OPE2}	V_{CC}	--	2.5	5	mA	Active mode (medium speed), $V_{CC} = 5 V$, $f_{OSC} = 10 MHz$	1,2
Sleep mode current dissipation	I_{SLEEP}	V_{CC}	--	5	10	mA	$V_{CC} = 5 V$, $f_{OSC} = 10 MHz$	1,2
Subactive mode current dissipation	I_{SUB}	V_{CC}	--	50	130	μA	$V_{CC} = 2.7 V$, LCD on, 32-kHz crystal oscillator ($????_{SUB} = ???w/2$)	1,2
			--	40	--	μA	$V_{CC} = 2.7 V$, LCD on, 32-kHz crystal oscillator ($????_{SUB} = ???w/8$)	Reference value 1,2
Subsleep mode current dissipation	I_{SUBSP}	V_{CC}	--	40	90	μA	$V_{CC} = 2.7 V$, LCD on, 32-kHz crystal oscillator ($\phi_{SUB} = \phi w/2$)	1,2
Watch mode current dissipation	I_{WATCH}	V_{CC}	--	--	6	μA	$V_{CC} = 2.7 V$, LCD not used, 32-kHz crystal oscillator	1,2
Standby mode current dissipation	I_{STBY}	V_{CC}	--	--	5	μA	32-kHz crystal oscillator not used	1,2
RAM data retaining voltage	V_{RAM}	V_{CC}	2	--	--	V		1, 2

- Notes: 1. Pin states during current measurement are shown below.
2. Excludes current in pull-up MOS transistors and output buffers.

Mode	RES Pin	Internal State	Other Pins	LCD Power Supply	Oscillator Pins
Active mode (high and medium speed)	V_{cc}	Operates	V_{cc}	Open	System clock oscillator: Crystal Subclock oscillator: Pin $X_1 = V_{cc}$
Sleep mode	V_{cc}	Only timer operates	V_{cc}	Open	
Subactive mode	V_{cc}	Operates	V_{cc}	Open	System clock oscillator: Crystal Subclock oscillator: Crystal
Subsleep mode	V_{cc}	Only timer operates, CPU stops	V_{cc}	Open	
Watch mode	V_{cc}	Only time-base clock operates, CPU stops	V_{cc}	Open	
Standby mode	V_{cc}	CPU and timers all stop	V_{cc}	Open	System clock oscillator: Crystal Subclock oscillator: Pin $X_1 = V_{cc}$

Table 15-2 DC Characteristics (cont)

$V_{CC} = 2.7\text{ V to }5.5\text{ V}$, $AV_{CC} = 2.7\text{ V to }5.5\text{ V}$, $V_{SS} = AV_{SS} = 0.0\text{ V}$, $T_a = -20^\circ\text{C to }+75^\circ\text{C}$, including subactive mode, unless otherwise indicated.

Item	Symbol	Applicable Min Pins	Typ	Max	Unit	Test Condition
Allowable output low current (per pin)	I_{OL}	Output pins -- except in ports 1 and 2	--	2	mA	$V_{CC} = 4.0\text{ V to }5.5\text{ V}$
		Ports 1 and 2	--	10		
		All output pins	--	0.5		
Allowable output low current (total)	ΣI_{OL}	Output pins -- except in ports 1 and 2	--	40	mA	$V_{CC} = 4.0\text{ V to }5.5\text{ V}$
		Ports 1 and 2	--	80		
		All output pins	--	20		
Allowable output high current (per pin)	$-I_{OH}$	All output pins	--	2	mA	$V_{CC} = 4.0\text{ V to }5.5\text{ V}$
		--	--	0.2		
Allowable output high current (total)	ΣI_{OH}	All output pins	--	15	mA	$V_{CC} = 4.0\text{ V to }5.5\text{ V}$
		--	--	10		

15.2.3 AC Characteristics

Table 15-3 lists the control signal timing, and tables 15-4 and 15-5 list the serial interface timing.

Table 15-3 Control Signal Timing

$V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_a = -20^\circ\text{C to } +75^\circ\text{C}$, including subactive mode, unless otherwise specified.

Item	Symbol	Applicable Pins	Min	Typ	Max	Units	Test Condition	Note
System clock oscillation frequency	f_{osc}	OSC ₁ , OSC ₂	2	--	10	MHz	V _{CC} = 4.0 V to 5.5 V	
			2	--	5			
OSC clock (ϕ_{osc}) cycle time	t_{osc}	OSC ₁ , OSC ₂	100	--	1000	ns	V _{CC} = 4.0 V to 5.5 V	1
			200	--	1000			
System clock (ϕ) cycle time	t_{cyc}		2	--	16	t_{osc}		
			--	--	2000	ns		
Subclock oscillation frequency	f_w	X ₁ , X ₂	--	32.768	--	kHz		
Watch clock cycle time (ϕ_w)	t_w	X ₁ , X ₂	--	30.5	--	μ S		
Subclock (ϕ_{SUB}) cycle time	t_{subcyc}		2	--	8	t_w		2
Instruction cycle time			2	--	--	t_{cyc} t_{subcyc}		
Oscillation stabilization time (crystal oscillator)	t_c	OSC ₁ , OSC ₂	--	--	49	ms	V _{CC} = 4.0 V to 5.5 V	
			--	--	60			
Oscillation stabilization time	t_c	X ₁ , X ₂	--	--	2	s		
External clock high width	t_{CPH}	OSC ₁	40	--	--	ns	V _{CC} = 4.0 V to 5.5 V	Figure 15-4
			80	--	--			
External clock low width	t_{CPL}	OSC ₁	40	--	--	ns	V _{CC} = 4.0 V to 5.5 V	Figure 15-4
			80	--	--			
External clock rise time	t_{CPr}		--	--	15	ns	V _{CC} = 4.0 V to 5.5 V	Figure 15-4
			--	--	20			
External clock fall time	t_{CPr}		--	--	15	ns	V _{CC} = 4.0 V to 5.5 V	Figure 15-4

Item	Symbol	Applicable Pins	Min	Typ	Max	Units	Test Condition	Note
			--	--	20			
Pin RES low width	t_{REL}	RES	10	--	--	tcyc		Figure 15-5

Notes: 1.A frequency between 1 MHz to 10 MHz is required when an external clock is input.
2.Selected with SA 1 and SA0 of system clock control register 2 (SYSCR2).

Table 15-3 Control Signal Timing (cont)

Table 15-3 Control Signal Timing (cont)

$V_{CC} = 2.7\text{ V to }5.5\text{ V}$, $AV_{CC} = 2.7\text{ V to }5.5\text{ V}$, $V_{SS} = AV_{SS} = 0.0\text{ V}$, $T_a = -20^\circ\text{C to }+75^\circ\text{C}$, including subactive mode, unless otherwise specified.

Item	Symbol	Applicable Pins	Min	Typ	Max	Units	Test Condition	Reference Figure
Input pin high width	t_{H}	NMI, IRQ ₀ to IRQ ₄ , WKP ₀ to WKP ₇ , ADTRG, TMIF, TMIG	2	--	--	t_{eye} t_{subcyc}		Figure 15-6
Input pin low width	t_{L}	NMI, IRQ ₀ to IRQ ₄ , WKP ₀ to WKP ₇ , ADTRG, TMIF, TMIG	2	--	--	t_{eye} t_{subcyc}		Figure 15-6

Table 15-4 Serial Interface Timing (SCI1)

$V_{CC} = 2.7\text{ V to }5.5\text{ V}$, $AV_{CC} = 2.7\text{ V to }5.5\text{ V}$, $V_{SS} = AV_{SS} = 0.0\text{ V}$, $T_a = -20^\circ\text{C to }+75^\circ\text{C}$, unless otherwise specified.

Item	Symbol	Applicable Pins	Min	Typ	Max	Unit	Test Condition	Reference Figure
Input serial clock cycle time	t_{scyc}	SCK ₁	2	--	--	t_{cyc}		Figure 15-7
Input serial clock high width	t_{SCKH}	SCK ₁	0.4	--	--	t_{scyc}		Figure 15-7
Input serial clock low width	t_{SCKL}	SCK ₁	0.4	--	--	t_{scyc}		Figure 15-7
Input serial clock rise time	t_{SCKr}	SCK ₁	--	--	60	ns	$V_{CC} = 4.0$ V to 5.5 V	Figure 15-7
			--	--	80			
Input serial clock fall time	t_{SCKf}	SCK ₁	--	--	60	ns	$V_{CC} = 4.0$ V to 5.5 V	Figure 15-7
			--	--	80			
Serial output data delay time	t_{SOD}	SO ₁	--	--	200	ns	$V_{CC} = 4.0$ V to 5.5 V	Figure 15-7
			--	--	350			
Serial input data setup time	t_{SIS}	SI ₁	200	--	--	ns	$V_{CC} = 4.0$ V to 5.5 V	Figure 15-7
			400	--	--			
Serial input data hold time	t_{SIH}	SI ₁	200	--	--	ns	$V_{CC} = 4.0$ V to 5.5 V	Figure 15-7
			400	--	--			

Table 15-5 Serial Interface Timing (SCI3)

$V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_a = -20^\circ\text{C to } +75^\circ\text{C}$, unless otherwise specified.

Item	Symbol	Min	Typ	Max	Unit	Test Condition	Reference
							Figure
Input clock cycle	Asynchronous $t_{s\text{cyc}}$	4	--	--	t_{cyc}		Figure 15-8
	Synchronous	6	--	--			
Input clock pulse width	t_{sckw}	0.4	--	0.6	$t_{\text{s\text{cyc}}}$		Figure 15-8
Transit data delay time (synchronous mode)	t_{TXD}	--	--	1	t_{cyc}	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$	Figure 15-9
		--	--	1			
Receive data setup time (synchronous mode)	t_{RXS}	200	--	--	ns	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$	Figure 15-9
		400	--	--			
Receive data hold time (synchronous mode)	t_{RXH}	200	--	--	ns	$V_{CC} = 4.0 \text{ V to } 5.5 \text{ V}$	Figure 15-9
		400	--	--			

15.2.4 A/D Converter Characteristics

Table 15-6 shows the A/D converter characteristics

Table 15-6 A/D Converter Characteristics

$AV_{CC} = V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $AV_{SS} = V_{SS} = 0.0 \text{ V}$, $T_a = -20^\circ\text{C to } 75^\circ\text{C}$, unless otherwise specified.

Applicable

Item	Symbol	Pins	Min	Typ	Max	Unit	Test Condition	Note
Analog power supply voltage	AV_{CC}	AV_{CC}	2.7	--	5.5	V		1
	AV_{ref}	AV_{ref}	2.5	--	$AV_{CC} + 0.3$	V		
Analog input voltage	AV_{IN}	AN_0 to AN_7	-0.3	--	$AV_{CC} + 0.3$	V		
Analog power supply current	AI_{OPE}	AV_{CC1} , AV_{ref}	--	--	1.5	mA	$AV_{CC} = 5.0$ V	
	AI_{STOP1}	AV_{CC1} , AV_{ref}	--	150	--	μ A		2 Reference value
	AI_{STOP2}	AV_{CC1} , AV_{ref}	--	--	5	μ A		3
Analog input capacitance	C_{AIN}	AN_0 to AN_7	--	--	30	pF		
Allowable signal source impedance	R_{AIN}		--	--	10	k Ω		
Resolution (data length)			--	--	8	bit		
Non-linearity error			--	--	± 2.0	LSB		
Quantization error			--	--	± 0.5	LSB		
Absolute accuracy			--	--	± 2.5	LSB		
Conversion time			12.	--	248	μ s	$AV_{CC} = 4.5$ V to 5.5 V	
			4					
			24.	--	248	μ s	$AV_{CC} = 4.0$ V to 5.5 V	
			8					

- Notes: 1. Set $AV_{CC} = V_{CC}$ when the A/D converter is not used.
2. AI_{STOP1} is the current in active and sleep modes while the A/D converter is idle.
3. AI_{STOP2} is the current at reset and in standby, watch, subactive, and subsleep modes while the A/D converter is idle.

15.2.5 LCD Characteristics

Table 15-7 lists the LCD characteristics, and table 15-8 lists the AC characteristics for external segment expansion.

Table 15-7 LCD Characteristics

$V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_a = -20^\circ\text{C to } 75^\circ\text{C}$, including subactive mode, unless otherwise specified.

Item	Symbol	Applicable			Max	Unit	Test Condition	Note
		Pins	Min	Typ				
Segment driver voltage drop	V_{DS}	SEG ₁ to SEG _{s2}	--	--	0.6	V	$I_D = 2 \mu\text{A}$	1
Common driver voltage drop	V_{DC}	COM ₁ to COM ₄	--	--	0.3	V	$I_D = 2 \mu\text{A}$	1
LCD power supply voltage divider resistance	R_{LCD}		50	300	900	K Ω	Between V_1 and V_{SS}	
LCD power supply voltage	V_{LCD}	V_1	2.7	--	V_{CC}	V		2

Notes: 1. These are the voltage drops between the voltage supply pins V1, V2, V3, and V_{SS} and the segment pins or common pins.

2. When V_{LCD} is supplied from an external source, the following relation must hold: $V_{CC} \geq V_1 \geq V_2 \geq V_3 \geq V_{SS}$

Table 15-8 AC Characteristics for External Segment Expansion

$V_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_a = -20^\circ\text{C to } +75^\circ\text{C}$, including subactive mode, unless otherwise specified.

Item	Symbol	Applicable				Unit	Test Condition	Reference
		Pins	Min	Typ	Max			Figure
Clock high width	t_{CWH}	CL ₁ , CL ₂	800	--	--	ns	*	Figure 15-1
Clock low width	t_{CWL}	CL ₂	800	--	--	ns	*	Figure 15-1
Clock setup time	t_{CSU}	CL ₁	500	--	--	ns	*	Figure 15-1
Data setup time	t_{SU}	DO	300	--	--	ns	*	Figure 15-1
Data hold time	t_{DH}	DO	300	--	--	ns	*	Figure 15-1
M delay time	t_{DM}	M	-1000	--	1000	ns		Figure 15-1
Clock rise and fall times	t_{CT}	CL ₁ , CL ₂	--	--	100	ns		Figure 15-1

Note: * Value when the frame frequency is set to between 32 Hz and 610 Hz.

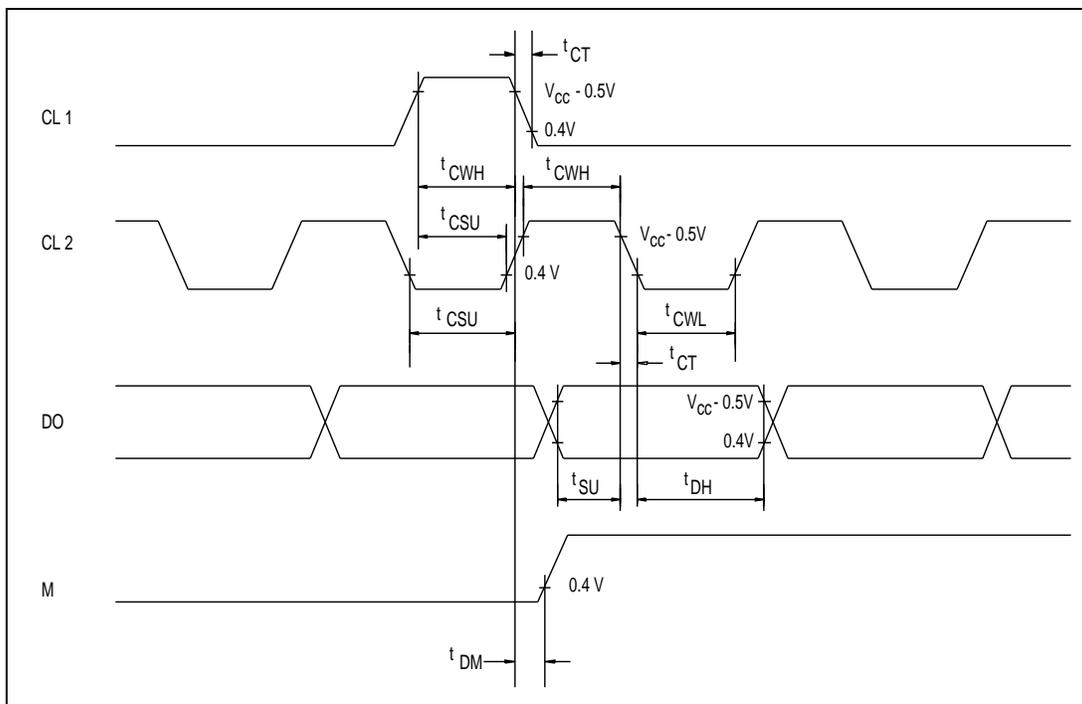


Figure 15-1 Segment Expansion Signal Timing

15.2.6 DTMF and Multitone Generator Characteristics

Table 15-9 lists the DTMF generator and multitone generator characteristics.

Table 15-9 DTMF and Multitone Generator Characteristics

$V_{CC} = 3.0 \text{ V to } 5.5 \text{ V}$, $AV_{CC} = 2.7 \text{ V to } 5.5 \text{ V}$, $V_{SS} = AV_{SS} = 0.0 \text{ V}$, $T_a = -20 \text{ to } +75^\circ\text{C}$, $f_{OSC} = 10 \text{ MHz}$, unless otherwise specified)

Item	Symbol	Pins	Applicable			Unit	Test Condition	Note
			Min	Typ	Max			
Reference level supply voltage	$V_{T_{ref}}$	$V_{T_{ref}}$	3.0	--	$V_{CC} + 0.3$	V		
DTMF output voltage (row)	V_{OR}	TONED	750	990	--	mVrms	$V_{T_{ref}} - \text{GND} = 3.0 \text{ V}$ $R_L = 100 \text{ k}\Omega$	Figure 15-2
DTMF output voltage (column)	V_{OC}	TONED	780	1040	--	mVrms	$V_{T_{ref}} - \text{GND} = 3.0 \text{ V}$ $R_L = 100 \text{ k}\Omega$	Figure 15-2
DTMF output distortion	%DISDT	TONED	--	3	7	%	$V_{T_{ref}} - \text{GND} = 3.0 \text{ V}$ $R_L = 100 \text{ k}\Omega$	Figure 15-2
DTMF output level	dB_{CR}	TONED	--	2.5	--	dB	$V_{T_{ref}} - \text{GND} = 3.0 \text{ V}$ $R_L = 100 \text{ k}\Omega$	Figure 15-2
MTG output voltage	V_{OMT}	TONEM	720	960	--	mVrms	$V_{T_{ref}} - \text{GND} = 3.0 \text{ V}$ $R_L = 100 \text{ k}\Omega$ Sine wave output ¹	Figure 15-3 ²
MTG output distortion	%DISMT	TONEM	--	1	3	%	$V_{T_{ref}} - \text{GND} = 3.0 \text{ V}$ $R_L = 100 \text{ k}\Omega$ Sine wave output*1	Figure 15-3 ²

Notes: 1. Measured under the settings given in table 14-3 for $f_{OSC} = 10 \text{ MHz}$.

2. TONEM output is voltage-driven, so avoid high-current loads.

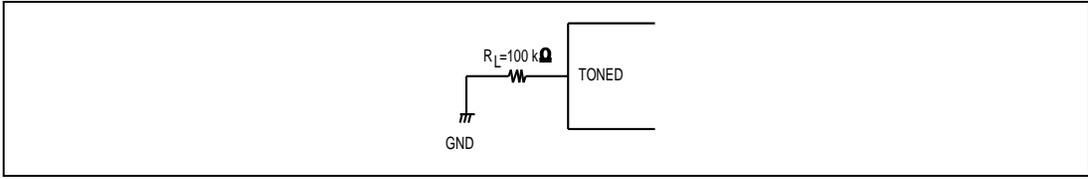


Figure 15-2 TONED Load Circuit

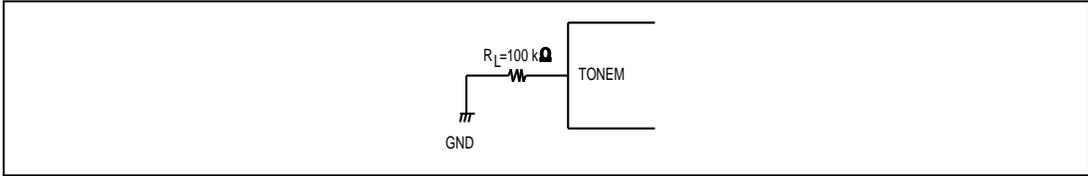


Figure 15-3 TONEM Load Circuit

15.3 Operation Timing

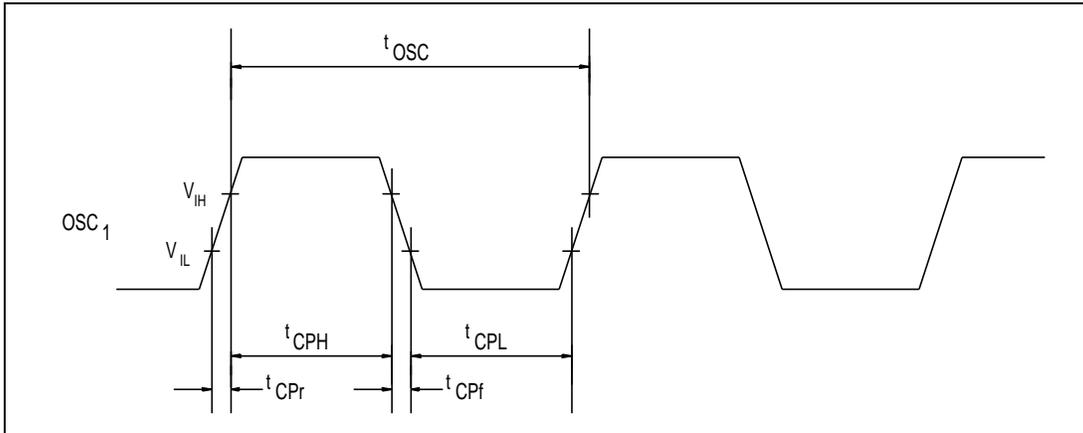


Figure 15-4 System Clock Input Timing

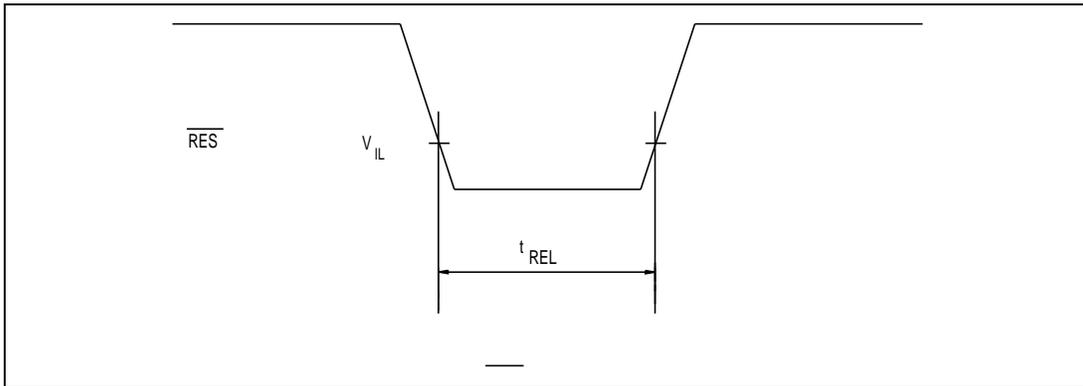


Figure 15-5 \overline{RES} Low Width

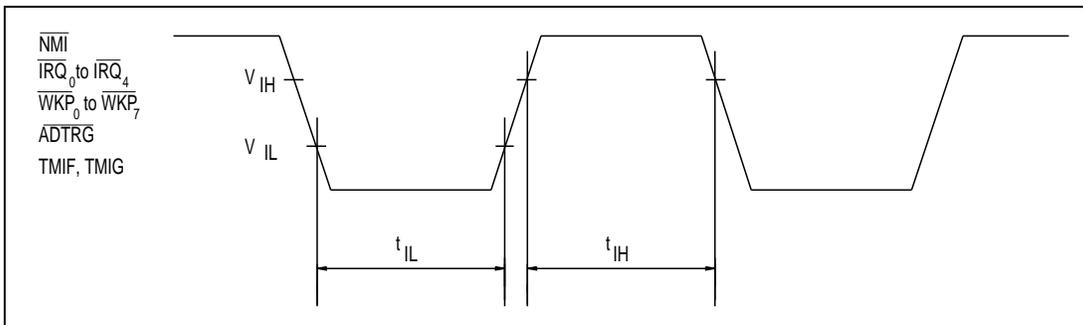


Figure 15-6 Input Timing

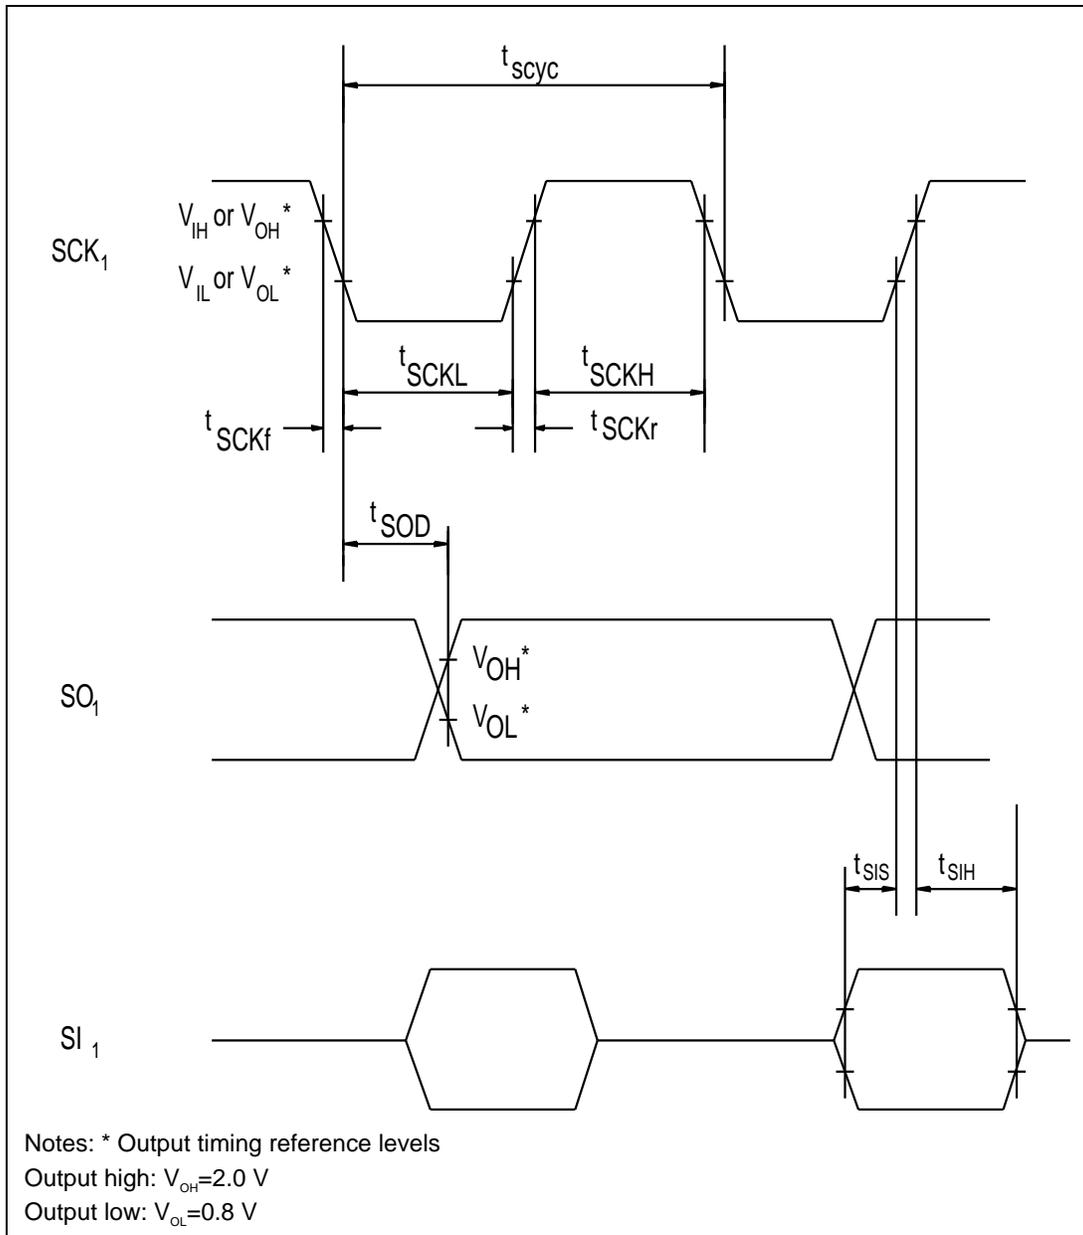


Figure 15-7 Serial Interface 1 Input/Output Timing

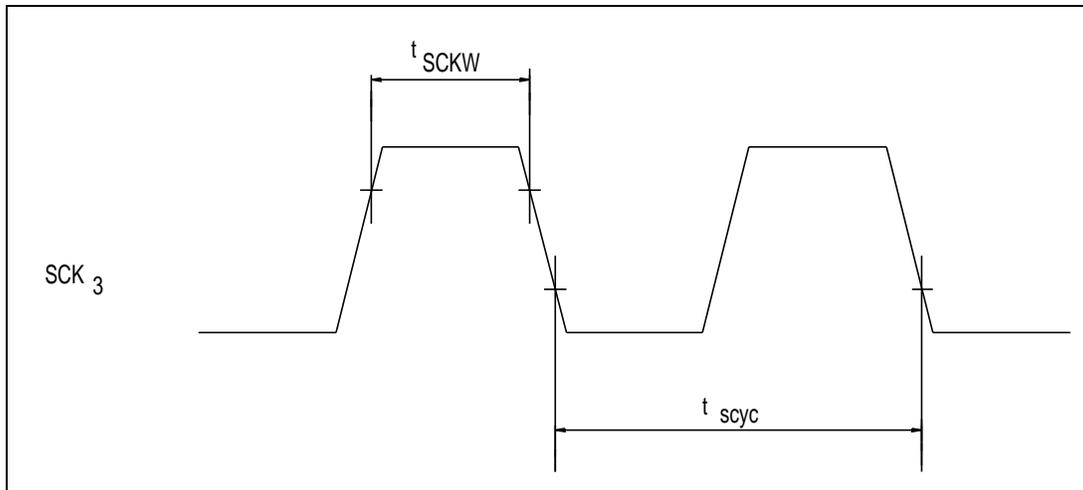


Figure 15-8 SCK₃ Input Clock Timing

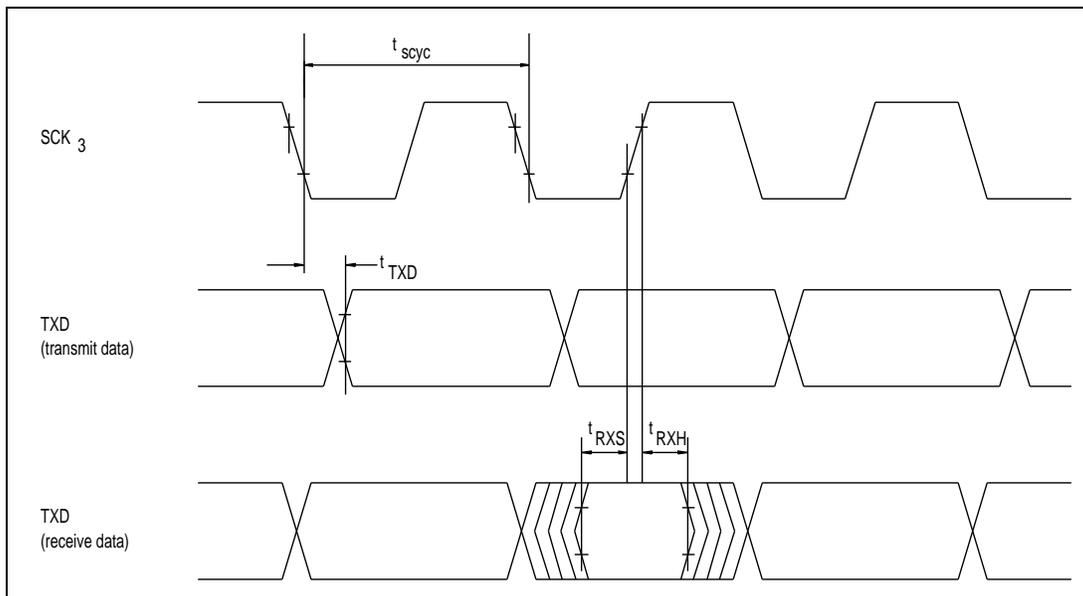


Figure 15-9 Input/Output Timing of Serial Interface 3 in Synchronous Mode

15.4 Output Load Circuits

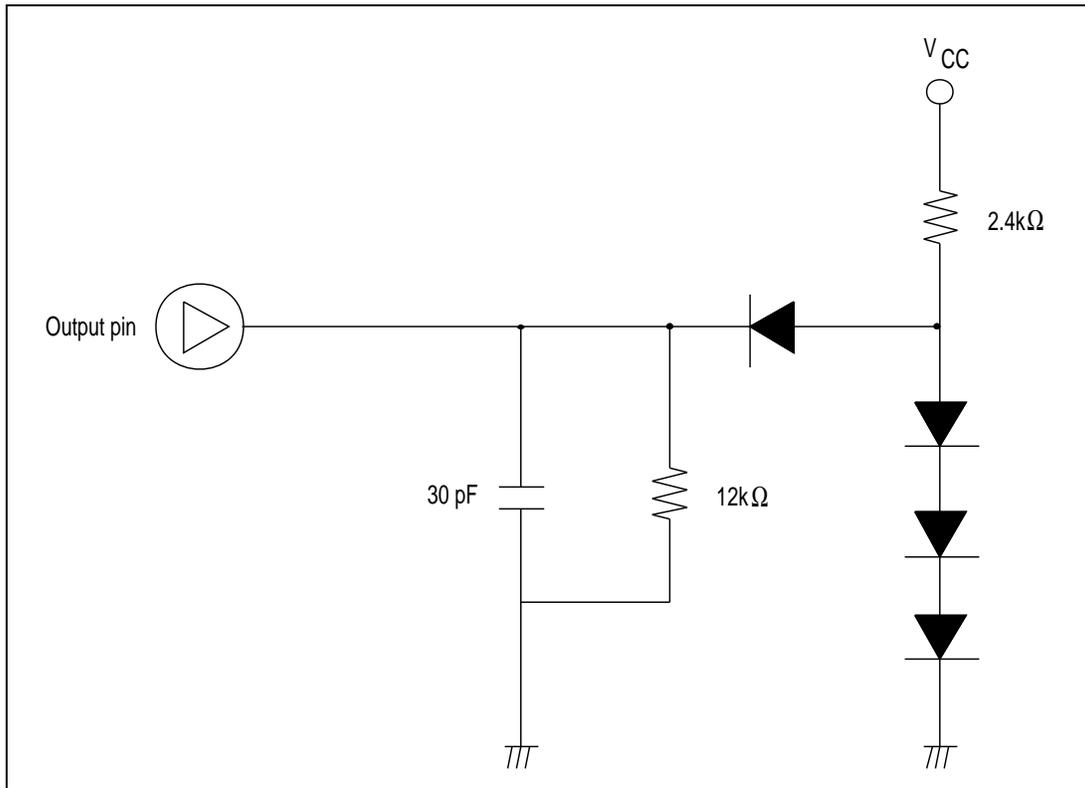


Figure 15-10 Output Load Condition

Appendix A CPU Instruction Set

A.1 Instructions

Operation Notation

Rd8/16	General register (destination) (8 or 16 bits)
Rs8/16	General register (source) (8 or 16 bits)
Rn8/16	General register (8 or 16 bits)
CCR	Condition code register
N	N (negative) flag in CCR
Z	Z (zero) flag in CCR
V	V (overflow) flag in CCR
C	C (carry) flag in CCR
PC	Program counter
SP	Stack pointer
#xx:3/8/16	Immediate data (3, 8, or 16 bits)
d: 8/16	Displacement (8 or 16 bits)
@aa: 8/16	Absolute address (8 or 16 bits)
+	Addition
-	Subtraction
X	Multiplication
÷	Division
^	Logical AND
∨	Logical OR
⊕	Exclusive logical OR
→	Move
--	Logical complement

Condition Code Notation

Symbol

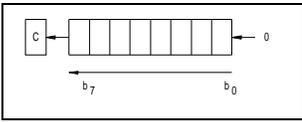
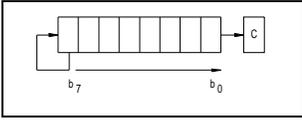
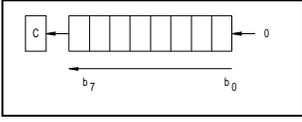
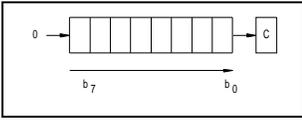
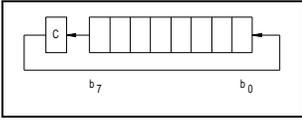
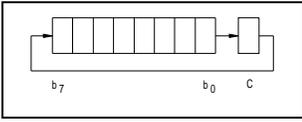
↑	Modified according to the instruction result
*	Not fixed (value not guaranteed)
0	Always cleared to 0
--	Not affected by the instruction execution result

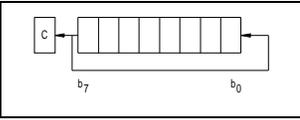
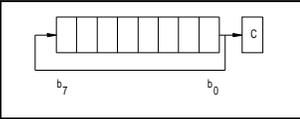
Table A-1 lists the H8/300L CPU instruction set.

Table A-1 Instruction Set

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
MOV.B #xx:8, Rd	B #xx:8→Rd8	#xx:8/16 2	-- -- ↑ ↓ 0 --	2
MOV.B Rs, Rd	B Rs8→Rd8	Rn 2	-- -- ↑ ↓ 0 --	2
MOV.B @Rs, Rd	B @Rs 16→Rd8	@Rn 2	-- -- ↑ ↓ 0 --	4
MOV.B @(d:16, Rs), Rd	B @(d:16, Rs 16)→Rd8	@(d:16, Rn) 4	-- -- ↑ ↓ 0 --	6
MOV.B @Rs+, Rd	B @Rs16→Rd8 Rs 16+1→Rs 16	@-Rn/@Rn+ 2	-- -- ↑ ↓ 0 --	6
MOV.B @aa:8, Rd	B @aa:8→Rd8	@aa:8/16 2	-- -- ↑ ↓ 0 --	4
MOV.B @aa:16, Rd	B @aa:16→Rd8	@aa:8/16 4	-- -- ↑ ↓ 0 --	6
MOV.B Rs, @Rd	B Rs8→@Rd16	@(d:8, PC) 2	-- -- ↑ ↓ 0 --	4
MOV.B Rs, @(d:16, Rd)	B Rs8→@(d:16, Rd16)	@@aa 4	-- -- ↑ ↓ 0 --	6
MOV.B Rs, @-Rd	B Rd16-1→Rd16 Rs8→@Rd16	Implied 2	-- -- ↑ ↓ 0 --	6
MOV.B Rs, @aa:8	B Rs8→@aa:8	2	-- -- ↑ ↓ 0 --	4
MOV.B Rs, @aa:16	B Rs8→@aa:16	4	-- -- ↑ ↓ 0 --	6
MOV.W #xx:16, Rd	W #xx:16→Rd	4	-- -- ↑ ↓ 0 --	4
MOV.W Rs, Rd	W Rs16→Rd16	2	-- -- ↑ ↓ 0 --	2
MOV.W @Rs, Rd	W @Rs16→Rd16	2	-- -- ↑ ↓ 0 --	4
MOV.W @(d:16, Rs), Rd	W @(d:16, Rs16)→Rd16	4	-- -- ↑ ↓ 0 --	6
MOV.W @Rs+, Rd	W @Rs16→Rd16 Rs16+2→Rs16	2 -- --	↑ ↓ 0 --	6
MOV.W @aa:16, Rd	W @aa:16→Rd16	4	-- -- ↑ ↓ 0 --	6
MOV.W Rs, @Rd	W Rs16→@Rd16	2	-- -- ↑ ↓ 0 --	4
MOV.W Rs, @(d:16, Rd)	W Rs16→@(d:16, Rd16)	4	-- -- ↑ ↓ 0 --	6
MOV.W Rs, @-Rd	W Rd16-2→Rd16 Rs16→@Rd16	2	-- -- ↑ ↓ 0 --	6
MOV.W Rs, @aa:16	W Rs16→@aa:16	4	-- -- ↑ ↓ 0 --	6
POP Rd	W @SP→Rd16 SP+2→SP	2	-- -- ↑ ↓ 0 --	6
PUSH Rs	W SP-2→SP Rs16→@SP	2	-- -- ↑ ↓ 0 --	6

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
	Operand Size	#xx:8/16 Rn @Rn @(d:16, Rn) @-Rn/@Rn+ @aa:8/16 @(d:8, PC) @aa Implied		
ADD.B #xx:8, Rd	B Rd8+#xx:8→Rd8	2	-- ↑ ↓ ↓ ↓ ↓ ↓ 2	
ADD.B Rs, Rd	B Rd8+Rs8→Rd8		-- ↑ ↓ ↓ ↓ ↓ ↓ 2	
ADD.W Rs, Rd	W Rd16+Rs16→Rd16	2	-- ① ↓ ↓ ↓ ↓ ↓ 2	
ADDX.B #xx:8, Rd	B Rd8+#xx:8+C→Rd8	2 2	-- ↑ ↓ ↓ ② ↓ ↓ 2	
ADDX.B Rs, Rd	B Rd8+Rs8+C→Rd8		-- ↑ ↓ ↓ ② ↓ ↓ 2	
ADDS.W #1, Rd	W Rd16+1→Rd16	2	-- -- -- -- -- -- 2	
ADDS.W #2, Rd	W Rd16+2→Rd16	2	-- -- -- -- -- -- 2	
INC.B Rd	B Rd8+1→Rd8	2	-- -- ↓ ↓ ↓ ↓ -- 2	
DAA.B Rd	B Rd8 decimal adjust → Rd8	2	-- * ↓ ↓ * ③ 2	
SUB.B Rs, Rd	B Rd8-Rs8→Rd8	2	-- ↓ ↓ ↓ ↓ ↓ ↓ 2	
SUB.W Rs, Rd	W Rd16-Rs16→Rd16	2	-- ① ↓ ↓ ↓ ↓ ↓ 2	
SUBX.B #xx:8, Rd	B Rd8-#xx:8-C→Rd8	2 2	-- ↓ ↓ ↓ ② ↓ ↓ 2	
SUBX.B Rs, Rd	B Rd8-Rs8-C→Rd8		-- ↓ ↓ ↓ ② ↓ ↓ 2	
SUBS.W #1, Rd	W Rd16-1→Rd16	2	-- -- -- -- -- -- 2	
SUBS.W #2, Rd	W Rd16-2→Rd16	2	-- -- -- -- -- -- 2	
DEC.B Rd	B Rd8-1→Rd8	2	-- -- ↓ ↓ ↓ ↓ -- 2	
DAS.B Rd	B Rd8 decimal adjust→Rd8	2	-- * ↓ ↓ * -- 2	
NEG.B Rd	B 0-Rd→Rd	2	-- ↓ ↓ ↓ ↓ ↓ ↓ 2	
CMP.B #xx:8, Rd	B Rd8-#xx:8	2 2	-- ↓ ↓ ↓ ↓ ↓ ↓ 2	
CMP.B Rs, Rd	B Rd8-Rs8		-- ↓ ↓ ↓ ↓ ↓ ↓ 2	
CMP.W Rs, Rd	W Rd16-Rs16	2	-- ① ↓ ↓ ↓ ↓ ↓ 2	
MULXU.B Rs, Rd	B Rd8 x Rs8→Rd16	2	-- -- -- -- -- -- 14	
DIVXU.B Rs, Rd	B Rd16+Rs8→Rd16 (RdH: remainder, RdL: quotient)	2	-- -- ⑤ ⑥ -- -- 14	
AND.B #xx:8, Rd	B Rd8^#xx:8→Rd8	2	-- -- ↓ ↓ 0 -- 2	
AND.B Rs, Rd	B Rd8^Rs8→Rd8	2	-- -- ↓ ↓ 0 -- 2	
OR.B #xx:8, Rd	B Rd8∨#xx:8→Rd8	2	-- -- ↓ ↓ 0 -- 2	

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
	Operand Size	#xx:8/16 Rn @Rn @(d:16, Rn) @-Rn/@Rn+ @aa:8/16 @(d:8, PC) @aa Implied		
OR.B Rs, Rd	B Rd8vRs8→Rd8	2	-- -- ↑ ↓ 0 -- 2	
XOR.B #xx:8, Rd	B Rd8@#xx:8 → Rd8	2	-- -- ↑ ↓ 0 -- 2	
XOR.B Rs, Rd	B Rd8@Rs8→Rd8	2	-- -- ↑ ↓ 0 -- 2	
NOT.B Rd	B Rd→Rd	2	-- -- ↑ ↓ 0 -- 2	
SHAL.B Rd	B 	2	-- -- ↑ ↓ ↓ ↓ 2	
SHAR.B Rd	B 	2	-- -- ↑ ↓ 0 ↑ 2	
SHLL.B Rd	B 	2	-- -- ↑ ↓ 0 ↑ 2	
SHLR.B Rd	B 	2	-- -- 0 ↓ 0 ↓ 2	
ROTXL.B Rd	B 	2	-- -- ↑ ↓ 0 ↑ 2	
ROTXR.B Rd	B 	2	-- -- ↑ ↓ 0 ↑ 2	

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
	Operand Size	#xx:8/16 Rn @Rn @(d:16, Rn) @-Rn/@Rn+ @aa:8/16 @(d:8, PC) @aa Implied		
ROTL.B Rd	B 	2	-- -- ↑ ↓ 0 ↑ 2	
ROTR.B Rd	B 	2	-- -- ↑ ↓ 0 ↑ 2	
BSET #xx:3, Rd	B (#xx:3 of Rd8) ← 1	2	-- -- -- -- -- -- 2	
BSET #xx:3, @Rd	B (#xx:3 of @Rd16) ← 1	4	-- -- -- -- -- -- 8	
BSET #xx:3, @aa:8	B (#xx:3 of @aa:8) ← 1	4	-- -- -- -- -- -- 8	
BSET Rn, Rd	B (Rn8 of Rd8) ← 1	2	-- -- -- -- -- -- 2	
BSET Rn, @Rd	B (Rn8 of @Rd16) ← 1	4	-- -- -- -- -- -- 8	
BSET Rn, @aa:8	B (Rn8 of @aa:8) ← 1	4	-- -- -- -- -- -- 8	
BCLR #xx:3, Rd	B (#xx:3 of Rd8) ← 0	2	-- -- -- -- -- -- 2	
BCLR #xx:3, @Rd	B (#xx:3 of @Rd16) ← 0	4	-- -- -- -- -- -- 8	
BCLR #xx:3, @aa:8	B (#xx:3 of @aa:8) ← 0	4	-- -- -- -- -- -- 8	
BCLR Rn, Rd	B (Rn8 of Rd8) ← 0	2	-- -- -- -- -- -- 2	
BCLR Rn, @Rd	B (Rn8 of @Rd16) ← 0	4	-- -- -- -- -- -- 8	
BCLR Rn, @aa:8	B (Rn8 of @aa:8) ← 0	4	-- -- -- -- -- -- 8	
BNOT #xx:3, Rd	B (#xx:3 of Rd8) ← $\overline{(\#xx:3 \text{ of } Rd8)}$	2	-- -- -- -- -- -- 2	
BNOT #xx:3, @Rd	B (#xx:3 of @Rd16) ← $\overline{(\#xx:3 \text{ of } @Rd16)}$	4	-- -- -- -- -- -- 8	
BNOT #xx:3, @aa:8	B (#xx:3 of @aa:8) ← $\overline{(\#xx:3 \text{ of } @aa:8)}$	4	-- -- -- -- -- -- 8	
BNOT Rn, Rd	B (Rn8 of @Rd8) ← $\overline{(Rn8 \text{ of } Rd8)}$	2	-- -- -- -- -- -- 2	

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
	Operand Size	#xx:8/16 Rn @Rn @(d:16, Rn) @-Rn/@Rn+ @aa:8/16 @(d:8, PC) @aa Implied		
BNOT Rn, @Rd	B (R8 of @Rd16) ← (Rn8 of @Rd16)	4	-- -- -- -- -- --	8
BNOT Rn, @aa:8	B (Rn8 of @aa:8) ← (Rn8 of @aa:8)	4	-- -- -- -- -- --	8
BTST #xx:3, Rd	B (#xx:3 of Rd8) → Z	2	-- -- -- ↓ -- --	2
BTST #xx:3, @Rd	B (#xx:3 of @Rd16) → Z	4	-- -- -- ↓ -- --	6
BTST #xx:3, @aa:8	B (#xx:3 of @aa:8) → Z	4	-- -- -- ↓ -- --	6
BTST Rn, Rd	B (Rn8 of Rd8) → Z	2	-- -- -- ↓ -- --	2
BTST Rn, @Rd	B (Rn8 of @Rd16) → Z	4	-- -- -- ↓ -- --	6
BTST Rn, @aa:8	B (Rn8 of @aa:8) → Z	4	-- -- -- ↓ -- --	6
BLD #xx:3, Rd	B (#xx:3 of Rd8) → C	2	-- -- -- -- -- ↓	2
BLD #xx:3, @Rd	B (#xx:3 of @Rd16) → C	4	-- -- -- -- -- ↓	6
BLD #xx:3, @aa:8	B (#xx:3 of @aa:8) → C	4	-- -- -- -- -- ↓	6
BILD #xx:3, Rd	B (#xx:3 of Rd8) → C	2	-- -- -- -- -- ↓	2
BILD #xx:3, @Rd	B (#xx:3 of @Rd16) → C	4	-- -- -- -- -- ↓	6
BILD #xx:3, @aa:8	B (#xx:3 of @aa:8) → C	4	-- -- -- -- -- ↓	6
BST #xx:3, Rd	B C → (#xx:3 of Rd8)	2	-- -- -- -- -- --	2
BST #xx:3, @Rd	B C → (#xx:3 of @Rd16)	4	-- -- -- -- -- --	8
BST #xx:3, @aa:8	B C → (#xx:3 of @aa:8)	4	-- -- -- -- -- --	8
BIST #xx:3, Rd	B C → (#xx:3 of Rd8)	2	-- -- -- -- -- --	2
BIST #xx:3, @Rd	B C → (#xx:3 of @Rd16)	4	-- -- -- -- -- --	8
BIST #xx:3, @aa:8	B C → (#xx:3 of @aa:8)	4	-- -- -- -- -- --	8
BAND #xx:3, Rd	B C ∧ (#xx:3 of Rd8) → C	2	-- -- -- -- -- ↓	2
BAND #xx:3, @Rd	B C ∧ (#xx:3 of @Rd16) → C	4	-- -- -- -- -- ↓	6
BAND #xx:3, @aa:8	B C ∧ (#xx:3 of @aa:8) → C	4	-- -- -- -- -- ↓	6
BIAND #xx:3, Rd	B C ∧ (#xx:3 of Rd8) → C	2	-- -- -- -- -- ↓	2
BIAND #xx:3, @Rd	B C ∧ (#xx:3 of @Rd16) → C	4	-- -- -- -- -- ↓	6

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
	Operand Size	#xx:8/16 Rn @Rn @(d:16, Rn) @-Rn/@Rn+ @aa:8/16 @(d:8, PC) @aa Implied		
BIAND #xx:3, @aa:8	B C^(#xx:3 of @aa:8) → C	4	-- -- -- -- --	6
BOR #xx:3, Rd	B Cv(#xx:3 of Rd8) → C	2	-- -- -- -- --	2
BOR #xx:3, @Rd	B Cv(#xx:3 of @Rd16) → C	4	-- -- -- -- --	6
BOR #xx:3, @aa:8	B Cv(#xx:3 of @aa:8) → C	4	-- -- -- -- --	6
BIOR #xx:3, Rd	B Cv(#xx:3 of Rd8) → C	2	-- -- -- -- --	2
BIOR #xx:3, @Rd	B Cv(#xx:3 of @Rd16) → C	4	-- -- -- -- --	6

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
Operand Size	Branching condition	#xx:8/16 Rn @Rn @(d:16, Rn) @-Rn/@Rn+ @aa:8/16 @(d:8, PC) @aa Implied		
BIOR #xx:3, @aa:8	B $C \vee (\#xx:3 \text{ of } @aa:8) \rightarrow C$	4	-- -- -- -- --	6
BXOR #xx:3, Rd	B $C \oplus (\#xx:3 \text{ of } Rd8) \rightarrow C$	2	-- -- -- -- --	2
BXOR #xx:3, @Rd	B $C \oplus (\#xx:3 \text{ of } @Rd16) \rightarrow C$	4	-- -- -- -- --	6
BXOR #xx:3, @aa:8	B $C \oplus (\#xx:3 \text{ of } @aa:8) \rightarrow C$	4	-- -- -- -- --	6
BIXOR #xx:3, Rd	B $C \oplus (\#xx:3 \text{ of } Rd8) \rightarrow C$	2	-- -- -- -- --	2
BIXOR #xx:3, @Rd	B $C \oplus (\#xx:3 \text{ of } @Rd16) \rightarrow C$	4	-- -- -- -- --	6
BIXOR #xx:3, @aa:8	B $C \oplus (\#xx:3 \text{ of } @aa:8) \rightarrow C$	4	-- -- -- -- --	6
BRA d:8 (BT d:8)	-- $PC \leftarrow PC + D:8$	2	-- -- -- -- --	4
BRN d:8 (BF d:8)	-- $PC \leftarrow PC + 2$	2	-- -- -- -- --	4
BHI d:8	-- If condition is true $C \vee Z = 0$ then $PC \leftarrow PC + d:8$ else next;	2	-- -- -- -- --	4
BLS d:8	-- $C \vee Z = 1$	2	-- -- -- -- --	4
BCC d:8	-- $C = 0$	2	-- -- -- -- --	4
BCS Bd:8 (BLO d:8)	-- $C = 1$	2	-- -- -- -- --	4
BNE d:8	-- $Z = 0$	2	-- -- -- -- --	4
BEQ d:8	-- $Z = 1$	2	-- -- -- -- --	4
BVC d:8	-- $V = 0$	2	-- -- -- -- --	4
BVS d:8	-- $V = 1$	2	-- -- -- -- --	4
BPL d:8	-- $N = 0$	2	-- -- -- -- --	4
BMI d:8	-- $N = 1$	2	-- -- -- -- --	4
BGE d:8	-- $N \oplus V = 0$	2	-- -- -- -- --	4
BLT d:8	-- $N \oplus V = 1$	2	-- -- -- -- --	4
BGT d:8	-- $Z \vee (N \oplus V) = 0$	2	-- -- -- -- --	4
BLE d:8	-- $Z \vee (N \oplus V) = 1$	2	-- -- -- -- --	4
JMP @Rn	$PC \leftarrow Rn16$	2	-- -- -- -- --	4
JMP @aa:16	-- $PC \leftarrow aa:16$	4	-- -- -- -- --	6

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
	Operand Size	Branching condition	#xx:8/16 Rn @Rn @(d:16, Rn) @-Rn/@Rn+ @aa:8/16 @(d:8, PC) @aa Implied	
JMP @@aa:8	-- PC ← @aa:8	2	-- -- -- -- --	8
BSR d:8	-- SP-2 → SP	2	-- -- -- -- --	6
	PC → @SP			
	PC ← PC+d:8			

Table A-1 Instruction Set (cont)

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
JSR @Rn	-- SP-2 → SP	2	-- -- -- -- -- --	6
	PC → @SP			
	PC ← Rn16			
JSR @aa:16	-- SP-2 → SP	4	-- -- -- -- -- --	8
	PC → @SP			
	PC ← aa:16			
JSR @@aa:8	SP-2 → SP	2	-- -- -- -- -- --	8
	PC → @SP			
	PC ← @aa:8			
RTS	-- PC ← @SP		2 -- -- -- -- -- --	8
	SP+2 ← SP			
RTE	-- CCR ← @SP		2 † † † † † † † †	10
	SP+2 → SP			
	PC ← @SP			
	SP+2 → SP			
SLEEP	-- Transit to sleep mode.		2 -- -- -- -- -- --	2
LDC #xx:8, CCR	B #xx:8 → CCR	2	† † † † † † † †	2
LDC Rs, CCR	B Rs8 → CCR	2	† † † † † † † †	2
STC CCR, Rd	B CCR → Rd8	2	-- -- -- -- -- --	2
ANDC #xx:8, CCR	B CCR ^ #xx:8 → CCR	2	† † † † † † † †	2
ORC #xx:8, CCR	B CCR ∨ #xx:8 → CCR	2	† † † † † † † †	2
XORC #xx:8, CCR	B CCR ⊕ #xx:8 → CCR	2	† † † † † † † †	2
NOP	-- PC ← PC+2		2 -- -- -- -- -- --	2
EEPMOV	-- if R4L ≠ 0 then		4 -- -- -- -- -- --	4
	Repeat @ R5 → @R6			
	R5 + 1 → R5			
	R6 + 1 → R6			

Mnemonic	Operation	Addressing Mode/Instruction Length (bytes)	Condition Code	No. of States
	Operand Size	#xx:8/16 Rn @Rn @(d:16, Rn) @-Rn/@Rn+ @aa:8/16 @(d:8, PC) @aa Implied		
		R4L - 1 → R4L		
		Until R4L = 0		
		else next;		

Notes: The number of execution states given here assumes the opcode and operand data are in on-chip memory. For other cases see Appendix A.3 below.

- (1) Set to 1 when there is a carry or borrow from bit 11; otherwise cleared to 0.
- (2) If the result is zero, the previous value of the flag is retained; otherwise the flag is cleared to 0.
- (3) Set to 1 if decimal adjustment produces a carry; otherwise retains value prior to arithmetic operation.
- (4) The number of states required for execution is $4n + 9$ ($n = \text{value of R4L}$).
- (5) Set to 1 if the divisor is negative; otherwise cleared to 0.
- (6) Set to 1 if the divisor is zero; otherwise cleared to 0.

A.2 Operation Code Map

Table A-2 is an operation code map. It shows the operation codes contained in the first byte of the instruction code (bits 15 to 8 of the first instruction word).

Instruction when first bit of byte 2 (bit 7 of first instruction word) is 0.

Instruction when first bit of byte 2 (bit 7 of first instruction word) is 1.

Table A-2 Operation Code Map

Low High	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	
0	NOP	SLEEP	STC	LDC	ORC	XORC	ANDC	LDC	ADD		INC	ADDS	MOV		ADDX	DAA	
1	SHLL SHAL	SHLR SHAR	ROTXL ROTL	ROTXR ROTR	OR	XOR	AND	NOT NEG	SUB		DEC	SUBS	CMP		SUBX	DAS	
2	MOV																
3																	
4	BRA	BRN	BHI	BLS	BCC	BCS	BNE	BEQ	BVC	BVS	BPL	BMI	BGE	BLT	BGT	BLE	
5	MULXU	DIVXU			RTS	BSR	RTE				JMP			JSR			
6	BSET	BNOT	BCLR	BTST				BST	BIST	MOV *							
7			BOR	BXOR	BAND	BLD	BIRD	BIXOR	BIBAND	BILD		MOV		EEPMOV	Bit-manipulation instructions		
8	ADD																
9	ADDX																
A	CMP																
B	SUBX																
C	OR																
D	XOR																
E	AND																
F	MOV																

Note: * The PUSH and POP instructions are identical in machine language to MOV instructions.

A.3 Number of Execution States

The tables here can be used to calculate the number of states required for instruction execution. Table A-3 indicates the number of states required for each cycle (instruction fetch, branch address read, stack operation, byte data access, word data access, internal operation).

Table A-4 indicates the number of cycles of each type occurring in each instruction. The total number of states required for execution of an instruction can be calculated from these two tables as follows:

$$\text{Execution states} = I \times S_I + J \times S_J + K \times S_K + L \times S_L + M \times S_M + N \times S_N$$

Examples: When instruction is fetched from on-chip ROM, and an on-chip RAM is accessed.

BSET #0, @FF00

From table A-4:

$$I = L = 2, J = K = M = N = 0$$

From table A-3:

$$S_I = 2, S_L = 2$$

$$\text{Number of states required for execution} = 2 \times 2 + 2 \times 2 = 8$$

When instruction is fetched from on-chip ROM, branch address is read from on-chip ROM, and on-chip RAM is used for stack area.

JSR @@ 30

From table A-4:

$$I = 2, J = K = 1, L = M = N = 0$$

From table A-3:

$$S_I = S_J = S_K = 2$$

$$\text{Number of states required for execution} = 2 \times 2 + 1 \times 2 + 1 \times 2 = 8$$

Table A-3 Number of Cycles in Each Instruction

Execution Status		Access Location	
(instruction cycle)		On-Chip Memory	On-Chip Peripheral Module
Instruction fetch	S_I	2	--
Branch address read	S_J		
Stack operation	S_K		
Byte data access	S_L		2 or 3*
Word data access	S_M		--
Internal operation	S_N	1	

Note: * Depends on which on-chip module is accessed. See 2.9.1, Notes on Data Access for details.

Table A-4 Number of Cycles in Each Instruction

Instruction Mnemonic		Instructio	Branch	Stack	Byte	Word	Internal
		n Fetch	Addr. Read	Operation	Data Access	Data Access	Operation
		I	J	K	L	M	N
ADD	ADD.B #xx:8, Rd	1					
	ADD.B Rs, Rd	1					
	ADD.W Rs, Rd	1					
ADDS	ADDS.W #1, Rd	1					
	ADDS.W #2, Rd	1					
ADDX	ADDX.B #xx:8, Rd	1					
	ADDX.B Rs, Rd	1					
AND	AND.B #xx:8, Rd	1					
	AND.B Rs, Rd	1					
ANDC	ANDC #xx:8, CCR	1					
BAND	BAND #xx:3, Rd	1					
	BAND #xx:3, @Rd	2			1		
	BAND #xx:3, @aa:8	2			1		
Bcc	BRA d:8 (BT d:8)	2					
	BRN d:8 (BF d:8)	2					
	BHI d:8	2					
	BLS d:8	2					
	BCC d:8 (BHS d:8)	2					
	BCS d:8 (BLO d:8)	2					
	BNE d:8	2					
	BEQ d:8	2					
	BVC d:8	2					
	BVS d:8	2					
	BPL d:8	2					
	BMI d:8	2					
	BGE d:8	2					
	BLT d:8	2					
	BGT d:8	2					
BLE d:8	2						
BCLR	BCLR #xx:3, Rd	1					
	BCLR #xx:3, @Rd	2			2		

		Instruction Fetch	Branch Addr. Read	Stack Operation	Byte Data Access	Word Data Access	Internal Operation
Instruction	Mnemonic	I	J	K	L	M	N
	BCLR #xx:3, @aa:8	2			2		
	BCLR Rn, Rd	1					

Table A-4 Number of Cycles in Each Instruction (cont)

Instruction	Mnemonic	Instru-ction	Branch	Stack Operation	Byte Data	Word Data	Internal
		Fetch	Addr. Read		Access	Access	Operation
		I	J	K	L	M	N
BCLR	BCLR Rn, @Rd	2			2		
	BCLR Rn, @aa:8	2			2		
BIAND	BIAND #xx:3, Rd	1					
	BIAND #xx:3, @Rd	2			1		
	BIAND #xx:3, @aa:8	2			1		
BILD	BILD #xx:3, Rd	1					
	BILD #xx:3, @Rd	2			1		
	BILD #xx:3, @aa:8	2			1		
BIOR	BIOR #xx:3, Rd	1					
	BIOR #xx:3, @Rd	2			1		
	BIOR #xx:3, @aa:8	2			1		
BIST	BIST #xx:3, Rd	1					
	BIST #xx:3, @Rd	2			2		
	BIST #xx:3, @aa:8	2			2		
BIXOR	BIXOR #xx:3, Rd	1					
	BIXOR #xx:3, @Rd	2			1		
	BIXOR #xx:3, aa:8	2			1		
BLD	BLD #xx:3, Rd	1					
	BLD #xx:3, @Rd	2			1		
	BLD #xx:3, @aa:8	2			1		
BNOT	BNOT #xx:3, Rd	1					
	BNOT #xx:3, @Rd	2			2		
	BNOT #xx:3, aa:8	2			2		
	BNOT Rn, Rd	1					
	BNOT Rn, @Rd	2			2		
	BNOT Rn, @aa:8	2			2		
BOR	BOR #xx:3, Rd	1					
	BOR #xx:3, @Rd	2			1		
	BOR #xx:3, @aa:8	2			1		
BSET	BSET #xx:3, Rd	1					
	BSET #xx:3, @Rd	2			2		
	BSET #xx:3, aa:8	2			2		
	BSET Rn, Rd	1					
	BSET Rn, @Rd	2			2		

Table A-4 Number of Cycles in Each Instruction (cont)

Instruction	Mnemonic	Instruction Cycles					
		I	J	K	L	M	N
BSET	BSET Rn, @aa:8	2			2		
BSR	BSR d:8	2		1			
BST	BST #xx:3, Rd	1					
	BST #xx:3, @Rd	2			2		
	BST #xx:3, @aa:8	2			2		
BTST	BTST #xx:3, Rd	1					
	BTST #xx:3, @Rd	2			1		
	BTST #XX:3, @aa;8	2			1		
	BTST Rn, @Rd	1					
	BTST Rn, @Rd	2			1		
	BTST Rn, @aa:8	2			1		
BXOR	BXOR #xx:3, Rd	1					
	BXOR #xx:3, @Rd	2			1		
	BXOR #xx:3, @aa:8	2			1		
CMP	CMP. B #xx:8, Rd	1					
	CMP. B Rs, Rd	1					
	CMP.W Rs, Rd	1					
DAA	DAA.B Rd	1					
DAS	DAS.B Rd	1					
DEC	DEC.B Rd	1					
DIVXU	DIVXU.B Rs, Rd	1					12
EEPMOV	EEPMOV	2			2n+2*		1
INC	INC.B Rd	1					
JMP	JMP @Rn	2					
	JMP @aa:16	2					2
	JMP @@aa:8	2	1				2
JSR	JSR @Rn	2		1			
	JSR @aa:16	2		1			2
	JSR @@aa:8	2	1	1			
LDC	LDC #xx:8, CCR	1					
	LDC Rs, CCR	1					
MOV	MOV.B #xx:8, Rd	1					

MOV.B Rs, Rd	1	
MOV.B @Rs, Rd	1	1

Note: n: Initial value in R4L. The source and destination operands are accessed n + 1 times each.

Table A-4 Number of Cycles in Each Instruction (cont)

Instruction	Mnemonic	Instruc	Branch	Stack	Byte	Word	Internal	
		tion Fetch	Addr. Read	Operation	Data Access	Data Access	Operation	
		I	J	K	L	M	N	
MOV	MOV.B @(d:16, Rs), Rd	2			1			
	MOV.B @Rs+, Rd	1			1		2	
	MOV.B @aa:8, Rd	1			1			
	MOV.B @aa:16, Rd	2			1			
	MOV.B Rs, @Rd	1			1			
	MOV.B Rs, @(d:16, Rd)	2			1			
	MOV.B Rs, @-Rd	1			1		2	
	MOV.B Rs, @aa:8	1			1			
	MOV.B Rs, @aa:16	2			1			
	MOV.W #xx:16, Rd	2						
	MOV.W Rs, Rd	1						
	MOV.W @Rs, Rd	1					1	
	MOV.W @(d:16, Rs), Rd	2					1	
	MOV.W @Rs+, Rd	1					1	2
	MOV.W @aa:16, Rd	2					1	
	MOV.W Rs, @Rd	1					1	
	MOV.W Rs, @(d:16, Rd)	2					1	
	MOV.W Rs, @-Rd	1					1	2
	MOV.W Rs, @aa:16	2					1	
	MULXU	MULXU.B Rs, Rd	1					12
NEG	NEG.B Rd	1						
NOP	NOP	1						
NOT	NOT.B Rd	1						
OR	OR.B #xx:8, Rd	1						
	OR.B Rs, Rd	1						
ORC	ORC #xx:8, CCR	1						
POP	POP Rd	1		1			2	
PUSH	PUSH Rs	1		1			2	

		Instruc tion Fetch	Branch Addr. Read	Stack Operation	Byte Data Access	Word Data Access	Internal Operation
Instruction	Mnemonic	I	J	K	L	M	N
ROTL	ROTL.B Rd	1					
ROTR	ROTR.B Rd	1					
ROTXL	ROTXL.B Rd	1					
ROTXR	ROTXR.B Rd	1					
RTE	RTE	2		2			2
RTS	RTS	2		1			2

Table A-4 Number of Cycles in Each Instruction (cont)

Instruction	Mnemonic	Instru-	Branch	Stack	Byte	Word	Internal
		ction Fetch	Addr. Read	Operation	Data Access	Data Access	Operation
		I	J	K	L	M	N
SHLL	SHLL.B Rd	1					
SHAL	SHAL.B Rd	1					
SHAR	SHAR.B Rd	1					
SHLR	SHLR.B Rd	1					
SLEEP	SLEEP	1					
STC	STC CCR, Rd	1					
SUB	SUB.B Rs, Rd	1					
	SUB.W Rs, Rd	1					
SUB	SUBS.W#1, Rd	1					
	SUBS.W #2, Rd	1					
SUBX	SUBX.B # xx:8, Rd	1					
	SUBX.B Rs, Rd	1					
XOR	XOR.B #xx:8, Rd	1					
	XOR.B RS, Rd1	1					
XORC	XORC #xx:8, CCR	1					

Appendix B On-Chip Registers

B.1 I/O Registers (1)

Address Register	Name	Bit Names								Module Name
		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
H'90	MTCR	DAOE	MTEN	DIR	--	FR1	FR2	FT1	FT0	Multitone generator
H'91	EBLR	--	EBL6	EBL5	EBL4	EBL3	EBL2	EBL1	EBL0	
H'92	FRMR	FRM7	FRM6	FRM5	FRM4	FRM3	FRM2	FRM1	FRM0	
H'93	FTNR	FTN7	FTN6	FTN5	FTN4	FTN3	FTN2	FTN1	FTN0	
H'94	ITLR	--	--	--	ITL4	ITL3	ITL2	ITL1	ITL0	
H'95										
H'96										
H'97										
H'98	PMR1	IRQ3	IRQ2	IRQ1	--	TMIG	TMOFH	TMOFL	TMOW	I/O ports
H'99	PMR2	IRQ0	--	POF1	NCS	SO1	SI1	SCK1	IRQ4	
H'9A										
H'9B	PMR5	WKP7	WKP6	WKP5	WKP4	WKP3	WKP2	WKP1	WKP0	
H'9C	PUCR1	PUCR1 ₇	PUCR1 ₆	PUCR1 ₅	PUCR1 ₄	PUCR1 ₃	PUCR1 ₂	PUCR1 ₁	PUCR1 ₀	
H'9D	PUCR2	PUCR2 ₇	PUCR2 ₆	PUCR2 ₅	PUCR2 ₄	PUCR2 ₃	PUCR2 ₂	PUCR2 ₁	PUCR2 ₀	
H'9E	PUCR5	PUCR5 ₇	PUCR5 ₆	PUCR5 ₅	PUCR5 ₄	PUCR5 ₃	PUCR5 ₂	PUCR5 ₁	PUCR5 ₀	
H'9F	PUCR6	PUCR6 ₇	PUCR6 ₆	PUCR6 ₅	PUCR6 ₄	PUCR6 ₃	PUCR6 ₂	PUCR6 ₁	PUCR6 ₀	
H'A0	SCR1	SNC1	SNC0	--	--	CKS3	CKS2	CKS1	CKS0	SCI1
H'A1	SCSR1	--	SOL	ORER	--	--	--	--	STF	
H'A2	SDRU	SDRU7	SDRU6	SDRU5	SDRU4	SDRU3	SDRU2	SDRU1	SDRU0	
H'A3	SDRL	SDRL7	SDRL6	SDRL5	SDRL4	SDRL3	SDRL2	SDRL1	SDRL0	
H'A4										
H'A5										
H'A6										
H'A7										

Address Register	Name	Bit Names								Module
		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Name
(low)										
H'A8	SMR	COM	CHR	PE	PM	STOP	MP	CKS1	CKS0	SCI3
H'A9	BRR	BRR7	BRR6	BRR5	BRR4	BRR3	BRR2	BRR1	BRR0	
H'AA	SCR3	TIE	RIE	TE	RE	MPIE	TEIE	CKE1	CKE0	
H'AB	TDR	TDR7	TDR6	TDR5	TDR4	TDR3	TDR2	TDR1	TDR0	
H'AC	SSR	TDRE	RDRF	OER	FER	PER	TEND	MPBR	MPBT	
H'AD	RDR	RDR7	RDR6	RDR5	RDR4	RDR3	RDR2	RDR1	RDR0	
H'AE										
H'AF										

Notation

SCI1: Serial communication interface 1

SCI3: Serial communication interface 3


Address Register		Bit Names								Module
(low)	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Name
H'B0	TMA	TMA7	TMA6	TMA5	--	TMA3	TMA2	TMA1	TMA0	Timer A
H'B1	TCA	TCA7	TCA6	TCA5	TCA4	TCA3	TCA2	TCA1	TCA0	
H'B2	DTCR	DTEN	--	CLOE	RWOE	CLF1	CLF0	RWF1	RWF0	DTMF
H'B3	DTLR	--	--	--	DTL4	DTL3	DTL2	DTL1	DTL0	generator
H'B4										
H'B5										
H'B6	TCRF	TOLH	CKSH2	CKSH1	CKSH0	TOLL	CKSL2	CKSL1	CKSLO	Timer F
H'B7	TCSR	OVFH	CMFH	OVIEH	CCLR	OVFL	CMFL	OVIEL	CCLRL	
H'B8	TCFH	TCFH7	TCFH6	TCFH5	TCFH4	TCFH3	TCFH2	TCFH1	TCFH0	
H'B9	TCFL	TCFL7	TCFL6	TCFL5	TCFL4	TCFL3	TCFL2	TCFL1	TCFL0	
H'BA	OCRFH	OCRFH	OCRFH	OCRFH	OCRFH	OCRFH	OCRFH	OCRFH	OCRFH	
		7	6	5	4	3	2	1	0	
H'BB	OCRFL	OCRFL	OCRFL	OCRFL	OCRFL	OCRFL	OCRFL	OCRFL	OCRFL	
		7	6	5	4	3	2	1	0	
H'BC	TMG	OVFH	OVFL	OVIE	IIEGS	CCLR1	CCLR0	CKS1	CKS0	Timer G
H'BD	ICRGF	ICRGF7	ICRGF6	ICRGF5	ICRGF4	ICRGF3	ICRGF2	ICRGF1	ICRGF0	
H'BE	ICRGR	ICRGR	ICRGR	ICRGR	ICRGR	ICRGR	ICRGR	ICRGR	ICRGR0	
		7	6	5	4	3	2	1		
H'BF										
H'CO	LPCR	DTS1	DTS0	CMX	SGX	SGS3	SGS2	SGS1	SGS0	LCD
H'C1	LCR	--	PSW	ACT	DISP	CKS3	CKS2	CKS1	CKS0	controller/driver
H'C2										
H'C3										
H'C4	AMR	CKS	TRGE	CKS1	--	CH3	CH2	CH1	CH0	A/D
H'C5	ADRR	ADR7	ADR6	ADR5	ADR4	ADR3	ADR2	ADR1	ADR0	converter
H'C6	ADSR	ADSF	--	--	--	--	--	--	--	
H'C7										
H'C8										
H'C9										
H'CA										


Address Register		Bit Names								Module
(low)	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	Name
	H'CB									
	H'CC									
	H'CD									
	H'CE									
	H'CF									

Address Register	Bit Names									Module
		Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	
H'D0										
H'D1										
H'D2	PDRD	PD ₇	PD ₆	PD ₅	PD ₄	PD ₃	PD ₂	PD ₁	PD ₀	I/O
H'D3	PDRE	--	--	--	--	PE ₃	PE ₂	PE ₁	PE ₀	ports
H'D4	PDR1	P1 ₇	P1 ₆	P1 ₅	P1 ₄	P1 ₃	P1 ₂	P1 ₁	P1 ₀	
H'D5	PDR2	P2 ₇	P2 ₆	P2 ₅	P2 ₄	P2 ₃	P2 ₂	P2 ₁	P2 ₀	
H'D6										
H'D7										
H'D8	PDR5	P5 ₇	P5 ₆	P5 ₅	P5 ₄	P5 ₃	P5 ₂	P5 ₁	P5 ₀	I/O
H'D9	PDR6	P6 ₇	P6 ₆	P6 ₅	P6 ₄	P6 ₃	P6 ₂	P6 ₁	P6 ₀	ports
H'DA	PDR7	P7 ₇	P7 ₆	P7 ₅	P7 ₄	P7 ₃	P7 ₂	P7 ₁	P7 ₀	
H'DB	PDR8	P8 ₇	P8 ₆	P8 ₅	P8 ₄	P8 ₃	P8 ₂	P8 ₁	P8 ₀	
H'DC	PDR9	P9 ₇	P9 ₆	P9 ₅	P9 ₄	P9 ₃	P9 ₂	P9 ₁	P9 ₀	
H'DD	PDRA	--	--	--	--	PA ₃	PA ₂	PA ₁	PA ₀	
H'DE	PDRB	PB ₇	PB ₆	PB ₅	PB ₄	PB ₃	PB ₂	PB ₁	PB ₀	
H'DF										
H'E0										
H'E1										
H'E2	PCRD	PCRD ₇	PCRD ₆	PCRD ₅	PCRD ₄	PCRD ₃	PCRD ₂	PCRD ₁	PCRD ₀	I/O
H'E3	PCRE	--	--	--	--	PCRE ₃	PCRE ₂	PCRE ₁	PCRE ₀	ports
H'E4	PCR1	PCR1 ₇	PCR1 ₆	PCR1 ₅	PCR1 ₄	PCR1 ₃	PCR1 ₂	PCR1 ₁	PCR1 ₀	
H'E5	PCR2	PCR2 ₇	PCR2 ₆	PCR2 ₅	PCR2 ₄	PCR2 ₃	PCR2 ₂	PCR2 ₁	PCR2 ₀	
H'E6										
H'E7										
H'E8	PCR5	PCR5 ₇	PCR5 ₆	PCR5 ₅	PCR5 ₄	PCR5 ₃	PCR5 ₂	PCR5 ₁	PCR5 ₀	I/O
H'E9	PCR6	PCR6 ₇	PCR6 ₆	PCR6 ₅	PCR6 ₄	PCR6 ₃	PCR6 ₂	PCR6 ₁	PCR6 ₀	ports
H'EA	PCR7	PCR7 ₇	PCR7 ₆	PCR7 ₅	PCR7 ₄	PCR7 ₃	PCR7 ₂	PCR7 ₁	PCR7 ₀	
H'EB	PCR8	8 ₇	PCR8 ₆	PCR8 ₅	PCR8 ₄	PCR8 ₃	PCR8 ₂	PCR8 ₁	PCR8 ₀	
H'EC	PCR9	PCR9 ₇	PCR9 ₆	PCR9 ₅	PCR9 ₄	PCR9 ₃	PCR9 ₂	PCR9 ₁	PCR9 ₀	
H'ED	PCRA	--	--	--	--	PCRA ₃	PCRA ₂	PCRA ₁	PCRA ₀	
H'EE										
H'EF										

Address Register	Name	Bit Names								Module Name
		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
H'F0	SYSCR 1	SSBY	STS2	STS1	STS0	LSON	--	--	--	System
H'F1	SYSCR 2	--	--	--	NESEL	DTON	MSON	SA1	SA0	control
H'F2	IEGR	NMIEG	--	--	IEG4	IEG3	IEG2	IEG1	IEG0	
H'F3	IENR1	IENTA	IENS1	IENWP	IEN4	IEN3	IEN2	IEN1	IEN0	
H'F4	IENR2	IENDT	IENDA	IENMT	IENTG	IENTH	IENTFL	--	--	
H'F5										
H'F6	IRR1	IRRTA	IRRS1	--	IRRI4	IRRI3	IRRI2	IRRI1	IRRI0	System
H'F7	IRR2	IRRDT	IRRAD	IRRMT	IRRTG	IRRTFH	IRRTFL	--	--	control
H'F8										
H'F9	IWPR	IWPF7	IWPF6	IWPF5	IWPF4	IWPF3	IWPF2	IWPF1	IWPF0	System control
H'FA										
H'FB										
H'FC										
H'FD										
H'FE										
H'FF										
H'FF										

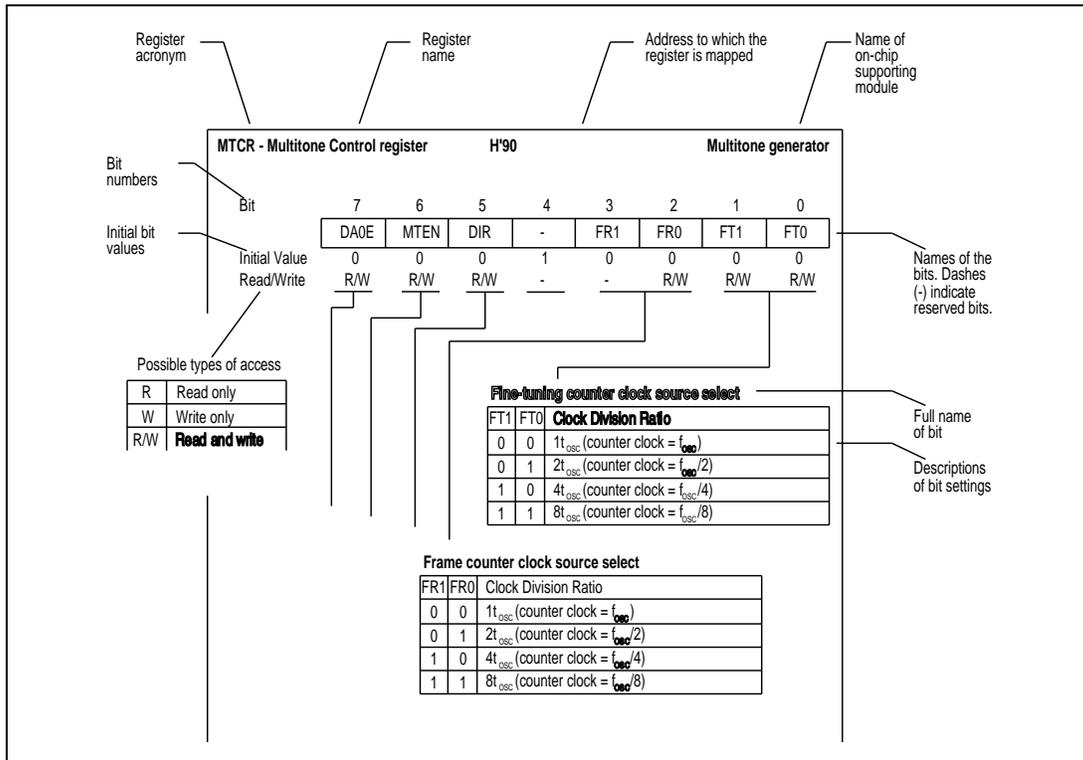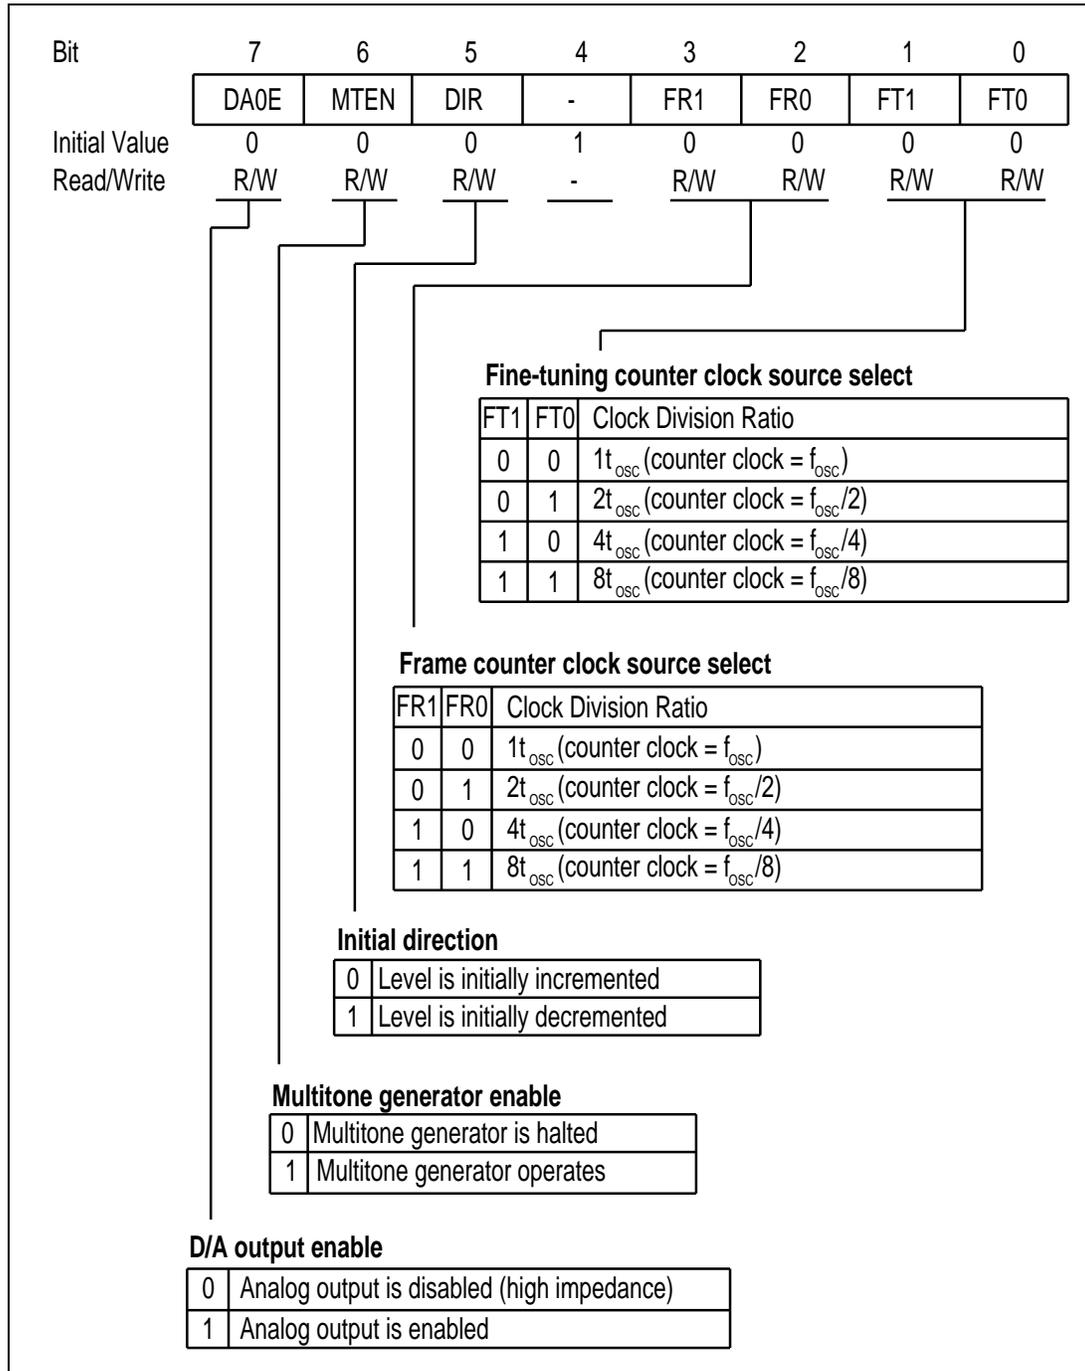B.2 I/O Registers (2)





EBLR--Effective bit length register**H'91 Multitone generator**

Bit	7	6	5	4	3	2	1	0
	-	EBL6	EBL5	EBL4	EBL3	EBL2	EBL1	EBL0
Initial value	1	0	0	0	0	0	0	0
Read/Write	-	R/W						

Effective bit length - 1

FRMR--Frame register**H'92 Multitone generator**

Bit	7	6	5	4	3	2	1	0
	FRM7	FRM6	FRM5	FRM4	FRM3	FRM2	FRM1	FRM0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

Value reloaded into frame counter

FTNR--Fine-tuning register**H'93 Multitone generator**

Bit	7	6	5	4	3	2	1	0
	FTN7	FTN6	FTN5	FTN4	FTN3	FTN2	FTN1	FTN0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

Value reloaded into fine - tuning counter


ITLR--Initial level register**H'94 Multitone generator**


Bit	7	6	5	4	3	2	1	0
	-	-	-	ITL4	ITL3	ITL2	ITL1	ITL0
Initial value	1	1	1	0	0	0	0	0
Read/Write	-	-	-	R/W	R/W	R/W	R/W	R/W

Initial analog output level

PMR1--Port mode register 1

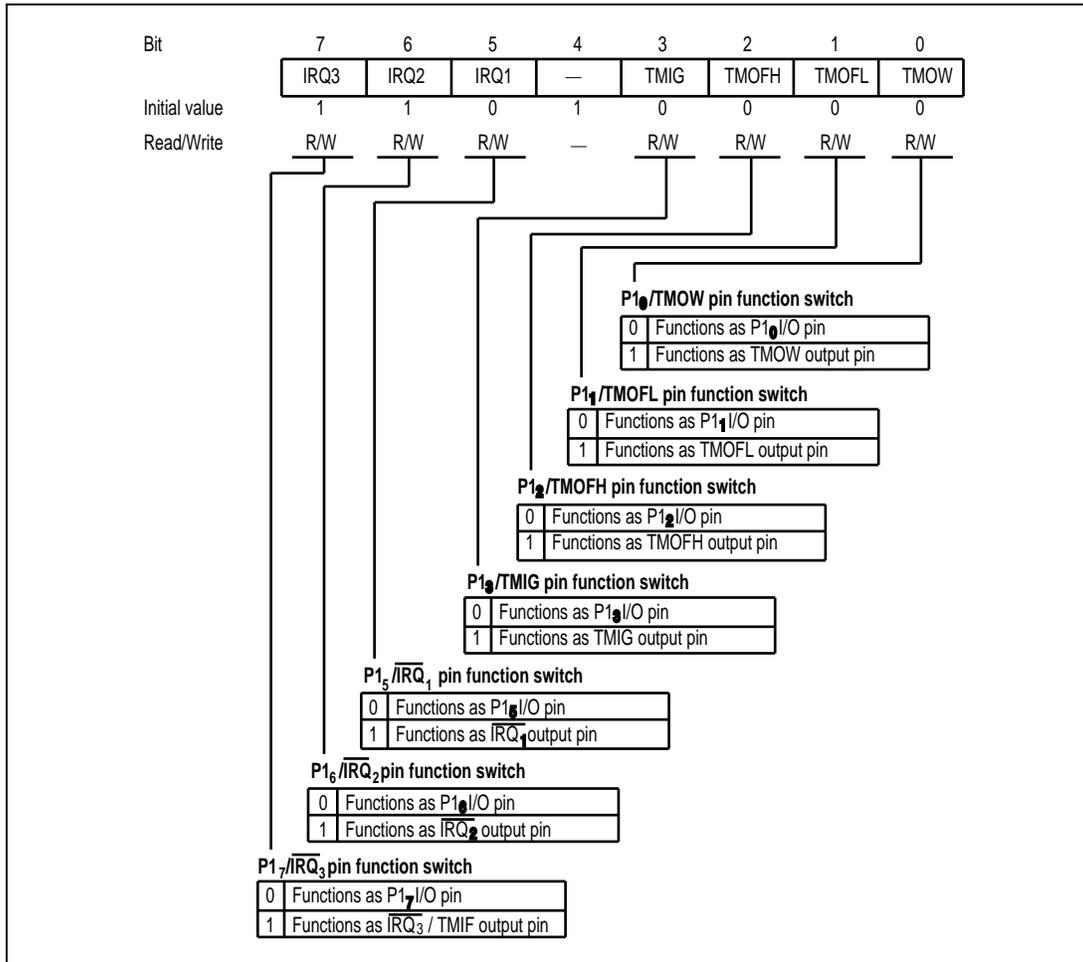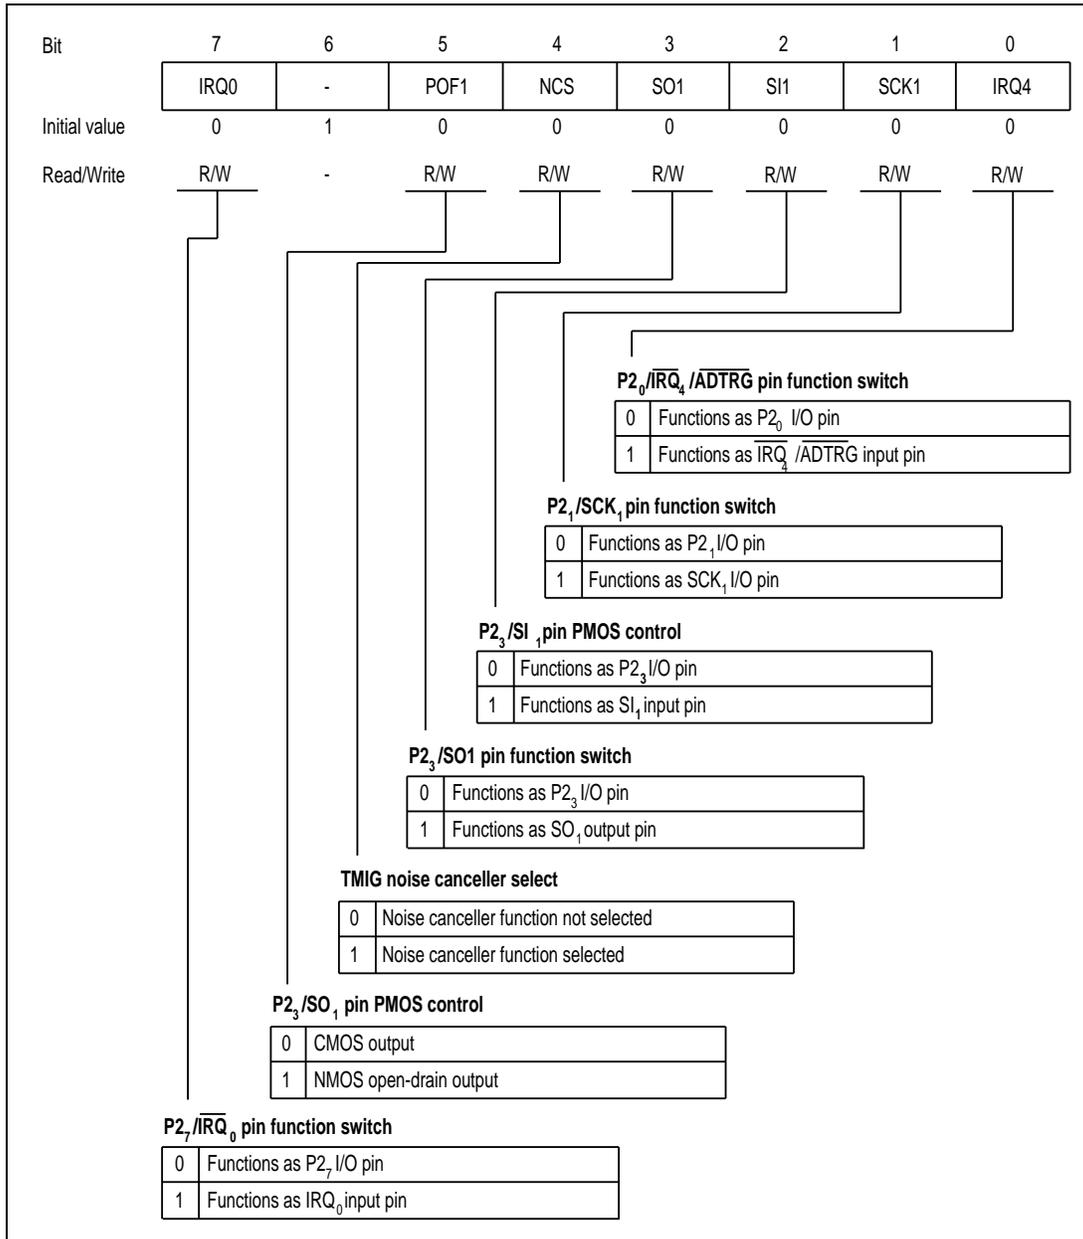H'98 I/O ports





PMR5--Port mode register 5

H'9B I/O ports

Bit	7	6	5	4	3	2	1	0
	WKP7	WKP6	WKP5	WKP4	WKP3	WKP2	WKP1	WKP0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

P5 _n / WKP _n / SEG _{n+1} pin function switch	
0	Functions as P5 _n I/O pin
1	Functions as WKP _n input pin

(n = 7 to 0)

PUCR1--Port pull-up control register 1

H'9C I/O ports

Bit	7	6	5	4	3	2	1	0
	PUCR1 ₇	PUCR1 ₆	PUCR1 ₅	PUCR1 ₄	PUCR1 ₃	PUCR1 ₂	PUCR1 ₁	PUCR1 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PUCR2--Port pull-up control register 2

H'9D I/O ports

Bit	7	6	5	4	3	2	1	0
	PUCR2 ₇	PUCR2 ₆	PUCR2 ₅	PUCR2 ₄	PUCR2 ₃	PUCR2 ₂	PUCR2 ₁	PUCR2 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PUCR5--Port pull-up control register 5

H'9E I/O ports

Bit	7	6	5	4	3	2	1	0
	PUCR5 ₇	PUCR5 ₆	PUCR5 ₅	PUCR5 ₄	PUCR5 ₃	PUCR5 ₂	PUCR5 ₁	PUCR5 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PUCR6--Port pull-up control register 6

H'9F I/O ports

Bit	7	6	5	4	3	2	1	0
	PUCR6 ₇	PUCR6 ₆	PUCR6 ₅	PUCR6 ₄	PUCR6 ₃	PUCR6 ₂	PUCR6 ₁	PUCR6 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

SCR1--Serial control register 1

H'A0 SCII

Bit	7	6	5	4	3	2	1	0
	SNC1	SNC0	-	-	CKS3	CKS2	CKS1	CKS0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W

Clock select

Bit 2 CKS2	Bit 1 CKS1	Bit 0 CKS0	Prescaler Division	Serial Clock Cycle	
				Synchronous	
				$\phi = 5 \text{ MHz}$	$\phi = 2.5 \text{ MHz}$
0	0	0	$\phi/1024$	204.8 μs	409.6 μs
		1	$\phi/256$	51.2 μs	102.4 μs
	1	0	$\phi/64$	12.8 μs	25.6 μs
		1	$\phi/32$	6.4 μs	12.8 μs
1	0	0	$\phi/16$	3.2 μs	6.4 μs
		1	$\phi/8$	1.6 μs	3.2 μs
	1	0	$\phi/4$	0.8 μs	1.6 μs
		1	$\phi/2$	-	0.8 μs

Clock source select


0	Clock source is prescaler S, and pin SCK ₁ is output pin
1	Clock source is external clock, and pin SCK ₁ is input pin

Operation mode select

0	0	8-bit synchronous transfer mode
0	1	16-bit synchronous transfer mode
1	0	Continuous clock output mode
1	1	Reserved


SCSR1--Serial control/status register 1

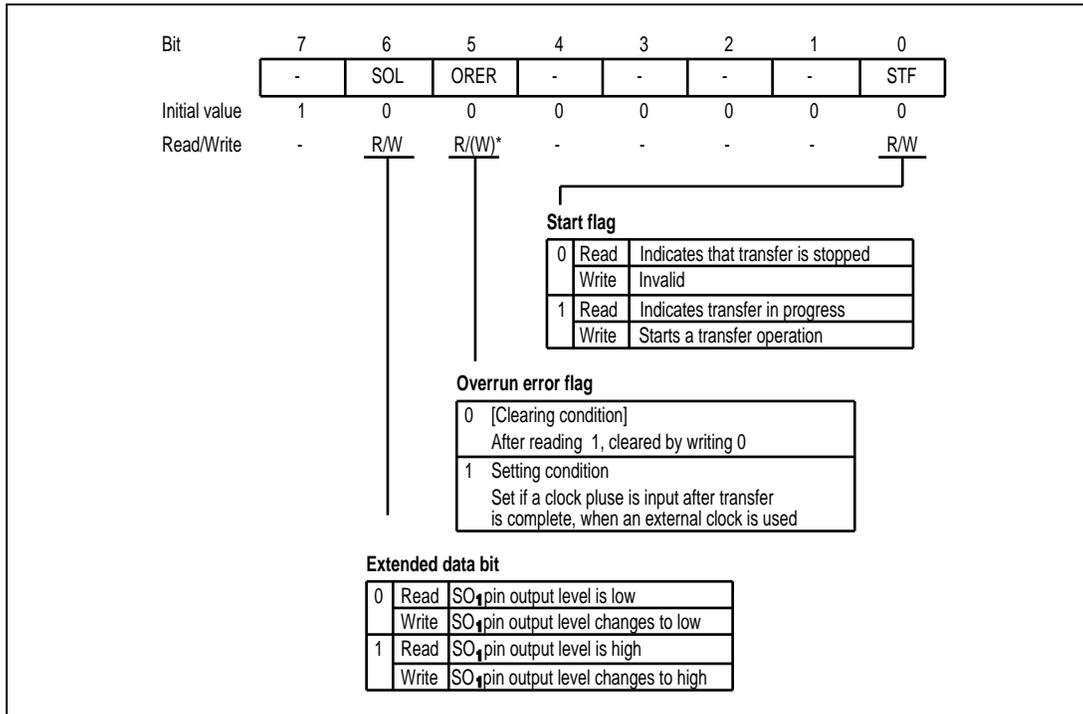H'A1 SCI1



SDRU--Serial data register U

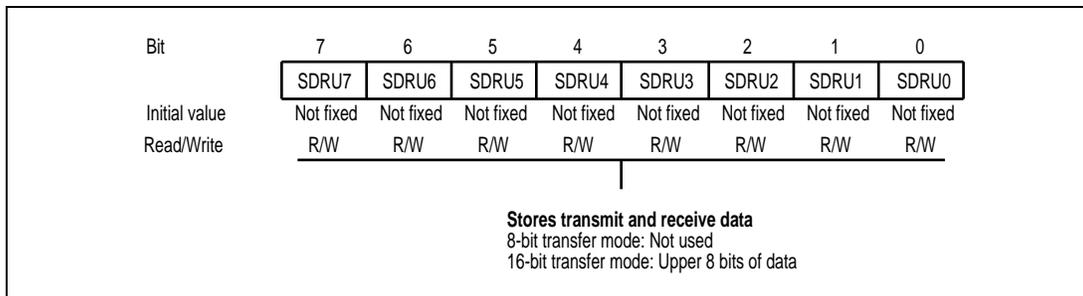H'A2 SCI1




SDRL--Serial data register L**H'A3 SCI1**

Bit	7	6	5	4	3	2	1	0
	SDRL7	SDRL6	SDRL5	SDRL4	SDRL3	SDRL2	SDRL1	SDRL0
Initial value	Not fixed							
Read/Write	R/W							

Stores transmit and receive data
8-bit transfer mode: 8-bit data
16-bit transfer mode: Lower 8 bits of data


SMR--Serial mode register

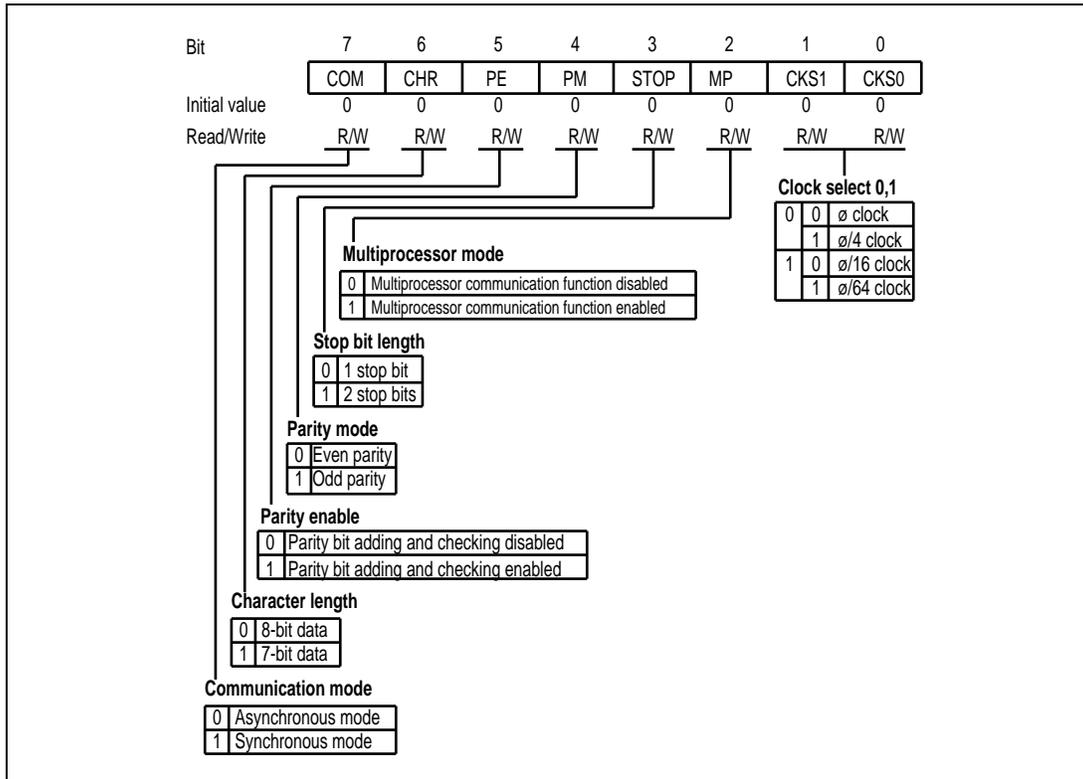
H'A8 SCI3



BRR--Bit rate register 1

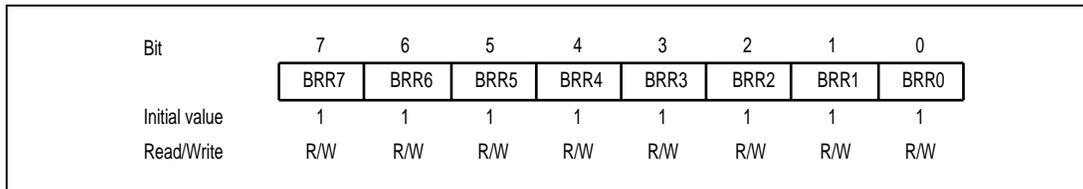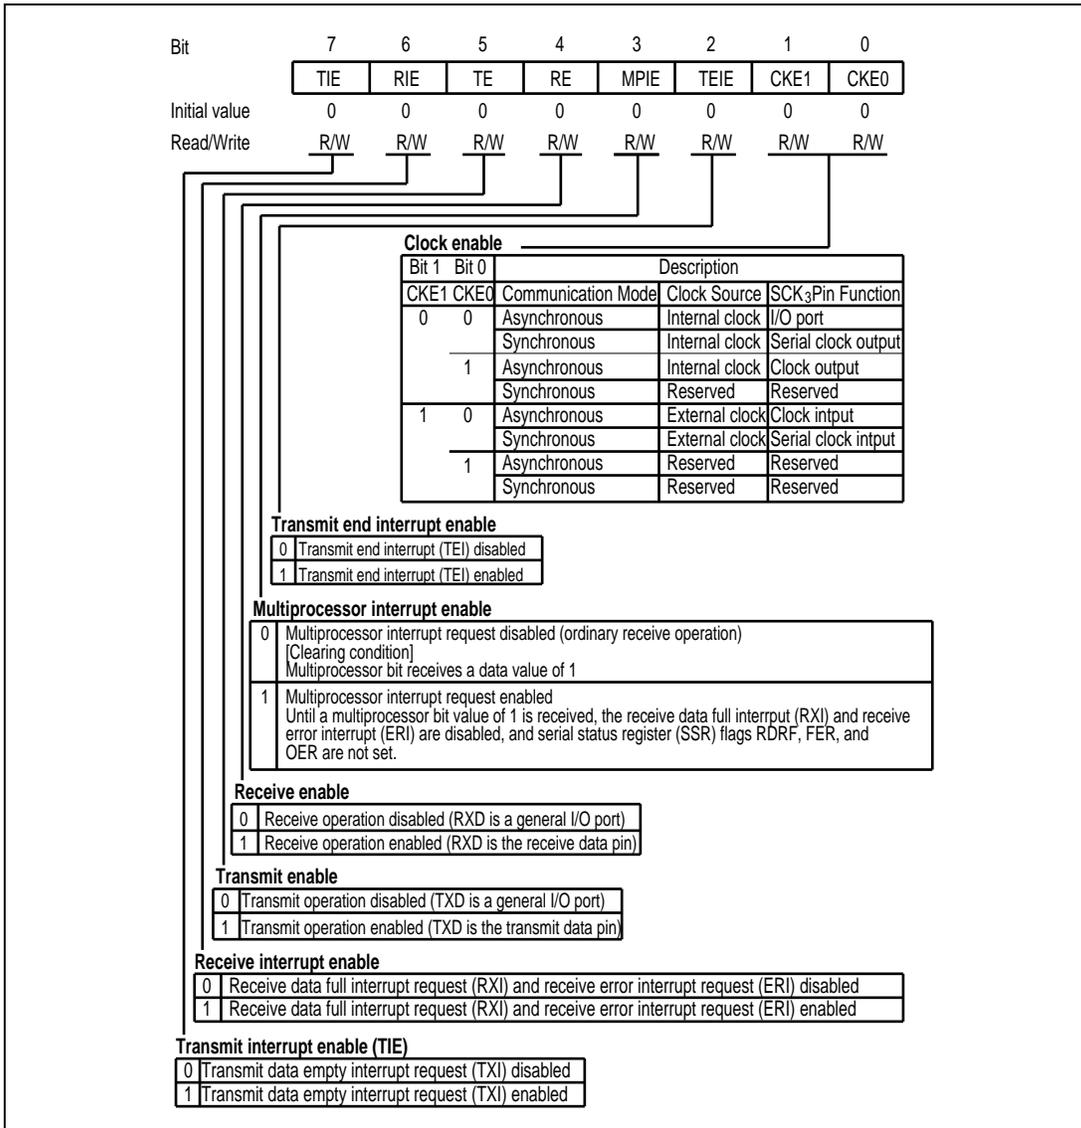H'A9 SCI3






TDR--Transmit data register

H'AB SCI3

Bit	7	6	5	4	3	2	1	0
	TDR7	TDR6	TDR5	TDR4	TDR3	TDR2	TDR1	TDR0
Initial value	1	1	1	1	1	1	1	1
Read/Write	R/W							

|
Data to be transferred to TSR

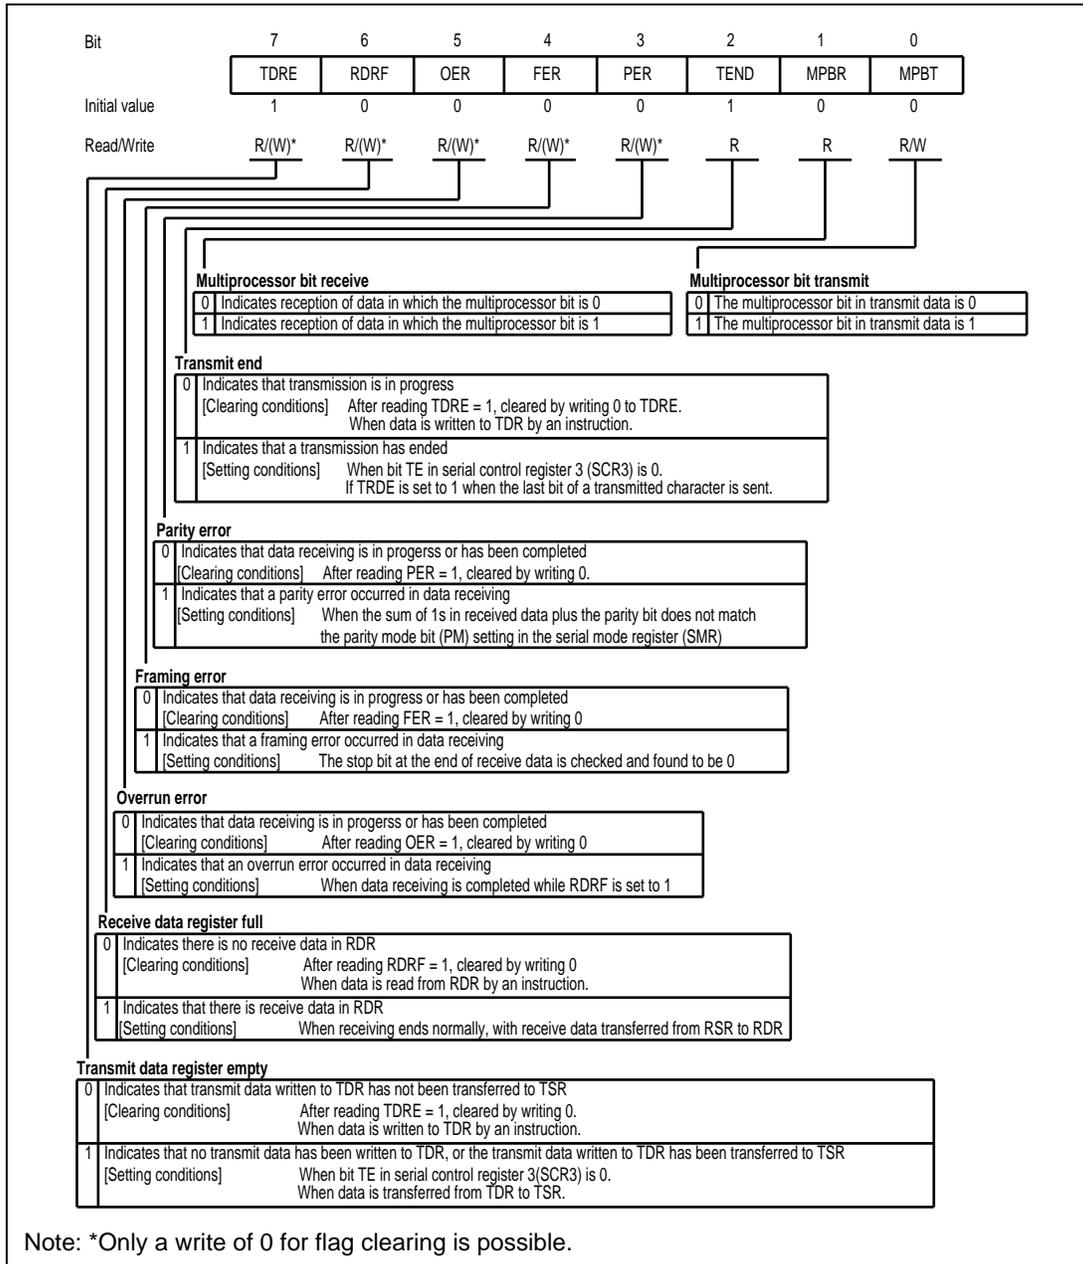

RDR--Receive data register

H'AD SCI3

Bit	7	6	5	4	3	2	1	0
	RDR7	RDR6	RDR5	RDR4	RDR3	RDR2	RDR1	RDR0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R	R	R	R	R	R	R	R

TMA--Timer mode register A

H'B0 Timer A


Bit	7	6	5	4	3	2	1	0
	TMA7	TAM6	TMA5	-	TMA3	TMA2	TMA1	TMA0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	-	R/W	R/W	R/W	R/W

Clock output select			
0	0	0	$\phi/32$
0	0	1	$\phi/16$
0	1	0	$\phi/8$
0	1	1	$\phi/4$
1	0	0	$\phi_w/32$
1	0	1	$\phi_w/16$
1	1	0	$\phi_w/8$
1	1	1	$\phi_w/4$

Internal clock select				Prescaler and Divider Ratio or Overflow Period	Function
0	0	0	0	PSS $\phi/8192$	Interval timer
			1	PSS $\phi/4096$	
		1	0	PSS $\phi/2048$	
			1	PSS $\phi/512$	
	1	0	0	PSS $\phi/256$	
			1	PSS $\phi/128$	
		1	0	PSS $\phi/32$	
			1	PSS $\phi/8$	
1	0	0	0	PSW 1 s	Time base
			1	PSW 0.5 s	
		1	0	PSW 0.25 s	
			1	PSW 0.03125 s	
	1	0	0	PSW and TCA are reset	
		1	0	1	


DTCR--DTMF control register

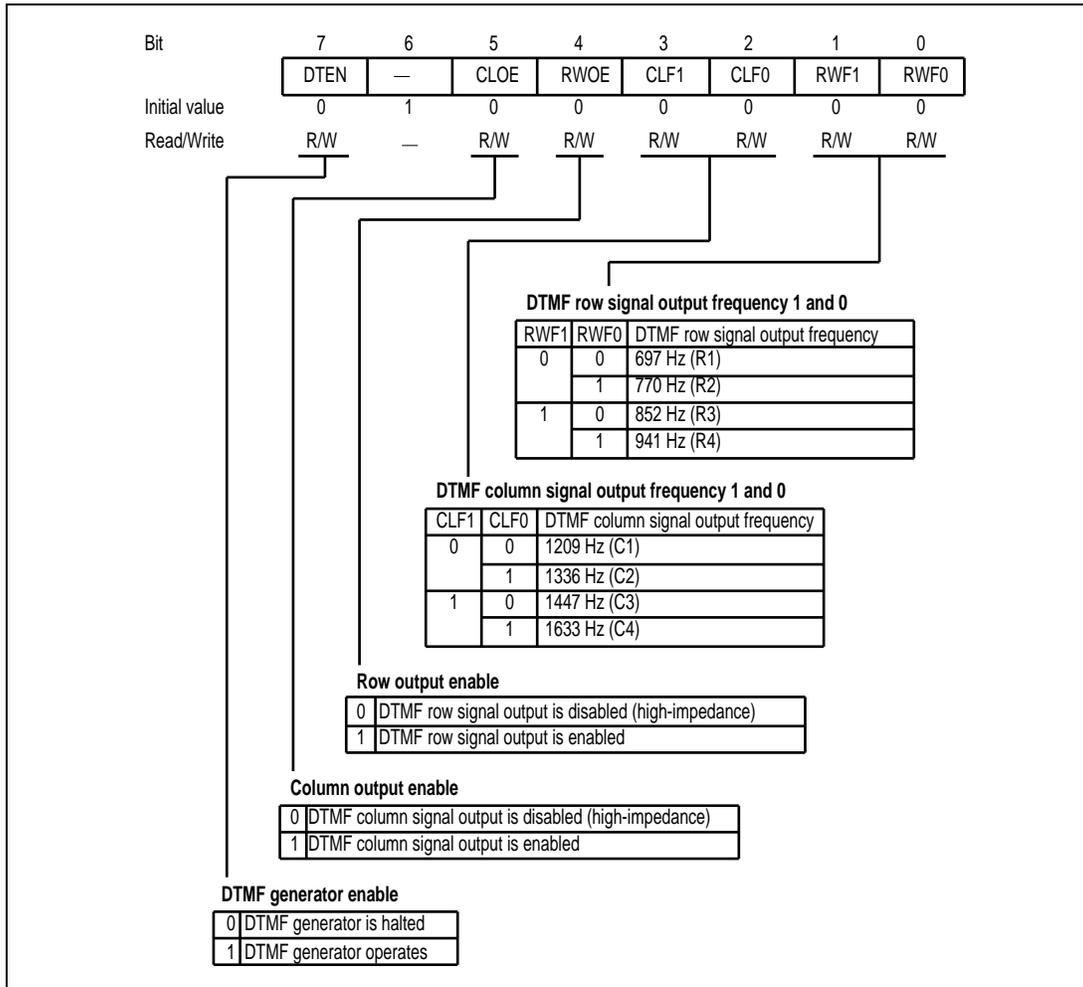H'B2 DTMF generator



DTLR--DTMF load register

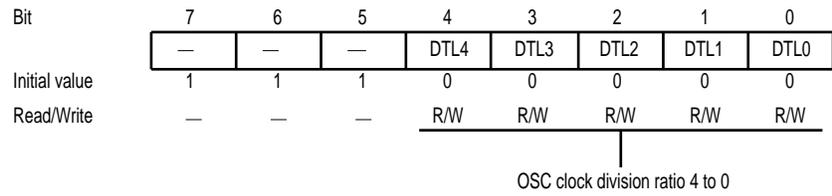H'B3 DTMF generator




DTL4	DTL3	DTL2	DTL1	DTL0	Division Ratio	OSC Clock Frequency
0	0	0	0	0	Illegal setting	(initial value)
0	0	0	0	1	Illegal setting	
0	0	0	1	0	Illegal setting	
0	0	0	1	1	3	1.2 MHz
0	0	1	0	0	4	1.6 MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮
1	1	0	0	1	25	10 MHz
1	1	0	1	*	Illegal setting	
1	1	1	*	*	Illegal setting	

Note: *Don't care


TCRF--Timer control register F

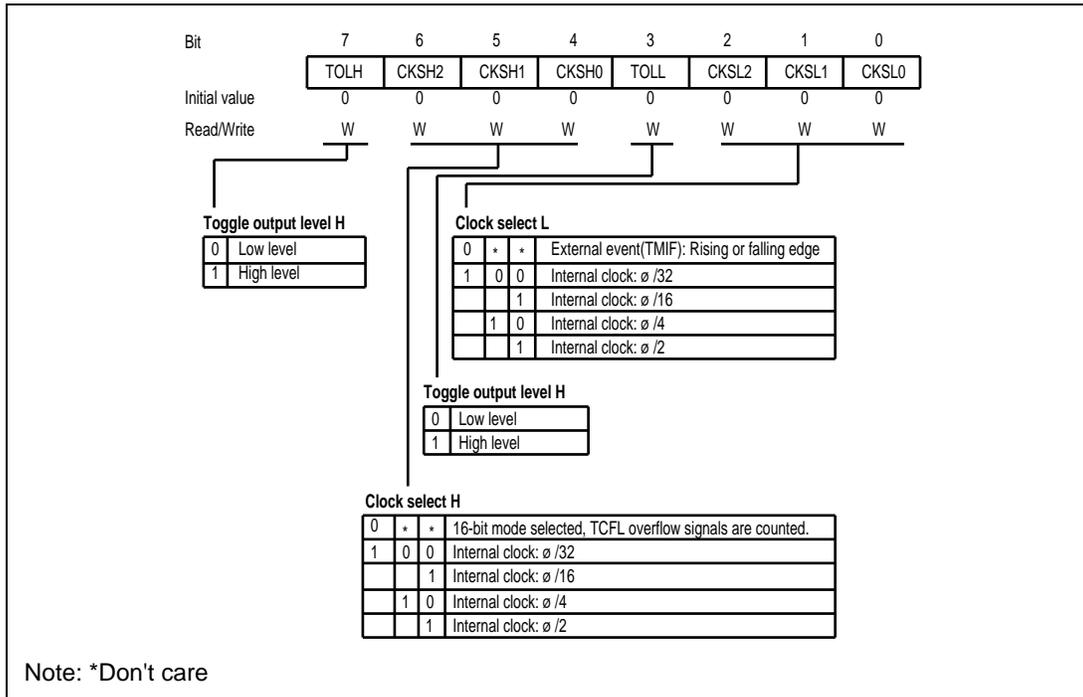H'B6 Timer F



TCSRFB--Timer control/status register F

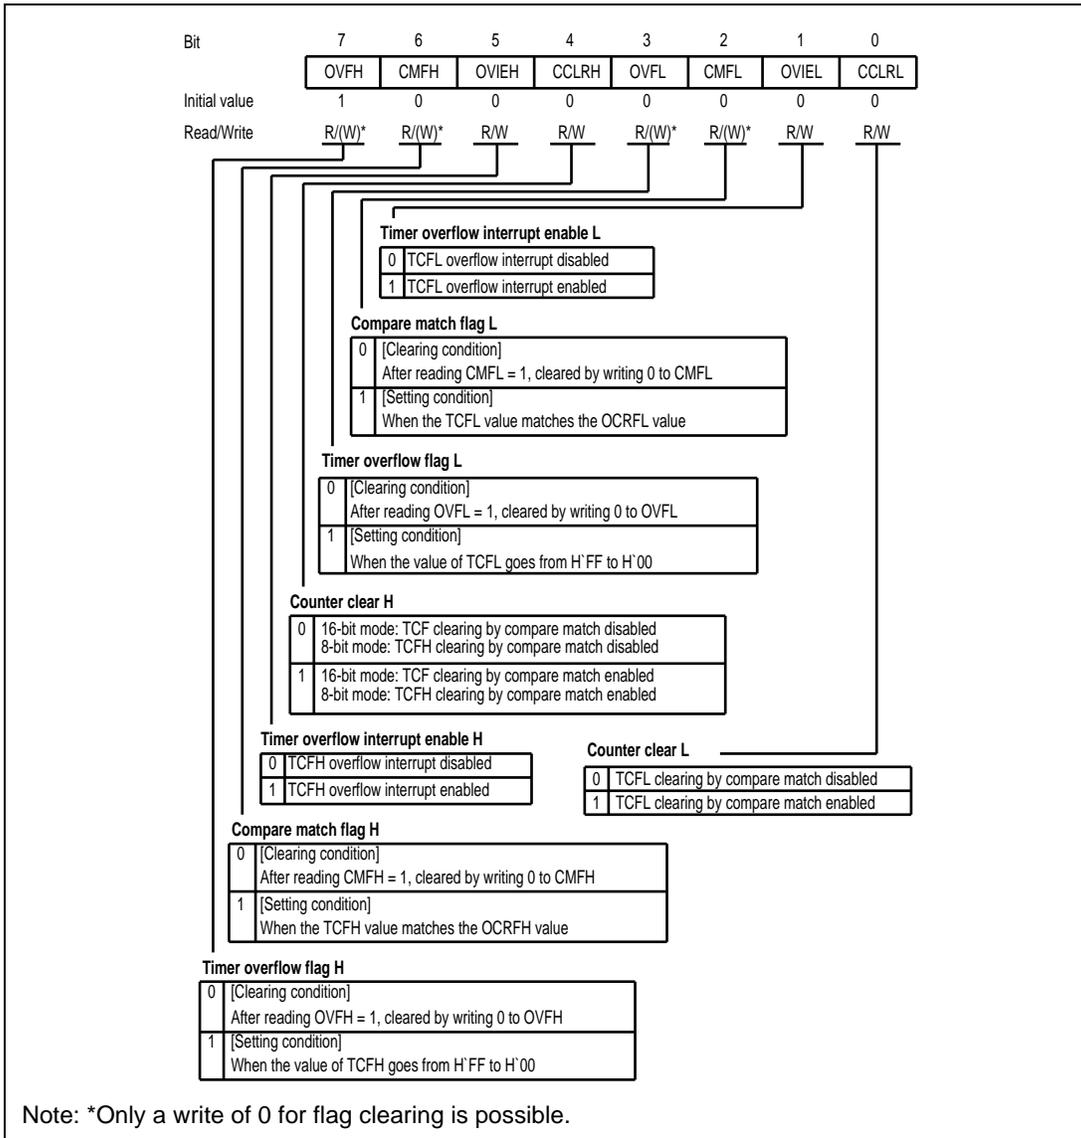H'B7 Timer F



TCFH--8-bit timer counter FH**H'B8 Timer F**

Bit	7	6	5	4	3	2	1	0
	TCFH7	TCFH6	TCFH5	TCFH4	TCFH3	TCFH2	TCFH1	TCFH0
Initial value	0	0	0	0	0	0	0	0
Read/Write	RW	R/W						

Count value

TCFL--8-bit timer control FL**H'B9 Timer F**

Bit	7	6	5	4	3	2	1	0
	TCFL7	TCFL6	TCFL5	TCFL4	TCFL3	TCFL2	TCFL1	TCFL0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

Count value

OCRFH--Output compare register FH**H'BA Timer F**


Bit	7	6	5	4	3	2	1	0
	OCRFH7	OCRFH6	OCRFH5	OCRFH4	OCRFH3	OCRFH2	OCRFH1	OCRFH0
Initial value	1	1	1	1	1	1	1	1
Read/Write	R/W							

OCRFL--Output compare register FL**H'BB Timer F**

Bit	7	6	5	4	3	2	1	0
	OCRFL7	OCRFL6	OCRFL5	OCRFL4	OCRFL3	OCRFL2	OCRFL1	OCRFL0
Initial value	1	1	1	1	1	1	1	1
Read/Write	R/W							

TMG--Timer mode register G

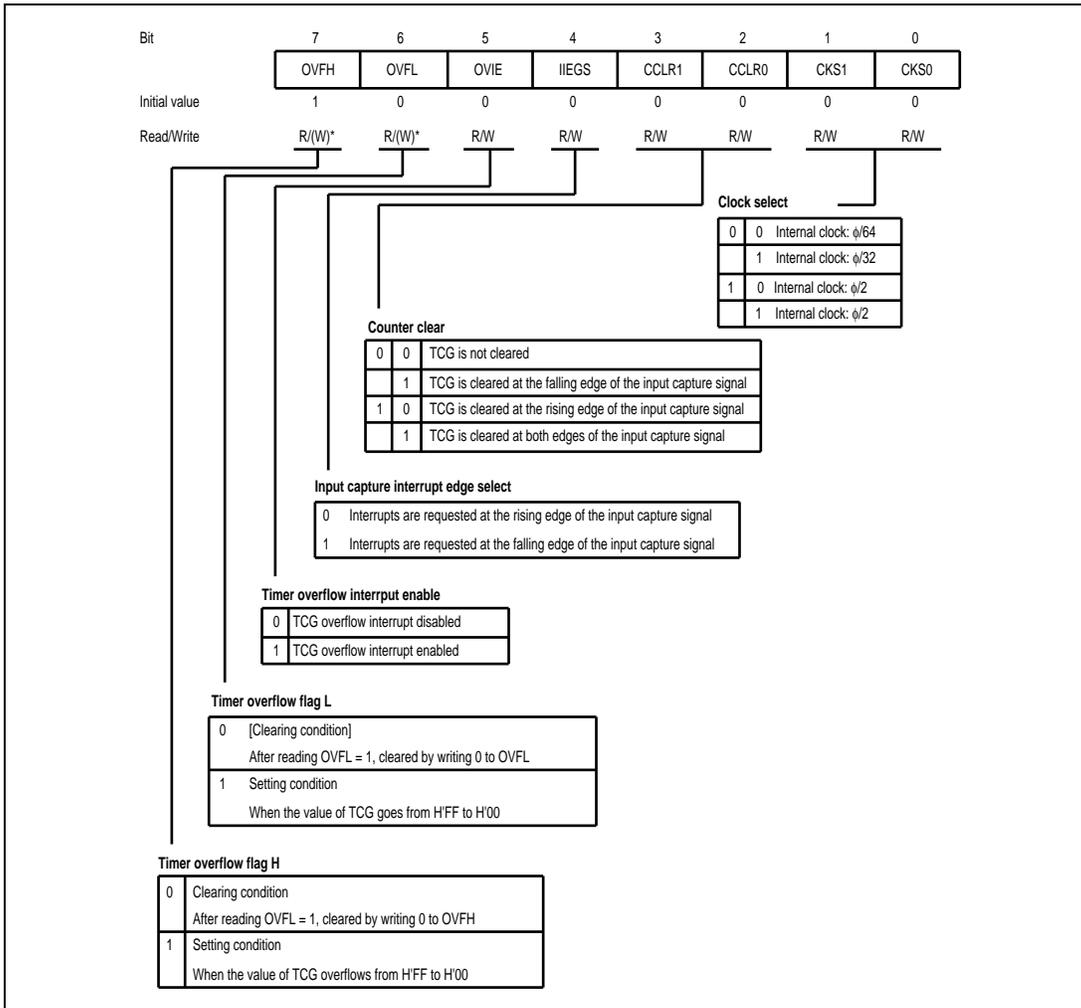H'BC Timer G




ICRGF--Input capture register GF**H'BD Timer G**

Bit	7	6	5	4	3	2	1	0
	ICRGF7	ICRGF6	ICRGF5	ICRGF4	ICRGF3	ICRGF2	ICRGF1	ICRGF0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R	R	R	R	R	R	R	R

ICRGR--Input capture register GR**H'BE Timer G**


Bit	7	6	5	4	3	2	1	0
	ICRGR7	ICRGR6	ICRGR5	ICRGR4	ICRGR3	ICRGR2	ICRGR1	ICRGR0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R	R	R	R	R	R	R	R

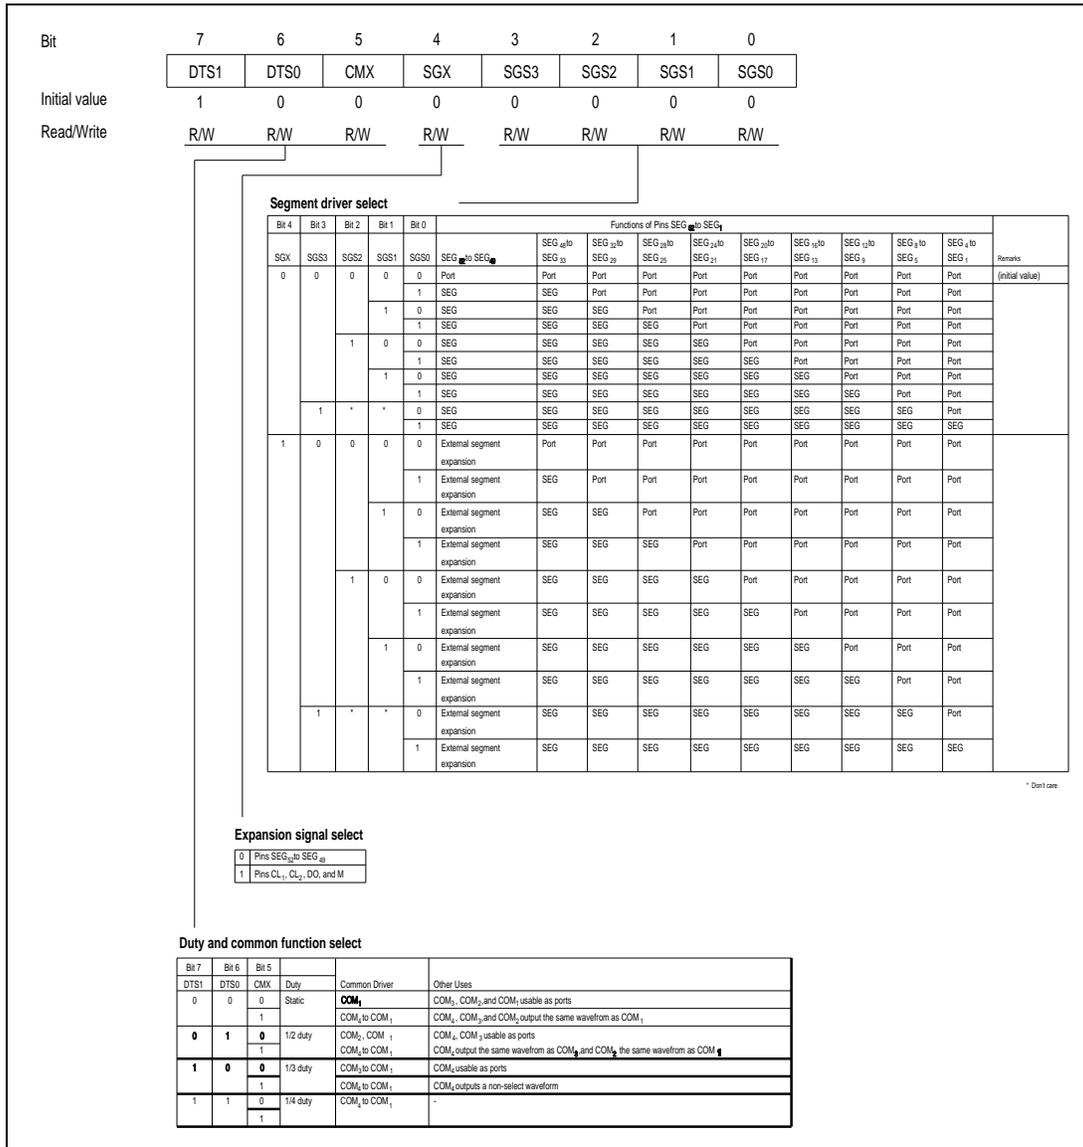LPCR--LCD port control register H'C0 LCD controller/driver




LCR--LCD control register

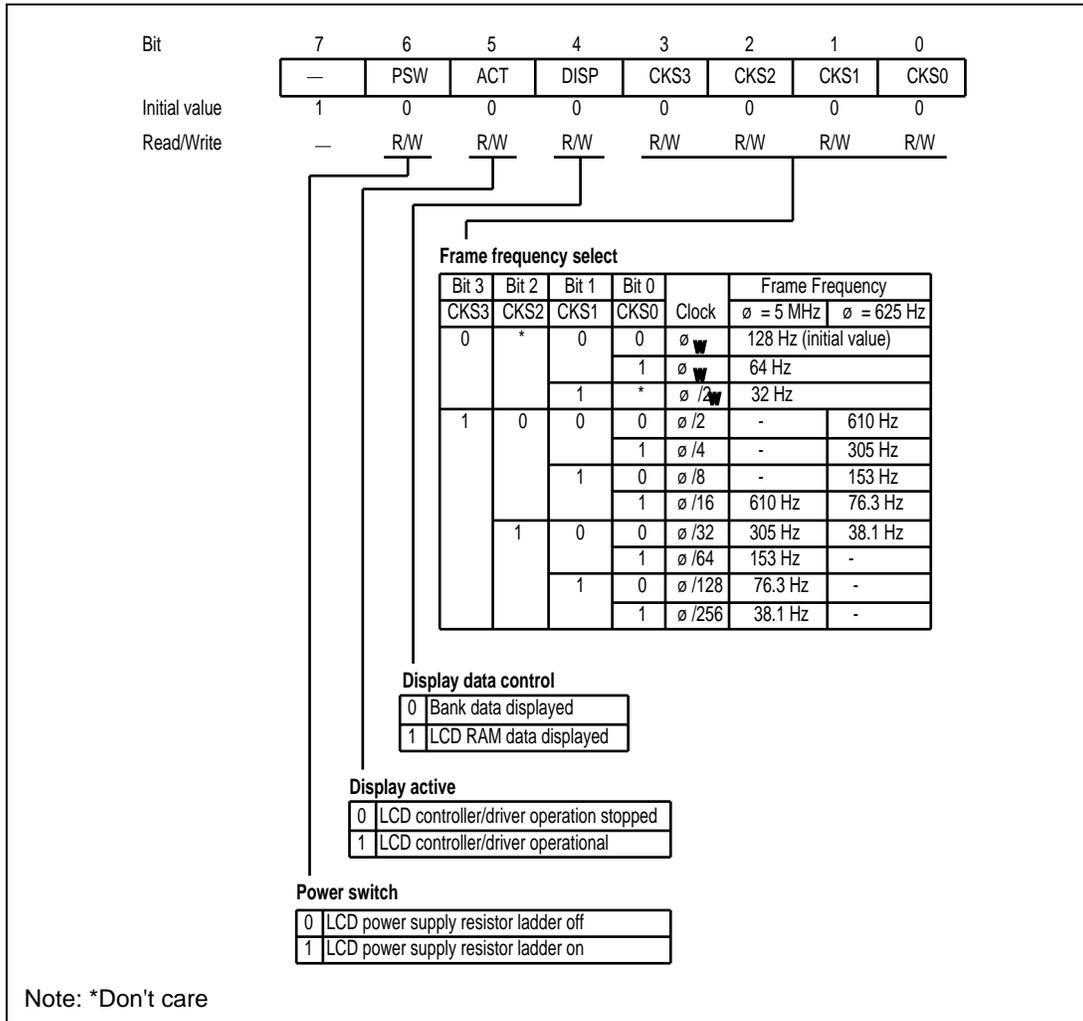H'C1 LCD controller/driver



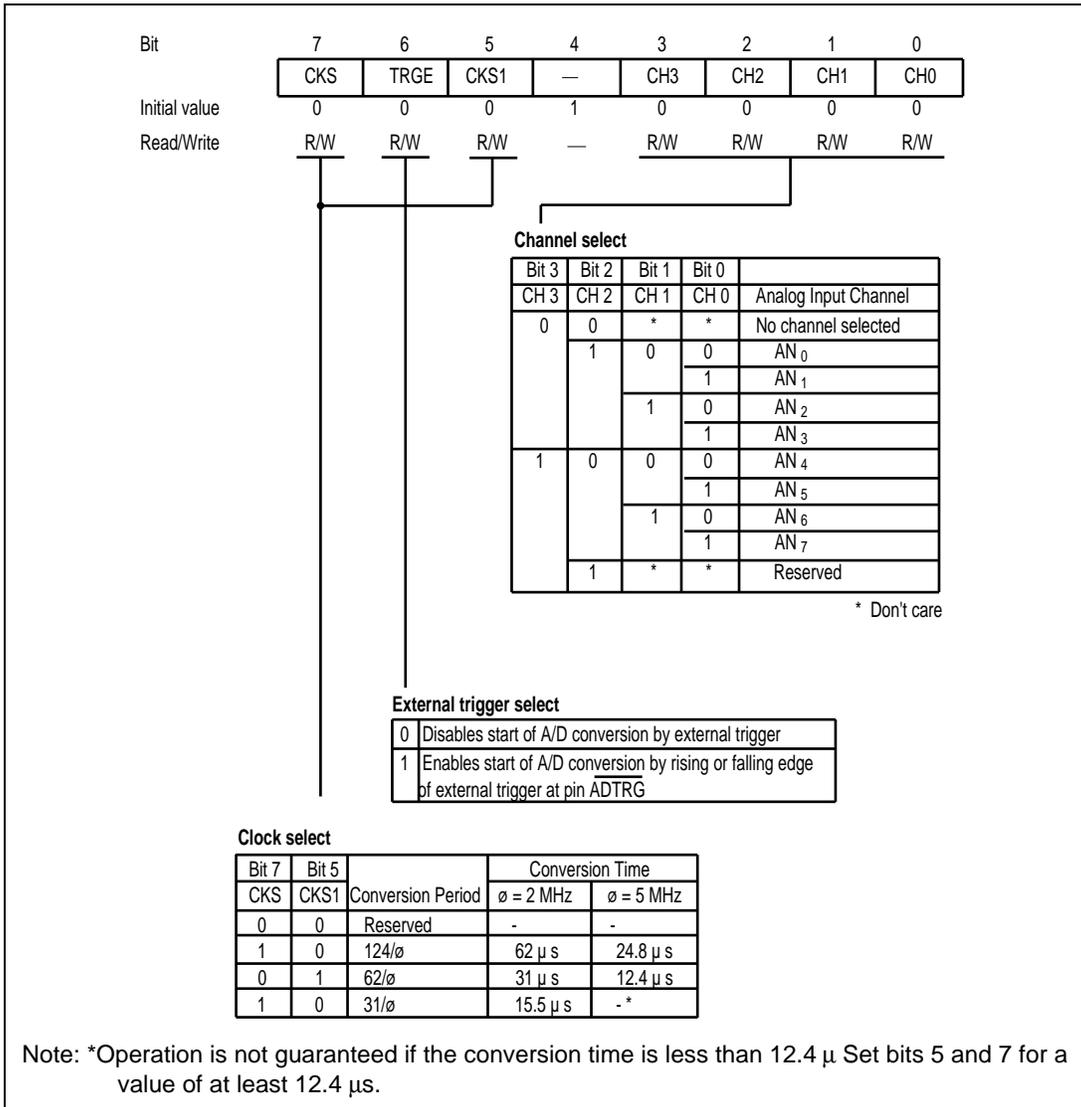AMR--A/D mode register H'C4 A/D converter



ADRR--A/D result register H'C5 A/D converter

Bit	7	6	5	4	3	2	1	0
	ADR7	ADR6	ADR5	ADR4	ADR3	ADR2	ADR1	ADR0
Initial value	Not fixed							
Read/Write	R	R	R	R	R	R	R	R

A/D conversion result

ADSR--A/D start register H'C6 A/D converter

Bit	7	6	5	4	3	2	1	0
	ADSF	—	—	—	—	—	—	—
Initial value	0	1	1	1	1	1	1	1
Read/Write	R/W	—	—	—	—	—	—	—

A/D status flag

0	[Read] Indicates the completion of A/D conversion [Write] Stops A/D conversion
1	[Read] Indicates A/D conversion in progress [Write] Starts A/D conversion

PDRD--Port data register D H'D2 I/O ports

Bit	7	6	5	4	3	2	1	0
	PD7	PD6	PD5	PD4	PD3	PD2	PD1	PD0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDRE--Port data register E H'D3 I/O ports

Bit	7	6	5	4	3	2	1	0
	—	—	—	—	PE3	PE2	PE1	PE0
Initial value	1	1	1	1	0	0	0	0
Read/Write	—	—	—	—	R/W	R/W	R/W	R/W

PDR1--Port data register 1 H'D4 I/O ports

Bit	7	6	5	4	3	2	1	0
	P17	P16	P15	P14	P13	P12	P11	P10
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR2--Port data register 2 H'D5 I/O ports

Bit	7	6	5	4	3	2	1	0
	P27	P26	P25	P24	P23	P22	P21	P20
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR5--Port data register 5 H'D8 I/O ports

Bit	7	6	5	4	3	2	1	0
	P27	P26	P25	P24	P23	P22	P21	P20
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR6--Port data register 6 H'D9 I/O ports

Bit	7	6	5	4	3	2	1	0
	P67	P66	P65	P64	P63	P62	P61	P60
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR7--Port data register 7 H'DA I/O ports

Bit	7	6	5	4	3	2	1	0
	P77	P76	P75	P74	P73	P72	P71	P70
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR8--Port data register 8 H'DB I/O ports

Bit	7	6	5	4	3	2	1	0
	P87	P86	P85	P84	P83	P82	P81	P80
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDR9--Port data register 9 H'DC I/O ports

Bit	7	6	5	4	3	2	1	0
	P97	P96	P95	P94	P93	P92	P91	P90
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W							

PDRA--Port data register A H'DD I/O ports

Bit	7	6	5	4	3	2	1	0
	—	—	—	—	PA3	PA2	PA1	PA0
Initial value	1	1	1	1	0	0	0	0
Read/Write	—	—	—	—	R/W	R/W	R/W	R/W

PDRB--Port data register B H'DE I/O ports

Bit	7	6	5	4	3	2	1	0
	PB7	PB6	PB5	PB4	PB3	PB2	PB1	PB0
Initial value								
Read/Write	R	R	R	R	R	R	R	R

PCRD--Port control register D H'E2 I/O ports

Bit	7	6	5	4	3	2	1	0
	PCRD ₇	PCRD ₆	PCRD ₅	PCRD ₄	PCRD ₃	PCRD ₂	PCRD ₁	PCRD ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

|

Port D input/output select

0	Input pin
1	Output pin

PCRE--Port control register E H'E3 I/O ports

Bit	7	6	5	4	3	2	1	0
	-	-	-	-	PCRE ₃	PCRE ₂	PCRE ₁	PCRE ₀
Initial value	1	1	1	1	0	0	0	0
Read/Write	-	-	-	-	W	W	W	W

|

Port E input/output select

0	Input pin
1	Output pin

PCR1--Port control register 1 H'E4 I/O ports

Bit	7	6	5	4	3	2	1	0
	PCR1 ₇	PCR1 ₆	PCR1 ₅	PCR1 ₄	PCR1 ₃	PCR1 ₂	PCR1 ₁	PCR1 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

|

Port 1 input/output select

0	Input pin
1	Output pin

PCR2--Port control register 2 H'E5 I/O ports

Bit	7	6	5	4	3	2	1	0
	PCR2 ₇	PCR2 ₆	PCR2 ₅	PCR2 ₄	PCR2 ₃	PCR2 ₂	PCR2 ₁	PCR2 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

Port 2 input/output select	
0	Input pin
1	Output pin

PCR5--Port control register 5 H'E8 I/O ports

Bit	7	6	5	4	3	2	1	0
	PCR5 ₇	PCR5 ₆	PCR5 ₅	PCR5 ₄	PCR5 ₃	PCR5 ₂	PCR5 ₁	PCR5 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

Port 5 input/output select	
0	Input pin
1	Output pin

PCR6--Port control register 6 H'E9 I/O ports

Bit	7	6	5	4	3	2	1	0
	PCR6 ₇	PCR6 ₆	PCR6 ₅	PCR6 ₄	PCR6 ₃	PCR6 ₂	PCR6 ₁	PCR6 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

Port 6 input/output select	
0	Input pin
1	Output pin

PCR7--Port control register 7 H'EA I/O ports

Bit	7	6	5	4	3	2	1	0
	PCR7 ₇	PCR7 ₆	PCR7 ₅	PCR7 ₄	PCR7 ₃	PCR7 ₂	PCR7 ₁	PCR7 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

Port 7 input/output select	
0	Input pin
1	Output pin

PCR8--Port control register 8 H'EB I/O ports

Bit	7	6	5	4	3	2	1	0
	PCR8 ₇	PCR8 ₆	PCR8 ₅	PCR8 ₄	PCR8 ₃	PCR8 ₂	PCR8 ₁	PCR8 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

Port 8 input/output select	
0	Input pin
1	Output pin

PCR9--Port control register 9 H'EC I/O ports

Bit	7	6	5	4	3	2	1	0
	PCR9 ₇	PCR9 ₆	PCR9 ₅	PCR9 ₄	PCR9 ₃	PCR9 ₂	PCR9 ₁	PCR9 ₀
Initial value	0	0	0	0	0	0	0	0
Read/Write	W	W	W	W	W	W	W	W

Port 9 input/output select	
0	Input pin
1	Output pin

PCRA--Port control register A H'ED I/O ports

Bit	7	6	5	4	3	2	1	0
	—	—	—	—	PCRA ₃	PCRA ₂	PCRA ₁	PCRA ₀
Initial value	1	1	1	1	0	0	0	0
Read/Write	—	—	—	—	W	W	W	W

Port A input/output select	
0	Input pin
1	Output pin

SYSCR1--System control register 1 H'F0 System control

Bit	7	6	5	4	3	2	1	0
	SSBY	STS2	STS1	STS0	LSON	—	—	—
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W	R/W	R/W	R/W	R/W	—	—	—

Low speed on flag	
0	The CPU operates on the system clock (ϕ)
1	The CPU operates on the subclock (ϕ SUB)


Standby timer select 2 to 0			
0	0	0	Wait time = 8,192 states
		1	Wait time = 16,384 states
	1	0	Wait time = 32,768 states
		1	Wait time = 65,536 states
1	*	*	Wait time = 131,072 states

Software standby	
0	When a SLEEP instruction is executed in active mode, a transition is made to sleep mode. When a SLEEP instruction is executed in subactive mode, a transition is made to subsleep mode.
1	When a SLEEP instruction is executed in active mode, a transition is made to standby mode or watch mode. When a SLEEP instruction is executed in subactive mode, a transition is made to watch mode.


Note: *Don't care

SYSCR2--System control register 2

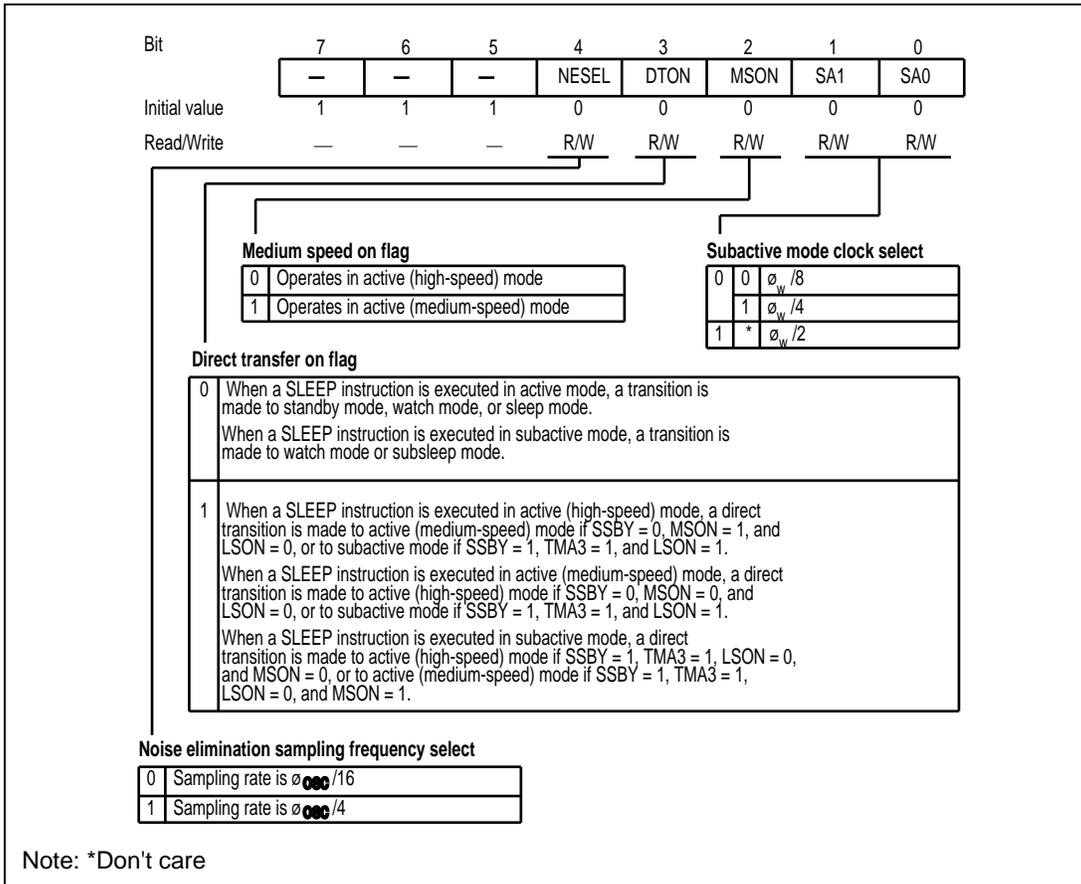H'F1 System control




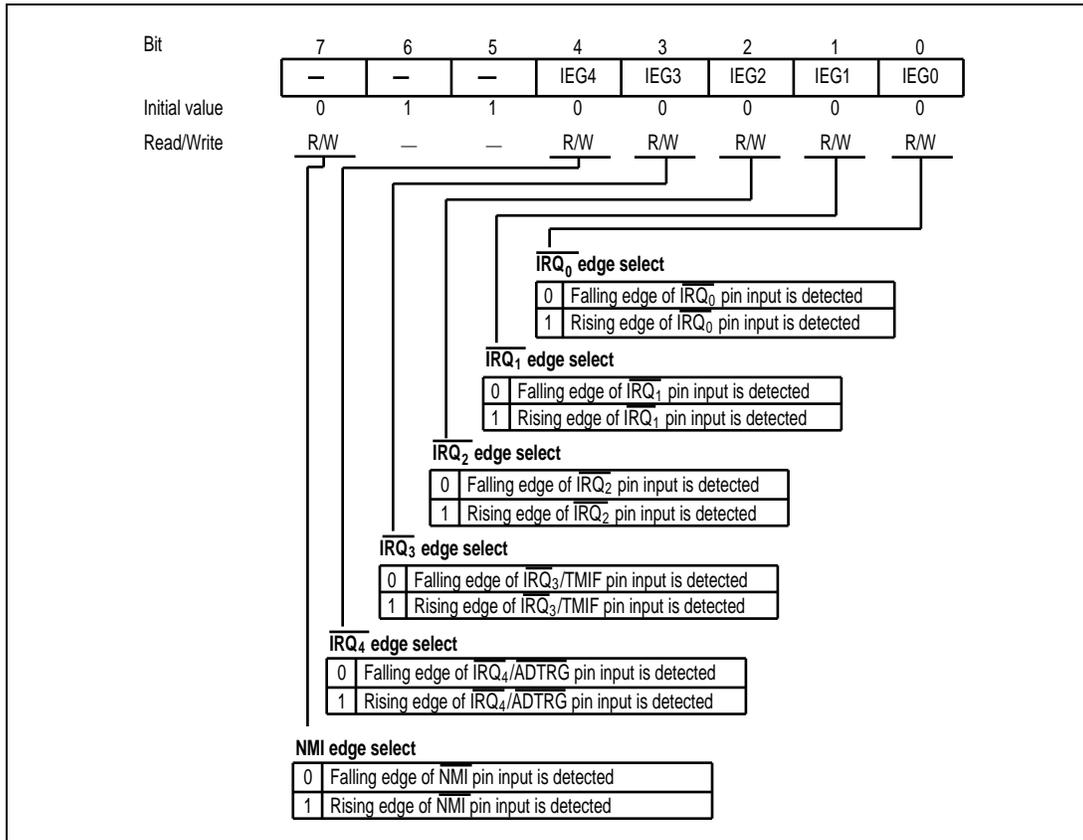IEGR--IRQ edge select register H'F2 System control




IENR1--Interrupt enable register 1

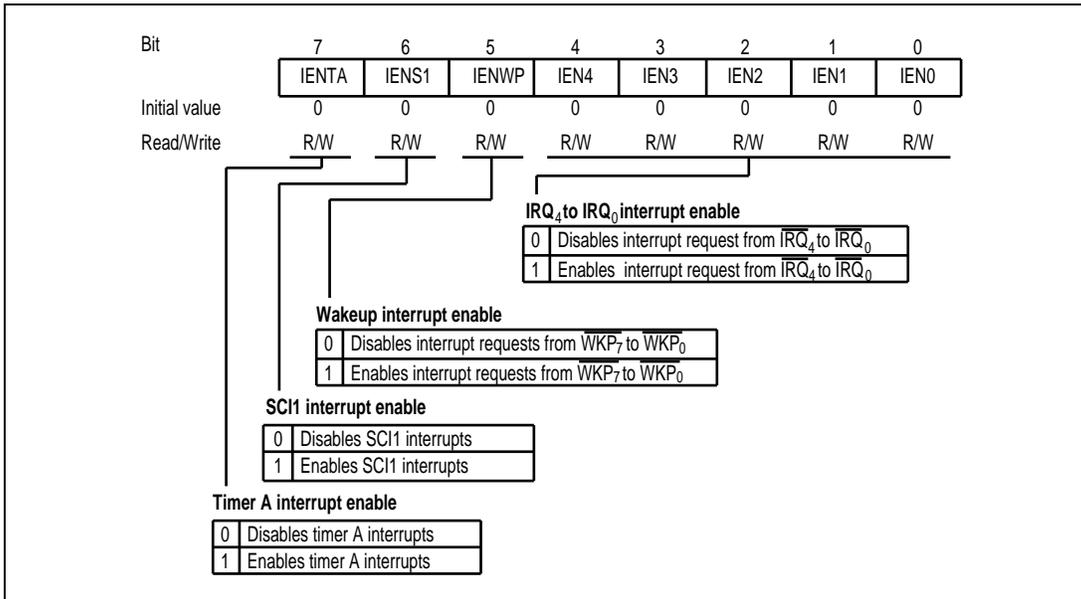H'F3 System control




IENR2--Interrupt enable register 2

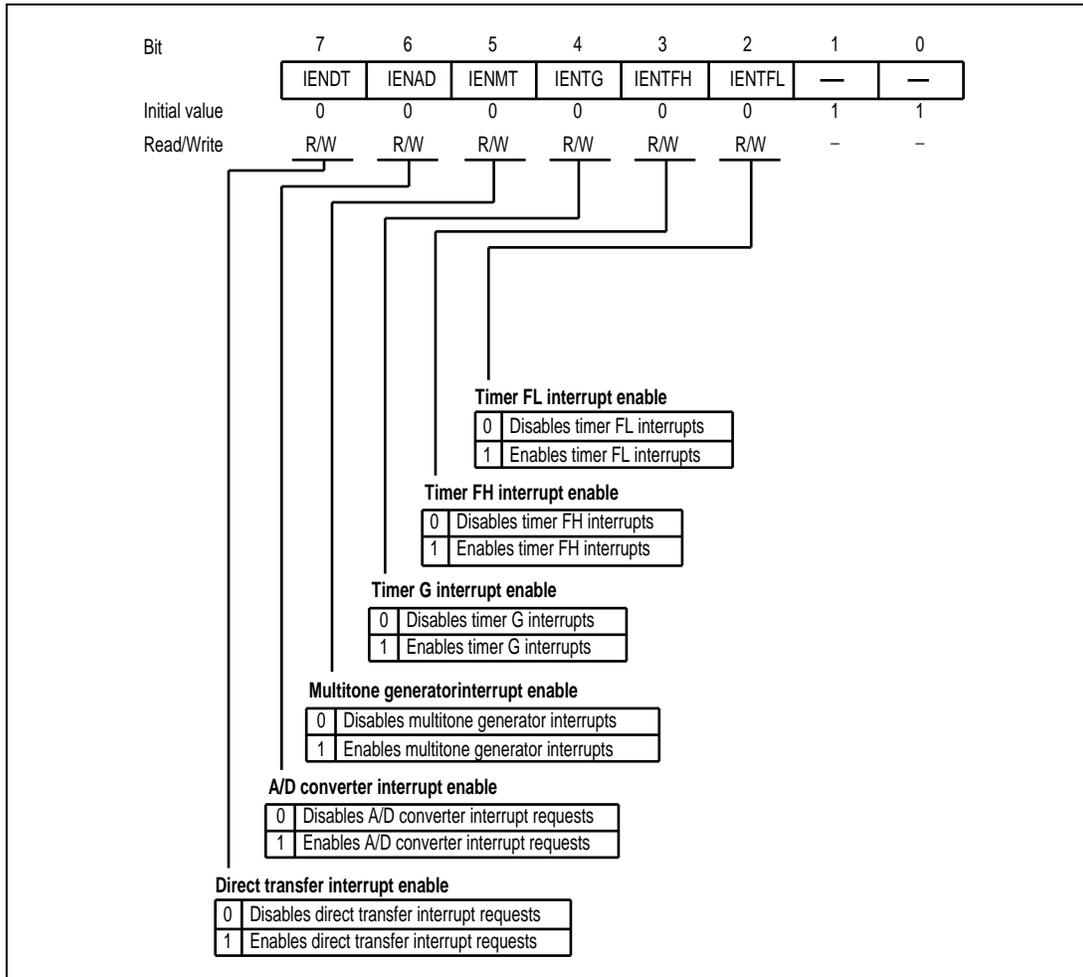
H'F4 System control



IRR1--Interrupt enable register 1 H'F6 System control

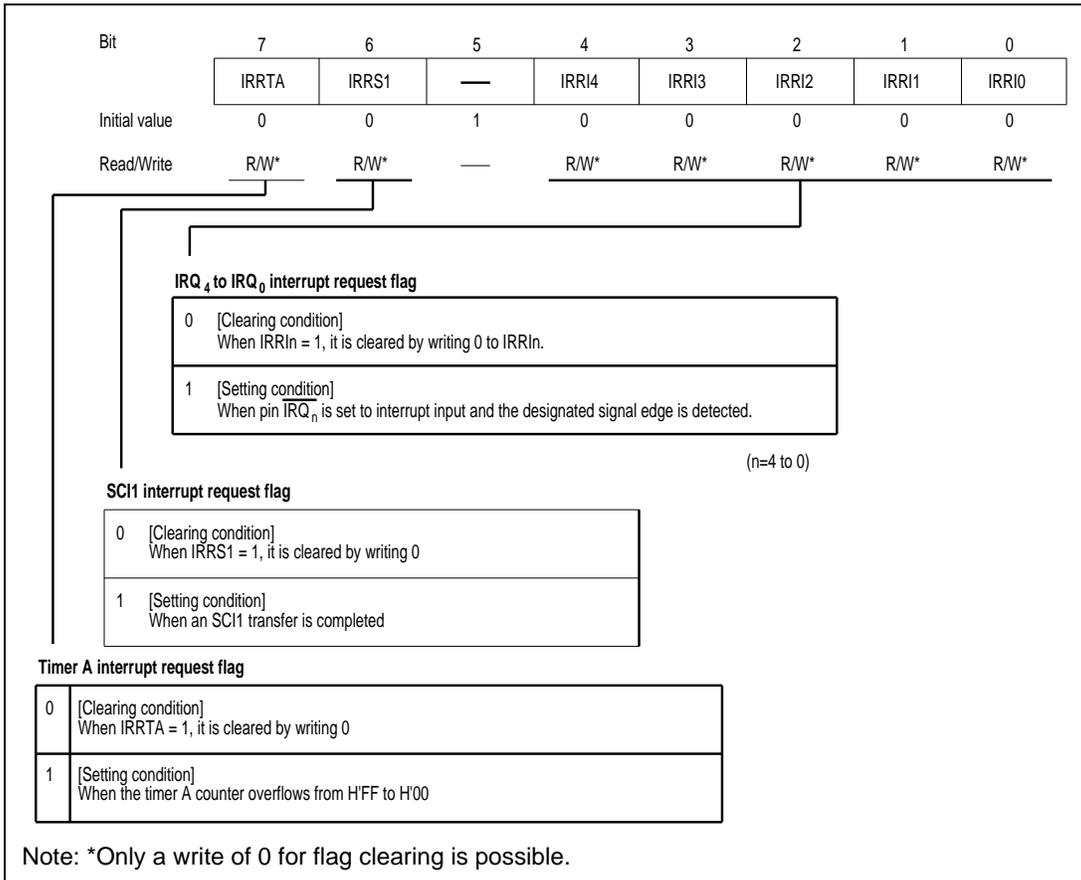

IRR2--Interrupt request register 2 H'F7 System control

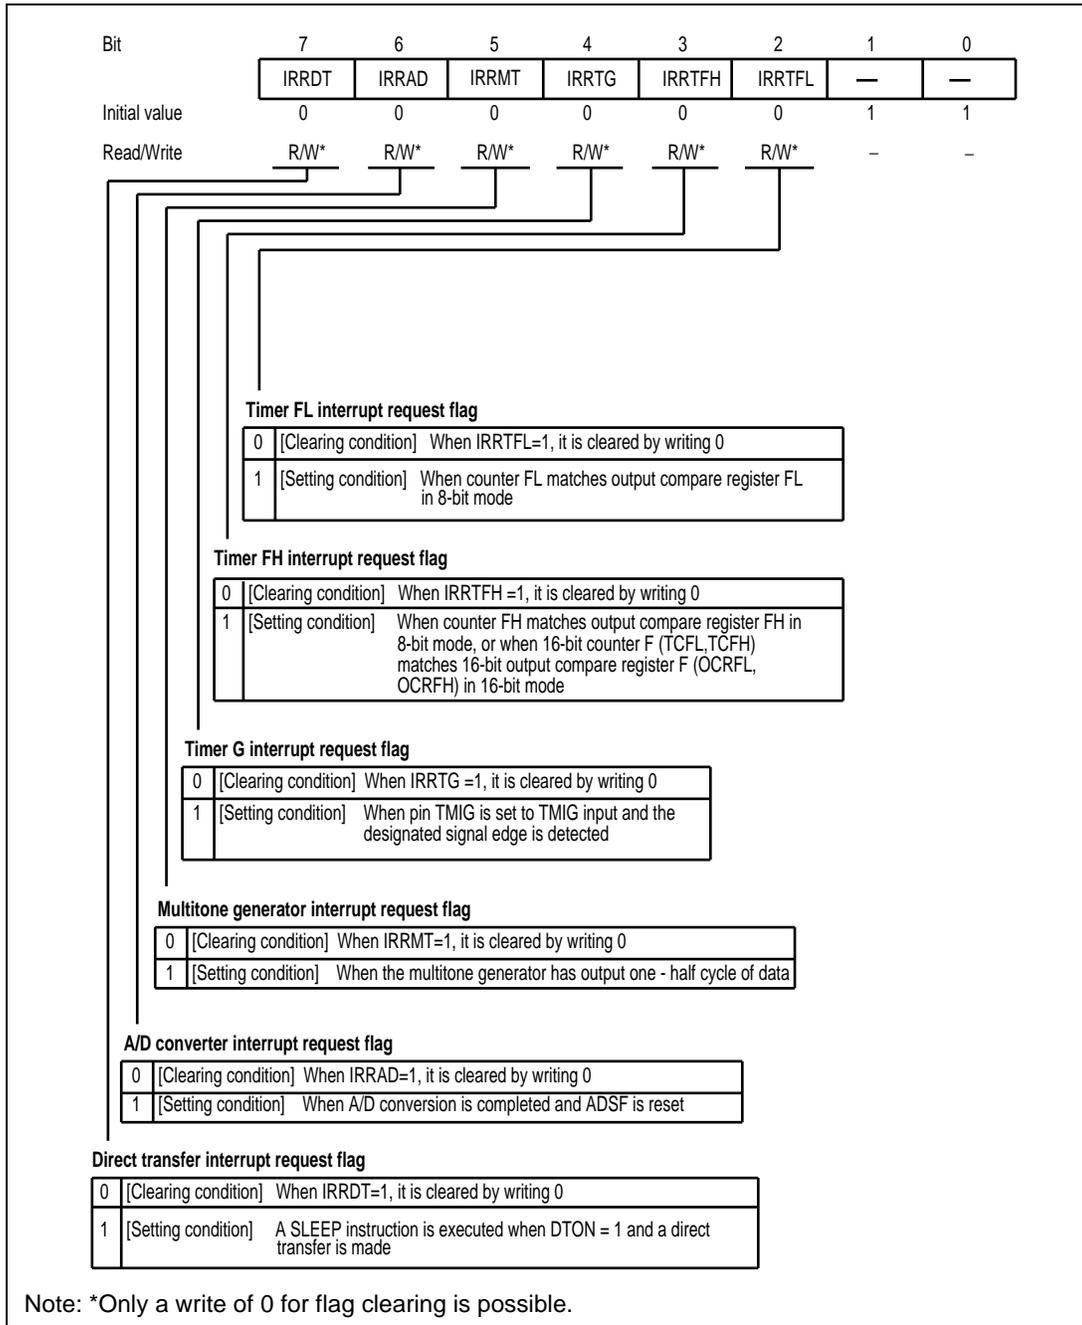

IWPR--Wakeup interrupt request register H'F9 System control

Bit	7	6	5	4	3	2	1	0
	IWPF7	IWPF6	IWPF5	IWPF4	IWPF3	IWPF2	IWPF1	IWPF0
Initial value	0	0	0	0	0	0	0	0
Read/Write	R/W*							

Wakeup interrupt request flag	
0	[Clearing condition] When IWPFn = 1, it is cleared by writing 0
1	[Setting condition] When pin WKP _n is set to interrupt input and a falling signal edge is detected.

(n=7 to 0)

Note: *Only a write of 0 for flag clearing is possible.

Appendix C I/O Port Block Diagrams

C.1 Port 1 Block Diagrams

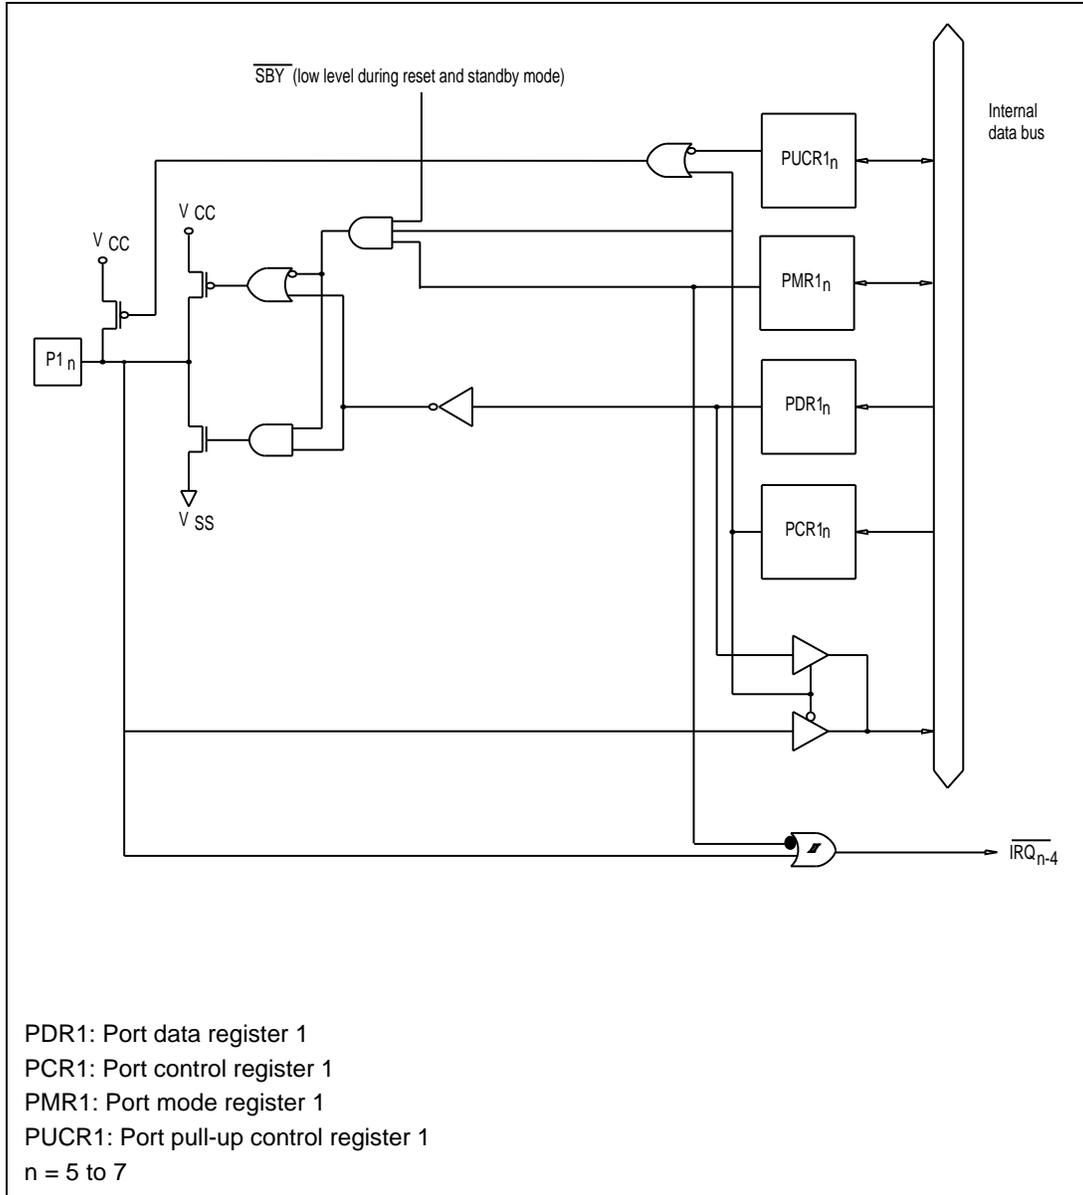


Figure C-1 (a) Port 1 Block Diagram (Pins $P1_7$ to $P1_5$)

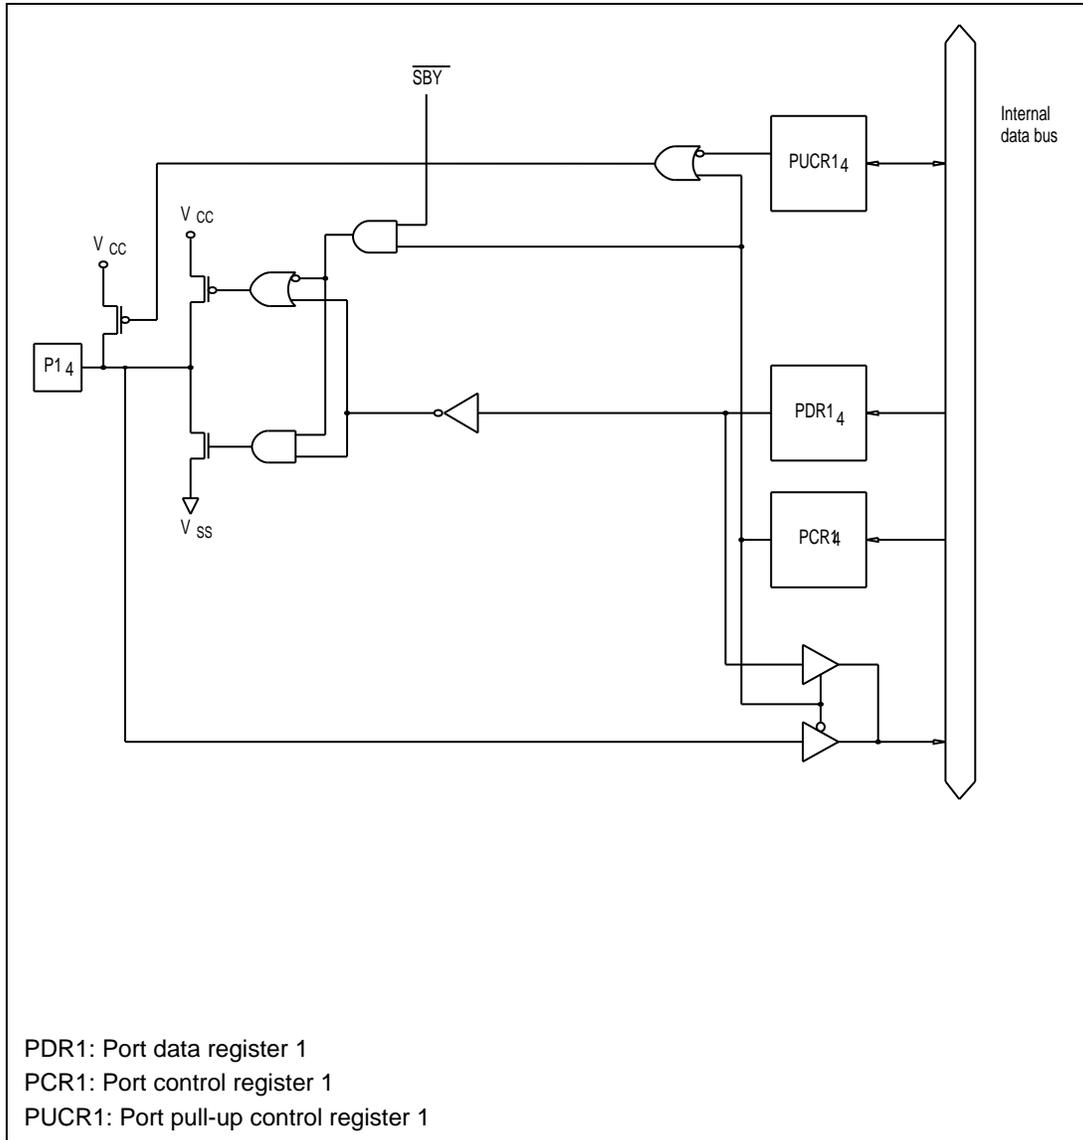


Figure C-1 (b) Port 1 Block Diagram (Pin P1₄)

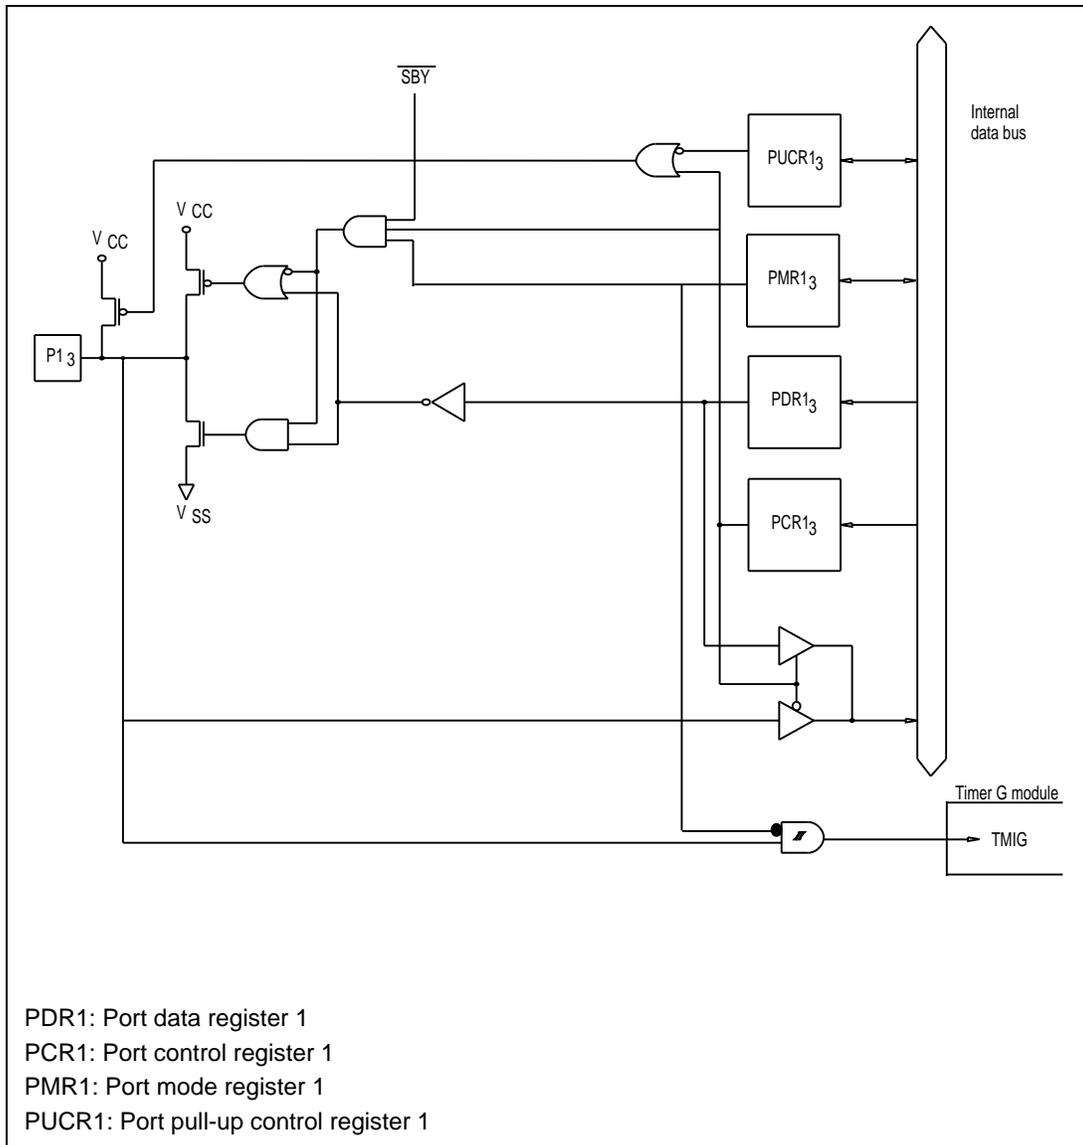


Figure C-1 (c) Port 1 Block Diagram (Pin P1₃)

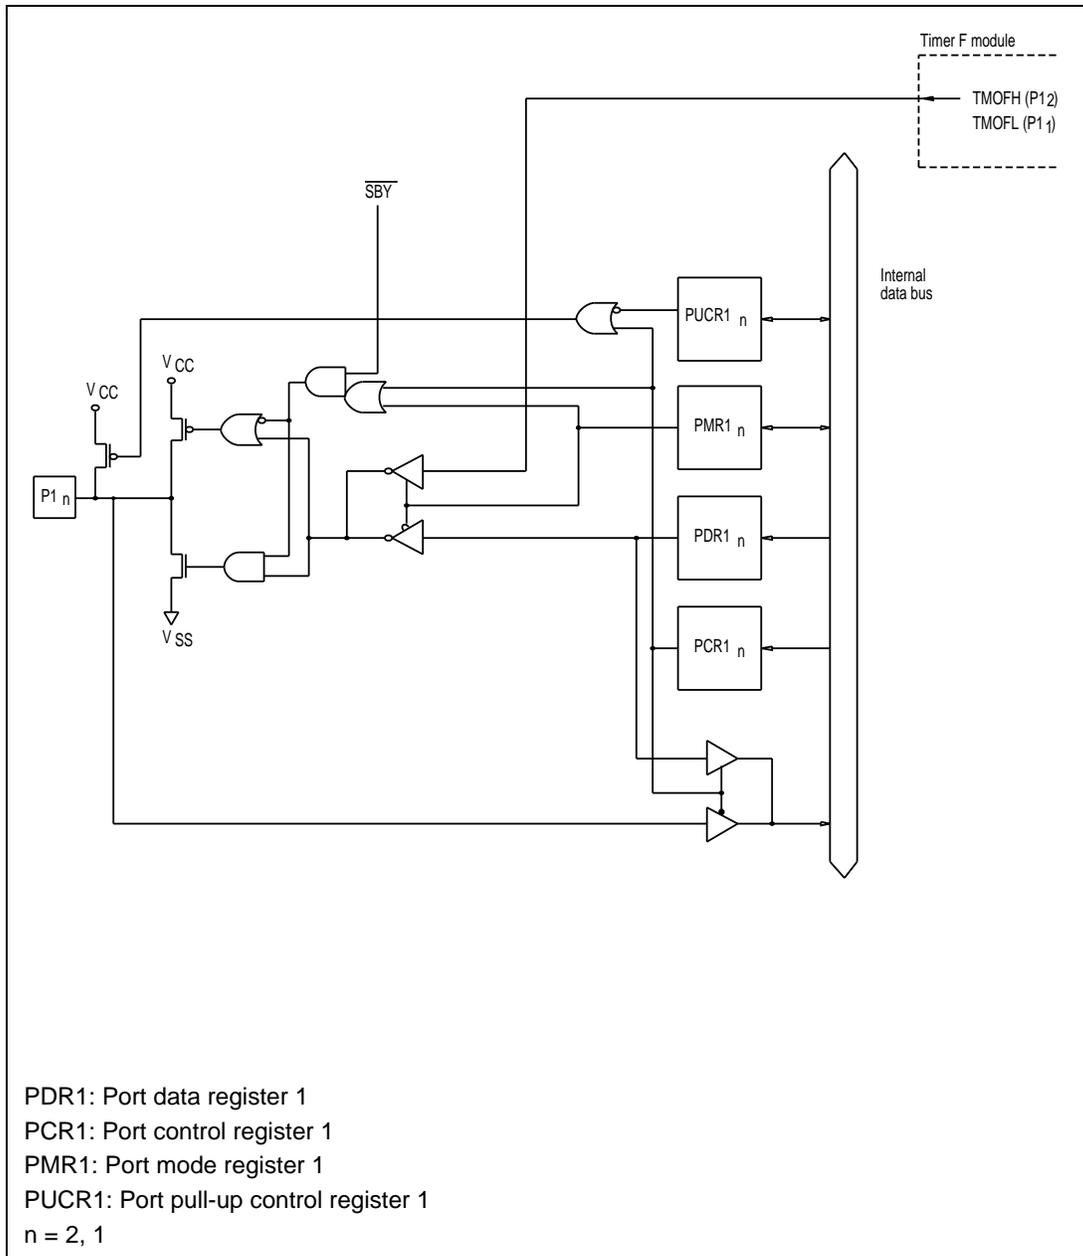


Figure C-1 (d) Port 1 Block Diagram (Pin P1₂ and P1₁)

C.2 Port 2 Block Diagrams

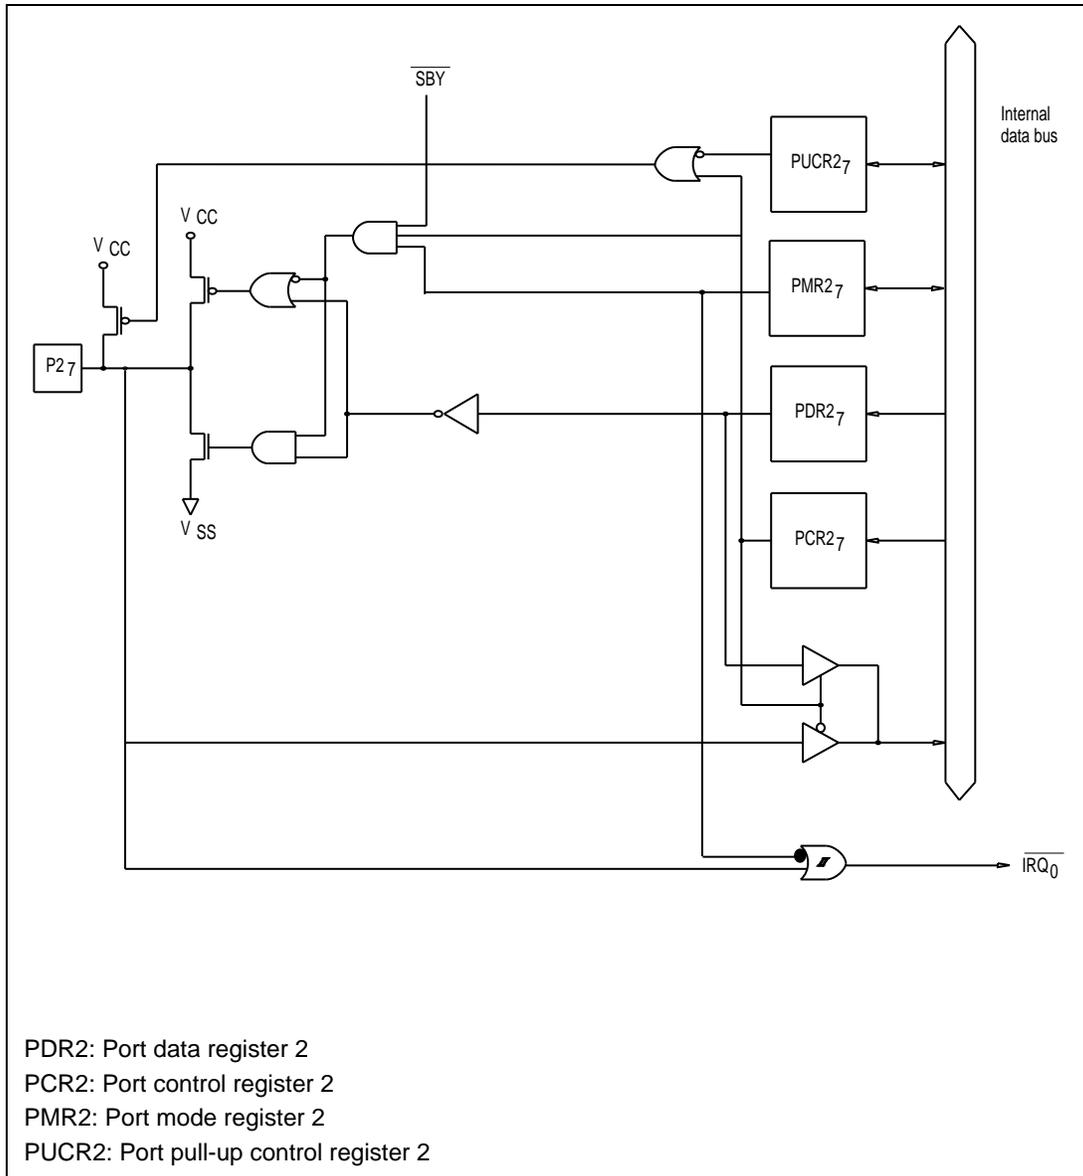


Figure C-2 (a) Port 2 Block Diagram (Pin P2₇)

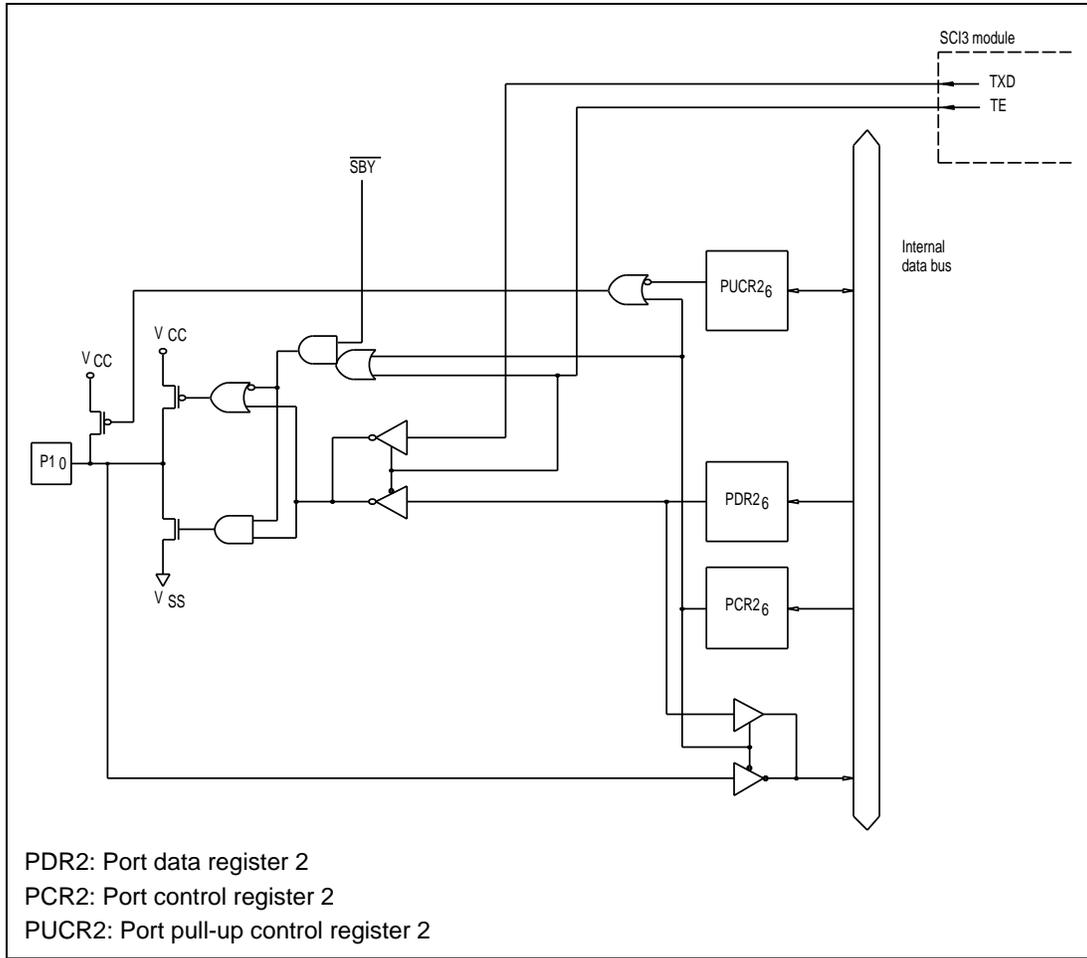


Figure C-2 (b) Port 2 Block Diagram (Pin P2₆)

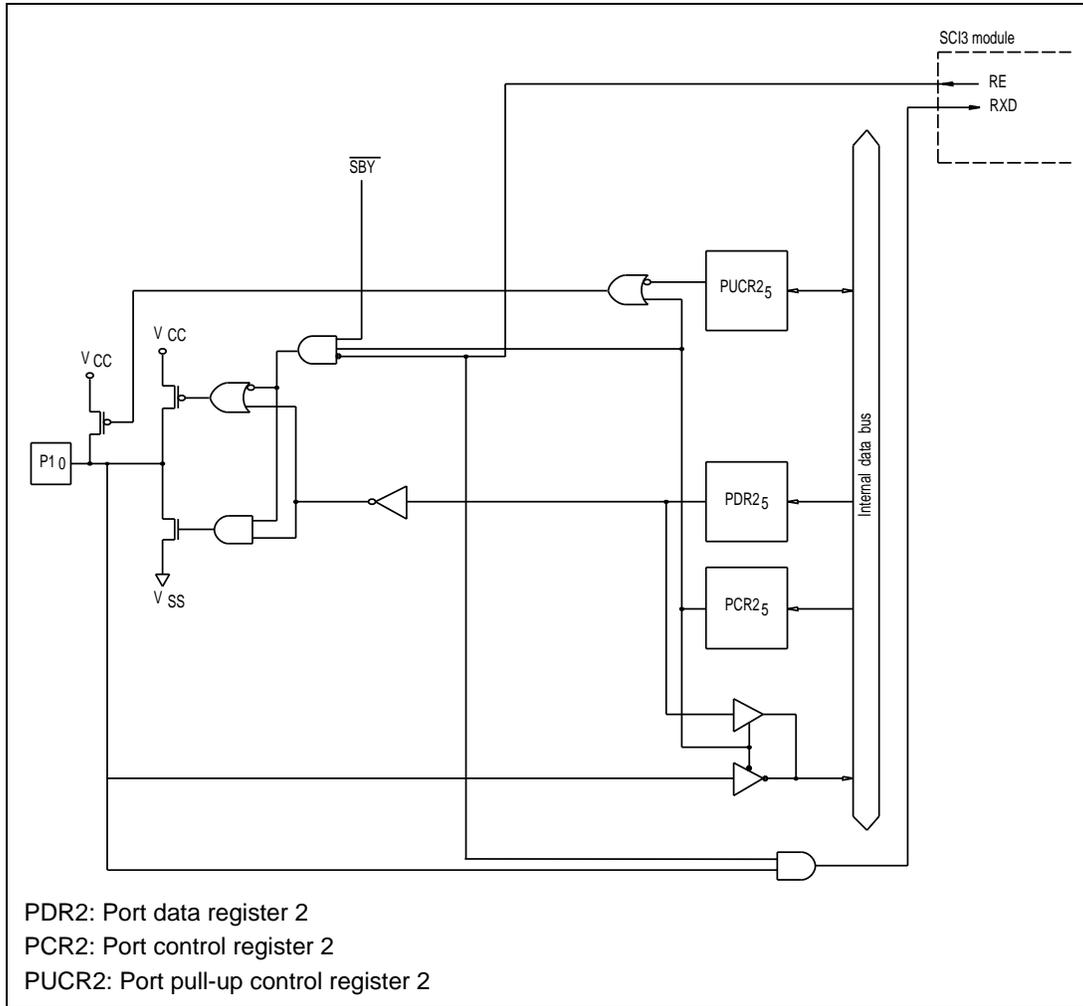


Figure C-2 (c) Port 2 Block Diagram (Pin P2₅)

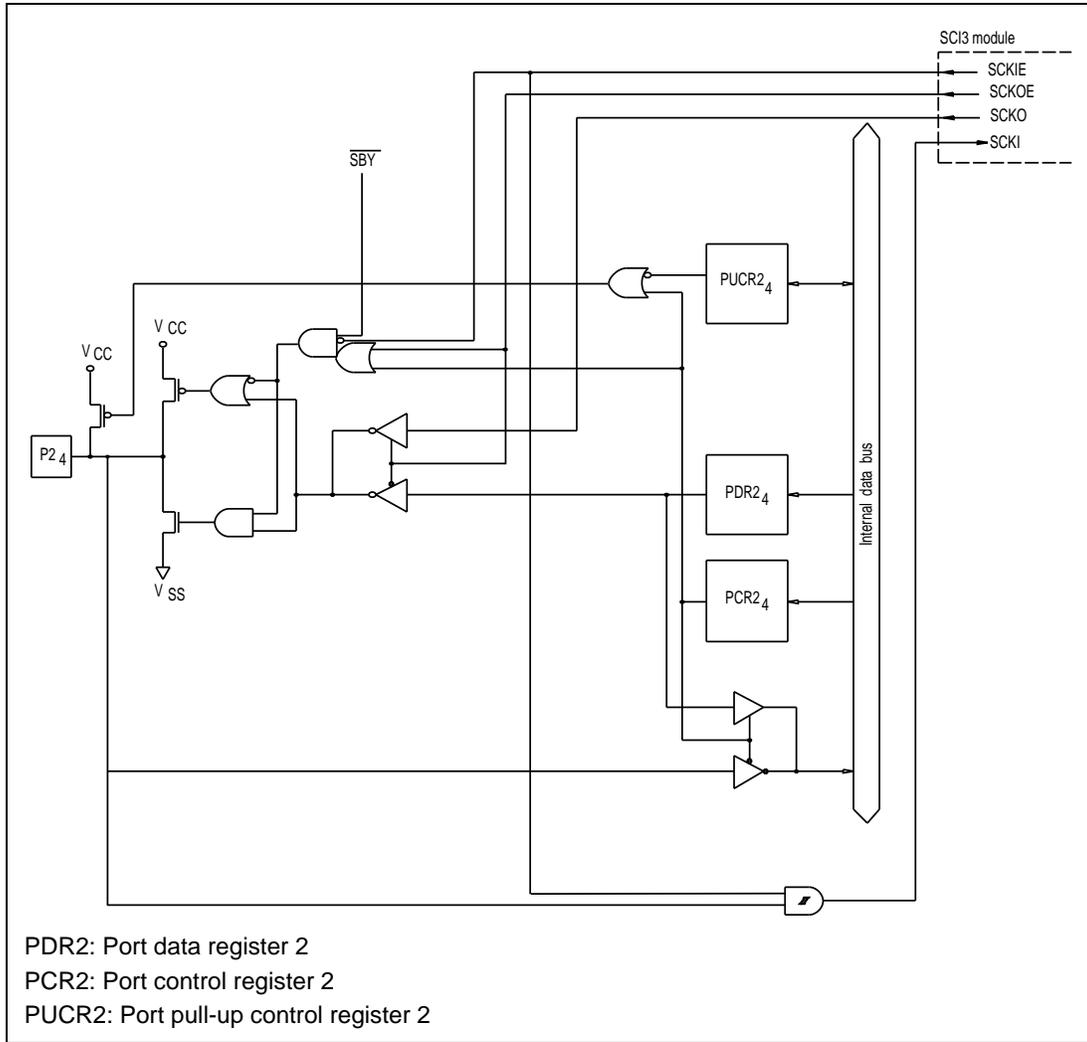


Figure C-2 (b) Port 2 Block Diagram (Pin P2₄)

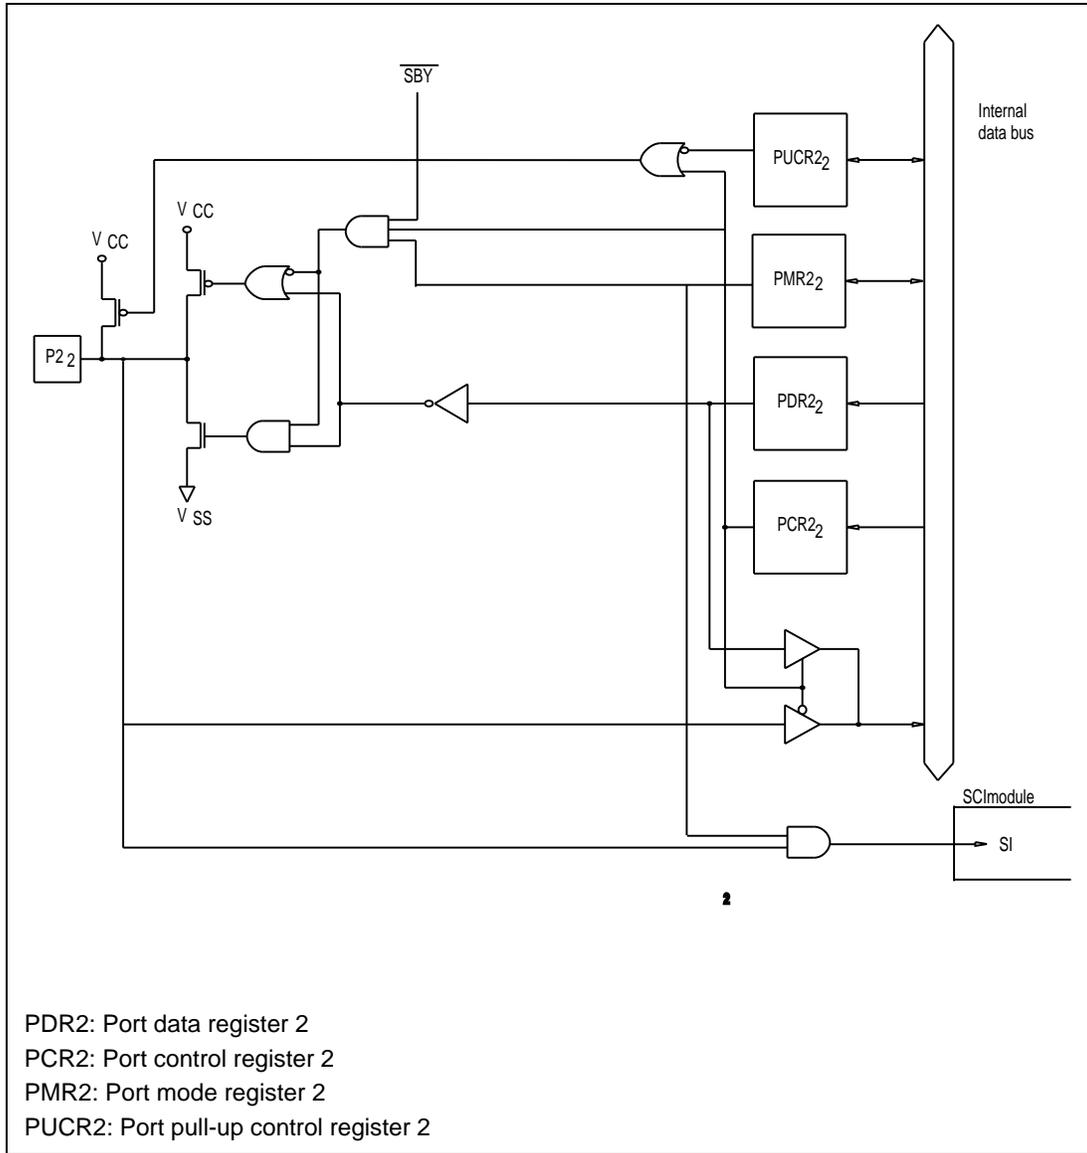


Figure C-2 (f) Port 2 Block Diagram (Pin P2₂)

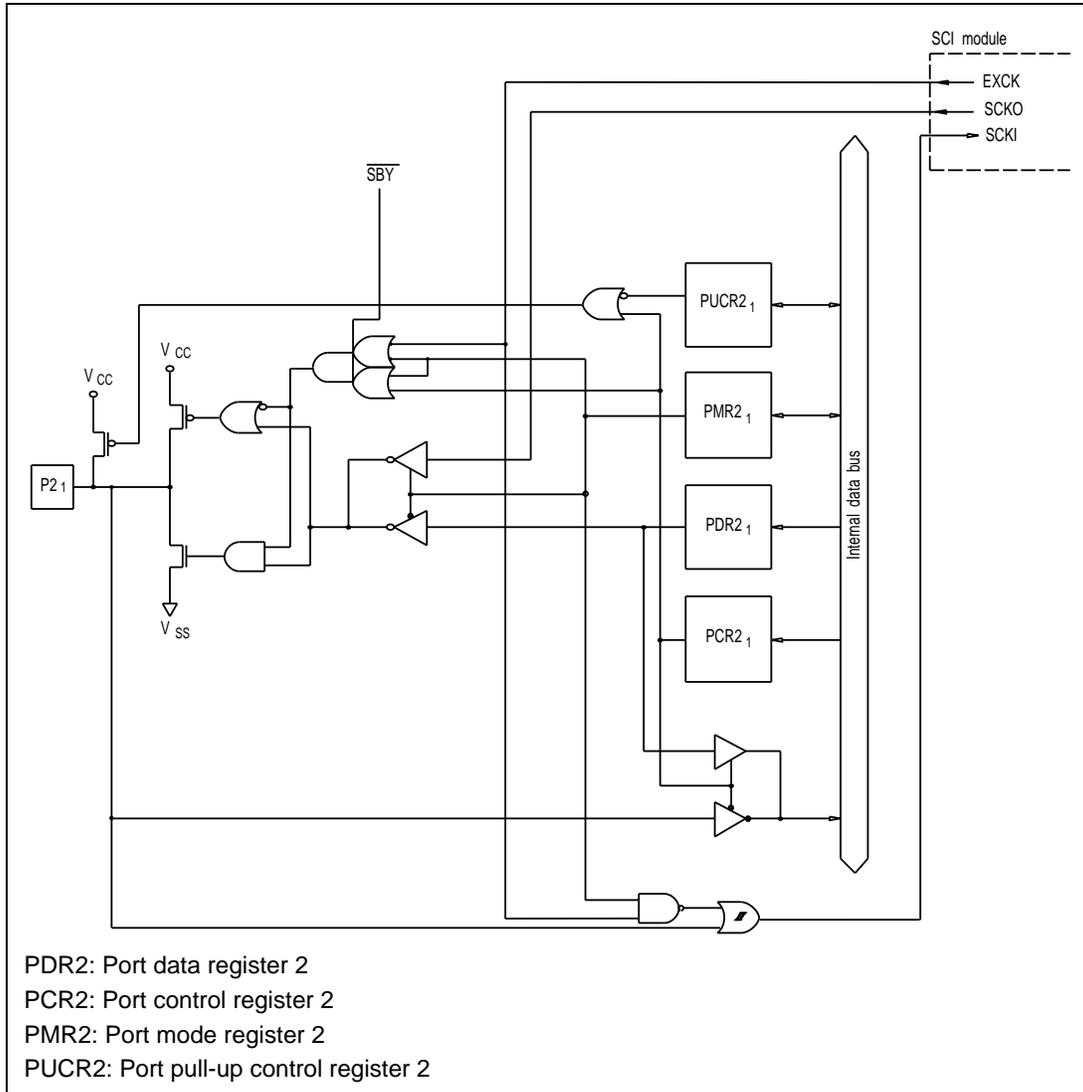


Figure C-2 (g) Port 2 Block Diagram (Pin P2₁)

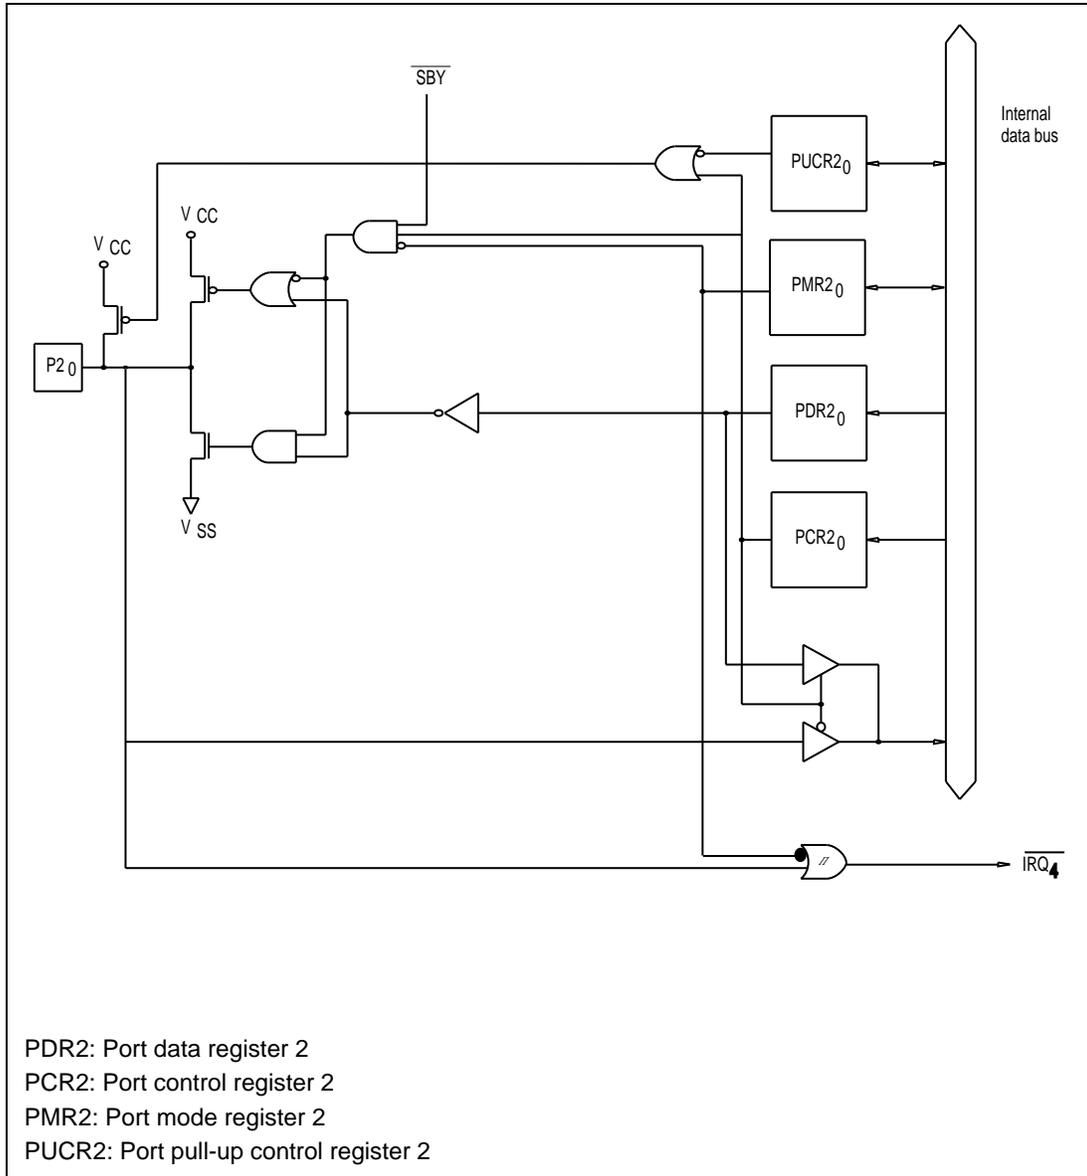


Figure C-2 (h) Port 2 Block Diagram (Pin P2₀)

C.4 Port 6 Block Diagram

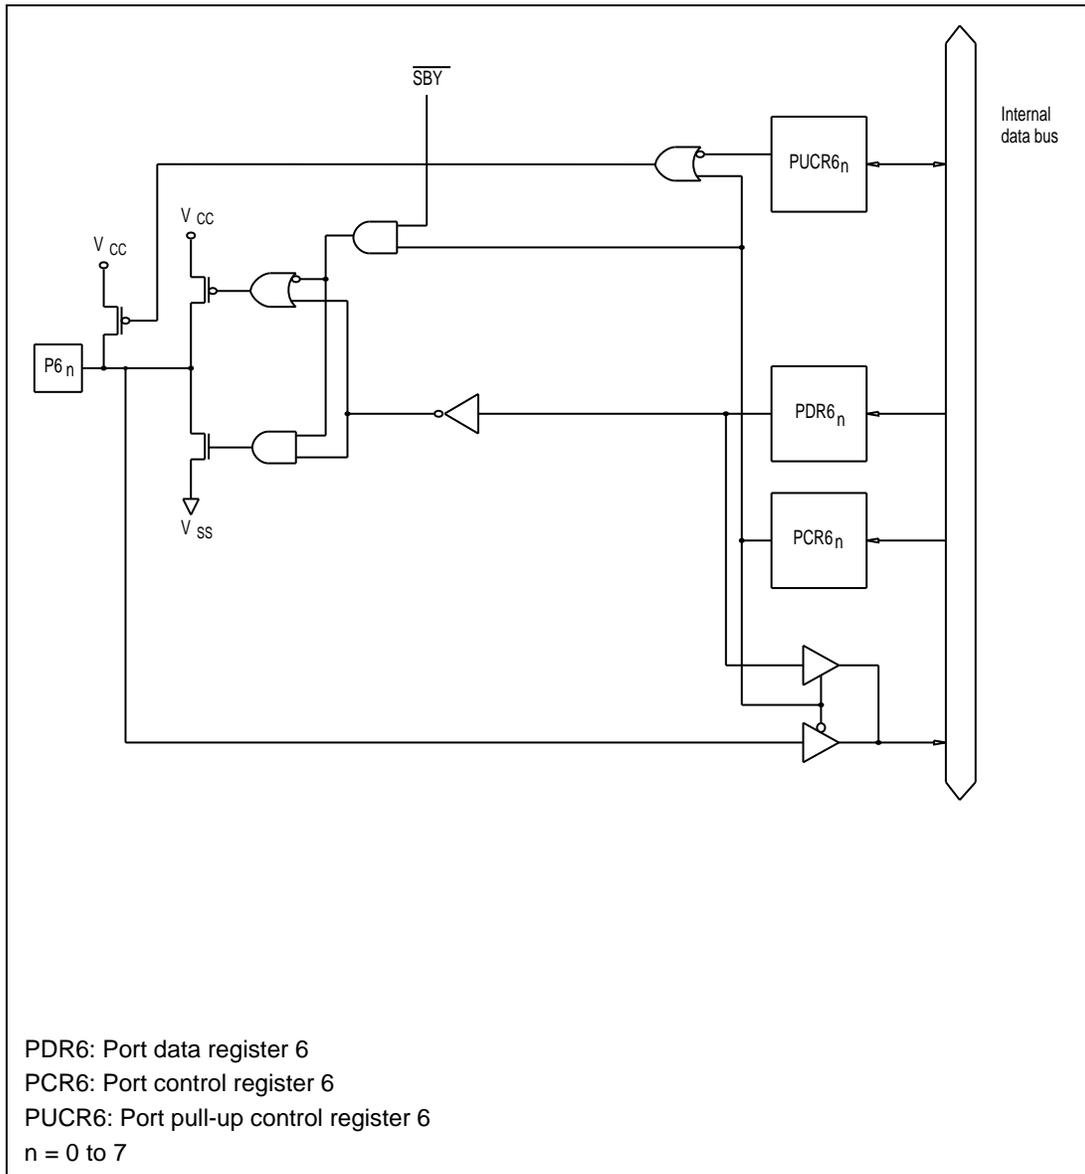


Figure C-4 Port 6 Block Diagram

C.5 Port 7 Block Diagram

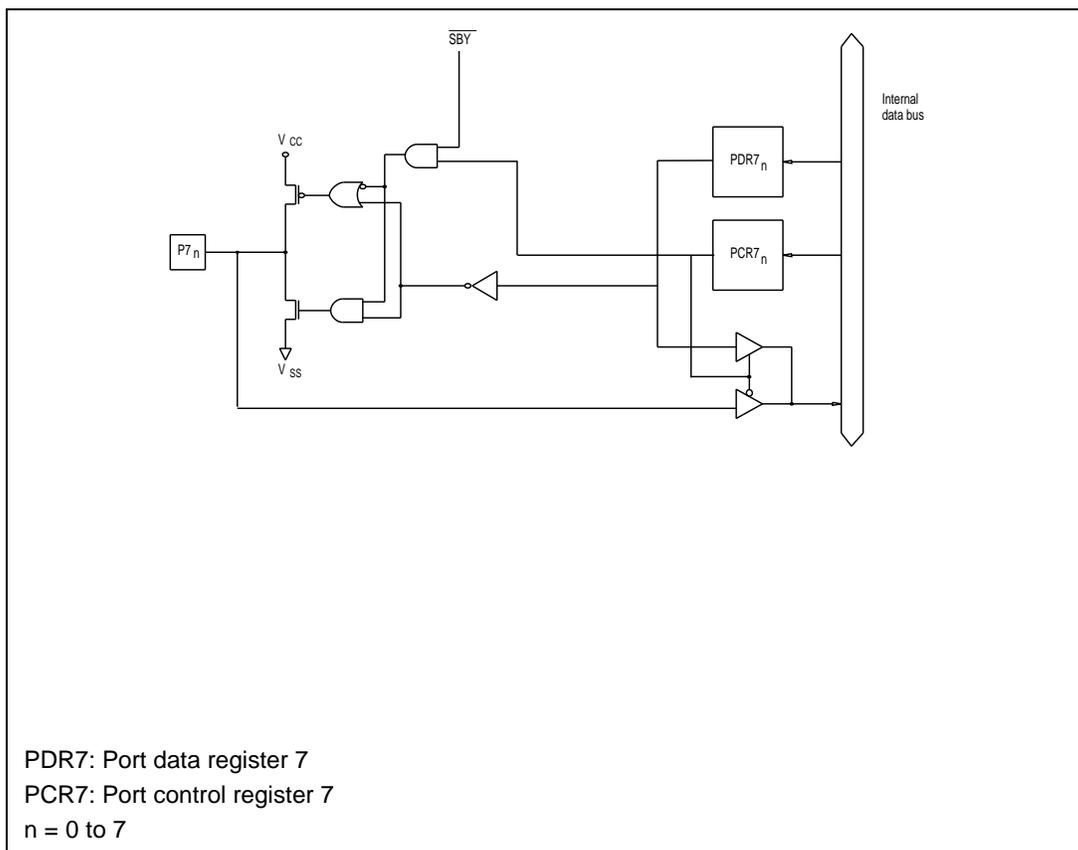


Figure C-5 Port 7 Block Diagram

C.7 Port 9 Block Diagram

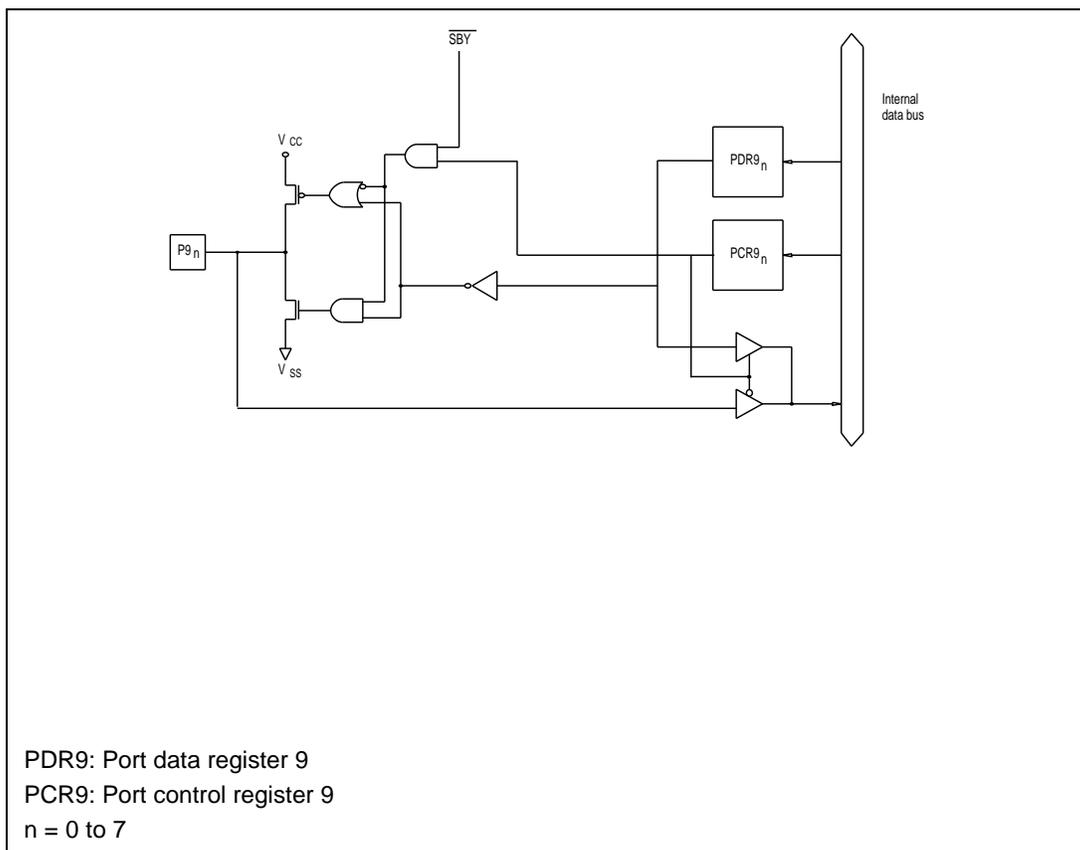


Figure C-7 Port 9 Block Diagram

C.8 Port A Block Diagram

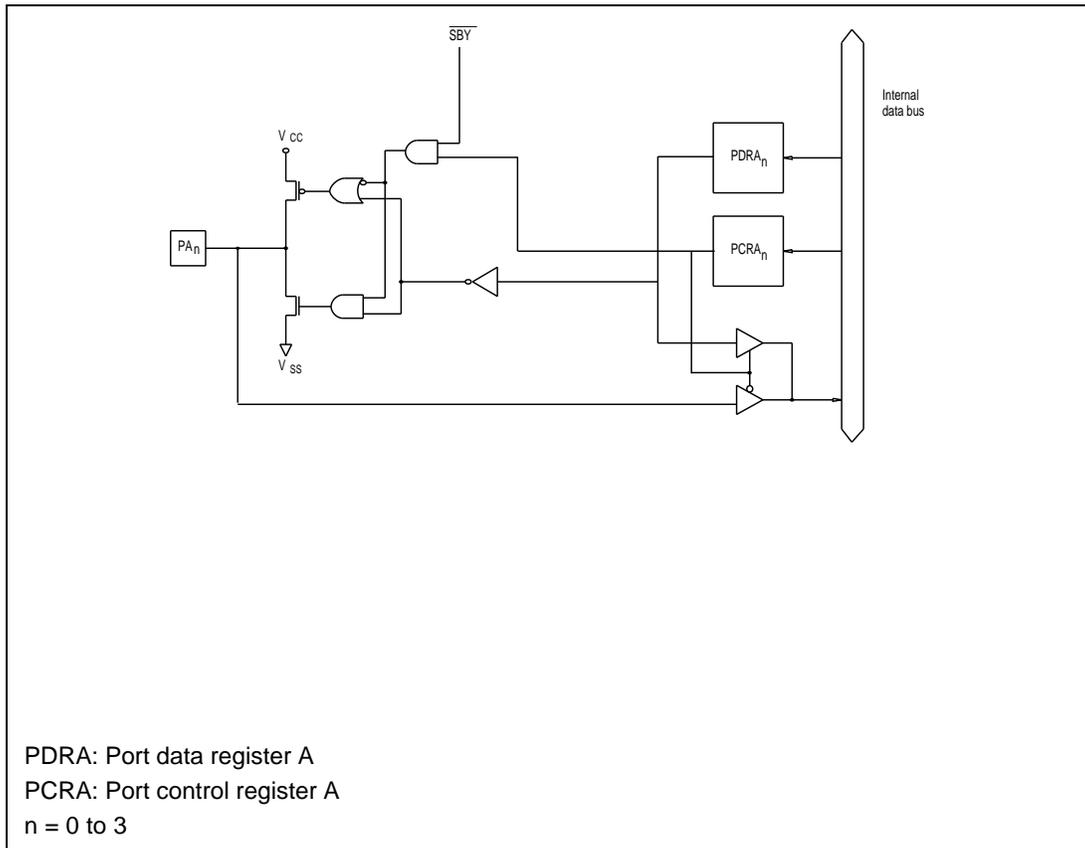


Figure C-8 Port A Block Diagram

C.9 Port B Block Diagram

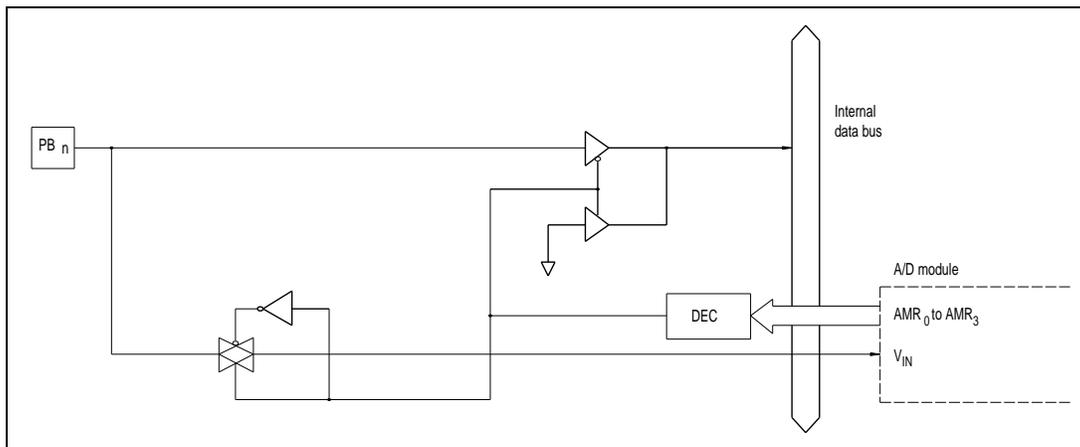


Figure C-9 Port B Block Diagram

C.10 Port D Block Diagram

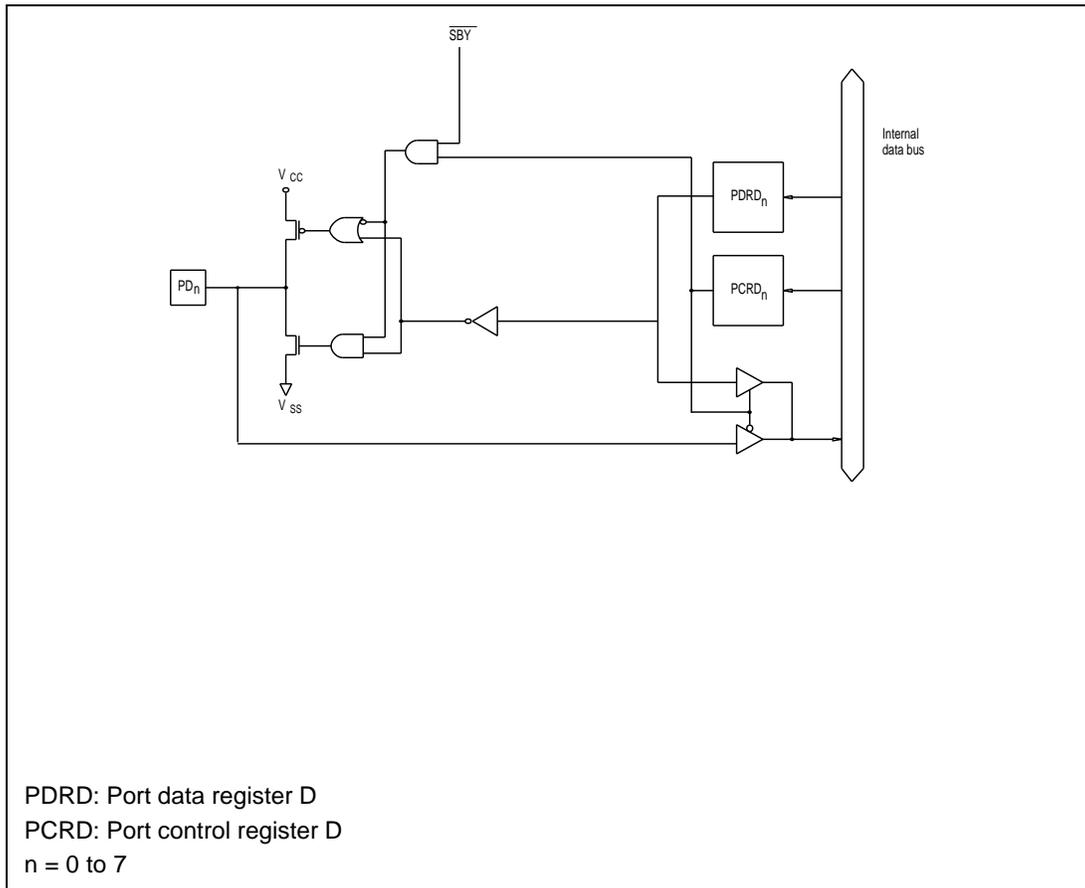


Figure C-10 Port D Block Diagram

C.11 Port E Block Diagram

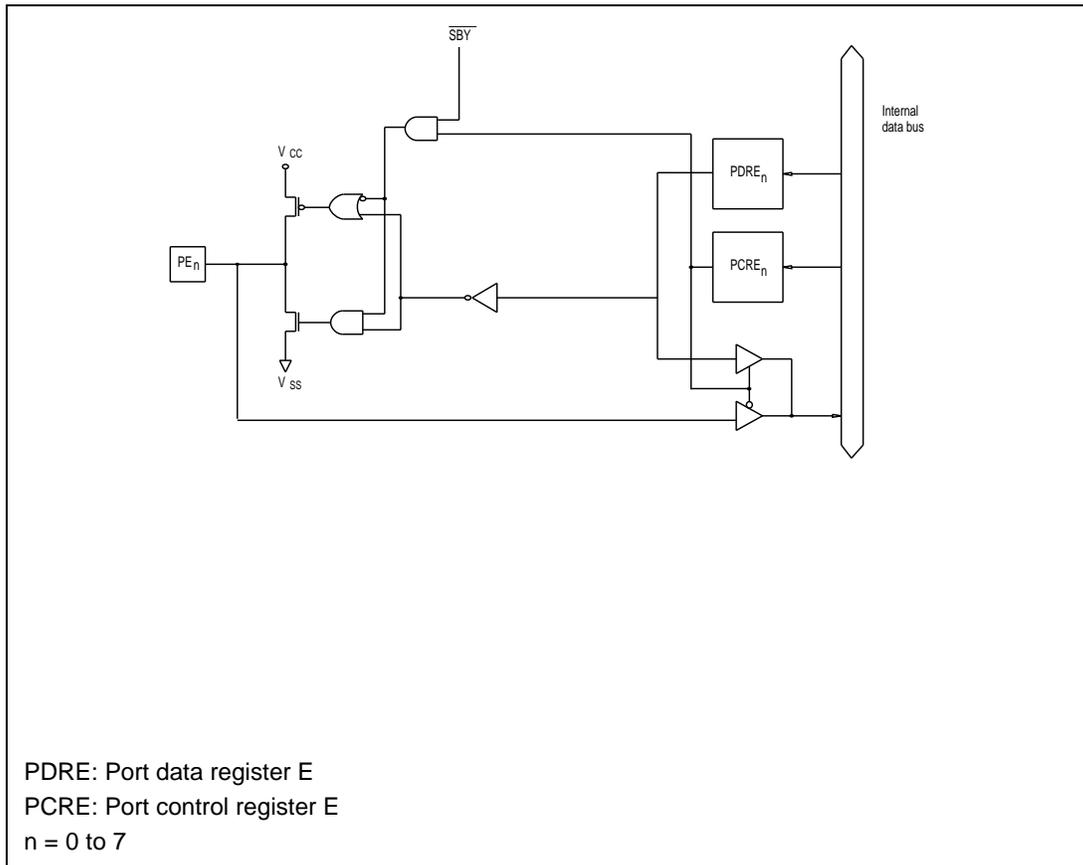


Figure C-11 Port E Block Diagram

Appendix D Port States in the Different Processing States

Table D-1 Port States Overview

Port	Reset	Sleep	Subsleep	Standby	Watch	Subactive	Active
P1 ₇ to P1 ₀	High impedance	Retained	Retained	High impedance*	Retained	Functional	Functional
P2 ₇ to P2 ₀	High impedance	Retained	Retained	High impedance*	Retained	Functional	Functional
P5 ₇ to P5 ₀	High impedance	Retained	Retained	High impedance*	Retained	Functional	Functional
P6 ₇ to P6 ₀	High impedance	Retained	Retained	High impedance*	Retained	Functional	Functional
P7 ₇ to P7 ₀	High impedance	Retained	Retained	High impedance	Retained	Functional	Functional
P8 ₇ to P8 ₀	High impedance	Retained	Retained	High impedance	Retained	Functional	Functional
P9 ₇ to P9 ₀	High impedance	Retained	Retained	High impedance	Retained	Functional	Functional
PA ₃ to PA ₀	High impedance	Retained	Retained	High impedance	Retained	Functional	Functional
PB ₇ to PB ₀	High impedance	High impedance	High impedance	High impedance	High impedance	High impedance	High impedance
PD ₇ to PD ₀	High impedance	Retained	Retained	High impedance	Retained	Functional	Functional
PE ₃ to PE ₀	High impedance	Retained	Retained	High impedance	Retained	Functional	Functional

Note: *High level output when MOS pull-up is in on state.

Appendix E Product Code Lineup

Table E-1 H8/3877U Series Product Code Lineup

Product Type			Product Code	Mark Code	Order Code Name	Package (Hitachi Package Code)
H8/3877U	ZTAT version	Standard products	HD6473877 UH	HD6473877 UH	HD6473877 UH	100-pin QFP (FP-100B)
	Mask ROM version	Standard products	HD6433877 UH	HD6433877 U(***)H	HD6433877 U(***)H	100-pin QFP (FP-100B)
H8/3876U	Mask ROM version	Standard products	HD6433876 UH	HD6433876 U(***)H	HD6433876 U(***)H	100-pin QFP (FP-100B)
H8/3875U	Mask ROM version	Standard products	HD6433875 UH	HD6433875 U(***)H	HD6433875 U(***)H	100-pin QFP (FP-100B)

Note: 1. (***) in mask ROM versions is the ROM code.

Appendix F Package Dimensions

Dimensional drawings of the H8/3877U Series FP-100B package are shown in figure F-1.

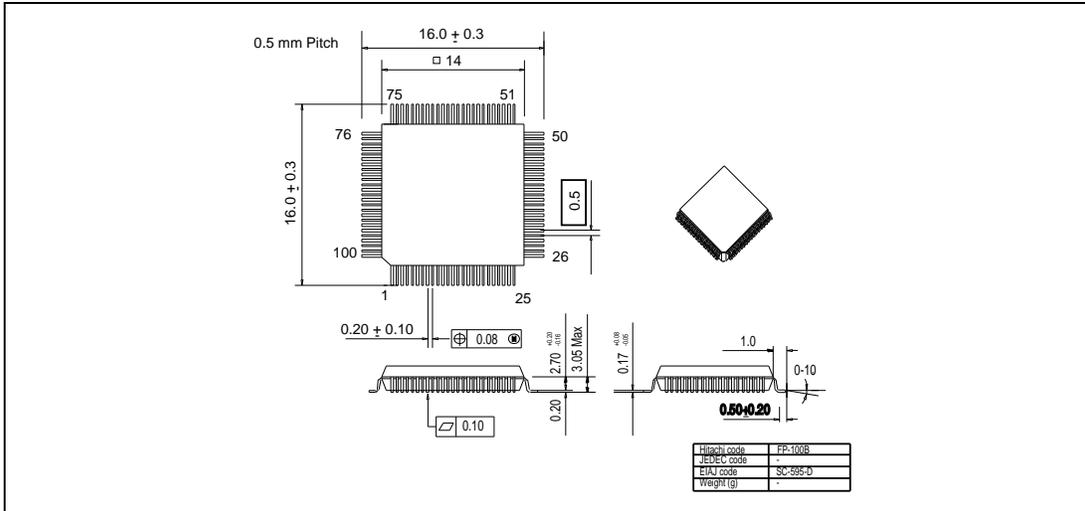


Figure F-1 FP-100B Package Dimensions

Note: In case of inconsistencies arising within figures, dimensional drawings listed in the Hitachi Semiconductor Packages Manual take precedence and are considered correct.