


Program Port Pinout Guide

Program/Debug Port

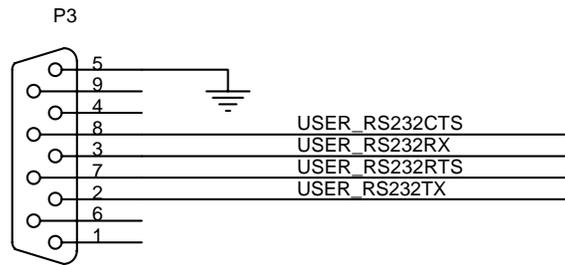

CTS is an output of the RC unit.
 RX is receive data to the RC unit.
 RTS is an input to the RC unit.
 TX is transmit data from the RC unit.

CONNECTOR DB9P SOLDER CUP
 Backside Solder Cup View

It is recommended to have an over-all shield for all cables connecting the backshells to each other.

Innovation First, Inc.		
Title		
Program Port Pinout Guide		
Size	Document Number	Rev
A	PPP-900	NC
Date:	Thursday, April 07, 2005	Sheet 1 of 1