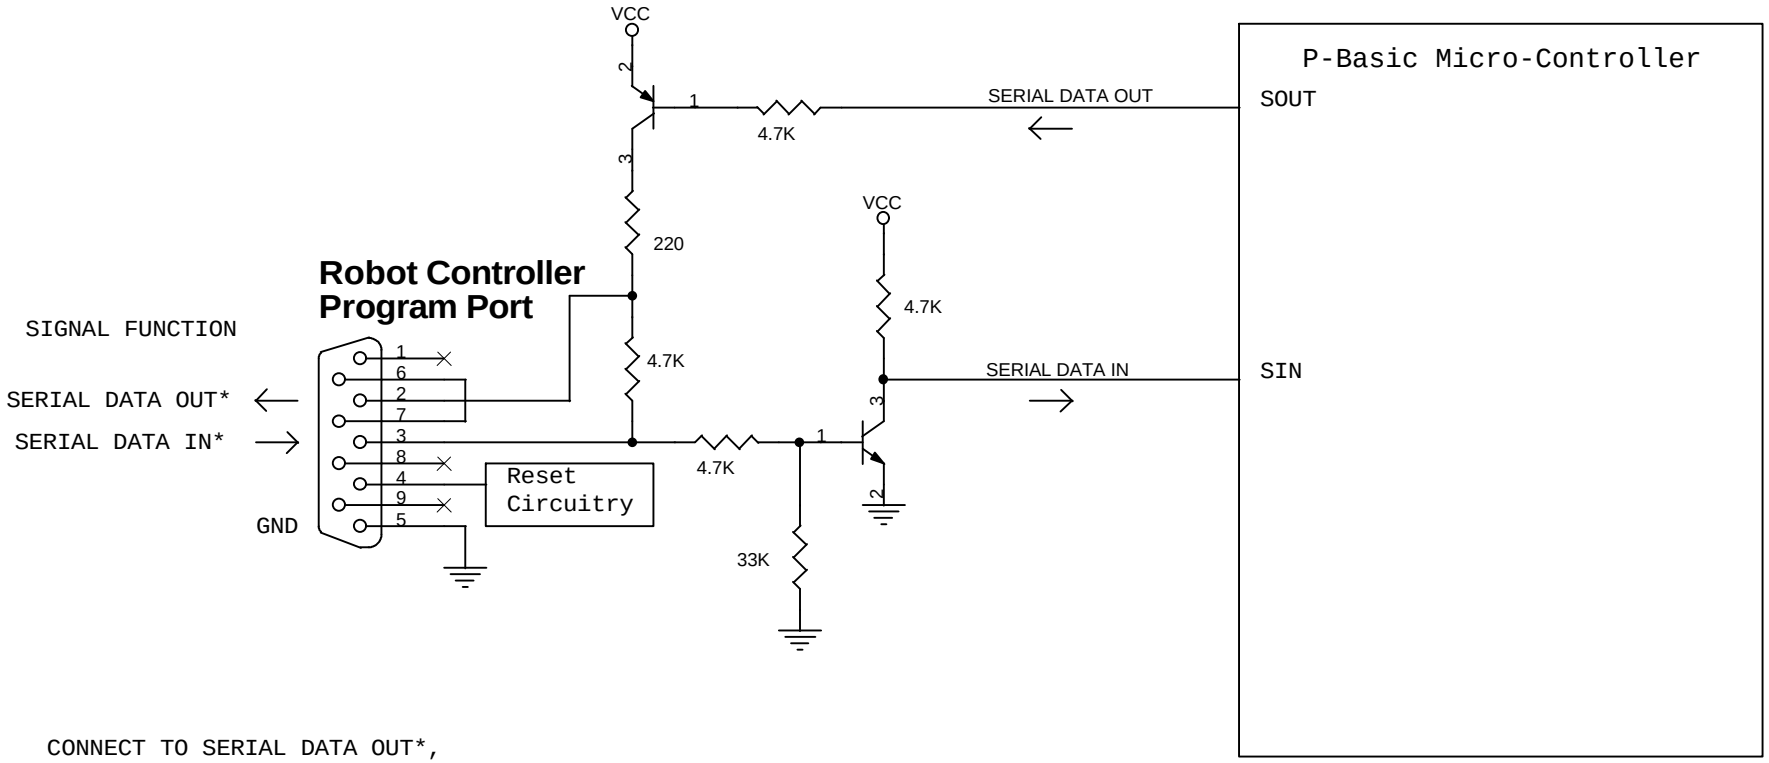

CONNECT TO SERIAL DATA OUT*,
SERIAL DATA IN* AND GND ONLY.

ASTERISK (*) INDICATES LOW
TRUE SIGNAL.

Title	Robot Controller P-Basic Programming Port (Serial Port)	
Size A	Document Number	Rev
Date: Tuesday, January 21, 2003	Sheet 1 of 1	