

AMP Connect

Alphabetical Picture Part Number

SEARCH SEARCH SEARCH

Go To Step Search™ Screen

MAIN MENU HELP

FAMILIES REGISTRATION

787203-1 -- 1 of 1 products


General **INFO**

Sales **INFO**

Customer Drawings **SPECIFICATIONS**

AMPLIMITE Subminiature D Connectors
AMPLIMITE 2000 Subminiature D Connectors

Please use Customer Drawing or CAD file for design activity; line art and other pictures are general representations of product dimensions.

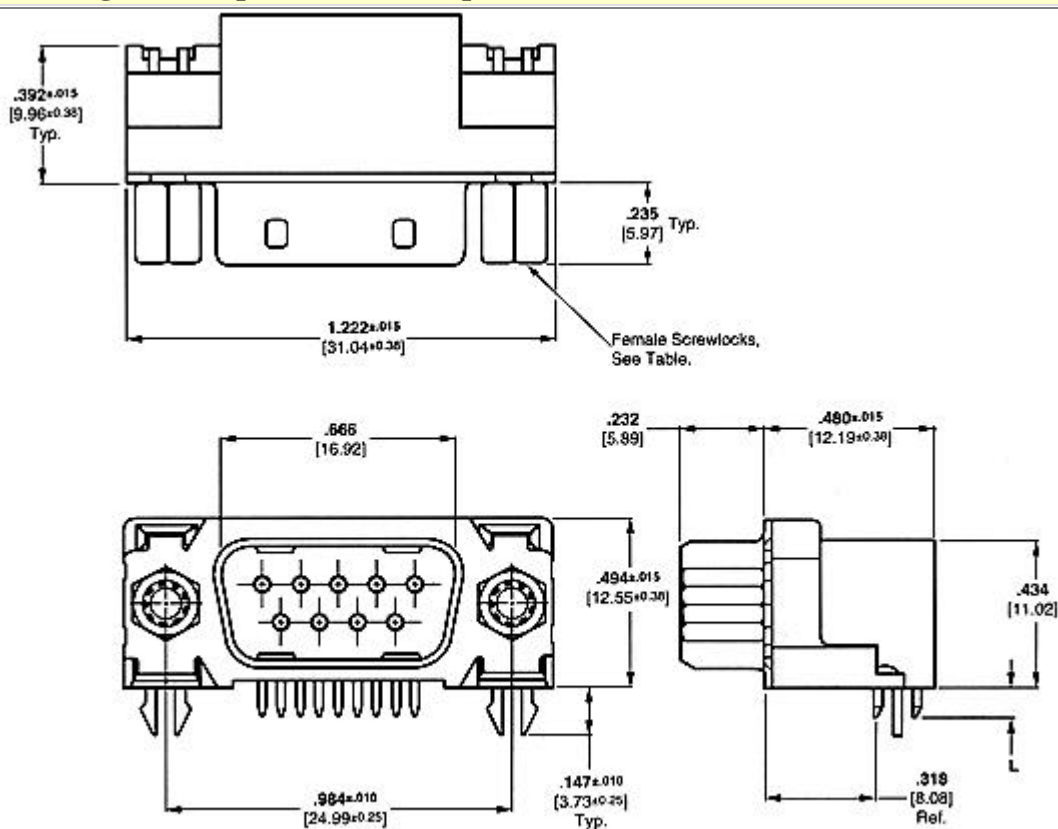

Line art represents typical product only.

[Recommended PC Board Layout](#)

<i>Searchable Features:</i>	
# of Positions	9
Sex	Plug
Grounding Indents	With
Mating Connector Lock Type	4-40 Threaded Insert
Contact Mating Area Plating	Gold Flash
<i>Other Properties:</i>	
Dim. L	.125 [3.18] in. [mm]
Contact Material	Brass
PCB Retention Method Feature	Boardlocks
Shell Type	Front Metal Shell
PCB Mount Angle	Right Angle
Product Series	HD-20
Solder Tail Plating	Tin Lead over Nickel underplating
Solder Tail Length	.125 [3.18] in. [mm]
Housing Material	Thermoplastic
Color	Black
Shell Material	Carbon Steel
Shell Plating	Tin over Copper
Boardlock and Threaded Insert Material	Steel
Footprint	.480 [12.19] in. [mm]
Housing Material Flammability Rating	UL 94V-0
Comment	Board Lock and Threaded Inserts are an integral part of front metal-shell.

[[Main Menu](#) | [Help](#) | [Family Search](#) | [Registration](#) | [Feedback](#)]
[Top of Page](#)