



# FLUKE®

## Fluke 70 Series III/20 Series III Digital Multimeters

Even tougher than before

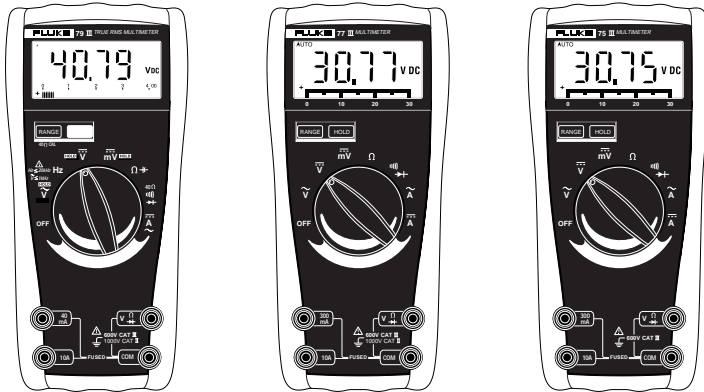


70 Series III Industrial Meters

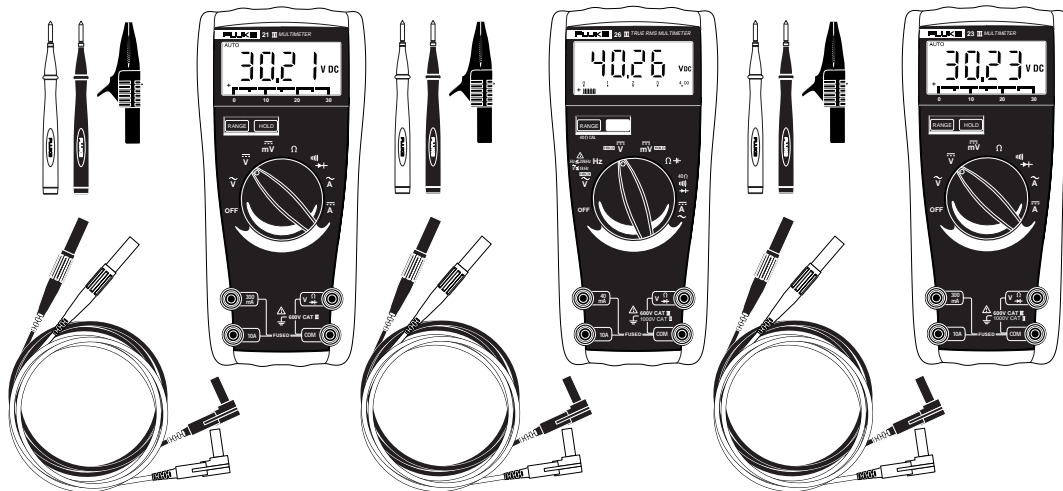

20 Series III Electrical Meters with premium electrician's test lead set

70 Series III Industrial Meters with Classic Design and Separate Holster

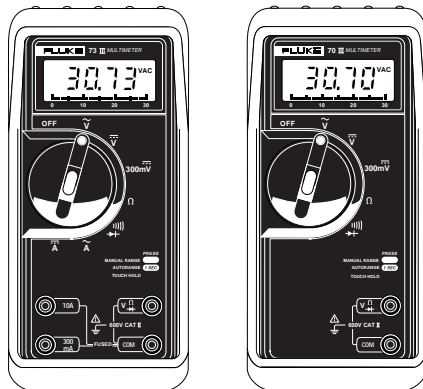

Rough handling and high voltage are tough on a meter. But the new Fluke 70 Series III and 20 Series III take it all in stride.

They're built tough inside and out. With overvoltage protection to guard against surges, and the IEC 1010-1 safety rating to prove it. They are even protected against accidentally measuring voltage with the knob set on ohms. Plus the rugged overmolded plastic case offers constant protection no matter how much you throw it around.

As tough as they are, the 70/20 Series III are very easy on you. The tapered design fits more easily in your hand, pocket, and tool box. The large screen and extra large characters are easy to read from a distance. Plus, there's easier access to Fluke's patented Touch Hold® mode which automatically captures the measurement, beeps, and locks it on the digital display for later viewing.

No matter how tough your job is, the new Fluke 70/20 Series III are even tougher. And of course, they're backed by a lifetime warranty.



LISTED



3111  
Pending



Pending



### Ordering Information

Fluke Model 70-III Digital Multimeter  
 Fluke Model 73-III Digital Multimeter  
 Fluke Model 75-III Digital Multimeter  
 Fluke Model 77-III Digital Multimeter  
 Fluke Model 79-III Digital Multimeter  
 Fluke Model 21-III Digital Multimeter  
 Fluke Model 23-III Digital Multimeter  
 Fluke Model 26-III Digital Multimeter

**Fluke Corporation**  
 P.O. Box 9090  
 Everett, WA USA 98206

**Fluke Europe B.V.**  
 P.O. Box 1186  
 5602 BD Eindhoven  
 The Netherlands

For more information call:  
 In the U.S.A. (800) 443-5853  
 or Fax (425) 356-5116  
 In Europe/M-East +31 (0)40 2 678 200  
 or Fax +31 (0)40 2 678 222  
 In Canada (905) 890-7600  
 or Fax (905) 890-6866  
 From other countries +1(425) 356-5500  
 or Fax +1(425) 356-5116  
 Web access: <http://www.fluke.com>

© 1997 Fluke Corporation. All rights reserved.  
 Printed in the Netherlands 10/97  
 Data subject to alteration without notice  
 C0149 EEN Rev B

**Fluke. Keeping your world up and running.**

## Fluke's most popular digital multimeters just got better. Discover why!

Features	Model 70/73	Model 21/75	Model 23/77	Model 26/79
True-rms ac readings so you get the correct measurement even when harmonics are present.				•
Auto range/manual range selection. Meter selects the correct range automatically. Press Range button to select manual range. Hold down Range button to return to auto range.	•	•	•	•
Extremely rugged overmolded case puts your meter in body armor. Ergonomic styling fits your hand perfectly.		•	•	•
Rugged, durable, removable holster with Flex-Stand™ protects your meter.	•			
Large, high contrast, easy to read display with analog bargraph.		•	•	•
Digital display with analog bargraph.	•			
Automatic Touch-Hold.® Automatic operation triggers meter to capture stable non-zero readings. Focus attention on test probes; meter beeps when reading is captured. Available in ac volts, dc volts, and dc mVolts.				•
Automatic Touch-Hold.® Automatic operation triggers meter to capture stable non-zero readings. Focus attention on test probes; meter beeps when reading is captured. Available in all functions.	•	•	•	
Changes easily between functions by pressing yellow shift button.				•
All inputs, ranges and functions protected to 600V CAT III and 1000V CAT II. Protected from overvoltage transients to 6kV per IEC 1010-1. Meets UL 3111 and IEC 1010 safety standards for 600V CAT III and 1000V CAT II applications.			•	•
All inputs, ranges and functions protected to 600V CAT III. Protected from overvoltage transients to 6kV per IEC 1010-1. Meets UL 3111 and IEC 1010 safety standards for 600V CAT III applications.		•		
All inputs, ranges and functions protected to 600V CAT II. Protected from overvoltage transients to 4 kV per IEC 1010-1. Meets UL 3111 and IEC 1010 safety standards for 600V CAT II applications.	•			
Lifetime Warranty as long as you, the original purchaser, own the products.	•	•	•	•
Improved format instruction sheets. With separate instruction sheets for each of 15 languages, you're certain to find one you can read.		•	•	•
Premium Electrician's Test Lead Set included with 20 Series meters consisting of extra long silicone test leads, removable test probes, and one black alligator clip to make convenient ground connections.		21	23	26

Features	Model 70/73	Model 21/75	Model 23/77	Model 26/79
Continuity Beeper	•	•	•	•
Diode Test	•	•	•	•
Display Counts	3200	3200	3200	4000
Analog Bargraph	•	•	•	•
Automatic Touch Hold	•	•	•	•
Fused Current Inputs	• (73 only)	•	•	•
Lead Resistance Compensation				•
Lo Ohms				•
True-rms				•
Premium Electrician's Test Lead Set		(21 only)	(23 only)	(26 only)
IEC 1010 Rating	600V CAT II	600V CAT III	600V CAT III and 1000V CAT II	
<b>Functions</b>	<b>Model 70/73</b>	<b>Model 21/75</b>	<b>Model 23/77</b>	<b>Model 26/79</b>
DC Volts				
Maximum Voltage	600V	600V	1000V	1000V
Basic Accuracy	0.3%	0.3%	0.3%	0.3%
Maximum Resolution	0.1 mV	0.1 mV	0.1 mV	0.01 mV
AC Volts				
Maximum Voltage	600V	600V	1000V	1000V
Basic Accuracy	2%	2%	2%	1.5%
Maximum Resolution	1 mV	1 mV	1 mV	0.1 mV
DC and AC Current				
Maximum Amps	10A continuous (73 only)	10A continuous	10A continuous	10A continuous
Maximum Resolution	0.01 mA (73 only)	0.01 mA	0.01 mA	0.001 mA
Resistance				
Maximum Resistance	32 MΩ	32 MΩ	32 MΩ	40 MΩ
Basic Accuracy	0.5%	0.5%	0.5%	0.4%
Maximum Resolution	0.1Ω	0.1Ω	0.1Ω	0.01Ω
Capacitance				0.1 nF to 9,999 μF
Frequency				1 Hz to 20 kHz