


**Construction No. 254**

**Wind Uplift-Class 90**  
**(See Item No. 4)**

**Fire Not Investigated**

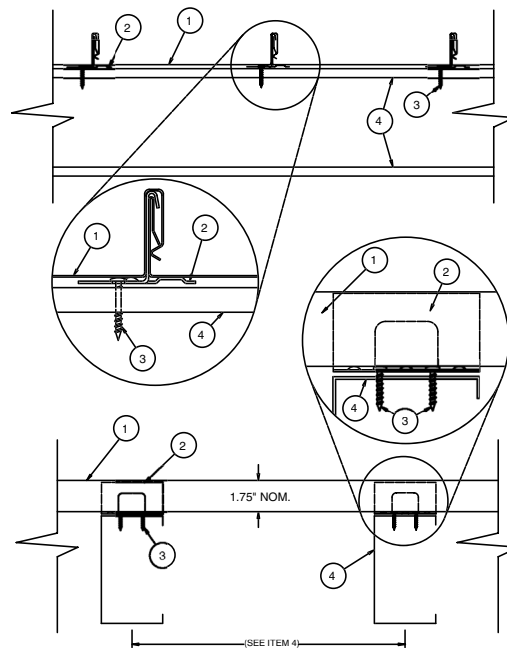

1. **Metal Roof Deck Panels\*** - No. 22 MSG or No. 24 MSG min thickness coated steel panels. Panels 12 in. wide, 1-3/4" in. high at the ribs. Panels continuous over two or more spans. A bead of sealant may be used at panel side joints.  
**Petersen Aluminum Corp.** - "Snap-Clad"
2. **Roof Deck Fasteners\* (Panel Clips)** - One piece assembly, 3-1/2 in. wide, 1-7/8 in. high, thickness 0.048 in. One panel clip located at each purlin intersection.  
**Petersen Aluminum Corp.** - "Snap-Clad Clip"
3. **Panel Fasteners (Screws)** - Fasteners used to attach panel clips (Item 2) to purlins to be No. 10-16 by 1 in. long No. 3 self-drilling point, No. 2 Phillips drive head, cadmium plated steel screws. Two screws per clip to be used inserted through ? in. diameter guide holes.  
Spacing - For 22 MSG thickness panels - 60 in. OC  
For 24 MSG thickness panels - 48 in. OC

\*Bearing the UL Classification Marking