



A Surge Protector With A Back Up Plan!

Your comprehensive ReSource™ for power protection

Your power protection should be as sophisticated and reliable as the computer and files you're looking to protect. With the increasing complexity of computer systems and the projects produced on them everyday, there is no room for downtime, lost files or damaged equipment. Protect yourself with **ReSource™**: the Belkin solution for total power protection.

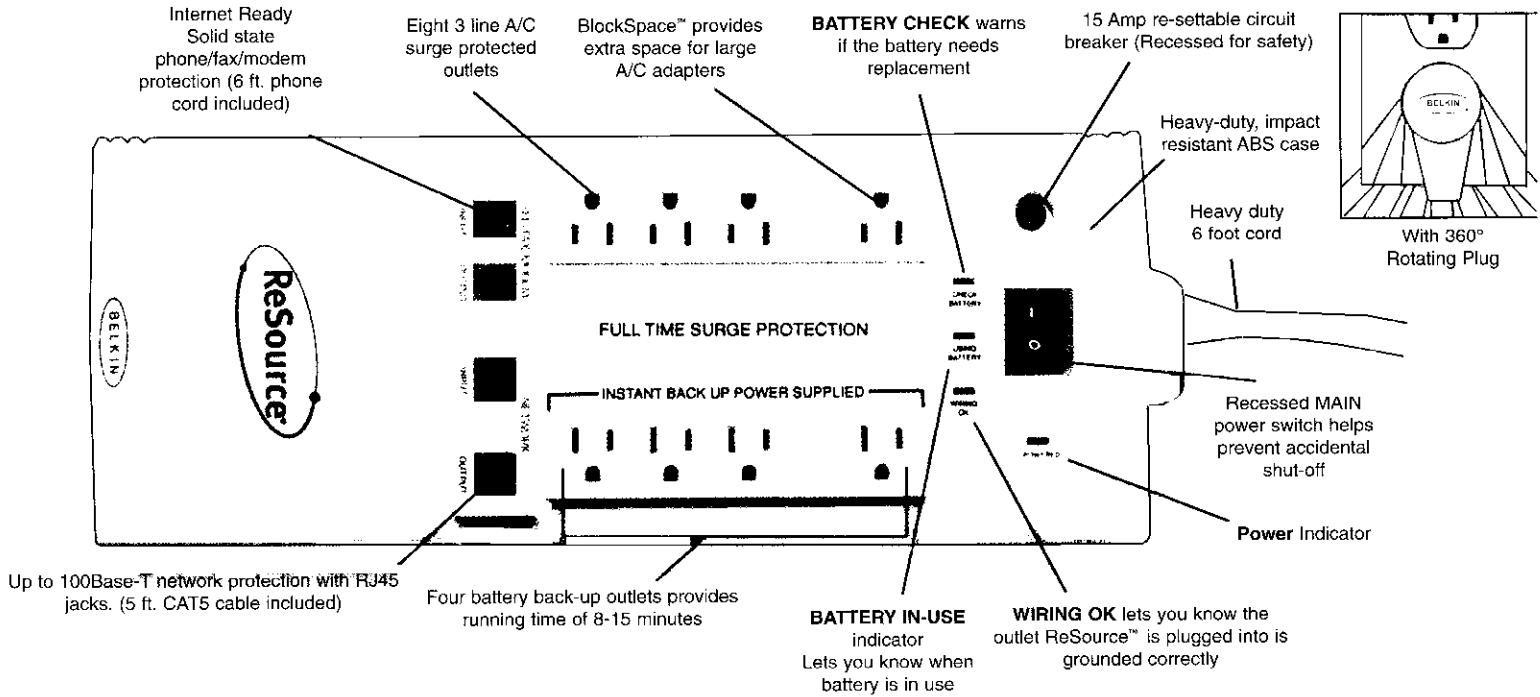
Combining the critical protection of an advanced surge protector and the insurance of UPS in one unit, **ReSource™** is the smart choice for small office or home use. It puts an end to concerns about surges, spikes, sags, brownouts, and even lightning strikes.

The unit is specially designed to provide a full 1260 Joules of surge protection on all 8 outlets, and a 325 VA battery back-up on 4 outlets, enough power to run your system for 15 minutes. Small businesses that have a growing need to protect their expanding network can simplify their power management with **ReSource™**. It offers complete 10/100 Base-T network and phone/fax/modem protection.






The unit carries a \$35,000 connected equipment warranty and a full 3-year Belkin Product Warranty.

ReSource™! Stop worrying. You have the power.





ReSource Specifications	
Max. Load for Full Time Surge Protection Outlets	125 V, 1800W, 15A (Total)
Max. Load utility Power Supplied outlets (4 outlets)	125 V, 1500W, 12 A
Max. Load for Battery Power Supplied outlets (4 outlets)	325 VA, 180W, 2.5 A
Brownout Voltage Transfer to Battery	95 Vac, typical
Overvoltage Transfer to Battery	135 Vac, typical
On-Battery Output Voltage	120 Vac ± 5%
Transfer Time	3 ms typical, 6 ms maximum
Surge Energy Rating H-N, H-G, N-G	1260 Joules
EMI/RFI Noise Filter	Frequency Range: 150 KHZ - 100 MHZ Attenuation: up to 58 db
Operating Temperature	+32° to +95° F (0 to 35 C)
Operating Relative Humidity	0 to 95% non-condensing
Typical Battery Recharge Time	12 hours from total discharge
Typical Battery Life	3-6 years
Size (L x W x H)	16 1/8" x 6" x 3"
Net Weight	8.15 Lbs.
UL Listings	1449, 1778

ReSource™ Battery Runtimes with Common Systems	
Pentium 200 MHz with 17" Monitor	
Pentium 166 MHz with 15" Monitor	
Pentium 133 MHz with 15" Monitor	
Power Mac Power PC with 17" Monitor	
Pentium 90 MHz with 15" Monitor	

Ordering Information	
Product Name	Resource™
Part #	F5C500
UPC	7-22868-16257-6
CasePack Quantity	4
SKU Dimensions (LxWxD)	9" x 19.75" x 3.4"
SKU Cube (Volume)	0.35 cubic Ft.
SKU Weight	9.75 lbs.
CasePack Dimensions	9" x 19.75" x 13.5"
CasePack Cube (Volume)	1.4 cubic ft.
Case Weight	40 lbs.
Suggested Retail	\$139.99

Belkin Components

501 West Walnut Street • Compton • CA 90220-5030
(800) 223-5546 • (310) 898-1100 • FAX (310) 898-1111 • www.belkin.com
6090 Northbelt Parkway, Suite E, Norcross, GA. 30071
(800) 282-2355 • (770) 825-0511 • FAX (770) 825-0679

Belkin Components, LTD.

Clarke Road, Mount Farm, Blechley, Milton Keynes, MK1 1LG, United Kingdom
Phone 01908 367 • FAX 01908 366 564

© 1997 Belkin Components. All Rights Reserved.
All Trade Names Are Registered Trademarks Of Respective Manufacturers Listed.
® Represent USA Registered Trademarks Of Respective Manufacturers Listed.