

V e n t u r i s™ F X - 2

Price-conscious users who want a PC for mainstream business applications will want the DIGITAL

Venturis™ FX-2 PC. Through leading-edge technology and innovative design, the Venturis FX-2 PC

delivers breakthrough performance at unbeatable prices! Easy-to-afford, easy-to-manage enterprise

clients for the Windows®-based computing environment, the Venturis FX-2 PC is a great value.

- Choice of processors:
 - 166MHz Pentium® processor.
 - 166MHz and 200MHz Pentium processors with MMX™ technology.
- Intel 430TX PCI chip set.
- Three DIMM sockets; 64-bit SDRAM interface, expandable to 256MB.
- 256KB pipeline-burst secondary cache.
- Preinstalled software includes ClientWORKS™ for reduced total cost of ownership.

Venturis™ FX-2

5166/5166M/5200M

Features

MODEL/PROCESSOR/SPEED/ ENCLOSURES

- DIGITAL Venturis™ FX-2 5166 LP/ST
166MHz Pentium® processor
- DIGITAL Venturis FX-2 5166M LP/ST
166MHz Pentium processor with MMX™
technology
- DIGITAL Venturis FX-2 5200M LP/ST
200MHz Pentium processor with MMX™
technology

PROCESSOR SOCKET

- Zero-Insertion-Force (ZIF) processor socket 7

SYSTEM MEMORY

- 16/32MB to 256MB SDRAM DIMMs

CACHE MEMORY

- 16KB primary cache standard with Pentium processor
- 32KB primary cache standard with Pentium processor with MMX technology
- 256KB fixed pipeline-burst, secondary cache standard for all models

GRAPHICS

- Integrated S3™ Trio 64V2/GX PCI 64-bit graphics controller with 1MB SGRAM standard, upgradable to 2MB
- Supports up to 1600 x 1200 @ 75Hz

SLOTS

Low-profile:

- 3 total
 - 1 PCI
 - 1 PCI/ISA
 - 1 ISA

Short-tower:

- 5 total
 - 2 PCI
 - 1 PCI/ISA
 - 2 ISA

BAYS

Low-profile:

- 4 total
 - 1 3.5" front-accessible slim-height (1.44MB diskette drive installed)
 - 2 5.25" front-accessible half-height
 - 1 3.5" internal slim-height

Short-tower:

- 6 total
 - 1 3.5" front-accessible slim-height (1.44MB diskette drive installed)
 - 3 5.25" front-accessible half-height
 - 2 3.5" internal slim-height

EXTERNAL PORTS

- 1 enhanced parallel (ECP/EPP)
- 1 high-speed 16550-compatible serial
- 2 Universal Serial Bus (USB)
- 1 VGA graphics
- 1 keyboard
- 1 mouse

SOFTWARE PREINSTALLED

- Windows® 95, DIGITAL ClientWORKS™ (Desktop Management Interface [DMI] manageable software), SMART applet, AMI diagnostics, Adobe® Acrobat® Reader, Microsoft® Internet Explorer System Readme, on-line documentation, power management

POWER SUPPLY

Low-profile:

- 100 watts, 110/220V switch-selectable
- Short-tower:

- 200 watts, 110/220V switch-selectable

DIMENSIONS

• Low-profile:

Height:	4.2"	105.7mm
Width:	16.5"	419.1mm
Depth:	17.75"	450.8mm
Weight:	31.2 lb	14.1kg

• Short-tower:

Height:	16.0"	406.4mm
Width:	8.5"	215.9mm
Depth:	17.5"	444.5mm
Weight:	33.6 lb	15.2kg

OTHER STANDARD FEATURES

- 2MB Flash ROM BIOS, including video BIOS
- Bus Master EIDE support for Mode 3 and 4 drives
- SMART interface disk support
- Slide-in, slide-out motherboard
- Intel 430TX PCI chip set
- Color-coded I/O ports
- Single-thumbscrew enclosure (low-profile)
- Three-thumbscrew enclosure (short-tower)
- Keyboard
- Mouse

MULTILEVEL SECURITY


- Built-in BIOS password protection
- User and supervisor passwords
- Flash ROM protection via jumper
- Security hasp
- Diskette drive boot control
- Diskette drive write control

CERTIFICATIONS

- EMI/safety: UL, CSA, TUV-GS, CE-Mark, FCC (Class B), VCCI-2, Korean EMI, CISPR-22, CB (European), PTT, D-Mark (DEMKO), S-Mark (SEMKO), N-Mark (NEMKO), FIMKO (SETI), AS/NZS 3548
- Operating systems: Windows 95, Windows NT® 4.0, Novell® NetWare® 386 3.12 and 4.1 (client only)

WARRANTY

- Three-year limited warranty

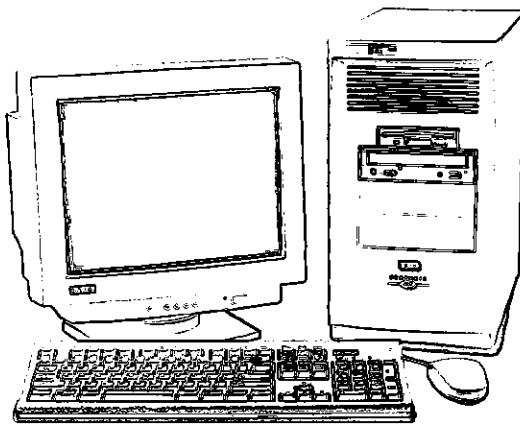

Options

SYSTEM MEMORY

- 16, 32, 64 and 128MB* SDRAM DIMM upgrade kits

GRAPHICS OPTIONS AND UPGRADES

- 1MB SGRAM upgrade for S3 Trio 64V2/GX
- Matrox MGA Millennium graphics accelerator
- 2MB WRAM upgrade for Matrox MGA Millennium
- 6MB WRAM upgrade for Matrox MGA Millennium

DISKETTE DRIVE

- 3.5": 1.44MB

HARD DISK DRIVES

- EIDE: 1.2GB, 2GB, 3.2GB
- Ultra-Wide SCSI: 2GB, 4GB

CD-ROM DRIVES

- 12x EIDE 5.25"

NETWORK INTERFACE CARDS

- Ethernet PCI 10Mbps
- Ethernet PCI 10/100Mbps

SCSI ADAPTER

- Adaptec 2940UW PCI/SCSI Ultra-Wide adapter

MULTIMEDIA

- Creative Labs multimedia kit
- Creative Labs sound card
- Speaker kit
- Headset with microphone

MONITORS

- 800 x 600 @ 85Hz, NI auto-sync:
14" (13.2"V), 15" (13.8"V)
- 1024 x 768 @ 85Hz, NI auto-sync, TCO'92:
15" (13.6"V), 17" (15.7"V), 17" (16.0"V)
- 1280 x 1024 @ 85Hz (1600 x 1200 @ 75Hz),
NI auto-sync, TCO'92: 21" (19.6"V)

OTHER

- Other high-quality options are available for your DIGITAL PC. Consult your DIGITAL Reseller for full details

*Based on industry availability.

Printed in U.S.A. EC-17600-48 Rev. A 48857 04 04 40 Copyright 1997 Digital Equipment Corporation. All rights reserved.

For more information about DIGITAL's PC products, call 1-800-722-9332 or visit us at www.windows.digital.com

© Digital Equipment Corporation, 1997. The DIGITAL logo, Venturis and ClientWORKS are trademarks of Digital Equipment Corporation. Microsoft Windows and Windows NT are registered trademarks of Microsoft Corporation. Novell and NetWare are registered trademarks of Novell, Inc. The Intel Inside logo and Pentium are registered trademarks and MMX is a trademark of Intel Corporation. S3 is a trademark of S3 Corporation. Adobe is a registered trademark and Acrobat is a trademark of Adobe Systems, Inc. AMIDiag is a trademark of AMI. All other trademarks that are referenced, but are not included in the above listing, are the registered trademarks or trade-marks of their respective owners. The information in this document is subject to change without notice and should not be construed as a commitment by Digital Equipment Corporation.



Microsoft
Windows 95

digital™