


KV-SV50/55 SCANNER

Panasonic

High Speed Scanning with Versatility and Performance.

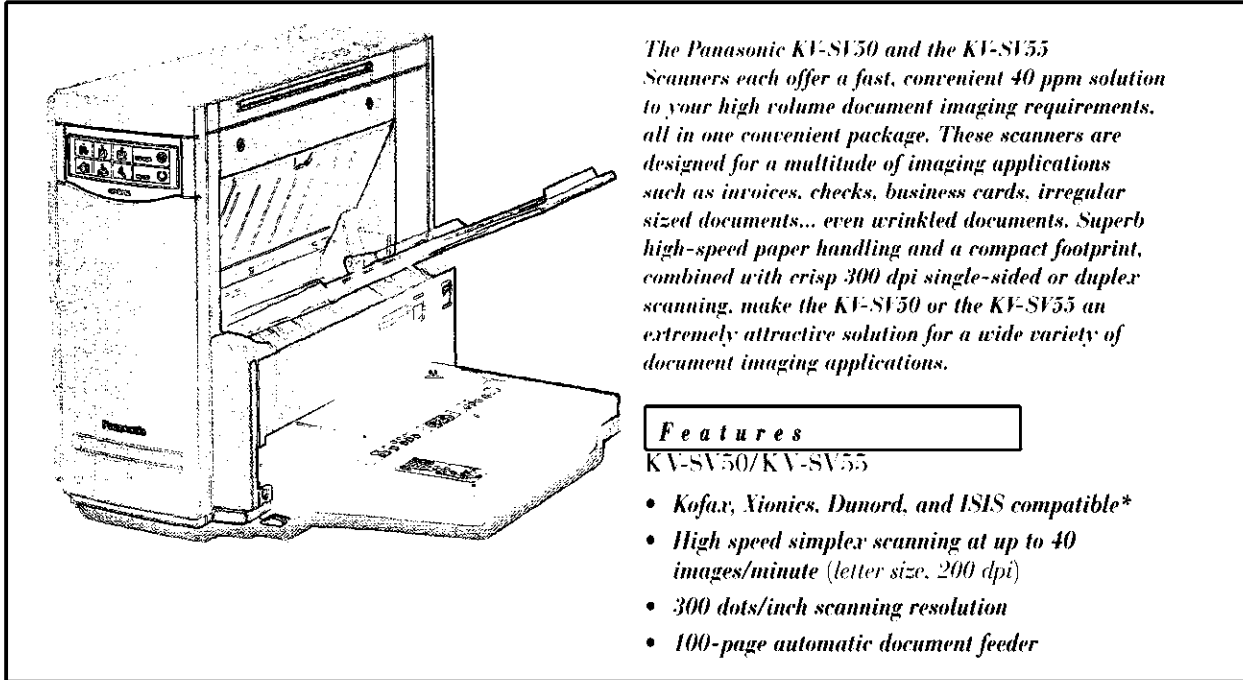

The Panasonic KV-SV50 and the KV-SV55 Scanners each offer a fast, convenient 40 ppm solution to your high volume document imaging requirements, all in one convenient package. These scanners are designed for a multitude of imaging applications such as invoices, checks, business cards, irregular sized documents... even wrinkled documents. Superb high-speed paper handling and a compact footprint, combined with crisp 300 dpi single-sided or duplex scanning, make the KV-SV50 or the KV-SV55 an extremely attractive solution for a wide variety of document imaging applications.

Features

KV-SV50/KV-SV55

- Kofax, Xionics, Dunord, and ISIS compatible*
- High speed simplex scanning at up to 40 images/minute (letter size, 200 dpi)
- 300 dots/inch scanning resolution
- 100-page automatic document feeder

Specifications

KV-SV50 Scanner

Scanning Face	Simplex scanning (single-sided)
Scanning Method	CCD image sensor
Scanning Speed	52 images/ minute at 150 dots/ inch 40 images/ minute at 200 dots/ inch 27 images/ minute at 300 dots/ inch
Resolution	150 dots/inch-300 lines per inch
Tonal Gradation	Binary mode: 64-step gradation (dither mode). 64-step gradation (error diffusion) mode
Paper Size	2.2" x 3.6" to legal 8.5" x 14"
Paper Thickness	Single paper feed: 2.0 to 7.9 mils / 1 mil = 1/1000 inch; continuous paper feed: 2.4 to 5.9 mils
Paper Weight	Single paper feed: 11 to 34lbs.; continuous paper feed: 13 to 27lbs.
External Dimensions	15.3" H x 22.4" W x 17.7" D
Weight	31 lbs.
Power Requirement	120V ± 12 VAC, 60 Hz
Power Consumption	1.3A max (scanning)
Operating Environment	59°F to 86°F; 30% to 80% RH
Storage Environment	32°F to 95°F; 10% to 80% RH
Accessories	Document tray, exit tray, exit tray sheet, power cord, operation manual and installation manual, & repacking instructions
Options	Cleaning Swab KV-SS03

Specifications

KV-SV55 Duplex Scanner

Scanning Face	Duplex scanning (front and back)
Scanning Method	CCD image sensor and contact image sensor
Scanning Speed	52 images/ minute at 150 dots/ inch 40 images/ minute at 200 dots/ inch 27 images/ minute at 300 dots/ inch
Resolution	150 dots/inch-300 lines per inch
Tonal Gradation	Binary mode: 64-step gradation (dither mode). 64-step gradation (error diffusion) mode
Paper Size	2.2" x 3.6" to legal 8.5" x 14"
Paper Thickness	Single paper feed: 2.0 to 7.9 mils / 1 mil = 1/1000 inch; continuous paper feed: 2.4 to 5.9 mils
Paper Weight	Single paper feed: 11 to 34lbs.; continuous paper feed: 13 to 27lbs.
External Dimensions	15.3" H x 22.4" W x 17.7" D
Weight	31 lbs.
Power Requirement	120V ± 12 VAC, 60 Hz
Power Consumption	1.3A max (scanning); 0.5A (standby)
Operating Environment	59°F to 86°F; 30% to 80% RH
Storage Environment	32°F to 95°F; 10% to 80% RH
Accessories	Document tray, exit tray, exit tray sheet, power cord, operation manual and installation manual, & repacking instructions.
Options	Cleaning Swab KV-SS03

Panasonic Computer Peripheral Company
Division of Panasonic Communications & Systems Company
Unit of Matsushita Electric Corporation of America
Imaging Products Group
Headquarters
2 Panasonic Way, Secaucus, NJ 07094

All product/brand names are trademarks or registered trademarks of their respective holders.



Printed in USA

SCAN-KVSV50-55-SS 8/97

For your nearest Dealer/Distributor
please call 1-800-742-8086

Internet: <http://www.panasonic.com/alive>

Faxback: 1-800-PANASYS (800-726-2797)

Technical Support: 1-800-PANASYS (800-726-2797)