


WY-60

KEY FEATURES

- Best selling general purpose terminal
- ASCII/ANSI/PCTerm terminal
- Choice of keyboards
ASCII/ANSI/Enhanced PC keyboard
- High-resolution character with 44/132 display format
- Ergonomic Design with optional height-adjustable arm
- WyseWorks desktop accessories package

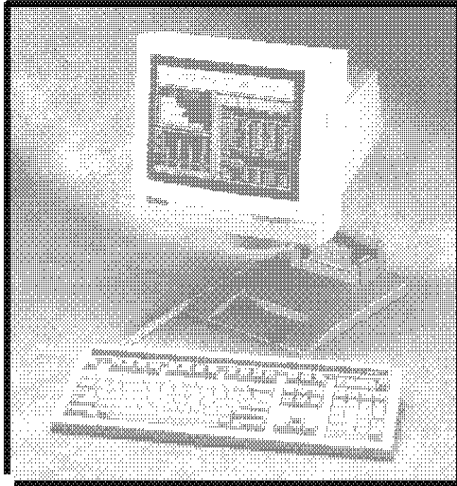

WY-60

A Powerful Tool for Sophisticated Applications

The WY-60 represents Wyse's most powerful, versatile, and user-friendly terminal designed to meet existing and emerging needs in the ASCII/ANSI/PC terminal markets.

End users will appreciate the WY-60's high-resolution character cell for exceptionally crisp characters. The WY-60 has the same superior keyboard touch and layout that users have come to expect from Wyse. Also standard is a tilt and swivel base for easy screen positioning. An optional height-adjustable arm provides eye-level viewing and occupies less desk space. A choice of green, amber and paper-white phosphors is available.

Systems integrators and VARs will value the powerful features available for emerging markets.

The WY-60's high-quality, dynamic-focus display is extremely sharp, plus it offers 44-line capability to display more of a spreadsheet or document. Users have a choice of WY-60 ASCII, WY-60 ANSI, and IBM Enhanced PC keyboards. Other key features include WyseWorks, a built-in clock/alarm, calendar, calculator, and ASCII table combination; selectable hidden or non-hidden attributes; double-high/wide capability for maximum screen display impact; up to seven pages of screen memory for more local editing capability; soft font to create any character set; an enhanced set-up menu; and user-programmable label line, function, and edit keys. The list goes on and on.

WYSE
| . | . | .

WY-60

PHYSICAL SPECIFICATIONS

Display console

- Height: 12.75 in (32.39 cm)
- Width: 12.5 in (31.75 cm)
- Depth: 13 in (33.02 cm)

Keyboards

- WY-60 ASCII and WY-60 ANSI: 2.25 in (H) x 17.25 in (W) x 7.6 in (D) [5.72 cm (H) x 43.82 cm (W) x 19.30 cm (D)]
- IBM Enhanced PC-style: 2.25 in (H) x 18.7 in (W) x 6.9 in (D) [5.72 cm (H) x 47.50 cm (W) x 17.53 cm (D)]
- Finish: Two-tone grey
- Shipping weight: 20 pounds (9.1 kg)

DISPLAY

- CRT: 14-inch (diagonal), flat-screen, 60 Hz refresh
- Tilt: -7 to +34 degrees
- Swivel: 360 degrees
- Phosphor choices: P-31 green phosphor; P-134 amber phosphor; P-188 paper-white phosphor
- Format: 26 lines by 80/132 columns. 44 lines by 80/132 columns.
- Memory: Up to seven pages of 26 lines by 80 columns (nonhidden-attributes mode); four pages of 26 lines by 132 columns (nonhidden-attributes mode); three pages of 26 lines by 80 columns (hidden-attributes modes); two pages of 26 lines by 132 columns (hidden-attributes mode); two pages of 44 lines by 80 columns (nonhidden-attributes mode); one page of 44 lines by 132 columns (hidden-attributes mode); one page of 44 lines by 80 columns (hidden-attributes mode); one page of 44 lines by 132 columns (nonhidden-attributes mode).

- Character set: 7x12 matrix in 10x16 cell with 3-dot descenders; 800 dots by 416 line resolution in 80-column mode; 7x12 matrix in 9x16 cell with 3-dot descenders: 1188 dots by 416-line resolution in 132-column mode; four separate programmable (soft) character fonts of 128 characters each; total font display capability of 512 characters.
- Character attributes: Normal, blink, blank, reverse, dim, underscore, and combinations. Hidden or non-hidden. Row attributes, double-wide, double-high and combinations, dim, reverse.
- Cursor: Block or underline, blink, steady or off.

KEYBOARDS CHOICES

- All keyboards: Full-travel mechanical keyswitches. Detached keyboard with 4-wire coiled cable, 6-foot extended length. Two-position tilt. DIN compliant. Full-touch keys. Approximately 350 nonvolatile bytes available, 64 non-volatile bytes maximum per key.

COMMUNICATIONS TYPE

- Serial ports: EIA RS-232C MODEM port from 50 to 38.4 kbps. EIA RS-232C AUX port from 110 to 19.2 kbps. Buffered, bidirectional, selectable host port.
- Format: 7 or 8 data bits, 1 or 2 stop bits.
- Modes: block, full duplex, half duplex.

COMPATIBILITY

- Operating modes: WY-60 hidden-attributes native mode; WY-50/50+; WY-75/ANSI 3.64 mode, DEC VT52/100; Data General D200/210; Lear-Siegler ADM 3A/5/31; TeleVideo 910+/920/925/950/955; ADDS Viewpoint A2/60; Hazeltine 1500; IBM 3101 1X/2X; IBM 3161; PC TERM

ADDITIONAL FEATURES

- Non-destructive multiline display English setup menu, downloadable soft font, horizontal-split screen, variable-speed smooth scroll (forward and reverse), WyseWorks (calculator, calendar, alarm clock and ASCII table), WyseWord (WordStar mode). Optional Height-Adjustable Arm.

CUSTOMER SERVICE

The Wyse Customer Service Department offers a wide array of services and programs. For more information, or for the Wyse Service Center nearest you, call toll free 1-800-626-3160.

INTERNATIONAL SALES OFFICES

Australia (2) 888-7455
Canada (416) 470-2810
France (1) 6982-9100
Germany (89) 46 00 99-0
Hong Kong (5) 290356 x260
Italy (2) 89201563
United Kingdom (734) 342-200
United States (408) 473-1200

ENVIRONMENTAL

- Operating: 52° to 104°F (10° to 40°C)
- Storage: -40° to 140°F (-40° to 60°C)
- Humidity: 20 to 80% noncondensing
- Altitude: sea level to 10,000 feet

OPTIONS

- Height-Adjustable Arm
- International language kits

POWER

- 120 or 220/240 VAC ± 10%, 47-63 Hz.

REGULATORY COMPLIANCE

- RFI: FCC Class A, VDE Radio Protection Mark (0871 Limit B)*
- Safety approvals: UL, CSA, TUV-GS*
*European version only.

WYSE TECHNOLOGY
3471 N. First Street
San Jose, CA 95134-1803

For more information,
call: 1-800-GET-WYSE
(1-800-438-9973)

WYSE
| | | |