

Preliminary Information

AMD-K6[®]-III

Processor Data Sheet



© 1999 Advanced Micro Devices, Inc. All rights reserved.

The contents of this document are provided in connection with Advanced Micro Devices, Inc. ("AMD") products. AMD makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this publication. Except as set forth in AMD's Standard Terms and Conditions of Sale, AMD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

AMD's products are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or in any other application in which the failure of AMD's product could create a situation where personal injury, death, or severe property or environmental damage may occur. AMD reserves the right to discontinue or make changes to its products at any time without notice.

Trademarks

AMD, the AMD logo, K6, 3DNow!, and combinations thereof, K86, and Super7 are trademarks, and AMD-K6 and RISC86 are registered trademarks of Advanced Micro Devices, Inc.

Microsoft, Windows, and Windows NT are registered trademarks of Microsoft Corporation.

NetWare is a registered trademark of Novell, Inc.

MMX is a trademark and Pentium is a registered trademark of Intel Corporation.

The TAP State Diagram is reprinted from IEEE Std 1149.1-1990 "IEEE Standard Test Access Port and Boundary-Scan Architecture," Copyright © 1990 by the Institute of Electrical and Electronics Engineers, Inc. The IEEE disclaims any responsibility or liability resulting from the placement and use in the described manner. Information is reprinted with the permission of the IEEE.

Other product names used in this publication are for identification purposes only and may be trademarks of their respective companies.

Contents

| | |
|---|-----------|
| Revision History | xvii |
| 1 AMD-K6[®]-III Processor | 1 |
| 1.1 Super7 [™] Platform Initiative | 3 |
| Super7 Platform Enhancements | 3 |
| Super7 Platform Advantages | 4 |
| 2 Internal Architecture | 5 |
| 2.1 Introduction | 5 |
| 2.2 AMD-K6 [®] -III Processor Microarchitecture Overview | 5 |
| Enhanced RISC86 [®] Microarchitecture | 6 |
| 2.3 Cache, Instruction Prefetch, and Predecode Bits | 9 |
| Cache | 9 |
| Prefetching | 10 |
| Predecode Bits | 10 |
| 2.4 Instruction Fetch and Decode | 11 |
| Instruction Fetch | 11 |
| Instruction Decode | 12 |
| 2.5 Centralized Scheduler | 14 |
| 2.6 Execution Units | 15 |
| Register X and Y Pipelines | 16 |
| 2.7 Branch-Prediction Logic | 17 |
| Branch History Table | 18 |
| Branch Target Cache | 18 |
| Return Address Stack | 18 |
| Branch Execution Unit | 19 |
| 3 Software Environment | 21 |
| 3.1 Registers | 21 |
| General-Purpose Registers | 22 |
| Integer Data Types | 23 |
| Segment Registers | 24 |
| Segment Usage | 24 |
| Instruction Pointer | 25 |
| Floating-Point Registers | 25 |
| Floating-Point Register Data Types | 28 |
| MMX [™] /3DNow! [™] Registers | 29 |
| MMX Data Types | 29 |
| 3DNow! Data Types | 30 |
| EFLAGS Register | 31 |
| Control Registers | 32 |
| Debug Registers | 34 |

| | | |
|----------|--|-----------|
| | Model-Specific Registers (MSR) | 37 |
| | Memory Management Registers | 45 |
| | Task State Segment | 46 |
| | Paging | 47 |
| | Descriptors and Gates | 50 |
| | Exceptions and Interrupts | 53 |
| 3.2 | Instructions Supported by the AMD-K6-III Processor | 54 |
| 4 | Signal Descriptions | 83 |
| 4.1 | Signal Terminology | 83 |
| 4.2 | A20M# (Address Bit 20 Mask) | 85 |
| 4.3 | A[31:3] (Address Bus) | 86 |
| 4.4 | ADS# (Address Strobe) | 87 |
| 4.5 | ADSC# (Address Strobe Copy) | 87 |
| 4.6 | AHOLD (Address Hold) | 88 |
| 4.7 | AP (Address Parity) | 89 |
| 4.8 | APCHK# (Address Parity Check) | 90 |
| 4.9 | BE[7:0]# (Byte Enables) | 91 |
| 4.10 | BF[2:0] (Bus Frequency) | 92 |
| 4.11 | BOFF# (Backoff) | 93 |
| 4.12 | BRDY# (Burst Ready) | 94 |
| 4.13 | BRDYC# (Burst Ready Copy) | 95 |
| 4.14 | BREQ (Bus Request) | 95 |
| 4.15 | CACHE# (Cacheable Access) | 96 |
| 4.16 | CLK (Clock) | 96 |
| 4.17 | D/C# (Data/Code) | 97 |
| 4.18 | D[63:0] (Data Bus) | 98 |
| 4.19 | DP[7:0] (Data Parity) | 99 |
| 4.20 | EADS# (External Address Strobe) | 100 |
| 4.21 | EWBE# (External Write Buffer Empty) | 101 |
| 4.22 | FERR# (Floating-Point Error) | 102 |
| 4.23 | FLUSH# (Cache Flush) | 103 |
| 4.24 | HIT# (Inquire Cycle Hit) | 104 |
| 4.25 | HITM# (Inquire Cycle Hit To Modified Line) | 104 |
| 4.26 | HLDA (Hold Acknowledge) | 105 |
| 4.27 | HOLD (Bus Hold Request) | 105 |
| 4.28 | IGNNE# (Ignore Numeric Exception) | 106 |
| 4.29 | INIT (Initialization) | 107 |
| 4.30 | INTR (Maskable Interrupt) | 108 |
| 4.31 | INV (Invalidation Request) | 108 |
| 4.32 | KEN# (Cache Enable) | 109 |
| 4.33 | LOCK# (Bus Lock) | 110 |
| 4.34 | M/IO# (Memory or I/O) | 111 |
| 4.35 | NA# (Next Address) | 112 |
| 4.36 | NMI (Non-Maskable Interrupt) | 112 |
| 4.37 | PCD (Page Cache Disable) | 113 |
| 4.38 | PCHK# (Parity Check) | 114 |

| | | |
|----------|---|------------|
| 4.39 | PWT (Page Writethrough) | 115 |
| 4.40 | RESET (Reset) | 116 |
| 4.41 | RSVD (Reserved) | 116 |
| 4.42 | SCYC (Split Cycle) | 117 |
| 4.43 | SMI# (System Management Interrupt) | 117 |
| 4.44 | SMIACT# (System Management Interrupt Active) | 118 |
| 4.45 | STPCLK# (Stop Clock) | 119 |
| 4.46 | TCK (Test Clock) | 119 |
| 4.47 | TDI (Test Data Input) | 120 |
| 4.48 | TDO (Test Data Output) | 120 |
| 4.49 | TMS (Test Mode Select) | 120 |
| 4.50 | TRST# (Test Reset) | 121 |
| 4.51 | VCC2DET (V _{CC2} Detect) | 121 |
| 4.52 | VCC2H/L# (V _{CC2} High/Low) | 121 |
| 4.53 | W/R# (Write/Read) | 122 |
| 4.54 | WB/WT# (Writeback or Writethrough) | 123 |
| 5 | Bus Cycles | 127 |
| 5.1 | Timing Diagrams | 127 |
| 5.2 | Bus State Machine Diagram | 129 |
| | Idle | 130 |
| | Address | 130 |
| | Data | 130 |
| | Data-NA# Requested | 130 |
| | Pipeline Address | 130 |
| | Pipeline Data | 131 |
| | Transition | 131 |
| 5.3 | Memory Reads and Writes | 132 |
| | Single-Transfer Memory Read and Write | 132 |
| | Misaligned Single-Transfer Memory Read and Write | 134 |
| | Burst Reads and Pipelined Burst Reads | 136 |
| | Burst Writeback | 138 |
| 5.4 | I/O Read and Write | 140 |
| | Basic I/O Read and Write | 140 |
| | Misaligned I/O Read and Write | 141 |
| 5.5 | Inquire and Bus Arbitration Cycles | 142 |
| | Hold and Hold Acknowledge Cycle | 142 |
| | HOLD-Initiated Inquire Hit to Shared or Exclusive Line | 144 |
| | HOLD-Initiated Inquire Hit to Modified Line | 146 |
| | AHOLD-Initiated Inquire Miss | 148 |
| | AHOLD-Initiated Inquire Hit to Shared or Exclusive Line | 150 |
| | AHOLD-Initiated Inquire Hit to Modified Line | 152 |
| | AHOLD Restriction | 154 |
| | Bus Backoff (BOFF#) | 156 |
| | Locked Cycles | 158 |
| | Basic Locked Operation | 158 |

| | | |
|----------|---|------------|
| | Locked Operation with BOFF# Intervention | 160 |
| | Interrupt Acknowledge | 162 |
| 5.6 | Special Bus Cycles | 164 |
| | Basic Special Bus Cycle | 164 |
| | Shutdown Cycle | 166 |
| | Stop Grant and Stop Clock States | 167 |
| | INIT-Initiated Transition from Protected Mode to Real Mode | 170 |
| 6 | Power-on Configuration and Initialization | 173 |
| 6.1 | Signals Sampled During the Falling Transition of RESET | 173 |
| | FLUSH# | 173 |
| | BF[2:0] | 173 |
| 6.2 | RESET Requirements | 174 |
| 6.3 | State of Processor After RESET | 174 |
| | Output Signals | 174 |
| | Registers | 174 |
| 6.4 | State of Processor After INIT | 177 |
| 7 | Cache Organization | 179 |
| 7.1 | MESI States in the L1 Data Cache and L2 Cache | 181 |
| 7.2 | Predecode Bits | 182 |
| 7.3 | Cache Operation | 182 |
| | Cache-Related Signals | 185 |
| 7.4 | Cache Disabling and Flushing | 185 |
| | L1 and L2 Cache Disabling | 185 |
| | L2 Cache Disabling | 186 |
| 7.5 | L2 Cache and Tag Array Testing | 186 |
| 7.6 | Cache-Line Fills | 187 |
| 7.7 | Cache-Line Replacements | 188 |
| 7.8 | Write Allocate | 189 |
| | Write to a Cacheable Page | 190 |
| | Write to a Sector | 190 |
| | Write Allocate Limit | 190 |
| | Write Allocate Logic Mechanisms and Conditions | 192 |
| 7.9 | Prefetching | 194 |
| | Hardware Prefetching | 194 |
| | Software Prefetching | 194 |
| 7.10 | Cache States | 194 |
| 7.11 | Cache Coherency | 197 |
| | Inquire Cycles | 197 |
| | Internal Snooping | 197 |
| | FLUSH# | 198 |
| | PFIR | 198 |
| | WBINVD and INVD | 199 |

| | | |
|-----------|--|------------|
| | Cache-Line Replacement | 199 |
| 7.12 | Writethrough versus Writeback Coherency States | 202 |
| 7.13 | A20M# Masking of Cache Accesses | 202 |
| 8 | Write Merge Buffer | 203 |
| 8.1 | EWBE Control | 203 |
| 8.2 | Memory Type Range Registers | 205 |
| | UC/WC Cacheability Control Register (UWCCR) | 205 |
| 9 | Floating-Point and Multimedia Execution Units | 209 |
| 9.1 | Floating-Point Execution Unit | 209 |
| | Handling Floating-Point Exceptions | 209 |
| | External Logic Support of Floating-Point Exceptions | 209 |
| 9.2 | Multimedia and 3DNow! Execution Units | 211 |
| 9.3 | Floating-Point and MMX/3DNow! Instruction Compatibility | 211 |
| | Registers | 211 |
| | Exceptions | 211 |
| | FERR# and IGNNE# | 211 |
| 10 | System Management Mode (SMM) | 213 |
| 10.1 | Overview | 213 |
| 10.2 | SMM Operating Mode and Default Register Values | 213 |
| 10.3 | SMM State-Save Area | 216 |
| 10.4 | SMM Revision Identifier | 218 |
| 10.5 | SMM Base Address | 219 |
| 10.6 | Halt Restart Slot | 219 |
| 10.7 | I/O Trap Dword | 220 |
| 10.8 | I/O Trap Restart Slot | 221 |
| 10.9 | Exceptions, Interrupts, and Debug in SMM | 222 |
| 11 | Test and Debug | 223 |
| 11.1 | Built-In Self-Test (BIST) | 223 |
| 11.2 | Tri-State Test Mode | 224 |
| 11.3 | Boundary-Scan Test Access Port (TAP) | 225 |
| | Test Access Port | 225 |
| | TAP Signals | 225 |
| | TAP Registers | 226 |
| | TAP Instructions | 231 |
| | TAP Controller State Machine | 232 |
| 11.4 | Cache Inhibit | 235 |
| | Purpose | 235 |
| 11.5 | L2 Cache and Tag Array Testing | 237 |
| | Level-2 Cache Array Access Register (L2AAR) | 237 |

| | | |
|-----------|--|------------|
| 11.6 | Debug | 241 |
| | Debug Registers | 241 |
| | Debug Exceptions | 246 |
| 12 | Clock Control | 249 |
| 12.1 | Halt State | 250 |
| | Enter Halt State | 250 |
| | Exit Halt State | 250 |
| 12.2 | Stop Grant State | 251 |
| | Enter Stop Grant State | 251 |
| | Exit Stop Grant State | 251 |
| 12.3 | Stop Grant Inquire State | 252 |
| | Enter Stop Grant Inquire State | 252 |
| | Exit Stop Grant Inquire State | 252 |
| 12.4 | Stop Clock State | 252 |
| | Enter Stop Clock State | 252 |
| | Exit Stop Clock State | 253 |
| 13 | Power and Grounding | 255 |
| 13.1 | Power Connections | 255 |
| 13.2 | Decoupling Recommendations | 256 |
| 13.3 | Pin Connection Requirements | 257 |
| 14 | Electrical Data | 259 |
| 14.1 | Operating Ranges | 259 |
| 14.2 | Absolute Ratings | 259 |
| 14.3 | DC Characteristics | 260 |
| 14.4 | Power Dissipation | 261 |
| 15 | I/O Buffer Characteristics | 263 |
| 15.1 | I/O Buffer Model | 263 |
| 15.2 | I/O Model Application Note | 264 |
| 15.3 | I/O Buffer AC and DC Characteristics | 265 |
| 16 | Signal Switching Characteristics | 267 |
| 16.1 | CLK Switching Characteristics | 267 |
| 16.2 | Clock Switching Characteristics for 100-MHz Bus Operation | 268 |
| 16.3 | Clock Switching Characteristics for 66-MHz Bus Operation | 268 |
| 16.4 | Valid Delay, Float, Setup, and Hold Timings | 269 |
| 16.5 | Output Delay Timings for 100-MHz Bus Operation | 270 |
| 16.6 | Input Setup and Hold Timings for 100-MHz Bus Operation | 272 |

| | | |
|-----------|--|------------|
| 16.7 | Output Delay Timings for 66-MHz Bus Operation | 274 |
| 16.8 | Input Setup and Hold Timings for 66-MHz Bus Operation | 276 |
| 16.9 | RESET and Test Signal Timing | 278 |
| 17 | Thermal Design | 285 |
| 17.1 | Package Thermal Specifications | 285 |
| | Heat Dissipation Path | 287 |
| | Measuring Case Temperature | 288 |
| 17.2 | Layout and Airflow Considerations | 288 |
| | Voltage Regulator | 288 |
| | Airflow Management in a System Design | 290 |
| 18 | Pin Description Diagram | 293 |
| 19 | Pin Designations | 295 |
| 20 | Package Specifications | 297 |
| 20.1 | 321-Pin Staggered CPGA Package Specification | 297 |
| 21 | Ordering Information | 299 |
| | Index | 301 |

List of Figures

| | | |
|------------|--|----|
| Figure 1. | AMD-K6-III Processor Block Diagram | 7 |
| Figure 2. | Cache Sector Organization | 10 |
| Figure 3. | The Instruction Buffer | 11 |
| Figure 4. | AMD-K6-III Processor Decode Logic | 12 |
| Figure 5. | AMD-K6-III Processor Scheduler | 15 |
| Figure 6. | Register X and Y Functional Units | 17 |
| Figure 7. | EAX Register with 16-Bit and 8-Bit Name Components. | 22 |
| Figure 8. | Integer Data Registers. | 23 |
| Figure 9. | Segment Register | 24 |
| Figure 10. | Segment Usage | 25 |
| Figure 11. | Floating-Point Register | 26 |
| Figure 12. | FPU Status Word Register | 26 |
| Figure 13. | FPU Control Word Register | 27 |
| Figure 14. | FPU Tag Word Register. | 27 |
| Figure 15. | Packed Decimal Data Register | 28 |
| Figure 16. | Precision Real Data Registers | 28 |
| Figure 17. | MMX/3DNow! Registers | 29 |
| Figure 18. | MMX Data Types | 30 |
| Figure 19. | 3DNow! Data Types | 30 |
| Figure 20. | EFLAGS Registers | 31 |
| Figure 21. | Control Register 4 (CR4). | 32 |
| Figure 22. | Control Register 3 (CR3). | 32 |
| Figure 23. | Control Register 2 (CR2). | 32 |
| Figure 24. | Control Register 1 (CR1). | 33 |
| Figure 25. | Control Register 0 (CR0). | 33 |
| Figure 26. | Debug Register DR7 | 34 |
| Figure 27. | Debug Register DR6 | 35 |
| Figure 28. | Debug Registers DR5 and DR4. | 35 |
| Figure 29. | Debug Registers DR3, DR2, DR1, and DR0. | 36 |
| Figure 30. | Machine-Check Address Register (MCAR). | 38 |
| Figure 31. | Machine-Check Type Register (MCTR). | 38 |
| Figure 32. | Test Register 12 (TR12). | 38 |
| Figure 33. | Time Stamp Counter (TSC). | 38 |
| Figure 34. | Extended Feature Enable Register (EFER)— MSR C000_0080h | 39 |
| Figure 35. | SYSCALL/SYSRET Target Address Register (STAR) | 40 |

| | |
|--|-----|
| Figure 36. Write Handling Control Register (WHCR)— MSR C0000_0082h | 41 |
| Figure 37. UC/WC Cacheability Control Register (UWCCR)— MSR C0000_0085h | 41 |
| Figure 38. Processor State Observability Register (PSOR)— MSR C000_0087h | 42 |
| Figure 39. Page Flush/Invalidate Register (PFIR)— MSR C000_0088h | 42 |
| Figure 40. L2 Tag or Data Location - EDX | 43 |
| Figure 41. L2 Data - EAX | 43 |
| Figure 42. L2 Tag Information - EAX | 44 |
| Figure 43. Memory Management Registers | 45 |
| Figure 44. Task State Segment (TSS) | 46 |
| Figure 45. 4-Kbyte Paging Mechanism | 47 |
| Figure 46. 4-Mbyte Paging Mechanism | 48 |
| Figure 47. Page Directory Entry 4-Kbyte Page Table (PDE) | 49 |
| Figure 48. Page Directory Entry 4-Mbyte Page Table (PDE) | 49 |
| Figure 49. Page Table Entry (PTE) | 50 |
| Figure 50. Application Segment Descriptor | 51 |
| Figure 51. System Segment Descriptor | 52 |
| Figure 52. Gate Descriptor | 53 |
| Figure 53. Logic Symbol Diagram | 84 |
| Figure 54. Waveform Definitions | 128 |
| Figure 55. Bus State Machine Diagram | 129 |
| Figure 56. Non-Pipelined Single-Transfer Memory Read/Write and Write Delayed by EWBE# | 133 |
| Figure 57. Misaligned Single-Transfer Memory Read and Write | 135 |
| Figure 58. Burst Reads and Pipelined Burst Reads | 137 |
| Figure 59. Burst Writeback due to Cache-Line Replacement | 139 |
| Figure 60. Basic I/O Read and Write | 140 |
| Figure 61. Misaligned I/O Transfer | 141 |
| Figure 62. Basic HOLD/HLDA Operation | 143 |
| Figure 63. HOLD-Initiated Inquire Hit to Shared or Exclusive Line | 145 |
| Figure 64. HOLD-Initiated Inquire Hit to Modified Line | 147 |
| Figure 65. AHOLD-Initiated Inquire Miss | 149 |
| Figure 66. AHOLD-Initiated Inquire Hit to Shared or Exclusive Line | 151 |
| Figure 67. AHOLD-Initiated Inquire Hit to Modified Line | 153 |
| Figure 68. AHOLD Restriction | 155 |
| Figure 69. BOFF# Timing | 157 |
| Figure 70. Basic Locked Operation | 159 |

| | | |
|-------------|---|-----|
| Figure 71. | Locked Operation with BOFF# Intervention. | 161 |
| Figure 72. | Interrupt Acknowledge Operation | 163 |
| Figure 73. | Basic Special Bus Cycle (Halt Cycle) | 165 |
| Figure 74. | Shutdown Cycle | 166 |
| Figure 75. | Stop Grant and Stop Clock Modes, Part 1 | 168 |
| Figure 76. | Stop Grant and Stop Clock Modes, Part 2 | 169 |
| Figure 77. | INIT-Initiated Transition from Protected Mode to Real Mode | 171 |
| Figure 78. | L1 and L2 Cache Organization | 180 |
| Figure 79. | L1 Cache Sector Organization. | 181 |
| Figure 80. | Write Handling Control Register (WHCR) | 190 |
| Figure 81. | Write Allocate Logic Mechanisms and Conditions. | 192 |
| Figure 82. | Page Flush/Invalidate Register (PFIR)— MSR C000_0088h | 198 |
| Figure 83. | UC/WC Cacheability Control Register (UWCCR)— MSR C000_0085h (Model 8/[F:8]). | 206 |
| Figure 84. | External Logic for Supporting Floating-Point Exceptions. . . | 210 |
| Figure 85. | SMM Memory | 215 |
| Figure 86. | TAP State Diagram | 233 |
| Figure 87. | L2 Cache Organization. | 237 |
| Figure 88. | L2 Cache Sector and Line Organization | 238 |
| Figure 89. | L2 Tag or Data Location - EDX. | 238 |
| Figure 90. | L2 Data - EAX. | 239 |
| Figure 91. | L2 Tag Information - EAX. | 240 |
| Figure 92. | LRU Byte. | 241 |
| Figure 93. | Debug Register DR7 | 242 |
| Figure 94. | Debug Register DR6 | 243 |
| Figure 95. | Debug Registers DR5 and DR4. | 243 |
| Figure 96. | Debug Registers DR3, DR2, DR1, and DR0. | 244 |
| Figure 97. | Clock Control State Transitions | 254 |
| Figure 98. | Suggested Component Placement | 256 |
| Figure 99. | Pulldown V/I Curves | 264 |
| Figure 100. | Pullup V/I Curves | 264 |
| Figure 101. | CLK Waveform | 269 |
| Figure 102. | Diagrams Key | 281 |
| Figure 103. | Output Valid Delay Timing. | 281 |
| Figure 104. | Maximum Float Delay Timing | 282 |
| Figure 105. | Input Setup and Hold Timing | 282 |
| Figure 106. | Reset and Configuration Timing | 283 |

| | |
|--|-----|
| Figure 107. TCK Waveform | 284 |
| Figure 108. TRST# Timing. | 284 |
| Figure 109. Test Signal Timing Diagram | 284 |
| Figure 110. Thermal Model | 286 |
| Figure 111. Power Consumption versus Thermal Resistance | 286 |
| Figure 112. Processor Heat Dissipation Path | 287 |
| Figure 113. Measuring Case Temperature. | 288 |
| Figure 114. Voltage Regulator Placement. | 289 |
| Figure 115. Airflow for a Heatsink with Fan. | 289 |
| Figure 116. Airflow Path in a Dual-Fan System | 290 |
| Figure 117. Airflow Path in an ATX Form-Factor System | 291 |
| Figure 118. AMD-K6-III Processor Top-Side View | 293 |
| Figure 119. AMD-K6-III Processor Pin-Side View. | 294 |
| Figure 120. 321-Pin Staggered CPGA Package Specification | 298 |

List of Tables

| | | |
|-----------|---|-----|
| Table 1. | Execution Latency and Throughput of Execution Units | 16 |
| Table 2. | General-Purpose Registers | 22 |
| Table 3. | General-Purpose Register Doubleword, Word, and Byte Names | 23 |
| Table 4. | Segment Registers | 24 |
| Table 5. | AMD-K6-III Processor Model 9 MSRs | 37 |
| Table 6. | Extended Feature Enable Register (EFER)—Model 9 Definition | 39 |
| Table 7. | SYSCALL/SYSRET Target Address Register (STAR) Definition | 40 |
| Table 8. | Memory Management Registers | 45 |
| Table 9. | Application Segment Types | 51 |
| Table 10. | System Segment and Gate Types | 52 |
| Table 11. | Summary of Exceptions and Interrupts | 53 |
| Table 12. | Integer Instructions | 55 |
| Table 13. | Floating-Point Instructions | 73 |
| Table 14. | MMX Instructions | 77 |
| Table 15. | 3DNow! Instructions | 81 |
| Table 16. | Processor-to-Bus Clock Ratios | 92 |
| Table 17. | Output Pin Float Conditions | 122 |
| Table 18. | Input Pin Types | 124 |
| Table 19. | Output Pin Float Conditions | 125 |
| Table 20. | Input/Output Pin Float Conditions | 125 |
| Table 21. | Test Pins | 125 |
| Table 22. | Bus Cycle Definition | 126 |
| Table 23. | Special Cycles | 126 |
| Table 24. | Bus-Cycle Order During Misaligned Transfers | 134 |
| Table 25. | A[4:3] Address-Generation Sequence During Bursts | 136 |
| Table 26. | Bus-Cycle Order During Misaligned I/O Transfers | 141 |
| Table 27. | Interrupt Acknowledge Operation Definition | 162 |
| Table 28. | Encodings For Special Bus Cycles | 164 |
| Table 29. | Output Signal State After RESET | 174 |
| Table 30. | Register State After RESET | 175 |
| Table 31. | PWT Signal Generation | 184 |
| Table 32. | PCD Signal Generation | 184 |
| Table 33. | CACHE# Signal Generation | 185 |
| Table 34. | L1 and L2 Cache States for Read and Write Accesses | 195 |
| Table 35. | Valid L1 and L2 Cache States and Effect of Inquire Cycles | 200 |
| Table 36. | L1 and L2 Cache States for Snoops, Flushes, and Invalidation | 201 |
| Table 37. | EWBEC Settings | 204 |

| | | |
|-----------|--|-----|
| Table 38. | WC/UC Memory Type | 207 |
| Table 39. | Valid Masks and Range Sizes | 207 |
| Table 40. | Initial State of Registers in SMM | 215 |
| Table 41. | SMM State-Save Area Map | 216 |
| Table 42. | SMM Revision Identifier | 219 |
| Table 43. | I/O Trap Dword Configuration | 220 |
| Table 44. | I/O Trap Restart Slot | 221 |
| Table 45. | Boundary Scan Bit Definitions | 229 |
| Table 46. | Device Identification Register | 230 |
| Table 47. | Supported Tap Instructions | 231 |
| Table 48. | Tag versus Data Selector | 239 |
| Table 49. | DR7 LEN and RW Definitions | 246 |
| Table 50. | Operating Ranges | 259 |
| Table 51. | Absolute Ratings | 259 |
| Table 52. | DC Characteristics | 260 |
| Table 53. | Typical and Maximum Power Dissipation | 261 |
| Table 54. | CLK Switching Characteristics for 100-MHz Bus Operation | 268 |
| Table 55. | CLK Switching Characteristics for 66-MHz Bus Operation . . | 268 |
| Table 56. | Output Delay Timings for 100-MHz Bus Operation | 270 |
| Table 57. | Input Setup and Hold Timings for 100-MHz Bus Operation | 272 |
| Table 58. | Output Delay Timings for 66-MHz Bus Operation | 274 |
| Table 59. | Input Setup and Hold Timings for 66-MHz Bus Operation . . | 276 |
| Table 60. | RESET and Configuration Signals for 100-MHz Bus Operation | 278 |
| Table 61. | RESET and Configuration Signals for 66-MHz Bus Operation | 279 |
| Table 62. | TCK Waveform and TRST# Timing at 25 MHz | 280 |
| Table 63. | Test Signal Timing at 25 MHz | 280 |
| Table 64. | Package Thermal Specification | 285 |
| Table 65. | 321-Pin Staggered CPGA Package Specification | 297 |
| Table 66. | Valid Ordering Part Number Combinations | 299 |

Revision History

| Date | Rev | Description |
|---------------|------------|---------------------------|
| February 1999 | A | Initial published release |

1 AMD-K6[®]-III Processor

- Advanced 6-Issue RISC86[®] Superscalar Microarchitecture
 - ◆ Ten parallel specialized execution units
 - ◆ Multiple sophisticated x86-to-RISC86 instruction decoders
 - ◆ Advanced two-level branch prediction
 - ◆ Speculative execution
 - ◆ Out-of-order execution
 - ◆ Register renaming and data forwarding
 - ◆ Issues up to six RISC86 instructions per clock
- Innovative TriLevel Cache Design
 - ◆ 320-Kbyte total internal cache
 - Internal split, 64-Kbyte L1 Cache
 - 32-Kbyte instruction cache with additional 20-Kbytes of predecode cache
 - 32-Kbyte writeback dual-ported data cache
 - Two-way set associative
 - MESI protocol support
 - Internal full-speed, 256-Kbyte L2 cache
 - Four-way set associative
 - ◆ Multiport internal cache design enabling simultaneous 64-bit reads/writes of L1 and L2 caches
 - ◆ 100-MHz frontside bus to optional Level-3 cache on Super7[™] platforms
- 3DNow![™] Technology
 - ◆ Additional instructions to improve 3D graphics and multimedia performance
 - ◆ Separate multiplier and ALU for superscalar instruction execution
- Compatible with Super7 platform
 - ◆ Leverages high-speed 100-MHz processor bus
 - ◆ Accelerated Graphic Port (AGP) support
- High-Performance IEEE 754-Compatible and 854-Compatible Floating-Point Unit
- High-Performance Industry-Standard MMX[™] Instructions
 - ◆ Dual integer ALU for superscalar execution
- 321-Pin Ceramic Pin Grid Array (CPGA) Package
- Industry-Standard System Management Mode (SMM)
- IEEE 1149.1 Boundary Scan
- x86 Binary Software Compatibility

As the newest member of the AMD K86[™] family of x86 processors, the innovative AMD-K6[®]-III processor brings industry-leading performance to PC systems running the extensive installed base of x86 software. Its Super7[™] compatible, 321-pin ceramic pin grid array (CPGA) package enables the processor to reduce time-to-market by leveraging today's cost-effective, industry-standard infrastructure to deliver a superior-performing PC solution.

The AMD-K6-III processor incorporates 3DNow![™] technology, a significant innovation to the x86 processor architecture that drives today's personal computers. With 3DNow! technology, new, more powerful hardware and software applications enable a more entertaining and productive PC platform. Improvements include fast frame rates on high-resolution scenes, superior modeling of real world environments and physics, life-like images and graphics, and big-screen sound and video.

AMD has taken a leadership role in developing new instructions that enable exciting new levels of performance and realism. 3DNow! technology was defined and implemented in collaboration with Microsoft[®], application developers, and graphics vendors, and has received an enthusiastic reception. It is compatible with today's existing x86 software, is supported by industry-standard APIs, and requires no operating system support, thereby enabling a broad class of applications to benefit from 3DNow! technology.

To provide state-of-the-art performance, the processor incorporates the innovative and efficient RISC86[®] microarchitecture, the largest total internal cache on any shipping x86 processor, a powerful IEEE 754-compatible and 854-compatible floating-point execution unit, and a high-performance industry-standard multimedia execution unit for executing MMX[™] instructions. The processor includes additional high-performance Single Instruction Multiple Data (SIMD) execution resources to support the 3DNow! technology. These techniques have been combined to deliver leading-edge performance on leading consumer and business applications in both the Microsoft Windows[®] 98 and Windows NT[®] operating environments.

The AMD-K6-III processor's 6-issue RISC86 microarchitecture is a decoupled decode/execution superscalar design that implements state-of-the-art design techniques to achieve leading-edge performance. Advanced design techniques implemented in the AMD-K6-III processor include multiple x86 instruction decode, single-clock internal RISC operations, ten execution units that support superscalar operation, out-of-order execution, data forwarding, speculative execution, and register renaming. In addition, the processor supports advanced branch prediction logic by implementing an 8192-entry branch history table, a branch target cache, and a return address stack, which combine to deliver better than a 95% prediction rate. These design techniques enable the AMD-K6-III processor to issue, execute, and retire multiple x86 instructions per clock, resulting in excellent scaleable performance.

The AMD-K6-III processor is x86 binary code compatible. AMD's extensive experience through six generations of x86 processors has been carefully integrated into the processor to enable compatibility with Windows 98, Windows 95, Windows 3.x, Windows NT, DOS, OS/2, Unix, Solaris, NetWare[®], Vines, and other leading x86 operating systems and applications. The AMD-K6-III processor is Super7 and Socket 7-compatible. The Super7 platform is an extension to the popular and robust Socket 7 platform. See "Super7™ Platform Initiative" for more information.

AMD is the world's second-leading supplier of Windows-compatible PC processors, having shipped more than 120 million x86 microprocessors, including more than 60 million Windows-compatible processors. The AMD-K6-III processor is the latest member in this long line of processors. With its combination of state-of-the-art features, industry-leading performance, high-performance 3DNow! technology and multimedia engines, x86 compatibility, and low-cost infrastructure, the AMD-K6-III is the superior choice for performance PCs.

1.1 Super7™ Platform Initiative

AMD and its industry partners launched the Super7 platform initiative in order to maintain the competitive vitality of the Socket 7 infrastructure through a series of enhancements, including the development of an industry-standard 100-MHz processor bus protocol.

In addition to the 100-MHz processor bus protocol, the Super7 initiative includes the introduction of chipsets that support the AGP specification, and support for a backside L2 cache and frontside L3 cache. Currently, over 40 motherboard vendors and all major BIOS and chipset vendors offer Super7-based products.

Super7™ Platform Enhancements

The Super7 platform has the following enhancements:

- *100-MHz processor bus*—The AMD-K6-III processor supports a 100-MHz, 800 Mbyte/second frontside bus to provide a high-speed interface to Super7 platform-based chipsets. The 100-MHz interface to the frontside cache and main system memory speeds up access to the frontside cache and main memory by 50 percent over the 66-MHz Socket 7 interface—resulting in a significant increase of 10% in overall system performance.
- *Accelerated graphics port support*—AGP improves the performance of mid-range PCs that have small amounts of video memory on the graphics card. The industry-standard AGP specification enables a 133-MHz graphics interface and will scale to even higher levels of performance.
- *Support for backside L2 and frontside L3 cache*—The Super7 platform has the 'headroom' to support higher-performance AMD-K6 processors, with clock speeds

scaling to 450 MHz and beyond. The Super7 platform also supports the AMD-K6-III processor which features a full-speed, internal backside 256-Kbyte L2 cache designed to enable new levels of performance to leading-edge desktop systems. This processor also supports an optional 100-MHz frontside external L3 cache for even higher-performance system configurations.

Super7™ Platform Advantages

The Super7 platform has the following advantages:

- Delivers performance and features competitive with alternate platforms at the same clock speed, and at a significantly lower cost
- Takes advantage of existing system designs for superior value
- Enables OEMs and resellers to take advantage of mature, high-volume infrastructure supported by multiple BIOS, chipset, graphics, and motherboard suppliers
- Reduces inventory and design costs with one motherboard for a wide range of products
- Builds on a huge installed base of more than 100 million motherboards
- Provides an easy upgrade path for future PC users, as well as a bridge to legacy users

By taking advantage of the low-cost, mature Socket 7 infrastructure, the Super7 platform will continue to provide superior value and leading-edge performance for desktop PC systems.

2 Internal Architecture

2.1 Introduction

The AMD-K6-III processor implements advanced design techniques known as the RISC86 microarchitecture. The RISC86 microarchitecture is a decoupled decode/execution design approach that yields superior sixth-generation performance for x86-based software. This chapter describes the techniques used and the functional elements of the RISC86 microarchitecture.

2.2 AMD-K6[®]-III Processor Microarchitecture Overview

When discussing processor design, it is important to understand the terms *architecture*, *microarchitecture*, and *design implementation*. The term *architecture* refers to the instruction set and features of a processor that are visible to software programs running on the processor. The architecture determines what software the processor can run. The architecture of the AMD-K6-III processor is the industry-standard x86 instruction set.

The term *microarchitecture* refers to the design techniques used in the processor to reach the target cost, performance, and functionality goals. The AMD-K6 family of processors are based on a sophisticated RISC core known as the Enhanced RISC86 microarchitecture. The Enhanced RISC86 microarchitecture is an advanced, second-order decoupled decode/execution design approach that enables industry-leading performance for x86-based software.

The term *design implementation* refers to the actual logic and circuit designs from which the processor is created according to the microarchitecture specifications.

**Enhanced RISC86[®]
Microarchitecture**

The Enhanced RISC86 microarchitecture defines the characteristics of the AMD-K6 family. The innovative RISC86 microarchitecture approach implements the x86 instruction set by internally translating x86 instructions into RISC86 operations. These RISC86 operations were specially designed to include direct support for the x86 instruction set while observing the RISC performance principles of fixed length encoding, regularized instruction fields, and a large register set. The Enhanced RISC86 microarchitecture used in the AMD-K6-III processor enables higher processor core performance and promotes straightforward extensions, such as those added in the current AMD-K6-III processor and those planned for the future. Instead of directly executing complex x86 instructions, which have lengths of 1 to 15 bytes, the AMD-K6-III processor executes the simpler and easier fixed-length RISC86 operations, while maintaining the instruction coding efficiencies found in x86 programs.

The AMD-K6-III processor contains parallel decoders, a centralized RISC86 operation scheduler, and ten execution units that support superscalar operation—multiple decode, execution, and retirement—of x86 instructions. These elements are packed into an aggressive and highly efficient six-stage pipeline.

AMD-K6[®]-III Processor Block Diagram. As shown in Figure 1 on page 7, the high-performance, out-of-order execution engine of the AMD-K6-III processor is mated to a split, level-one, 64-Kbyte, writeback cache with 32 Kbytes of instruction cache and 32 Kbytes of data cache. Backing up the level-one cache is a large, unified, level-two, 256-Kbyte, writeback cache. The level-one instruction cache feeds the decoders and, in turn, the decoders feed the scheduler. The ICU issues and retires RISC86 operations contained in the scheduler. The system bus interface is an industry-standard 64-bit Super7 and Socket 7 demultiplexed bus.

The AMD-K6-III processor combines the latest in processor microarchitecture to provide the highest x86 performance for today's personal computers. The AMD-K6-III processor offers true sixth-generation performance and x86 binary software compatibility.

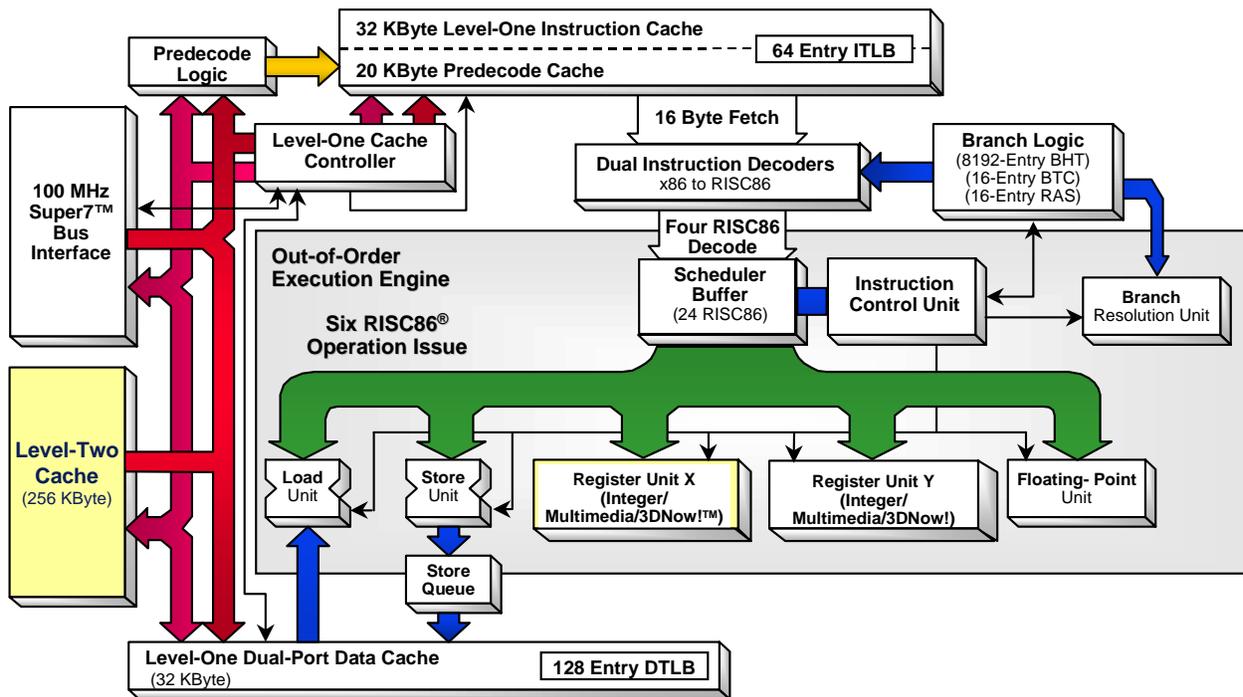


Figure 1. AMD-K6[®]-III Processor Block Diagram

Decoders. Decoding of the x86 instructions begins when the on-chip level-one instruction cache is filled. Predecode logic determines the length of an x86 instruction on a byte-by-byte basis. This predecode information is stored, along with the x86 instructions, in the level-one instruction cache, to be used later by the decoders. The decoders translate on-the-fly, with no additional latency, up to two x86 instructions per clock into RISC86 operations.

Note: In this chapter, “clock” refers to a processor clock.

The AMD-K6-III processor categorizes x86 instructions into three types of decodes—short, long, and vector. The decoders process either two short, one long, or one vector decode at a time. The three types of decodes have the following characteristics:

- Short decodes—x86 instructions less than or equal to seven bytes in length
- Long decodes—x86 instructions less than or equal to 11 bytes in length
- Vector decodes—complex x86 instructions

Short and long decodes are processed completely within the decoders. Vector decodes are started by the decoders and then completed by fetched sequences from an on-chip ROM. After decoding, the RISC86 operations are delivered to the scheduler for dispatching to the executions units.

Scheduler/Instruction Control Unit. The centralized scheduler or buffer is managed by the Instruction Control Unit (ICU). The ICU buffers and manages up to 24 RISC86 operations at a time. This equals from 6 to 12 x86 instructions. This buffer size (24) is perfectly matched to the processor's six-stage RISC86 pipeline and four RISC86-operations decode rate. The scheduler accepts as many as four RISC86 operations at a time from the decoders and retires up to four RISC86 operations per clock cycle. The ICU is capable of simultaneously issuing up to six RISC86 operations at a time to the execution units. This consists of the following types of operations:

- Memory load operation
- Memory store operation
- Complex integer, MMX or 3DNow! register operation
- Simple integer, MMX or 3DNow! register operation
- Floating-point register operation
- Branch condition evaluation

Registers. When managing the 24 RISC86 operations, the ICU uses 69 physical registers contained within the RISC86 microarchitecture. 48 of the physical registers are located in a general register file and are grouped as 24 committed or architectural registers plus 24 rename registers. The 24 architectural registers consist of 16 scratch registers and 8 registers that correspond to the x86 general-purpose registers—EAX, EBX, ECX, EDX, EBP, ESP, ESI, and EDI. There is an analogous set of registers specifically for MMX and 3DNow! operations. There are 9 MMX/3DNow! committed or architectural registers plus 12 MMX/3DNow! rename registers. The 9 architectural registers consist of one scratch register and 8 registers that correspond to the MMX registers (mm0–mm7), as shown in Figure 17 on page 29.

Branch Logic. The AMD-K6-III processor is designed with highly sophisticated dynamic branch logic consisting of the following:

- Branch history/Prediction table
- Branch target cache
- Return address stack

The AMD-K6-III processor implements a two-level branch prediction scheme based on an 8192-entry branch history table. The branch history table stores prediction information that is used for predicting conditional branches. Because the branch history table does not store predicted target addresses, special address ALUs calculate target addresses on-the-fly during instruction decode. The branch target cache augments predicted branch performance by avoiding a one clock cache-fetch penalty. This specialized target cache does this by supplying the first 16 bytes of target instructions to the decoders when branches are predicted. The return address stack is a unique device specifically designed for optimizing CALL and RETURN pairs. In summary, the AMD-K6-III processor uses dynamic branch logic to minimize delays due to the branch instructions that are common in x86 software.

3DNow!™ Technology. AMD has taken a lead role in improving the multimedia and 3D capabilities of the x86 processor family with the introduction of 3DNow! technology, which uses a packed, single-precision, floating-point data format and Single Instruction Multiple Data (SIMD) operations based on the MMX technology model.

2.3 Cache, Instruction Prefetch, and Predecode Bits

The writeback level-one cache on the AMD-K6-III processor is organized as a separate 32-Kbyte instruction cache and a 32-Kbyte data cache with two-way set associativity. The level-two cache is 256 Kbytes, and is organized as a unified, four-way set-associative cache. The cache line size is 32 bytes, and lines are fetched from external memory using an efficient pipelined burst transaction. As the level-one instruction cache is filled from the level-two cache or from external memory, each instruction byte is analyzed for instruction boundaries using predecoding logic. Predecoding annotates information (5 bits per byte) to each instruction byte that later enables the decoders to efficiently decode multiple instructions simultaneously.

Cache

The processor cache design takes advantage of a sectored organization (see Figure 2 on page 10). Each sector consists of 64 bytes configured as two 32-byte cache lines. The two cache lines of a sector share a common tag but have separate pairs of MESI (Modified, Exclusive, Shared, Invalid) bits that track the state of each cache line.

Two forms of cache misses and associated cache fills can take place—a tag-miss cache fill and a tag-hit cache fill. In the case of a tag-miss cache fill, the level-one cache miss is due to a tag mismatch, in which case the required cache line is filled either from the level-two cache or from external memory, and the level-one cache line within the sector that was not required is marked as invalid. In the case of a tag-hit cache fill, the address matches the tag, but the requested cache line is marked as invalid. The required level-one cache line is filled from the level-two cache or from external memory, and the level-one cache line within the sector that is not required remains in the same cache state.

Prefetching

The AMD-K6-III processor conditionally performs cache prefetching which results in the filling of the required cache line first, and a prefetch of the second cache line making up the other half of the sector. From the perspective of the external bus, the two cache-line fills typically appear as two 32-byte burst read cycles occurring back-to-back or, if allowed, as pipelined cycles.

The 3DNow! technology includes an instruction called PREFETCH that allows a cache line to be prefetched into the level-one data cache and the level-two cache. The PREFETCH instruction format is defined in Table 15, “3DNow!™ Instructions,” on page 81. For more detailed information, see the *3DNow!™ Technology Manual*, order# 21928.

Predecode Bits

Decoding x86 instructions is particularly difficult because the instructions are variable-length and can be from 1 to 15 bytes long. Predecode logic supplies the five predecode bits that are associated with each instruction byte. The predecode bits indicate the number of bytes to the start of the next x86 instruction. The predecode bits are stored in an extended instruction cache alongside each x86 instruction byte as shown in Figure 2. The predecode bits are passed with the instruction bytes to the decoders where they assist with parallel x86 instruction decoding.

| | | | | | | | | | | |
|-------------|--------------|---------|----------------|---------|----------------|-------|-------|--------|----------------|-----------|
| Tag Address | Cache Line 0 | Byte 31 | Predecode Bits | Byte 30 | Predecode Bits | | | Byte 0 | Predecode Bits | MESI Bits |
| | Cache Line 1 | Byte 31 | Predecode Bits | Byte 30 | Predecode Bits | | | Byte 0 | Predecode Bits | MESI Bits |

Figure 2. Cache Sector Organization

2.4 Instruction Fetch and Decode

Instruction Fetch

The processor can fetch up to 16 bytes per clock out of the level-one instruction cache or branch target cache. The fetched information is placed into a 16-byte instruction buffer that feeds directly into the decoders (see Figure 3). Fetching can occur along a single execution stream with up to seven outstanding branches taken.

The instruction fetch logic is capable of retrieving any 16 contiguous bytes of information within a 32-byte boundary. There is no additional penalty when the 16 bytes of instructions lie across a cache line boundary. The instruction bytes are loaded into the instruction buffer as they are consumed by the decoders. Although instructions can be consumed with byte granularity, the instruction buffer is managed on a memory-aligned word (two bytes) organization. Therefore, instructions are loaded and replaced with word granularity. When a control transfer occurs—such as a JMP instruction—the entire instruction buffer is flushed and reloaded with a new set of 16 instruction bytes.

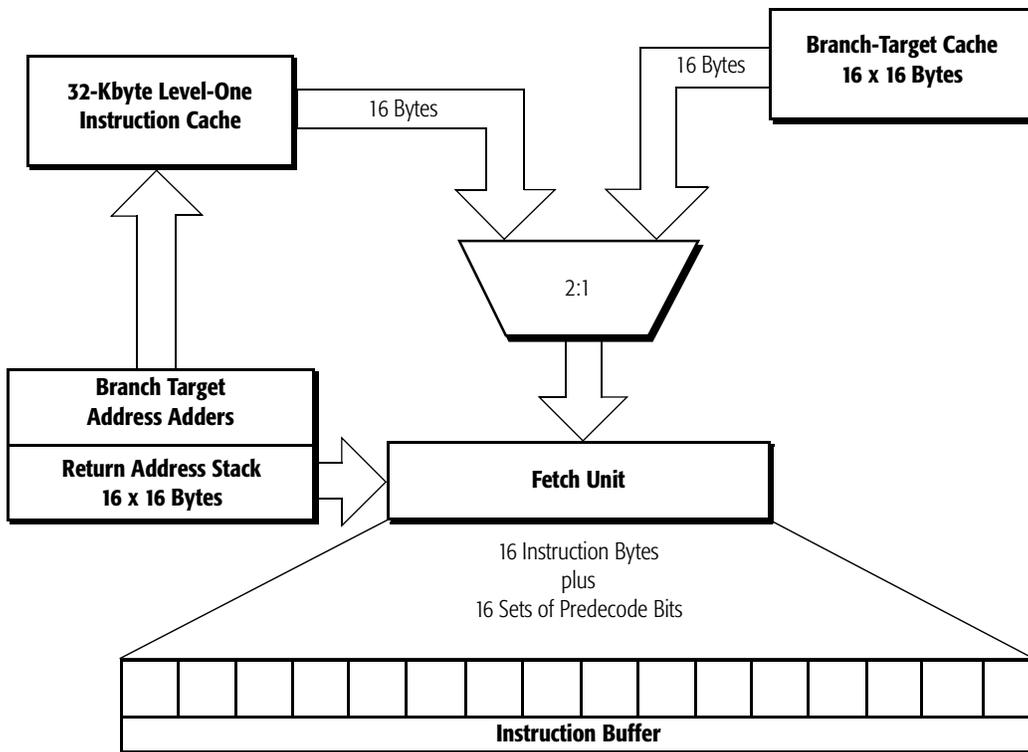


Figure 3. The Instruction Buffer

Instruction Decode

The AMD-K6-III processor decode logic is designed to decode multiple x86 instructions per clock (see Figure 4). The decode logic accepts x86 instruction bytes and their predecode bits from the instruction buffer, locates the actual instruction boundaries, and generates RISC86 operations from these x86 instructions.

RISC86 operations are fixed-length internal instructions. Most RISC86 operations execute in a single clock. RISC86 operations are combined to perform every function of the x86 instruction set. Some x86 instructions are decoded into as few as zero RISC86 operations—for instance a NOP—or one RISC86 operation—a register-to-register add. More complex x86 instructions are decoded into several RISC86 operations.

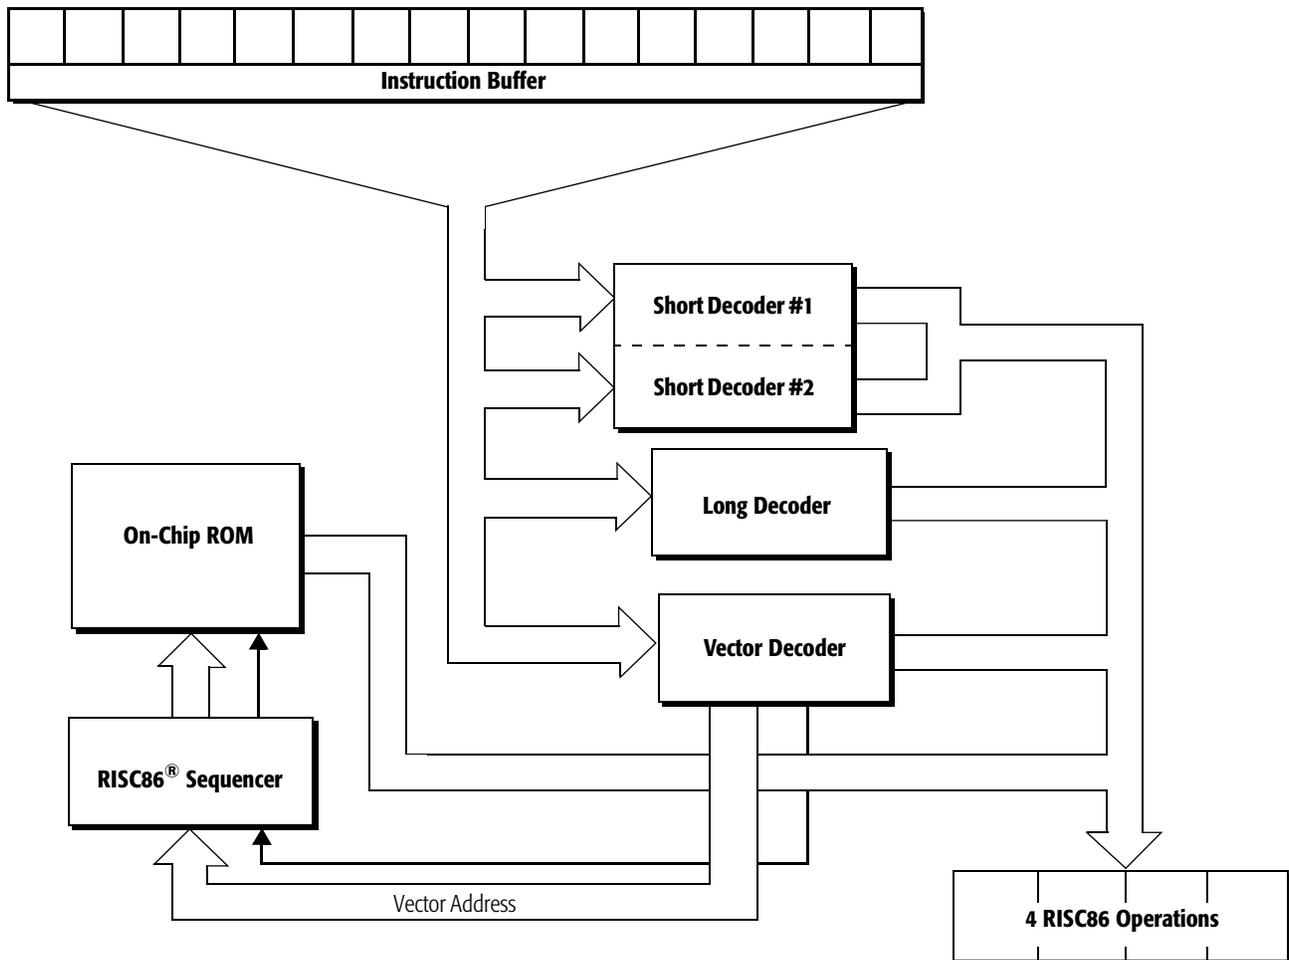


Figure 4. AMD-K6[®]-III Processor Decode Logic

The AMD-K6-III processor uses a combination of decoders to convert x86 instructions into RISC86 operations. The hardware consists of three sets of decoders—two parallel short decoders, one long decoder, and one vector decoder. The two parallel short decoders translate the most commonly-used x86 instructions (moves, shifts, branches, ALU, FPU) and the extensions to the x86 instruction set (including MMX and 3DNow! instructions) into zero, one, or two RISC86 operations each. The short decoders only operate on x86 instructions that are up to seven bytes long. In addition, they are designed to decode up to two x86 instructions per clock. The commonly-used x86 instructions that are greater than seven bytes but not more than 11 bytes long, and semi-commonly-used x86 instructions that are up to seven bytes long are handled by the long decoder.

The long decoder only performs one decode per clock and generates up to four RISC86 operations. All other translations (complex instructions, serializing conditions, interrupts and exceptions, etc.) are handled by a combination of the vector decoder and RISC86 operation sequences fetched from an on-chip ROM. For complex operations, the vector decoder logic provides the first set of RISC86 operations and a vector (initial ROM address) to a sequence of further RISC86 operations. The same types of RISC86 operations are fetched from the ROM as those that are generated by the hardware decoders.

Note: *Although all three sets of decoders are simultaneously fed a copy of the instruction buffer contents, only one of the three types of decoders is used during any one decode clock.*

The decoders or the on-chip RISC86 ROM always generate a group of four RISC86 operations. For decodes that cannot fill the entire group with four RISC86 operations, RISC86 NOP operations are placed in the empty locations of the grouping. For example, a long-decoded x86 instruction that converts to only three RISC86 operations is padded with a single RISC86 NOP operation and then passed to the scheduler. Up to six groups or 24 RISC86 operations can be placed in the scheduler at a time.

All of the common, and a few of the uncommon, floating-point instructions (also known as ESC instructions) are hardware decoded as short decodes. This decode generates a RISC86 floating-point operation and, optionally, an associated

floating-point load or store operation. Floating-point or ESC instruction decode is only allowed in the first short decoder, but non-ESC instructions can be decoded simultaneously by the second short decoder along with an ESC instruction decode in the first short decoder.

All of the MMX and 3DNow! instructions, with the exception of the EMMS, FEMMS, and PREFETCH instructions, are hardware decoded as short decodes. The MMX instruction decode generates a RISC86 MMX operation and, optionally, an associated MMX load or store operation. A 3DNow! instruction decode generates a RISC86 3DNow! operation and, optionally, an associated load or store operation. MMX and 3DNow! instructions can be decoded in either or both of the short decoders.

2.5 Centralized Scheduler

The scheduler is the heart of the AMD-K6-III processor (see Figure 5 on page 15). It contains the logic necessary to manage out-of-order execution, data forwarding, register renaming, simultaneous issue and retirement of multiple RISC86 operations, and speculative execution. The scheduler's buffer can hold up to 24 RISC86 operations. This equates to a maximum of 12 x86 instructions. The scheduler can issue RISC86 operations from any of the 24 locations in the buffer. When possible, the scheduler can simultaneously issue a RISC86 operation to any available execution unit (store, load, branch, register X integer/multimedia, register Y integer/multimedia, or floating-point). In total, the scheduler can issue up to six and retire up to four RISC86 operations per clock.

The main advantage of the scheduler and its operation buffer is the ability to examine an x86 instruction window equal to 12 x86 instructions at one time. This advantage is due to the fact that the scheduler operates on the RISC86 operations in parallel and allows the AMD-K6-III processor to perform dynamic on-the-fly instruction code scheduling for optimized execution. Although the scheduler can issue RISC86 operations for out-of-order execution, it always retires x86 instructions in order.

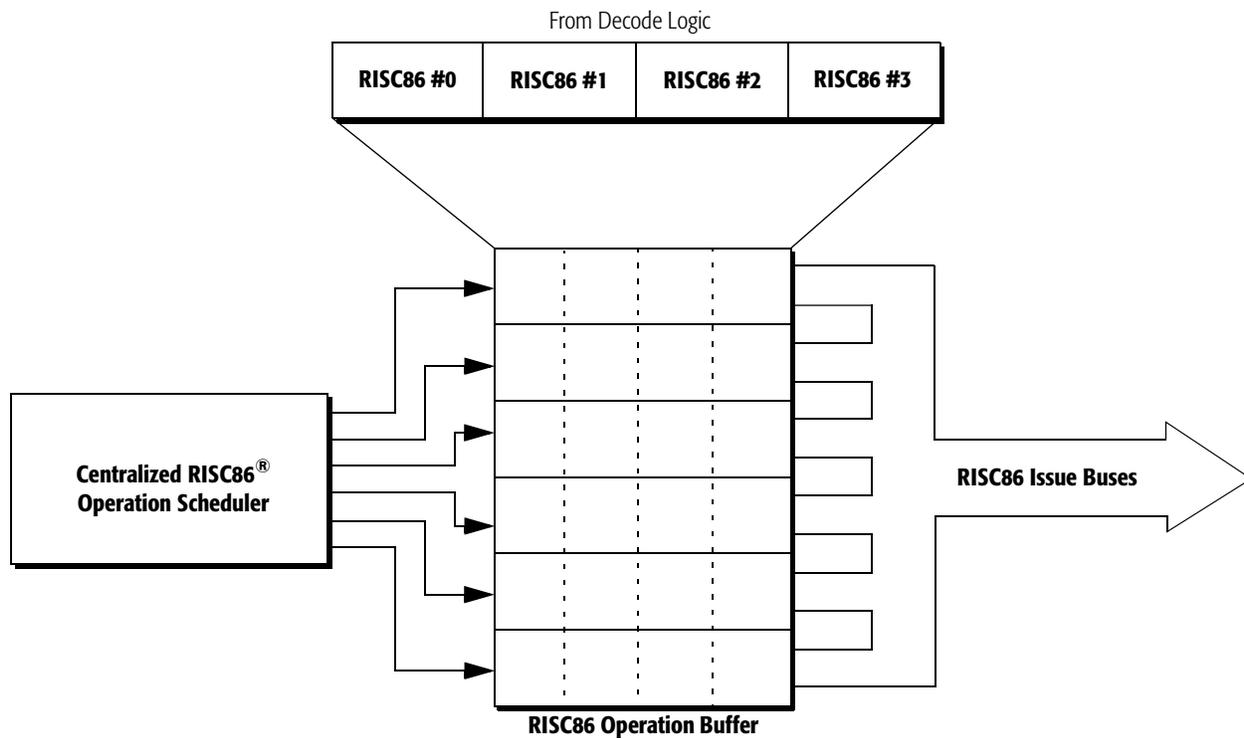


Figure 5. AMD-K6[®]-III Processor Scheduler

2.6 Execution Units

The AMD-K6-III processor contains ten parallel execution units—store, load, integer X ALU, integer Y ALU, MMX ALU (X), MMX ALU (Y), MMX/3DNow! multiplier, 3DNow! ALU, floating-point, and branch condition. Each unit is independent and capable of handling the RISC86 operations. Table 1 on page 16 details the execution units, functions performed within these units, operation latency, and operation throughput.

The store and load execution units are two-stage pipelined designs. The store unit performs data writes and register calculation for LEA/PUSH. Data memory and register writes from stores are available after one clock. Store operations are held in a store queue prior to execution. From there, they execute in order. The load unit performs data memory reads. Data is available from the load unit after two clocks.

The Integer X execution unit can operate on all ALU operations, multiplies, divides (signed and unsigned), shifts, and rotates.

The Integer Y execution unit can operate on the basic word and doubleword ALU operations—ADD, AND, CMP, OR, SUB, XOR, zero-extend and sign-extend operands.

Table 1. Execution Latency and Throughput of Execution Units

| Functional Unit | Function | Latency | Throughput |
|---|--|---------|------------|
| Store | LEA/PUSH, Address (Pipelined) | 1 | 1 |
| | Memory Store (Pipelined) | 1 | 1 |
| Load | Memory Loads (Pipelined) | 2 | 1 |
| Integer X | Integer ALU | 1 | 1 |
| | Integer Multiply | 2–3 | 2–3 |
| | Integer Shift | 1 | 1 |
| Multimedia (processes MMX instructions) | MMX ALU | 1 | 1 |
| | MMX Shifts, Packs, Unpack | 1 | 1 |
| | MMX Multiply | 2 | 1 |
| Integer Y | Basic ALU (16-bit and 32-bit operands) | 1 | 1 |
| Branch | Resolves Branch Conditions | 1 | 1 |
| FPU | FADD, FSUB, FMUL | 2 | 2 |
| 3DNow! | 3DNow! ALU | 2 | 1 |
| | 3DNow! Multiply | 2 | 1 |
| | 3DNow! Convert | 2 | 1 |

Register X and Y Pipelines

The functional units that execute MMX and 3DNow! instructions share pipeline control with the Integer X and Integer Y units.

The register X and Y functional units are attached to the issue bus for the register X execution pipeline or the issue bus for the register Y execution pipeline or both. Each register pipeline has dedicated resources that consist of an integer execution unit and an MMX ALU execution unit, therefore allowing superscalar operation on integer and MMX instructions. In addition, both the X and Y issue buses are connected to the 3DNow! ALU, the MMX/3DNow! multiplier and MMX shifter, which allows the appropriate RISC86 operation to be issued through either bus. Figure 6 on page 17 shows the details of the X and Y register pipelines.

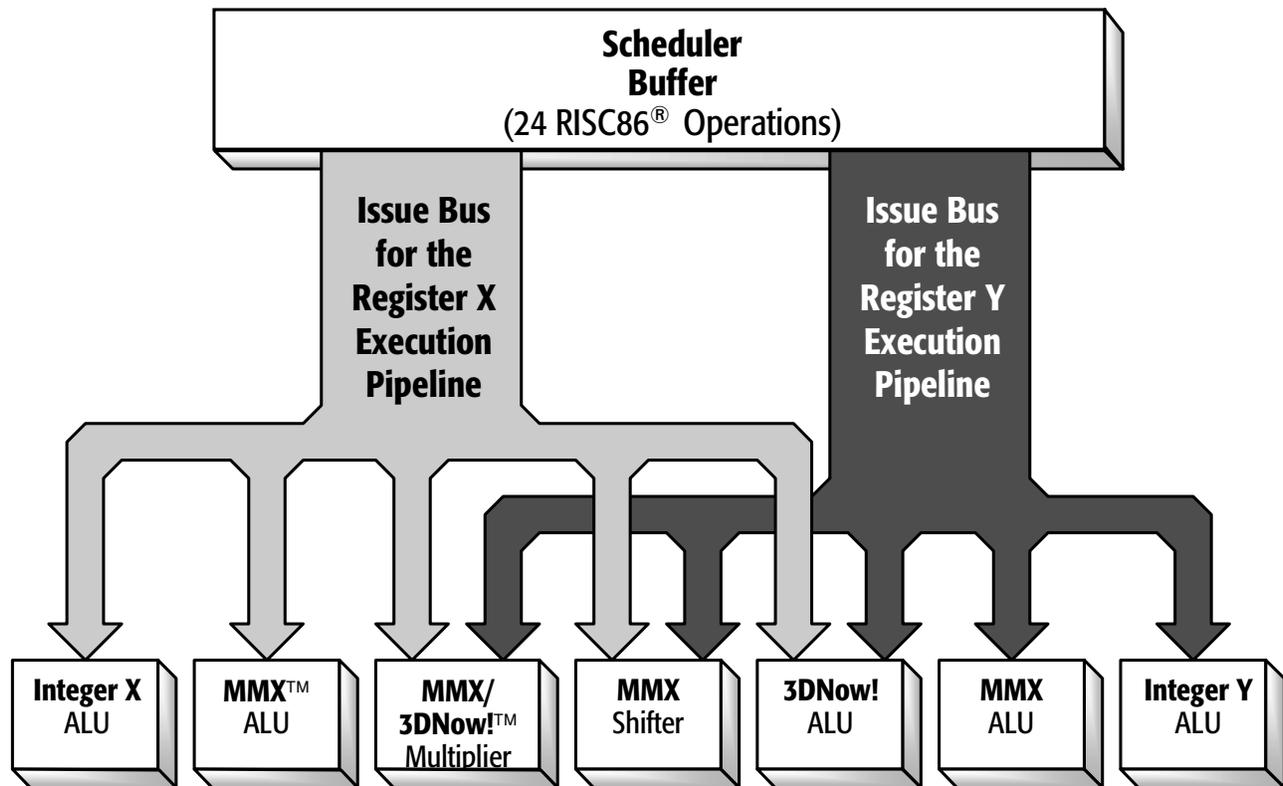


Figure 6. Register X and Y Functional Units

The branch condition unit is separate from the branch prediction logic in that it resolves conditional branches such as JCC and LOOP after the branch condition has been evaluated.

2.7 Branch-Prediction Logic

Sophisticated branch logic that can minimize or hide the impact of changes in program flow is designed into the AMD-K6-III processor. Branches in x86 code fit into two categories—unconditional branches, which always change program flow (that is, the branches are always taken) and conditional branches, which may or may not divert program flow (that is, the branches are taken or not-taken). When a conditional branch is not taken, the processor simply continues decoding and executing the next instructions in memory.

Typical applications have up to 10% of unconditional branches and another 10% to 20% conditional branches. The AMD-K6-III processor branch logic has been designed to handle this type of

program behavior and its negative effects on instruction execution, such as stalls due to delayed instruction fetching and the draining of the processor pipeline. The branch logic contains an 8192-entry branch history table, a 16-entry by 16-byte branch target cache, a 16-entry return address stack, and a branch execution unit.

Branch History Table

The AMD-K6-III processor handles unconditional branches without any penalty by redirecting instruction fetching to the target address of the unconditional branch. However, conditional branches require the use of the dynamic branch-prediction mechanism built into the AMD-K6-III processor. A two-level adaptive history algorithm is implemented in an 8192-entry branch history table. This table stores executed branch information, predicts individual branches, and predicts the behavior of groups of branches. To accommodate the large branch history table, the AMD-K6-III processor does not store predicted target addresses. Instead, the branch target addresses are calculated on-the-fly using ALUs during the decode stage. The adders calculate all possible target addresses before the instructions are fully decoded and the processor chooses which addresses are valid.

Branch Target Cache

To avoid a one clock cache-fetch penalty when a branch is predicted taken, a built-in branch target cache supplies the first 16 bytes of instructions directly to the instruction buffer (assuming the target address hits this cache). (See Figure 3 on page 11.) The branch target cache is organized as 16 entries of 16 bytes. In total, the branch prediction logic achieves branch prediction rates greater than 95%.

Return Address Stack

The return address stack is a special device designed to optimize CALL and RET pairs. Software is typically compiled with subroutines that are frequently called from various places in a program. This is usually done to save space. Entry into the subroutine occurs with the execution of a CALL instruction. At that time, the processor pushes the address of the next instruction in memory following the CALL instruction onto the stack (allocated space in memory). When the processor encounters a RET instruction (within or at the end of the subroutine), the branch logic pops the address from the stack and begins fetching from that location. To avoid the latency of main memory accesses during CALL and RET operations, the return address stack caches the pushed addresses.

Branch Execution Unit

The branch execution unit enables efficient speculative execution. This unit gives the processor the ability to execute instructions beyond conditional branches before knowing whether the branch prediction was correct. The AMD-K6-III processor does not permanently update the x86 registers or memory locations until all speculatively executed conditional branch instructions are resolved. When a prediction is incorrect, the processor backs out to the point of the mispredicted branch instruction and restores all registers. The AMD-K6-III processor can support up to seven outstanding branches.

3 Software Environment

This chapter provides a general overview of the AMD-K6-III processor's x86 software environment and briefly describes the data types, registers, operating modes, interrupts, and instructions supported by the AMD-K6-III processor architecture and design implementation.

The AMD-K6-III processor Model 9 implements the same ten MSRs as the AMD-K6-2 processor Model 8/[F:8], and the bits and fields within these ten MSRs are defined identically. The AMD-K6-III processor Model 9 supports an additional MSR for a total of eleven MSRs.

The name *AMD-K6-III processor* by itself refers to all steppings of the Model 9. See “Model-Specific Registers (MSR)” on page 37 for the MSR definitions.

3.1 Registers

The AMD-K6-III processor contains all the registers defined by the x86 architecture, including general-purpose, segment, floating-point, MMX/3DNow!, EFLAGS, control, task, debug, test, and descriptor/memory-management registers. In addition, this chapter provides information on the AMD-K6-III processor MSRs.

Note: *Areas of the register designated as Reserved should not be modified by software.*

General-Purpose Registers

The eight 32-bit x86 general-purpose registers are used to hold integer data or memory pointers used by instructions. Table 2 contains a list of the general-purpose registers and the functions for which they are used.

Table 2. General-Purpose Registers

| Register | Function |
|----------|--|
| EAX | Commonly used as an accumulator |
| EBX | Commonly used as a pointer |
| ECX | Commonly used for counting in loop operations |
| EDX | Commonly used to hold I/O information and to pass parameters |
| EDI | Commonly used as a destination pointer by the ES segment |
| ESI | Commonly used as a source pointer by the DS segment |
| ESP | Used to point to the stack segment |
| EBP | Used to point to data within the stack segment |

In order to support byte and word operations, EAX, EBX, ECX, and EDX can also be used as 8-bit and 16-bit registers. The shorter registers are overlaid on the longer ones. For example, the name of the 16-bit version of EAX is AX (low 16 bits of EAX) and the 8-bit names for AX are AH (high order bits) and AL (low order bits). The same naming convention applies to EBX, ECX, and EDX. EDI, ESI, ESP, and EBP can be used as smaller 16-bit registers called DI, SI, SP, and BP respectively, but these registers do not have 8-bit versions. Figure 7 shows the EAX register with its name components, and Table 3 lists the doubleword (32-bit) general-purpose registers and their corresponding word (16-bit) and byte (8-bit) versions.

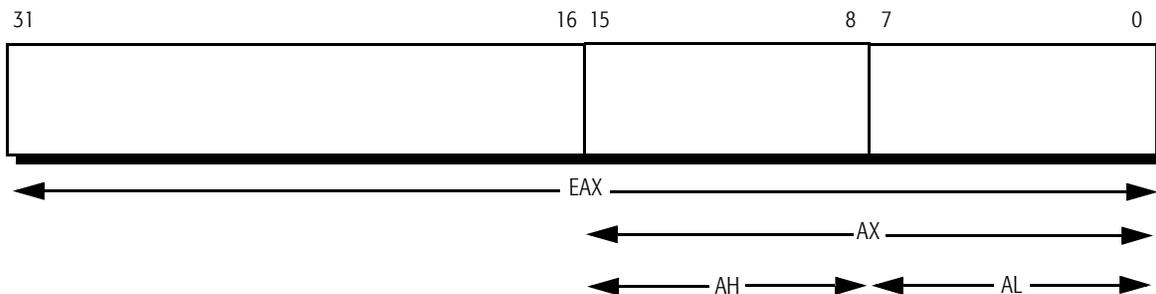


Figure 7. EAX Register with 16-Bit and 8-Bit Name Components


Table 3. General-Purpose Register Doubleword, Word, and Byte Names

| 32-Bit Name (Doubleword) | 16-Bit Name (Word) | 8-Bit Name (High-order Bits) | 8-Bit Name (Low-order Bits) |
|-----------------------------|-----------------------|---------------------------------|--------------------------------|
| EAX | AX | AH | AL |
| EBX | BX | BH | BL |
| ECX | CX | CH | CL |
| EDX | DX | DH | DL |
| EDI | DI | – | – |
| ESI | SI | – | – |
| ESP | SP | – | – |
| EBP | BP | – | – |

Integer Data Types

Four types of data are used in general-purpose registers—byte, word, doubleword, and quadword integers. Figure 8 shows the format of the integer data registers.

Byte Integer



Word Integer



Doubleword Integer



Quadword Integer



Figure 8. Integer Data Registers

Segment Registers

The six 16-bit segment registers are used as pointers to areas (segments) of memory. Table 4 lists the segment registers and their functions. Figure 9 shows the format for all six segment registers.

Table 4. Segment Registers

| Segment Register | Segment Register Function |
|------------------|--|
| CS | Code segment, where instructions are located |
| DS | Data segment, where data is located |
| ES | Data segment, where data is located |
| FS | Data segment, where data is located |
| GS | Data segment, where data is located |
| SS | Stack segment |

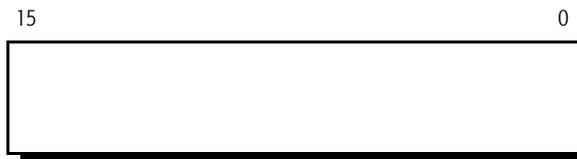


Figure 9. Segment Register

Segment Usage

The operating system determines the type of memory model that is implemented. The segment register usage is determined by the operating system's memory model. In a Real mode memory model the segment register points to the base address in memory. In a Protected mode memory model the segment register is called a selector and it selects a segment descriptor in a descriptor table. This descriptor contains a pointer to the base of the segment, the limit of the segment, and various protection attributes. For more information on descriptor formats, see "Descriptors and Gates" on page 50. Figure 10 on page 25 shows segment usage for Real mode and Protected mode memory models.

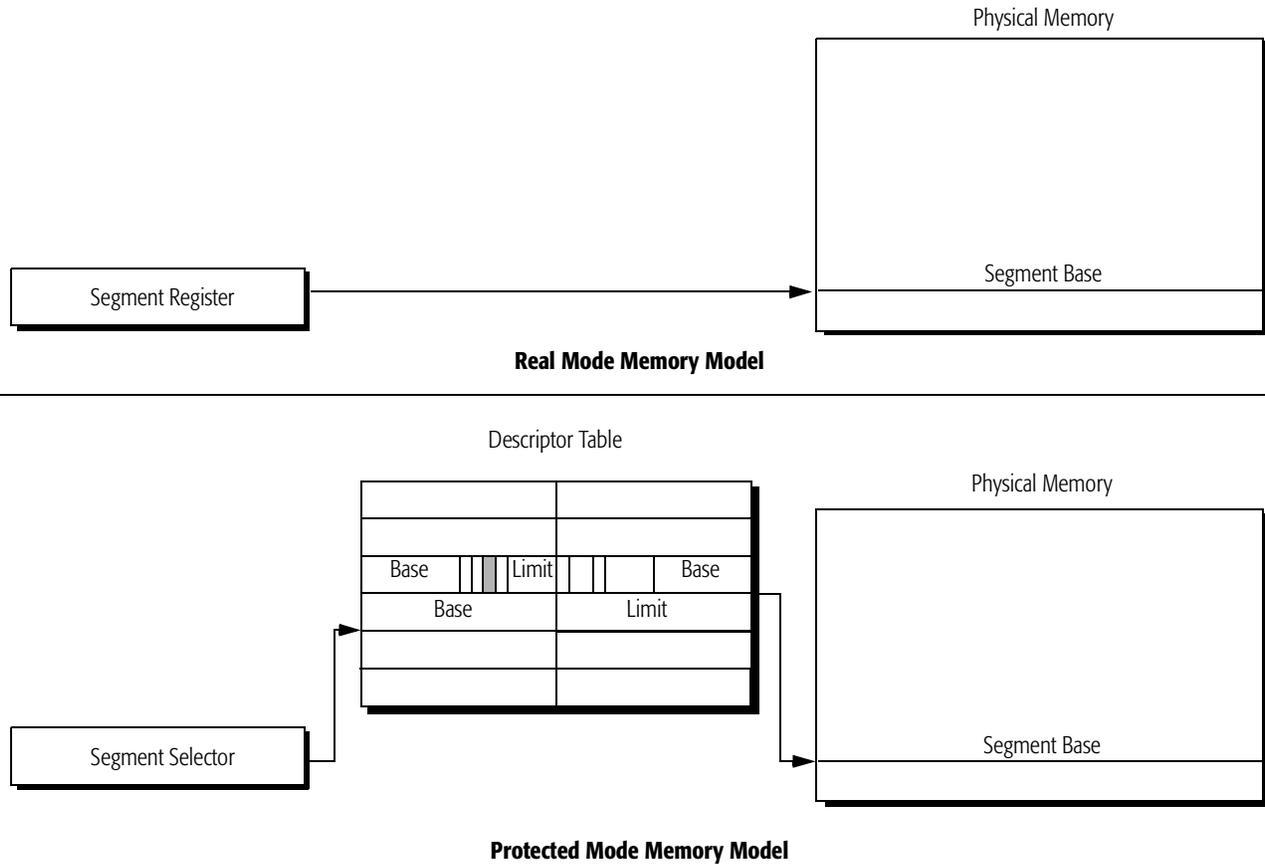


Figure 10. Segment Usage

Instruction Pointer

The instruction pointer (EIP or IP) is used in conjunction with the code segment register (CS). The instruction pointer is either a 32-bit register (EIP) or a 16-bit register (IP) that keeps track of where the next instruction resides within memory. This register cannot be directly manipulated, but can be altered by modifying return pointers when a JMP or CALL instruction is used.

Floating-Point Registers

The floating-point execution unit in the AMD-K6-III processor is designed to perform mathematical operations on non-integer numbers. This floating-point unit conforms to the IEEE 754 and 854 standards and uses several registers to meet these standards—eight numeric floating-point registers, a status word register, a control word register, and a tag word register.

The eight floating-point registers are physically 80 bits wide and labeled FPR0–FPR7. Figure 11 shows the format of these floating-point registers. See “Floating-Point Register Data Types” on page 28 for information on allowable floating-point data types.



Figure 11. Floating-Point Register

The 16-bit FPU status word register contains information about the state of the floating-point unit. Figure 12 shows the format of this register.

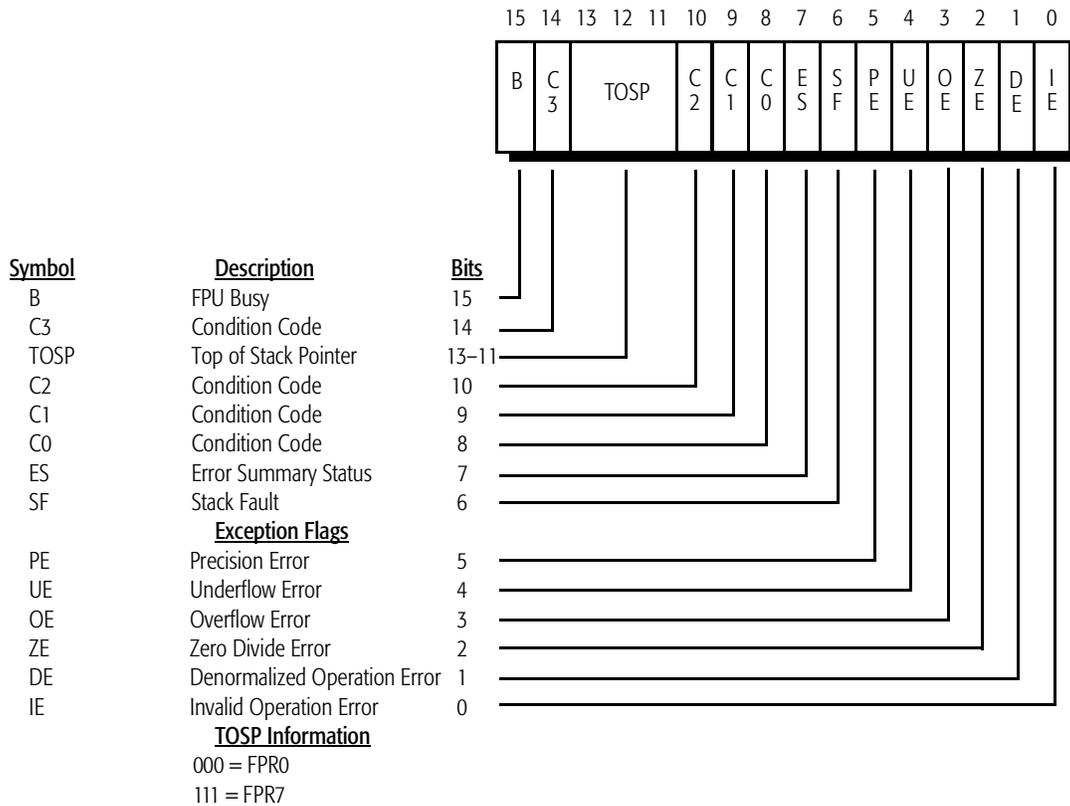


Figure 12. FPU Status Word Register

The FPU control word register allows a programmer to manage the FPU processing options. Figure 13 shows the format of this register.

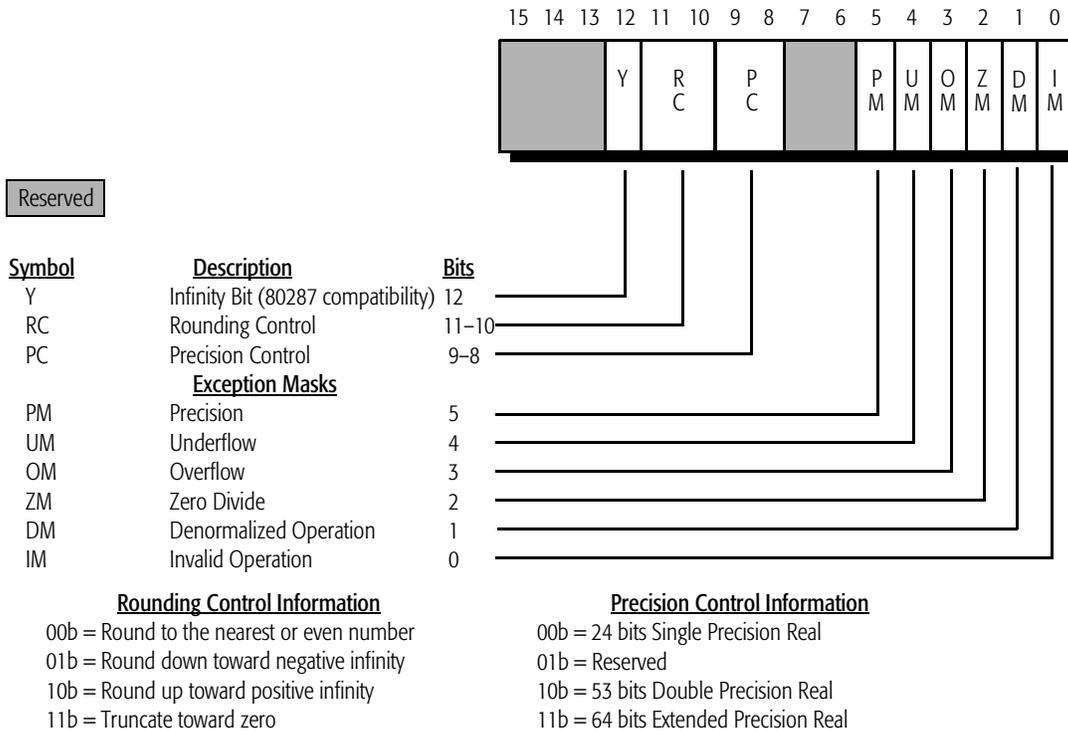


Figure 13. FPU Control Word Register

The FPU tag word register contains information about the registers in the register stack. Figure 14 shows the format of this register.

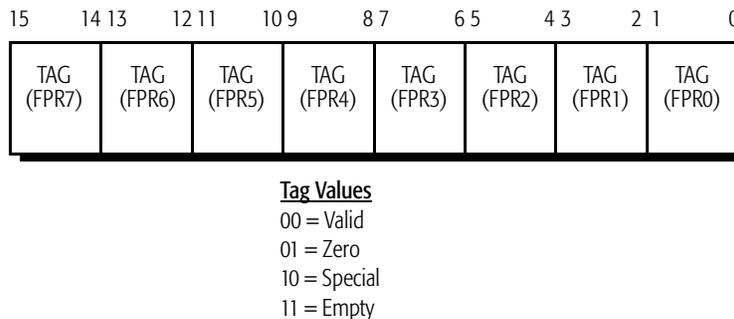


Figure 14. FPU Tag Word Register

Floating-Point Register Data Types

Floating-point registers use four different types of data—packed decimal, single-precision real, double-precision real, and extended-precision real. Figures 15 and 16 show the formats for these registers.


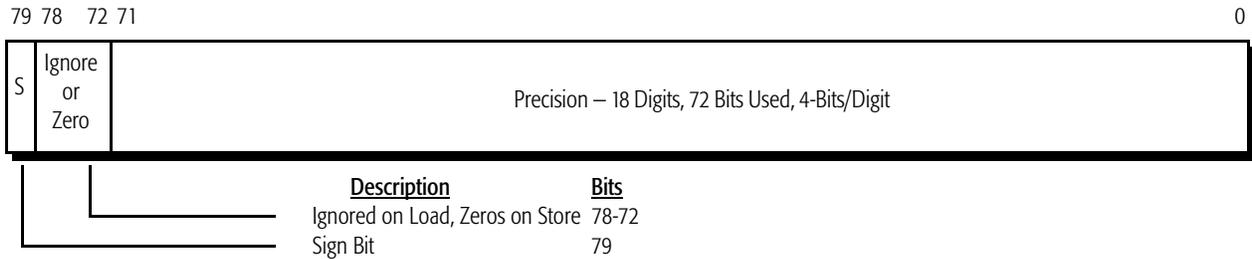


Figure 15. Packed Decimal Data Register

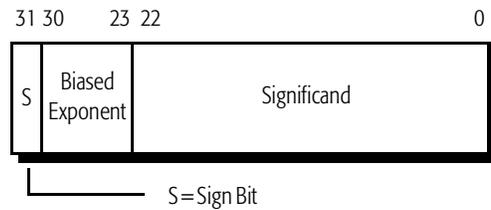Single-Precision Real



Double-Precision Real



Extended-Precision Real



Figure 16. Precision Real Data Registers

MMX™/3DNow!™ Registers

The AMD-K6-III processor implements eight 64-bit MMX/3DNow! registers for use by multimedia software. These registers are mapped on the floating-point register stack. The MMX and 3DNow! instructions refer to these registers as mm0 to mm7. Figure 17 shows the format of these registers. For more information, see the *AMD-K6[®] Processor Multimedia Technology Manual*, order# 20726 and the *3DNow! Technology Manual*, order# 21928.


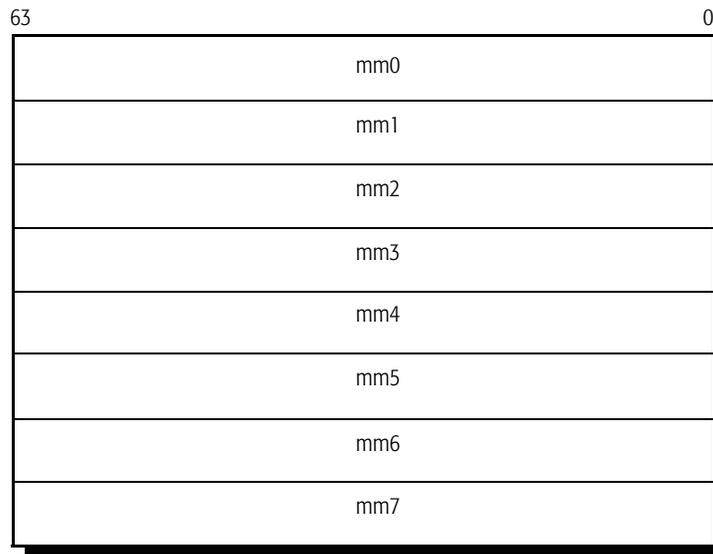


Figure 17. MMX™/3DNow!™ Registers


MMX™ Data Types

For the MMX instructions, the MMX registers use three types of data—packed eight-byte integer, packed quadword integer, and packed dual doubleword integer. Figure 18 on page 30 shows the format of these data types.

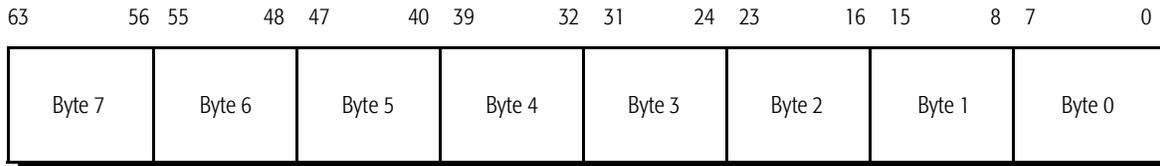Packed Bytes Integer



Packed Words Integer

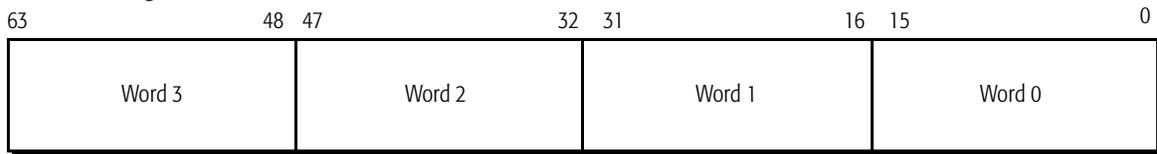

Packed Doubleword Integer

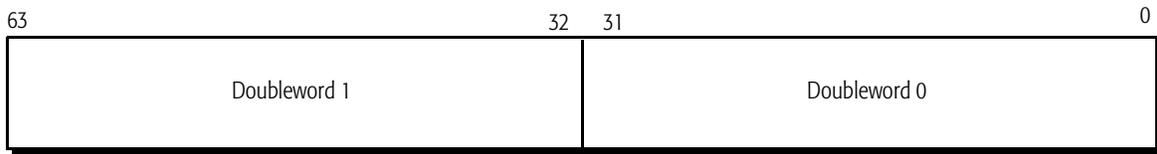


Figure 18. MMX™ Data Types

3DNow!™ Data Types

For 3DNow! instructions, the MMX/3DNow! registers use packed single-precision real data. Figure 19 shows the format of the 3DNow! data type.

Packed Single Precision Floating Point

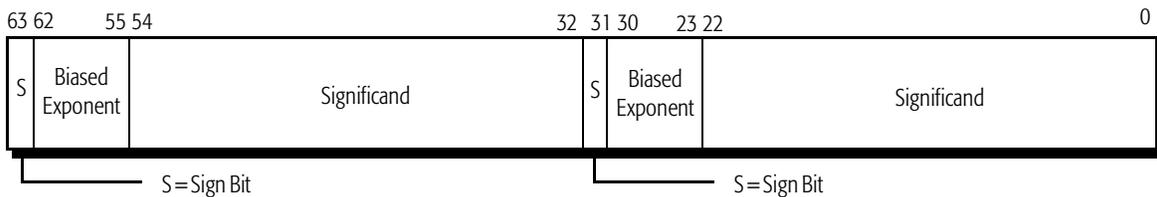


Figure 19. 3DNow!™ Data Types

EFLAGS Register

The EFLAGS register provides for three different types of flags—system, control, and status. The system flags provide operating system controls, the control flag provides directional information for string operations, and the status flags provide information resulting from logical and arithmetic operations. Figure 20 shows the format of this register.

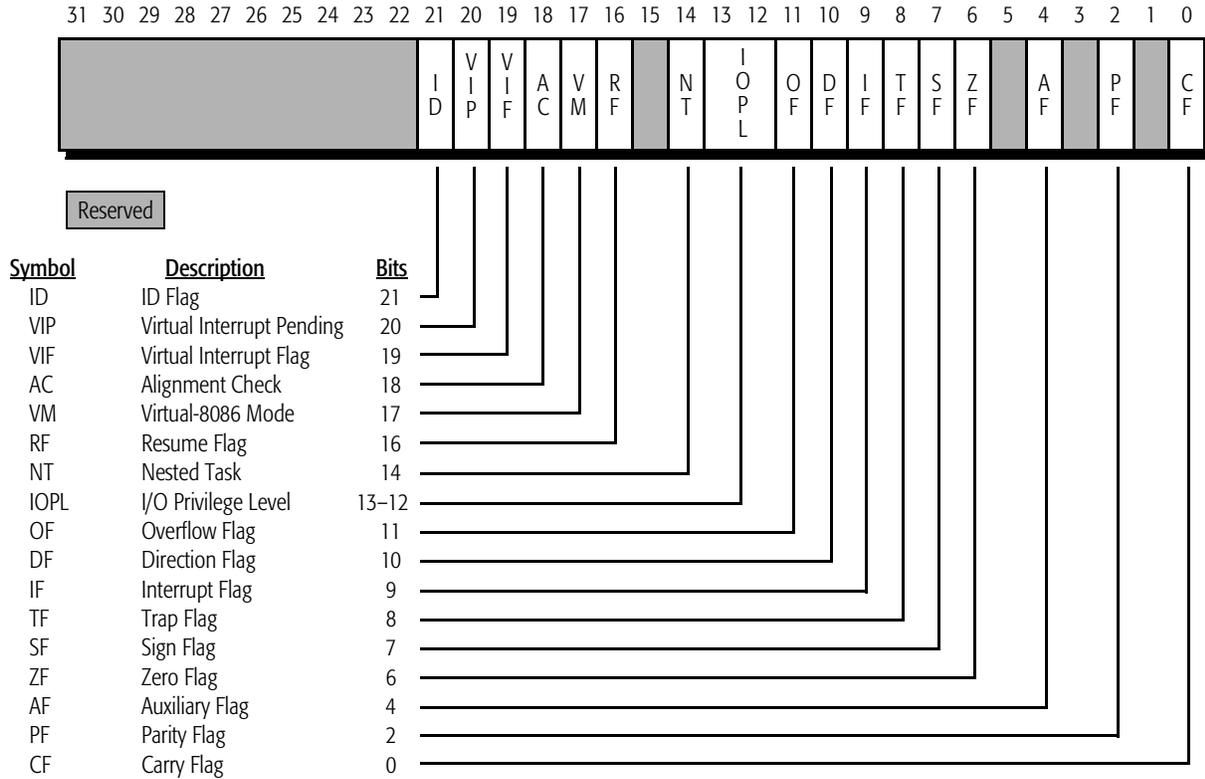


Figure 20. EFLAGS Registers

Control Registers

The five control registers contain system control bits and pointers. Figures 21 through 25 show the formats of these registers.

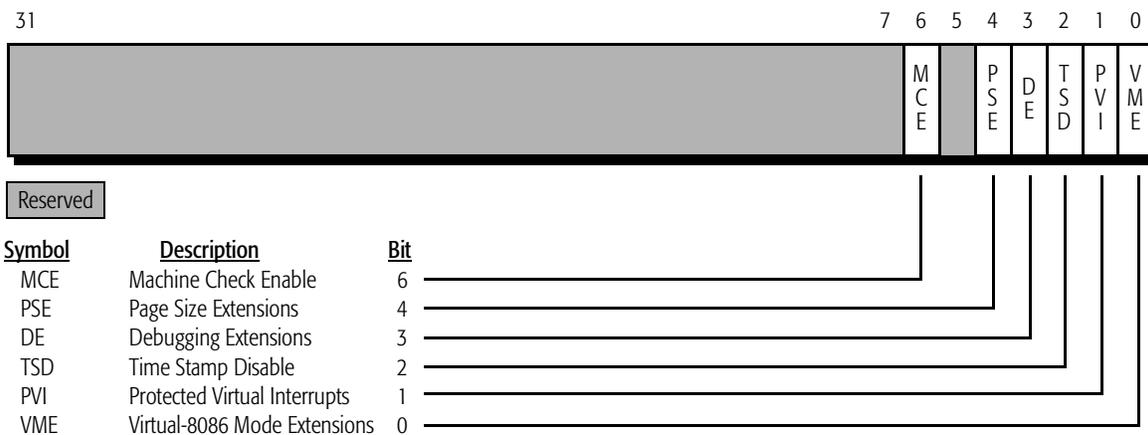


Figure 21. Control Register 4 (CR4)

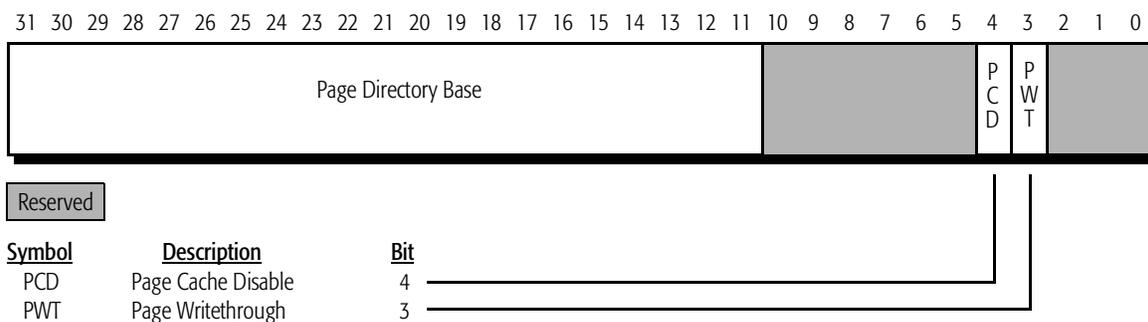


Figure 22. Control Register 3 (CR3)



Figure 23. Control Register 2 (CR2)



Figure 24. Control Register 1 (CR1)

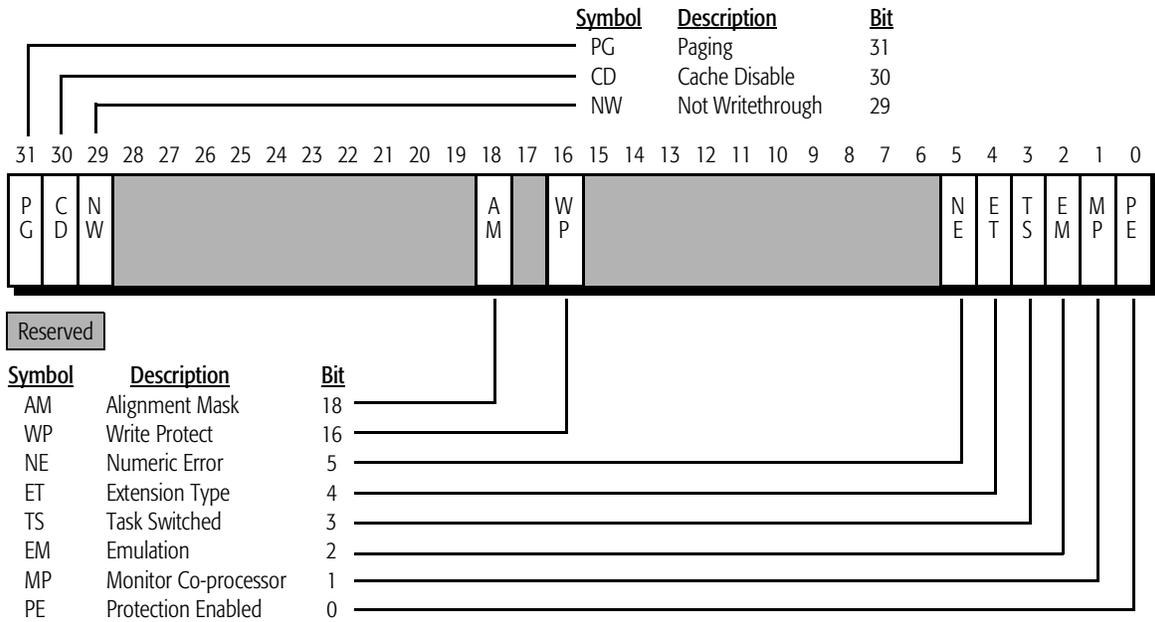


Figure 25. Control Register 0 (CR0)

Debug Registers

Figures 26 through 29 show the 32-bit debug registers supported by the processor.

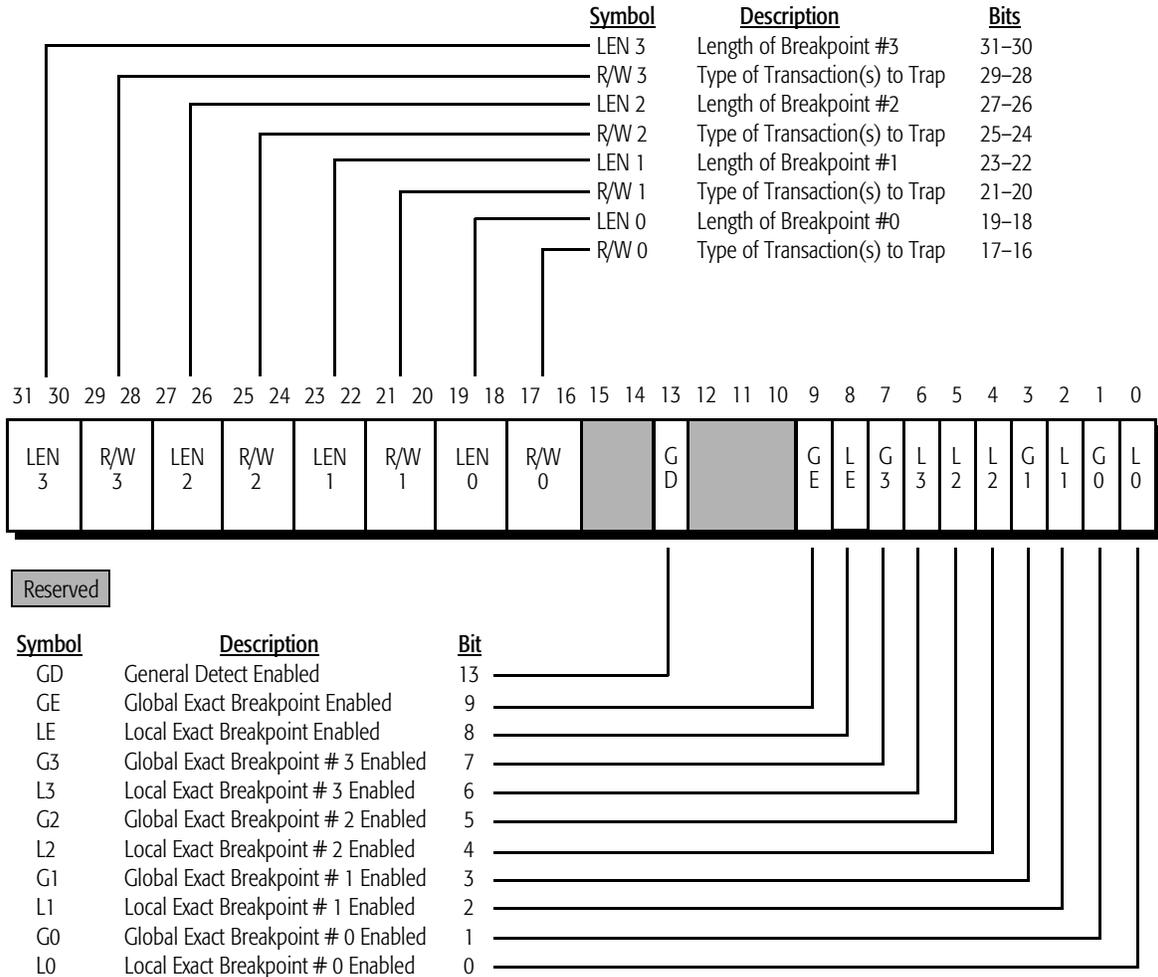


Figure 26. Debug Register DR7


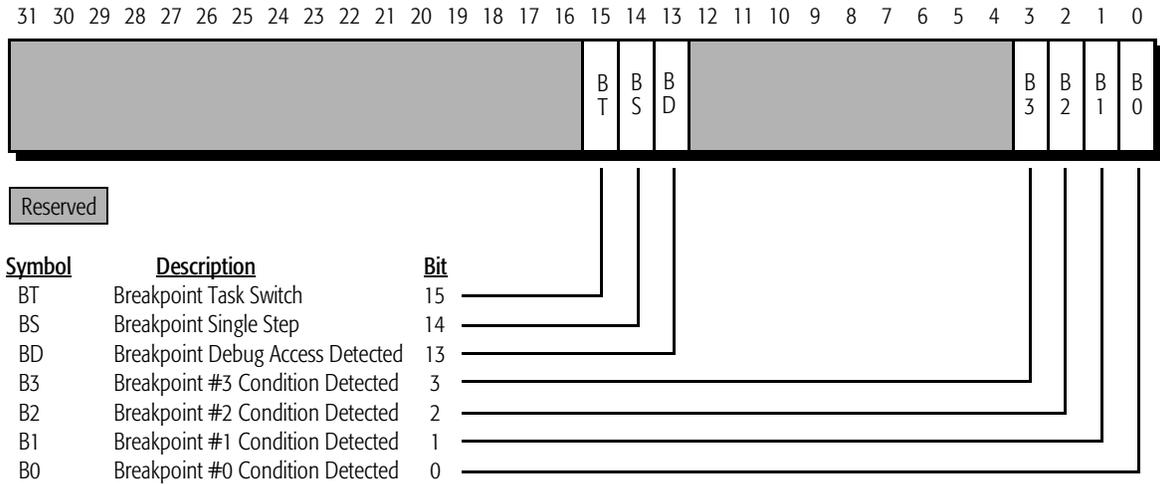


Figure 27. Debug Register DR6

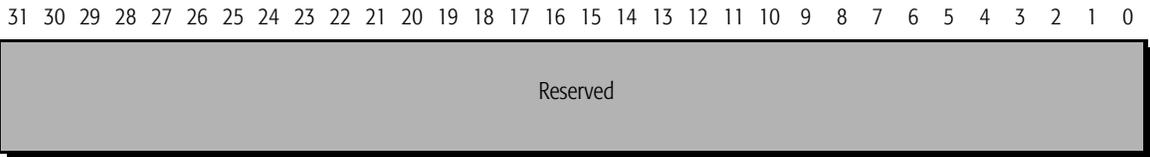DR5



DR4

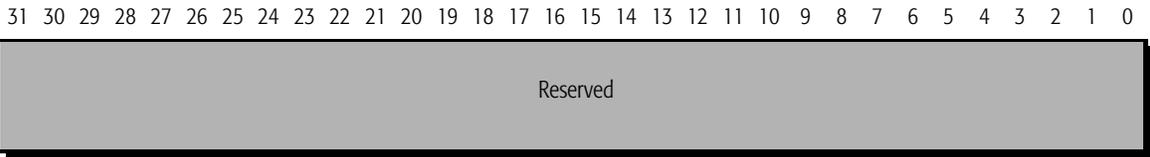


Figure 28. Debug Registers DR5 and DR4

DR3

31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0



DR2

31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0



DR1

31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0



DR0

31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0



Figure 29. Debug Registers DR3, DR2, DR1, and DR0

Model-Specific Registers (MSR)

The AMD-K6-III processor provides eleven MSRs. The value in the ECX register selects the MSR to be addressed by the RDMSR and WRMSR instructions. The values in EAX and EDX are used as inputs and outputs by the RDMSR and WRMSR instructions. Table 5 lists the MSRs and the corresponding value of the ECX register. Figures 30 through 42 show the MSR formats.

Table 5. AMD-K6[®]-III Processor Model 9 MSRs

| Model-Specific Register | Value of ECX |
|---|--------------|
| Machine Check Address Register (MCAR) | 00h |
| Machine Check Type Register (MCTR) | 01h |
| Test Register 12 (TR12) | 0Eh |
| Time Stamp Counter (TSC) | 10h |
| Extended Feature Enable Register (EFER) | C000_0080h |
| SYSCALL/SYSRET Target Address Register (STAR) | C000_0081h |
| Write Handling Control Register (WHCR) | C000_0082h |
| UC/WC Cacheability Control Register (UWCCR) | C000_0085h |
| Processor State Observability Register (PSOR) | C000_0087h |
| Page Flush/Invalidate Register (PFIR) | C000_0088h |
| Level-2 Cache Array Register (L2AAR) | C000_0089h |

For more information about the MSRs, see the *AMD-K6[®] Processor BIOS Design Application Note*, order# 21329.

For more information about the RDMSR and WRMSR instructions, see the *AMD K86[™] Family BIOS and Software Tools Development Guide*, order# 21062.

MCAR and MCTR. The AMD-K6-III processor does not support the generation of a machine check exception. However, the processor does provide a 64-bit machine check address register (MCAR), a 64-bit machine check type register (MCTR), and a machine check enable (MCE) bit in CR4. Because the processor does not support machine check exceptions, the contents of the MCAR and MCTR are only affected by the WRMSR instruction and by RESET being sampled asserted (where all bits in each register are reset to 0).

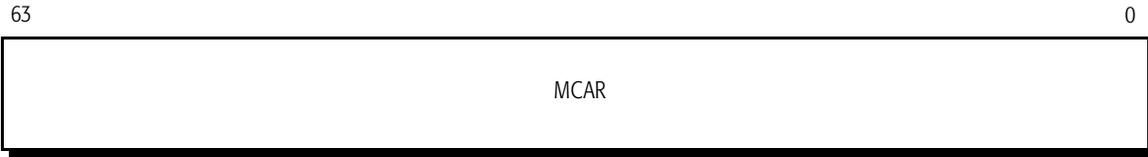


Figure 30. Machine-Check Address Register (MCAR)



Figure 31. Machine-Check Type Register (MCTR)

Test Register 12 (TR12). Test register 12 provides a method for disabling the L1 caches. Figure 32 shows the format of TR12.

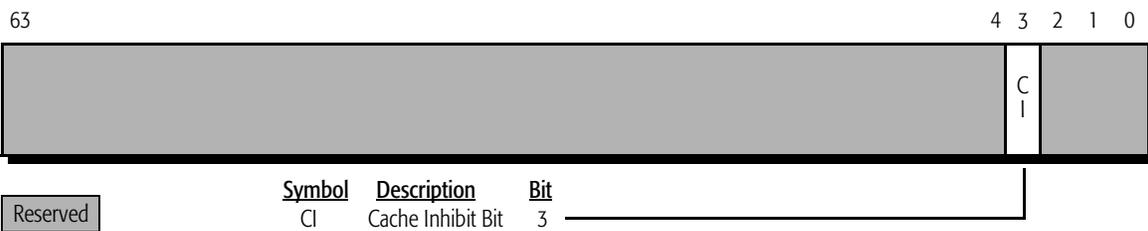


Figure 32. Test Register 12 (TR12)

Time Stamp Counter. With each processor clock cycle, the processor increments the 64-bit time stamp counter (TSC) MSR. Figure 33 shows the format of the TSC.

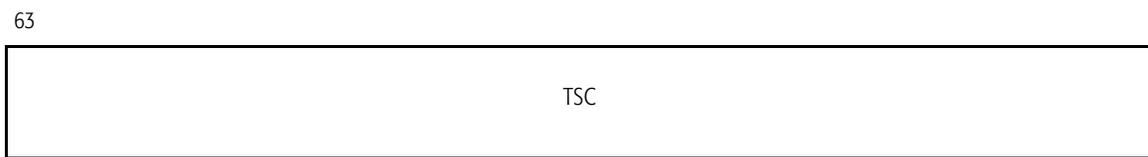


Figure 33. Time Stamp Counter (TSC)

Extended Feature Enable Register (EFER). The Extended Feature Enable Register (EFER) contains the control bits that enable the extended features of the processor. Figure 34 shows the format of the EFER register, and Table 6 defines the function of each bit of the EFER register.

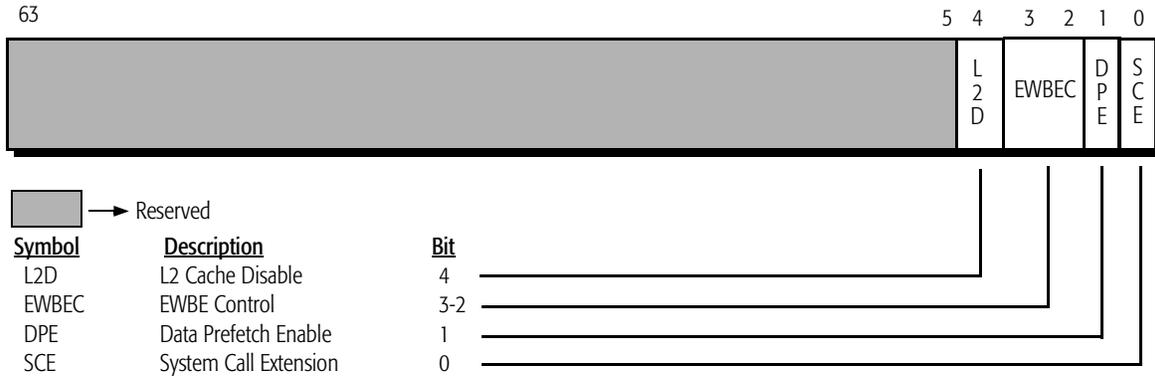


Figure 34. Extended Feature Enable Register (EFER)—MSR C000_0080h

Table 6. Extended Feature Enable Register (EFER)—Model 9 Definition

| Bit | Description | R/W | Function |
|------|-----------------------------|-----|--|
| 63–5 | Reserved | R | Writing a 1 to any reserved bit causes a general protection fault to occur. All reserved bits are always read as 0. |
| 4 | L2D | R/W | If L2D is set to 1, the L2 cache is completely disabled. This bit is provided for debug and testing purposes. For normal operation and maximum performance, this bit must be set to 0 (this is the default setting following reset). |
| 3–2 | EWBE Control (EWBEC) | R/W | This 2-bit field controls the behavior of the processor with respect to the ordering of write cycles and the EWBE# signal. EFER[3] and EFER[2] are Global EWBE Disable (GEWBED) and Speculative EWBE Disable (SEWBED), respectively. |
| 1 | Data Prefetch Enable (DPE) | R/W | DPE must be set to 1 to enable data prefetching (this is the default setting following reset). If enabled, cache misses initiated by a memory read within a 32-byte line are conditionally followed by cache-line fetches of the other line in the 64-byte sector. |
| 0 | System Call Extension (SCE) | R/W | SCE must be set to 1 to enable the usage of the SYSCALL and SYSRET instructions. |

For more information on EWBEC, see “EWBE Control” on page 203

SYSCALL/SYSRET Target Address Register (STAR).

The SYSCALL/SYSRET target address register (STAR) contains the target EIP address used by the SYSCALL instruction and the 16-bit code and stack segment selector bases used by the SYSCALL and SYSRET instructions. Figure 35 shows the format of the STAR register, and Table 7 defines the function of each bit of the STAR register. For more information, see the *SYSCALL and SYSRET Instruction Specification Application Note*, order# 21086.

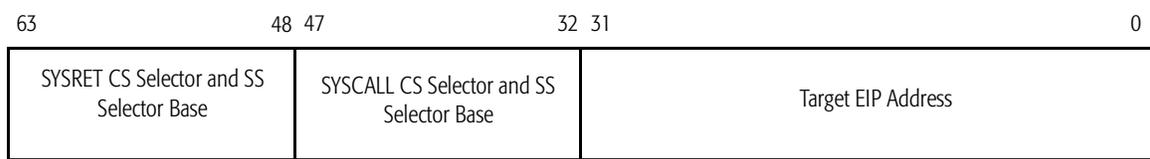


Figure 35. SYSCALL/SYSRET Target Address Register (STAR)

Table 7. SYSCALL/SYSRET Target Address Register (STAR) Definition

| Bit | Description | R/W |
|-------|---------------------------------|-----|
| 63–48 | SYSRET CS and SS Selector Base | R/W |
| 47–32 | SYSCALL CS and SS Selector Base | R/W |
| 31–0 | Target EIP Address | R/W |

Write Handling Control Register (WHCR). The Write Handling Control Register (WHCR) is a MSR that contains two fields—the Write Allocate Enable Limit (WAELIM) field, and the Write Allocate Enable 15-to-16-Mbyte (WAE15M) bit (see Figure 36). For more information, see “Write Allocate” on page 189.

Note: The WHCR register as defined in the Model 9 is the same as the Model 8/[F:8].

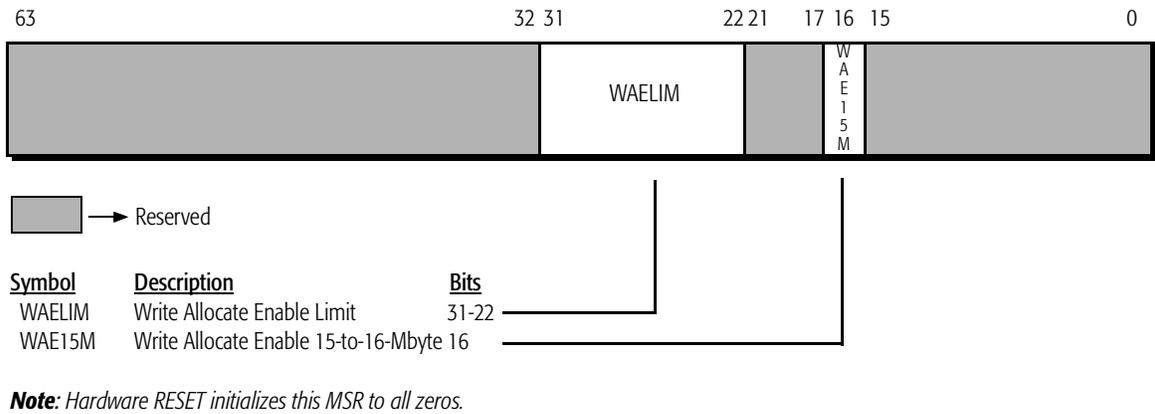


Figure 36. Write Handling Control Register (WHCR)—MSR C0000_0082h

UC/WC Cacheability Control Register (UWCCR).

The AMD-K6-III processor provides two variable-range Memory Type Range Registers (MTRRs)—MTRR0 and MTRR1—that each specify a range of memory. Each range can be defined as uncacheable (UC) or write-combining (WC) memory. For more information, see “Memory Type Range Registers” on page 205.

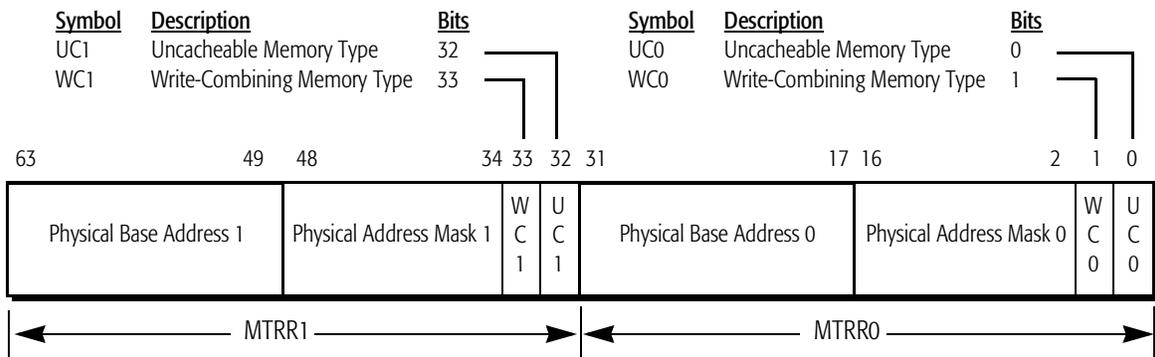


Figure 37. UC/WC Cacheability Control Register (UWCCR)—MSR C0000_0085h

Processor State Observability Register (PSOR).

The AMD-K6-III processor provides the Processor State Observability Register (PSOR) (see Figure 38).

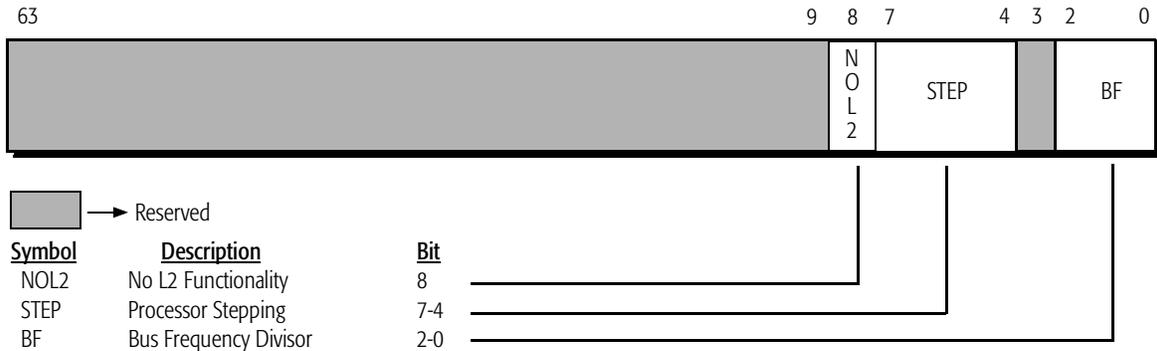


Figure 38. Processor State Observability Register (PSOR)—MSR C000_0087h

Page Flush/Invalidate Register (PFIR). The AMD-K6-III processor contains the Page Flush/Invalidate Register (PFIR) (see Figure 39) that allows cache invalidation and optional flushing of a specific 4-Kbyte page from the linear address space. For more detailed information on PFIR, see “PFIR” on page 198.

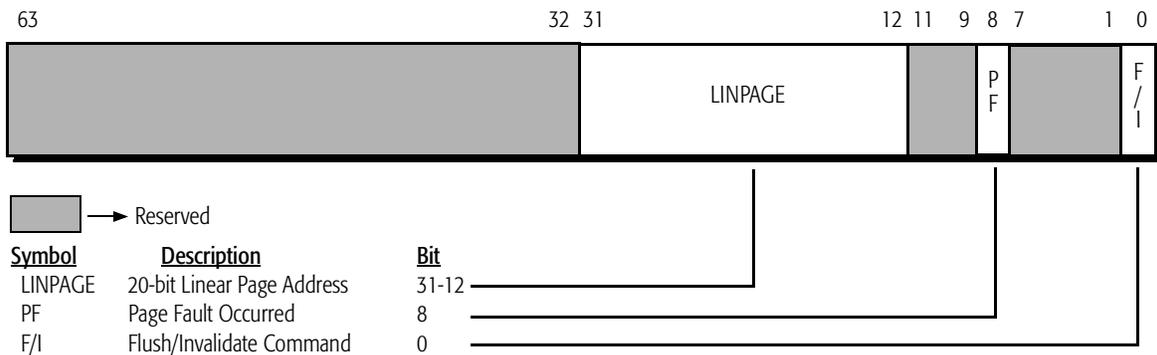


Figure 39. Page Flush/Invalidate Register (PFIR)—MSR C000_0088h

Level-2 Cache Array Access Register (L2AAR).

The AMD-K6-III processor provides the L2AAR register that allows for direct access to the L2 cache and L2 tag arrays. The L2AAR register is MSR C000_0089h. The operation that is performed on the L2 cache is a function of the instruction executed—RDMSR or WRMSR—and the contents of the EDX register. The EDX register specifies the location of the access, and whether the access is to the L2 cache data or tags (refer to Figure 40).

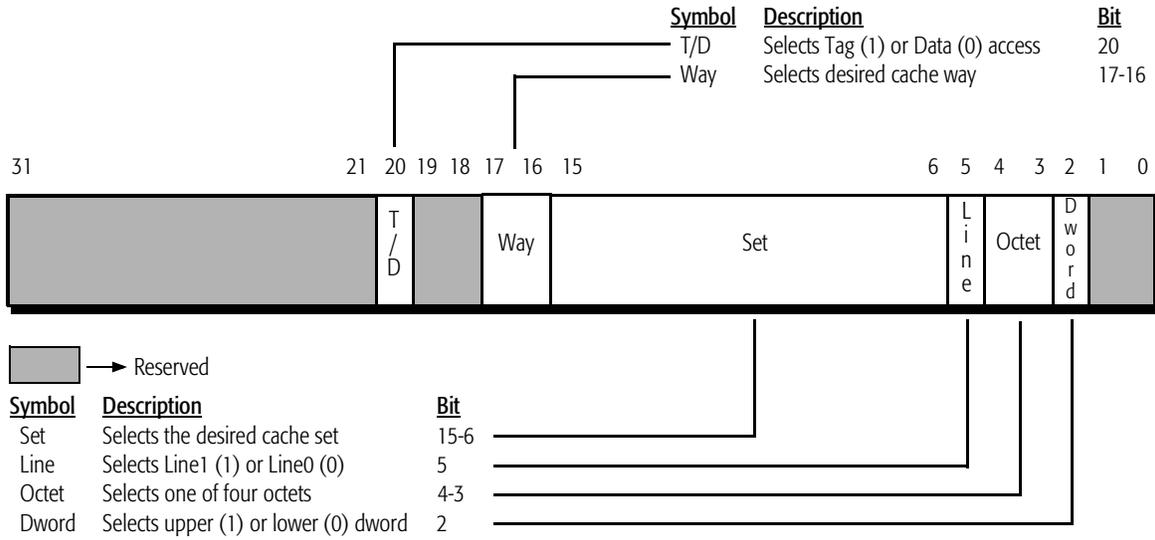


Figure 40. L2 Tag or Data Location - EDX

If the L2 cache data is read (as opposed to reading the tag information), the result (dword) is placed in EAX in the format as illustrated in Figure 41. Similarly, if the L2 cache data is written, the write data is taken from EAX.

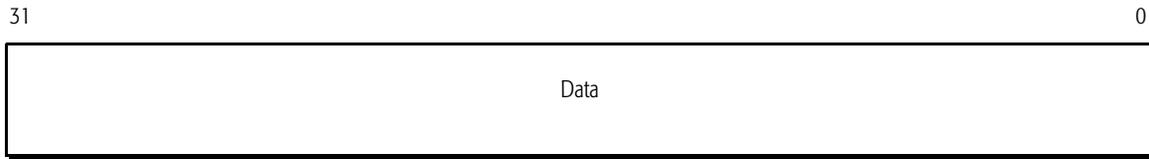


Figure 41. L2 Data - EAX

If the L2 tag is read (as opposed to reading the cache data), the result is placed in EAX in the format as illustrated in Figure 42. Similarly, if the L2 tag is written, the write data is taken from EAX.

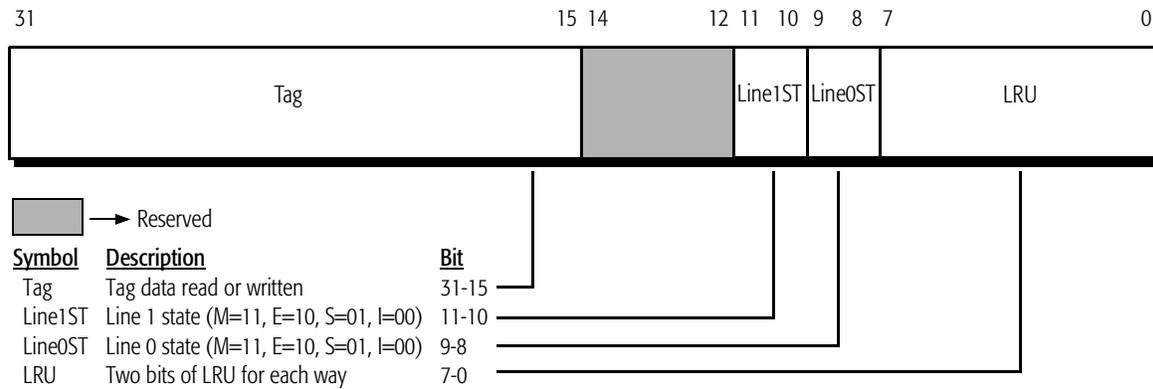


Figure 42. L2 Tag Information - EAX

For more detailed information, refer to “L2 Cache and Tag Array Testing” on page 237.


Memory Management Registers

The AMD-K6-III processor controls segmented memory management with the registers listed in Table 8. Figure 43 on page 45 shows the formats of these registers.

Table 8. Memory Management Registers

| Register Name | Function |
|-------------------------------------|--|
| Global Descriptor Table Register | Contains a pointer to the base of the global descriptor table |
| Interrupt Descriptor Table Register | Contains a pointer to the base of the interrupt descriptor table |
| Local Descriptor Table Register | Contains a pointer to the local descriptor table of the current task |
| Task Register | Contains a pointer to the task state segment of the current task |

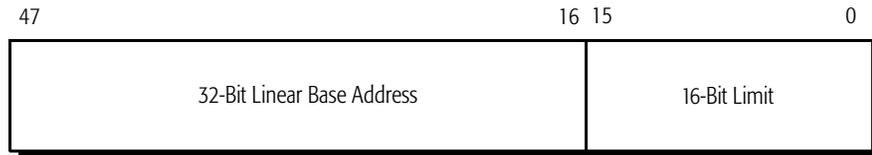Global and Interrupt Descriptor Table Registers



Local Descriptor Table Register and Task Register

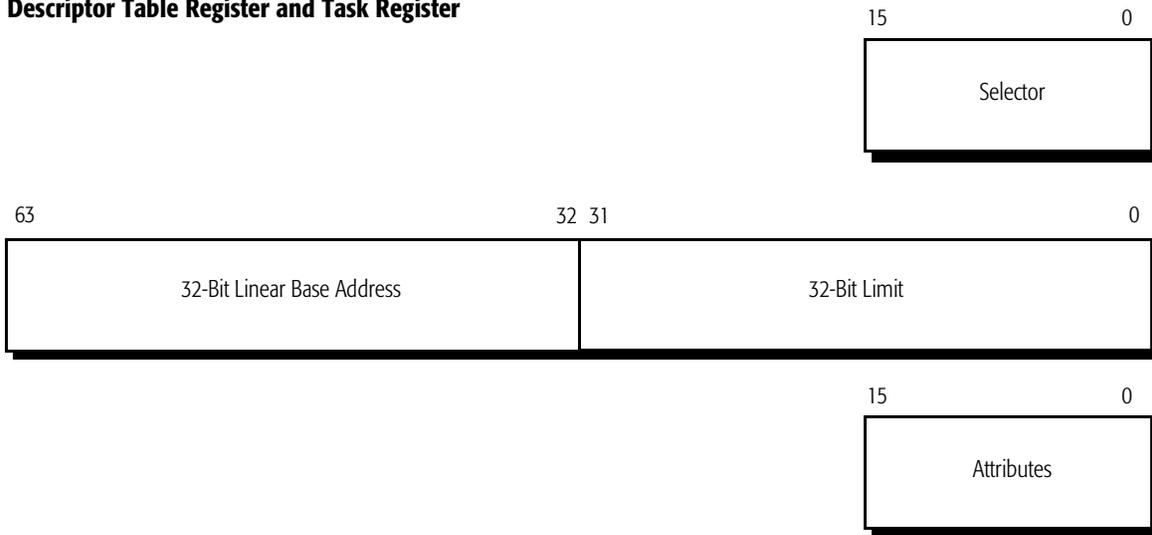


Figure 43. Memory Management Registers

Task State Segment

Figure 44 shows the format of the task state segment (TSS).

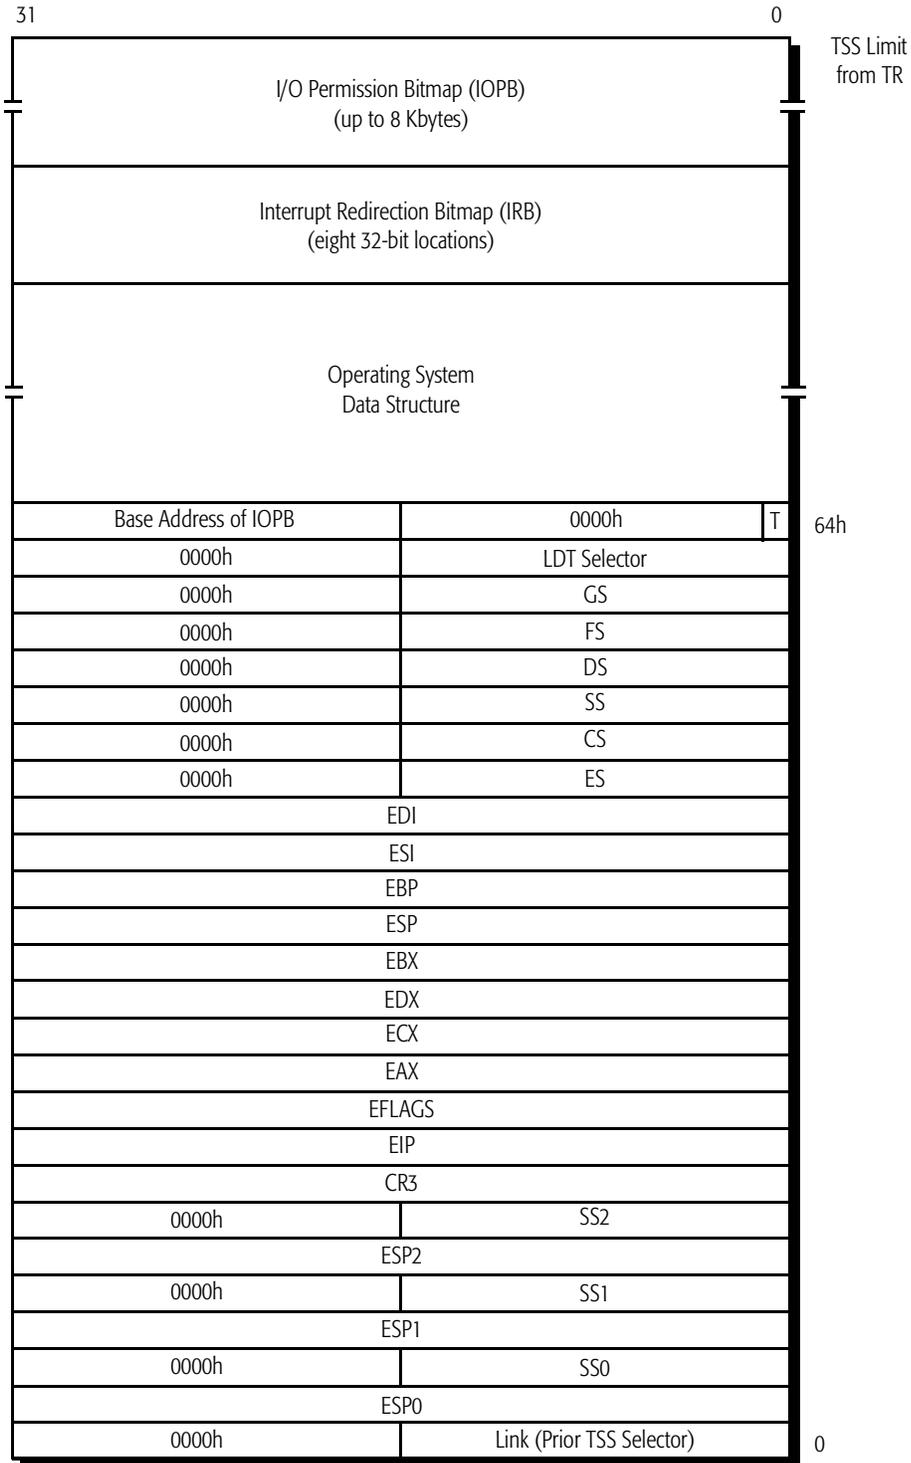


Figure 44. Task State Segment (TSS)

Paging

The AMD-K6-III processor can physically address up to four Gbytes of memory. This memory can be segmented into pages. The size of these pages is determined by the operating system design and the values set up in the page directory entries (PDE) and page table entries (PTE). The processor can access both 4-Kbyte pages and 4-Mbyte pages, and the page sizes can be intermixed within a page directory. When the page size extension (PSE) bit in CR4 is set, the processor translates linear addresses using either the 4-Kbyte translation lookaside buffer (TLB) or the 4-Mbyte TLB, depending on the state of the page size (PS) bit in the page directory entry. Figures 45 and 46 show how 4-Kbyte and 4-Mbyte page translations work.

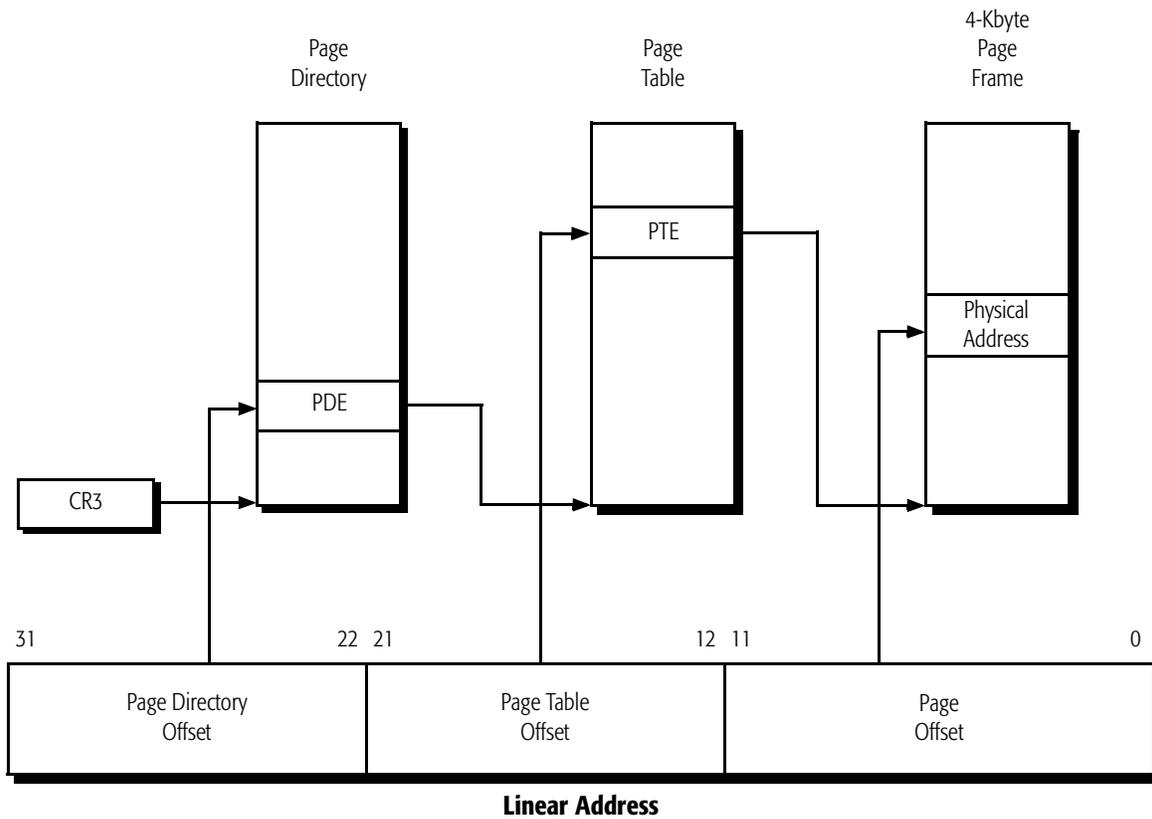


Figure 45. 4-Kbyte Paging Mechanism

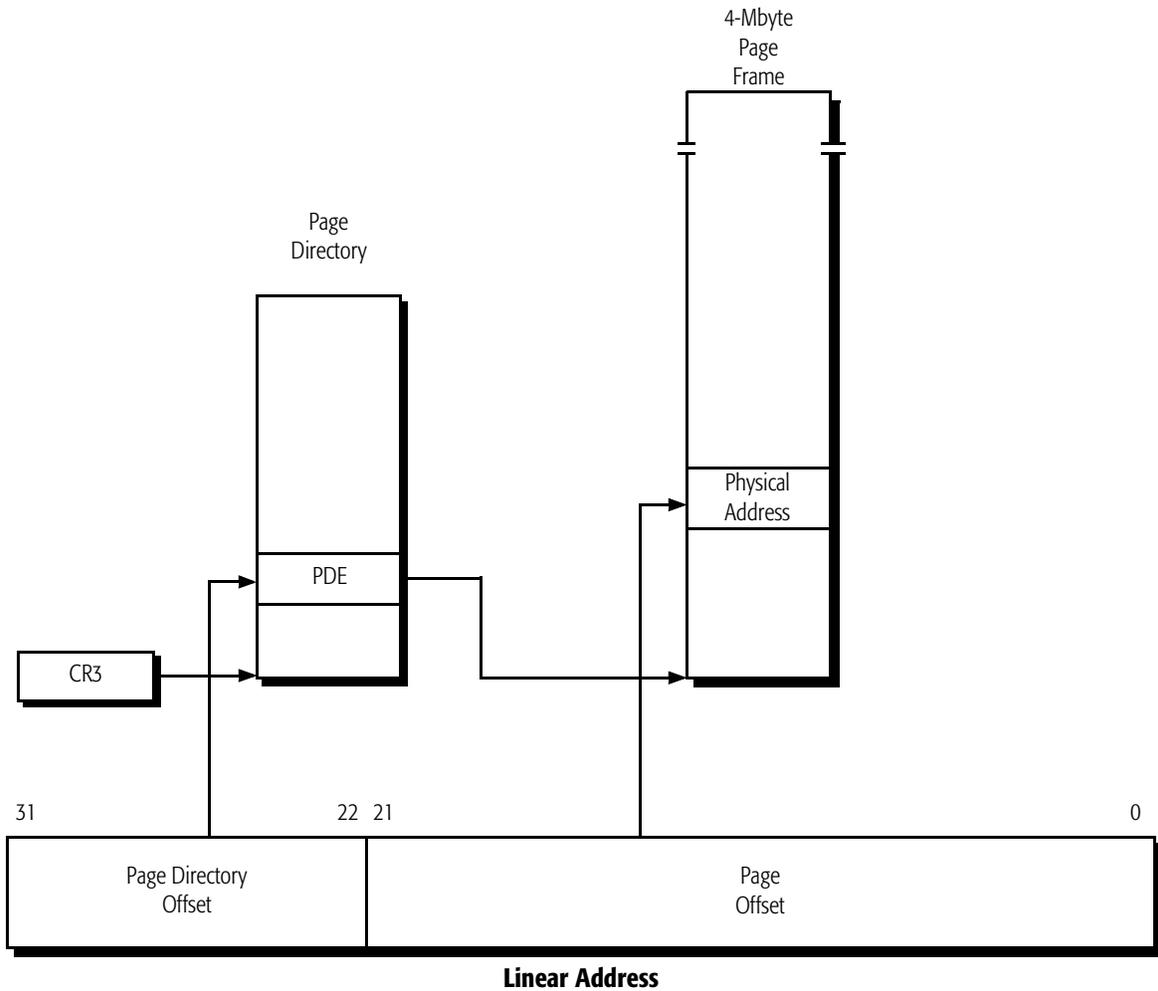


Figure 46. 4-Mbyte Paging Mechanism

Figures 47 through 49 show the formats of the PDE and PTE. These entries contain information regarding the location of pages and their status.

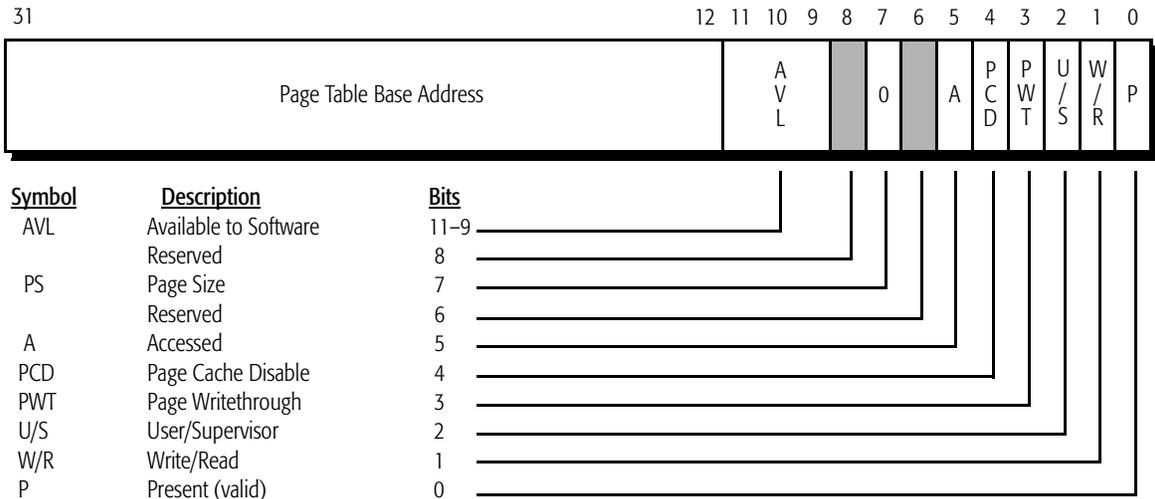


Figure 47. Page Directory Entry 4-Kbyte Page Table (PDE)

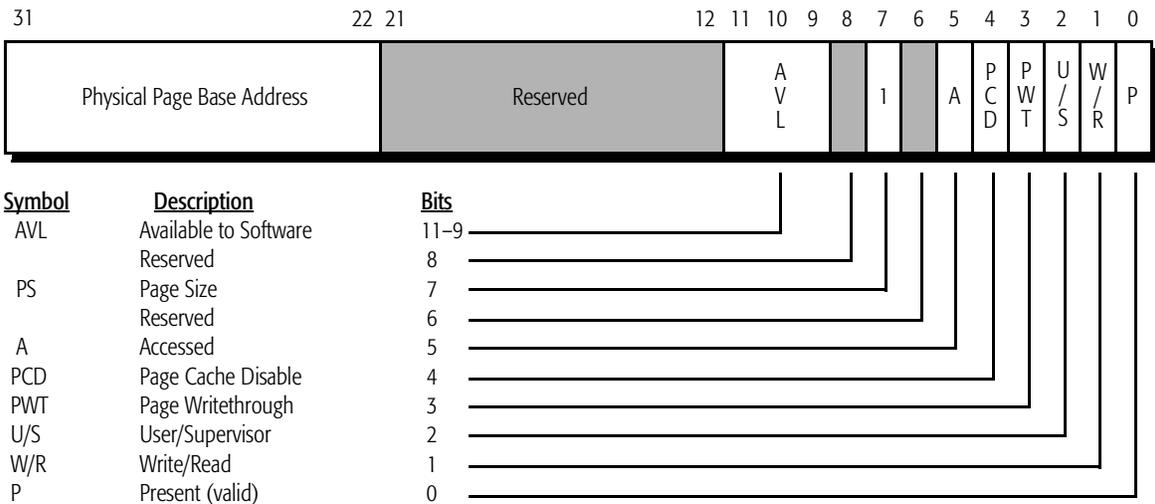


Figure 48. Page Directory Entry 4-Mbyte Page Table (PDE)

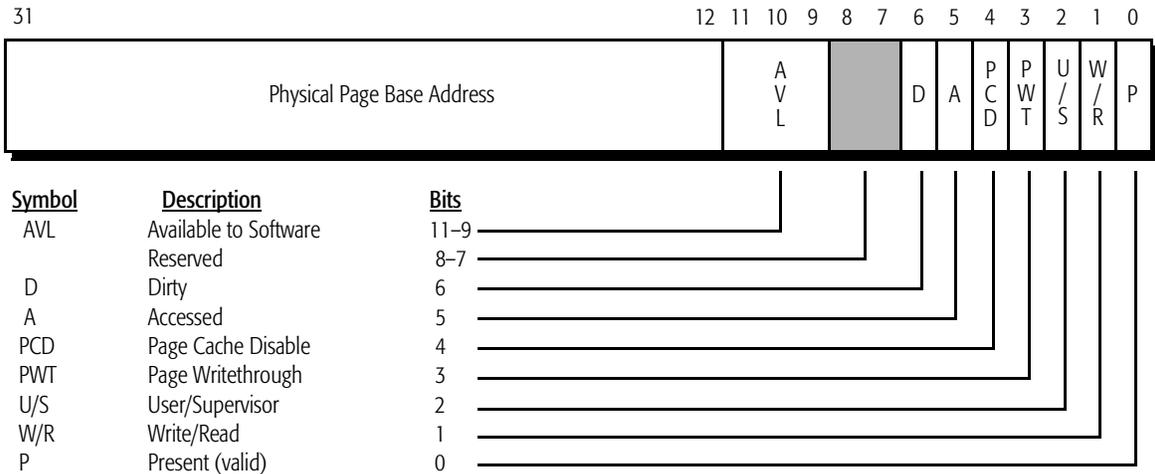


Figure 49. Page Table Entry (PTE)

Descriptors and Gates

There are various types of structures and registers in the x86 architecture that define, protect, and isolate code segments, data segments, task state segments, and gates. These structures are called descriptors.

Figure 50 on page 51 shows the application segment descriptor format. Table 9 contains information describing the memory segment type to which the descriptor points. The application segment descriptor is used to point to either a data or code segment.

Figure 51 on page 52 shows the system segment descriptor format. Table 10 contains information describing the type of segment or gate to which the descriptor points. The system segment descriptor is used to point to a task state segment, a call gate, or a local descriptor table.

The AMD-K6-III processor uses gates to transfer control between executable segments with different privilege levels. Figure 52 on page 53 shows the format of the gate descriptor types. Table 10 contains information describing the type of segment or gate to which the descriptor points.

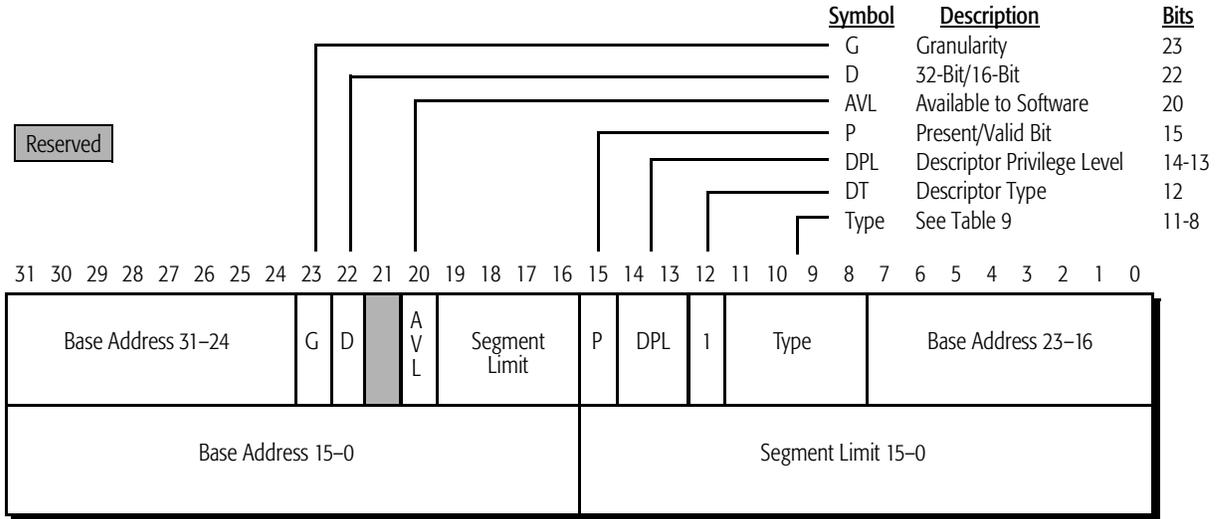


Figure 50. Application Segment Descriptor

Table 9. Application Segment Types

| Type | Data/Code | Description |
|------|-----------|--|
| 0 | Data | Read-Only |
| 1 | | Read-Only—Accessed |
| 2 | | Read/Write |
| 3 | | Read/Write—Accessed |
| 4 | | Read-Only—Expand-down |
| 5 | | Read-Only—Expand-down, Accessed |
| 6 | | Read/Write—Expand-down |
| 7 | | Read/Write—Expand-down, Accessed |
| 8 | Code | Execute-Only |
| 9 | | Execute-Only—Accessed |
| A | | Execute/Read |
| B | | Execute/Read—Accessed |
| C | | Execute-Only—Conforming |
| D | | Execute-Only—Conforming, Accessed |
| E | | Execute/Read-Only—Conforming |
| F | | Execute/Read-Only—Conforming, Accessed |

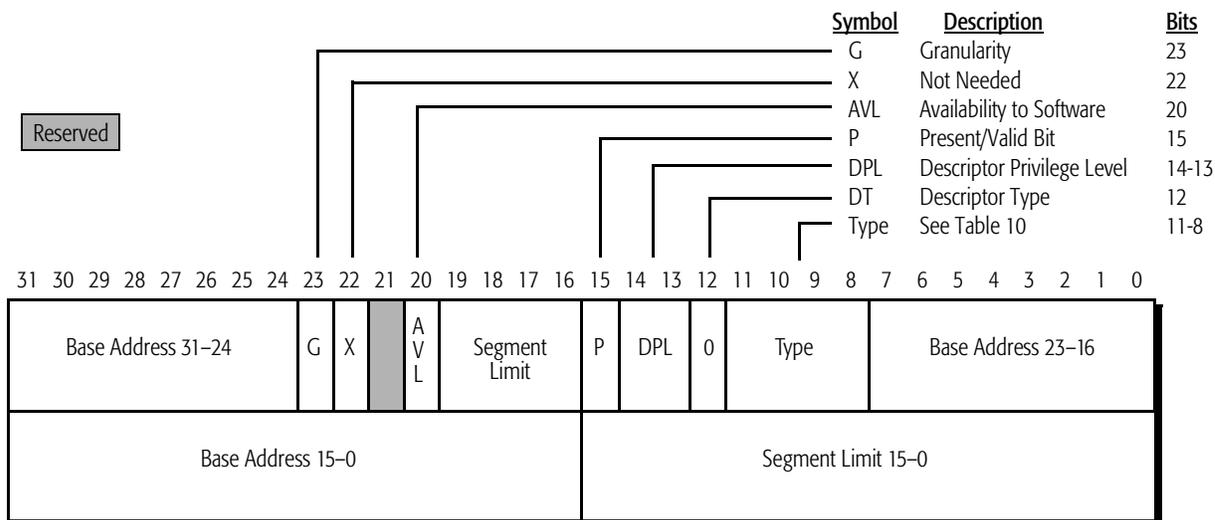


Figure 51. System Segment Descriptor

Table 10. System Segment and Gate Types

| Type | Description |
|------|-----------------------|
| 0 | Reserved |
| 1 | Available 16-bit TSS |
| 2 | LDT |
| 3 | Busy 16-bit TSS |
| 4 | 16-bit Call Gate |
| 5 | Task Gate |
| 6 | 16-bit Interrupt Gate |
| 7 | 16-bit Trap Gate |
| 8 | Reserved |
| 9 | Available 32-bit TSS |
| A | Reserved |
| B | Busy 32-bit TSS |
| C | 32-bit Call Gate |
| D | Reserved |
| E | 32-bit Interrupt Gate |
| F | 32-bit Trap Gate |

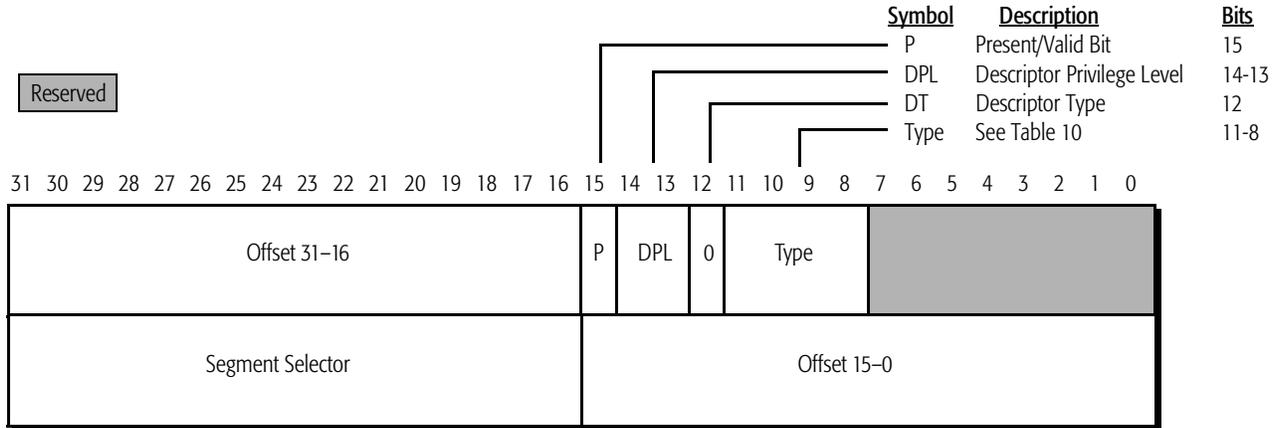


Figure 52. Gate Descriptor

Exceptions and Interrupts

Table 11 summarizes the exceptions and interrupts.

Table 11. Summary of Exceptions and Interrupts

| Interrupt Number | Interrupt Type | Cause |
|------------------|-------------------------|---|
| 0 | Divide by Zero Error | DIV, IDIV |
| 1 | Debug | Debug trap or fault |
| 2 | Non-Maskable Interrupt | NMI signal sampled asserted |
| 3 | Breakpoint | Int 3 |
| 4 | Overflow | INTO |
| 5 | Bounds Check | BOUND |
| 6 | Invalid Opcode | Invalid instruction |
| 7 | Device Not Available | ESC and WAIT |
| 8 | Double Fault | Fault occurs while handling a fault |
| 9 | Reserved - Interrupt 13 | — |
| 10 | Invalid TSS | Task switch to an invalid segment |
| 11 | Segment Not Present | Instruction loads a segment and present bit is 0 (invalid segment) |
| 12 | Stack Segment | Stack operation causes limit violation or present bit is 0 |
| 13 | General Protection | Segment related or miscellaneous invalid actions |
| 14 | Page Fault | Page protection violation or a reference to missing page |
| 16 | Floating-Point Error | Arithmetic error generated by floating-point instruction |
| 17 | Alignment Check | Data reference to an unaligned operand. (The AC flag and the AM bit of CR0 are set to 1.) |
| 0-255 | Software Interrupt | INT n |

3.2 Instructions Supported by the AMD-K6[®]-III Processor

This section documents all of the x86 instructions supported by the AMD-K6-III processor. The following tables show the instruction mnemonic, opcode, modR/M byte, decode type, and RISC86 operation(s) for each instruction. Tables 12 through 15 define the integer, floating-point, MMX, and 3DNow! instructions for the AMD-K6-III processor, respectively.

The first column in these tables indicates the instruction mnemonic and operand types with the following notations:

- *reg8*—byte integer register defined by instruction byte(s) or bits 5, 4, and 3 of the modR/M byte
- *mreg8*—byte integer register or byte integer value in memory defined by the modR/M byte
- *reg16/32*—word or doubleword integer register defined by instruction byte(s) or bits 5, 4, and 3 of the modR/M byte
- *mreg16/32*—word or doubleword integer register, or word or doubleword integer value in memory defined by the modR/M byte
- *mem8*—byte integer value in memory
- *mem16/32*—word or doubleword integer value in memory
- *mem32/48*—doubleword or 48-bit integer value in memory
- *mem48*—48-bit integer value in memory
- *mem64*—64-bit value in memory
- *imm8*—8-bit immediate value
- *imm16/32*—16-bit or 32-bit immediate value
- *disp8*—8-bit displacement value
- *disp16/32*—16-bit or 32-bit displacement value
- *disp32/48*—doubleword or 48-bit displacement value
- *eXX*—register width depending on the operand size
- *mem32real*—32-bit floating-point value in memory
- *mem64real*—64-bit floating-point value in memory
- *mem80real*—80-bit floating-point value in memory
- *mmreg*—MMX/3DNow! register
- *mmreg1*—MMX/3DNow! register defined by bits 5, 4, and 3 of the modR/M byte
- *mmreg2*—MMX/3DNow! register defined by bits 2, 1, and 0 of the modR/M byte

The second and third columns list all applicable opcode bytes.

The fourth column lists the modR/M byte when used by the instruction. The modR/M byte defines the instruction as a register or memory form. If modR/M bits 7 and 6 are documented as mm (memory form), mm can only be 10b, 01b or 00b.

The fifth column lists the type of instruction decode—short, long, and vector. The AMD-K6-III processor decode logic can process two short, one long, or one vector decode per clock.

The sixth column lists the type of RISC86 operation(s) required for the instruction. The operation types and corresponding execution units are as follows:

- *load, fload, mload*—load unit
- *store, fstore, mstore*—store unit
- *alu*—either of the integer execution units
- *alux*—integer X execution unit only
- *branch*—branch condition unit
- *float*—floating-point execution unit
- *meu*—Multimedia execution units for MMX and 3DNow! instructions
- *limm*—load immediate, instruction control unit

Table 12. Integer Instructions

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-------------------------|------------|-------------|-------------|-------------|-------------------|
| AAA | 37h | | | vector | |
| AAD | D5h | 0Ah | | vector | |
| AAM | D4h | 0Ah | | vector | |
| AAS | 3Fh | | | vector | |
| ADC mreg8, reg8 | 10h | | 11-xxx-xxx | vector | |
| ADC mem8, reg8 | 10h | | mm-xxx-xxx | vector | |
| ADC mreg16/32, reg16/32 | 11h | | 11-xxx-xxx | vector | |
| ADC mem16/32, reg16/32 | 11h | | mm-xxx-xxx | vector | |
| ADC reg8, mreg8 | 12h | | 11-xxx-xxx | vector | |
| ADC reg8, mem8 | 12h | | mm-xxx-xxx | vector | |
| ADC reg16/32, mreg16/32 | 13h | | 11-xxx-xxx | vector | |
| ADC reg16/32, mem16/32 | 13h | | mm-xxx-xxx | vector | |
| ADC AL, imm8 | 14h | | | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-----------------------------------|------------|-------------|-------------|-------------|-------------------|
| ADC EAX, imm16/32 | 15h | | | vector | |
| ADC mreg8, imm8 | 80h | | 11-010-xxx | vector | |
| ADC mem8, imm8 | 80h | | mm-010-xxx | vector | |
| ADC mreg16/32, imm16/32 | 81h | | 11-010-xxx | vector | |
| ADC mem16/32, imm16/32 | 81h | | mm-010-xxx | vector | |
| ADC mreg16/32, imm8 (signed ext.) | 83h | | 11-010-xxx | vector | |
| ADC mem16/32, imm8 (signed ext.) | 83h | | mm-010-xxx | vector | |
| ADD mreg8, reg8 | 00h | | 11-xxx-xxx | short | alux |
| ADD mem8, reg8 | 00h | | mm-xxx-xxx | long | load, alux, store |
| ADD mreg16/32, reg16/32 | 01h | | 11-xxx-xxx | short | alu |
| ADD mem16/32, reg16/32 | 01h | | mm-xxx-xxx | long | load, alu, store |
| ADD reg8, mreg8 | 02h | | 11-xxx-xxx | short | alux |
| ADD reg8, mem8 | 02h | | mm-xxx-xxx | short | load, alux |
| ADD reg16/32, mreg16/32 | 03h | | 11-xxx-xxx | short | alu |
| ADD reg16/32, mem16/32 | 03h | | mm-xxx-xxx | short | load, alu |
| ADD AL, imm8 | 04h | | | short | alux |
| ADD EAX, imm16/32 | 05h | | | short | alu |
| ADD mreg8, imm8 | 80h | | 11-000-xxx | short | alux |
| ADD mem8, imm8 | 80h | | mm-000-xxx | long | load, alux, store |
| ADD mreg16/32, imm16/32 | 81h | | 11-000-xxx | short | alu |
| ADD mem16/32, imm16/32 | 81h | | mm-000-xxx | long | load, alu, store |
| ADD mreg16/32, imm8 (signed ext.) | 83h | | 11-000-xxx | short | alux |
| ADD mem16/32, imm8 (signed ext.) | 83h | | mm-000-xxx | long | load, alux, store |
| AND mreg8, reg8 | 20h | | 11-xxx-xxx | short | alux |
| AND mem8, reg8 | 20h | | mm-xxx-xxx | long | load, alux, store |
| AND mreg16/32, reg16/32 | 21h | | 11-xxx-xxx | short | alu |
| AND mem16/32, reg16/32 | 21h | | mm-xxx-xxx | long | load, alu, store |
| AND reg8, mreg8 | 22h | | 11-xxx-xxx | short | alux |
| AND reg8, mem8 | 22h | | mm-xxx-xxx | short | load, alux |
| AND reg16/32, mreg16/32 | 23h | | 11-xxx-xxx | short | alu |
| AND reg16/32, mem16/32 | 23h | | mm-xxx-xxx | short | load, alu |
| AND AL, imm8 | 24h | | | short | alux |
| AND EAX, imm16/32 | 25h | | | short | alu |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-----------------------------------|------------|-------------|-------------|-------------|-------------------|
| AND mreg8, imm8 | 80h | | 11-100-xxx | short | alux |
| AND mem8, imm8 | 80h | | mm-100-xxx | long | load, alux, store |
| AND mreg16/32, imm16/32 | 81h | | 11-100-xxx | short | alu |
| AND mem16/32, imm16/32 | 81h | | mm-100-xxx | long | load, alu, store |
| AND mreg16/32, imm8 (signed ext.) | 83h | | 11-100-xxx | short | alux |
| AND mem16/32, imm8 (signed ext.) | 83h | | mm-100-xxx | long | load, alux, store |
| ARPL mreg16, reg16 | 63h | | 11-xxx-xxx | vector | |
| ARPL mem16, reg16 | 63h | | mm-xxx-xxx | vector | |
| BOUND | 62h | | | vector | |
| BSF reg16/32, mreg16/32 | 0Fh | BCh | 11-xxx-xxx | vector | |
| BSF reg16/32, mem16/32 | 0Fh | BCh | mm-xxx-xxx | vector | |
| BSR reg16/32, mreg16/32 | 0Fh | BDh | 11-xxx-xxx | vector | |
| BSR reg16/32, mem16/32 | 0Fh | BDh | mm-xxx-xxx | vector | |
| BSWAP EAX | 0Fh | C8h | | long | alu |
| BSWAP ECX | 0Fh | C9h | | long | alu |
| BSWAP EDX | 0Fh | CAh | | long | alu |
| BSWAP EBX | 0Fh | CBh | | long | alu |
| BSWAP ESP | 0Fh | CCh | | long | alu |
| BSWAP EBP | 0Fh | CDh | | long | alu |
| BSWAP ESI | 0Fh | CEh | | long | alu |
| BSWAP EDI | 0Fh | CFh | | long | alu |
| BT mreg16/32, reg16/32 | 0Fh | A3h | 11-xxx-xxx | vector | |
| BT mem16/32, reg16/32 | 0Fh | A3h | mm-xxx-xxx | vector | |
| BT mreg16/32, imm8 | 0Fh | BAh | 11-100-xxx | vector | |
| BT mem16/32, imm8 | 0Fh | BAh | mm-100-xxx | vector | |
| BTC mreg16/32, reg16/32 | 0Fh | BBh | 11-xxx-xxx | vector | |
| BTC mem16/32, reg16/32 | 0Fh | BBh | mm-xxx-xxx | vector | |
| BTC mreg16/32, imm8 | 0Fh | BAh | 11-111-xxx | vector | |
| BTC mem16/32, imm8 | 0Fh | BAh | mm-111-xxx | vector | |
| BTR mreg16/32, reg16/32 | 0Fh | B3h | 11-xxx-xxx | vector | |
| BTR mem16/32, reg16/32 | 0Fh | B3h | mm-xxx-xxx | vector | |
| BTR mreg16/32, imm8 | 0Fh | BAh | 11-110-xxx | vector | |
| BTR mem16/32, imm8 | 0Fh | BAh | mm-110-xxx | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-----------------------------------|------------|-------------|-------------|-------------|-------------------|
| BTS mreg16/32, reg16/32 | 0Fh | ABh | 11-xxx-xxx | vector | |
| BTS mem16/32, reg16/32 | 0Fh | ABh | mm-xxx-xxx | vector | |
| BTS mreg16/32, imm8 | 0Fh | BAh | 11-101-xxx | vector | |
| BTS mem16/32, imm8 | 0Fh | BAh | mm-101-xxx | vector | |
| CALL full pointer | 9Ah | | | vector | |
| CALL near imm16/32 | E8h | | | short | store |
| CALL mem16:16/32 | FFh | | 11-011-xxx | vector | |
| CALL near mreg32 (indirect) | FFh | | 11-010-xxx | vector | |
| CALL near mem32 (indirect) | FFh | | mm-010-xxx | vector | |
| CBW/CWDE EAX | 98h | | | vector | |
| CLC | F8h | | | vector | |
| CLD | FCh | | | vector | |
| CLI | FAh | | | vector | |
| CLTS | 0Fh | 06h | | vector | |
| CMC | F5h | | | vector | |
| CMP mreg8, reg8 | 38h | | 11-xxx-xxx | short | alux |
| CMP mem8, reg8 | 38h | | mm-xxx-xxx | short | load, alux |
| CMP mreg16/32, reg16/32 | 39h | | 11-xxx-xxx | short | alu |
| CMP mem16/32, reg16/32 | 39h | | mm-xxx-xxx | short | load, alu |
| CMP reg8, mreg8 | 3Ah | | 11-xxx-xxx | short | alux |
| CMP reg8, mem8 | 3Ah | | mm-xxx-xxx | short | load, alux |
| CMP reg16/32, mreg16/32 | 3Bh | | 11-xxx-xxx | short | alu |
| CMP reg16/32, mem16/32 | 3Bh | | mm-xxx-xxx | short | load, alu |
| CMP AL, imm8 | 3Ch | | | short | alux |
| CMP EAX, imm16/32 | 3Dh | | | short | alu |
| CMP mreg8, imm8 | 80h | | 11-111-xxx | short | alux |
| CMP mem8, imm8 | 80h | | mm-111-xxx | short | load, alux |
| CMP mreg16/32, imm16/32 | 81h | | 11-111-xxx | short | alu |
| CMP mem16/32, imm16/32 | 81h | | mm-111-xxx | short | load, alu |
| CMP mreg16/32, imm8 (signed ext.) | 83h | | 11-111-xxx | long | load, alu |
| CMP mem16/32, imm8 (signed ext.) | 83h | | mm-111-xxx | long | load, alu |
| CMPSB mem8, mem8 | A6h | | | vector | |
| CMPSW mem16, mem32 | A7h | | | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|------------------------------------|------------|-------------|-------------|-------------|-------------------|
| CMPD mem32, mem32 | A7h | | | vector | |
| CMPXCHG mreg8, reg8 | 0Fh | B0h | 11-xxx-xxx | vector | |
| CMPXCHG mem8, reg8 | 0Fh | B0h | mm-xxx-xxx | vector | |
| CMPXCHG mreg16/32, reg16/32 | 0Fh | B1h | 11-xxx-xxx | vector | |
| CMPXCHG mem16/32, reg16/32 | 0Fh | B1h | mm-xxx-xxx | vector | |
| CMPXCHG8B EDX:EAX | 0Fh | C7h | 11-xxx-xxx | vector | |
| CMPXCHG8B mem64 | 0Fh | C7h | mm-xxx-xxx | vector | |
| CPUID | 0Fh | A2h | | vector | |
| CWD/CDQ EDX, EAX | 99h | | | vector | |
| DAA | 27h | | | vector | |
| DAS | 2Fh | | | vector | |
| DEC EAX | 48h | | | short | alu |
| DEC ECX | 49h | | | short | alu |
| DEC EDX | 4Ah | | | short | alu |
| DEC EBX | 4Bh | | | short | alu |
| DEC ESP | 4Ch | | | short | alu |
| DEC EBP | 4Dh | | | short | alu |
| DEC ESI | 4Eh | | | short | alu |
| DEC EDI | 4Fh | | | short | alu |
| DEC mreg8 | FEh | | 11-001-xxx | vector | |
| DEC mem8 | FEh | | mm-001-xxx | long | load, alux, store |
| DEC mreg16/32 | FFh | | 11-001-xxx | vector | |
| DEC mem16/32 | FFh | | mm-001-xxx | long | load, alu, store |
| DIV AL, mreg8 | F6h | | 11-110-xxx | vector | |
| DIV AL, mem8 | F6h | | mm-110-xxx | vector | |
| DIV EAX, mreg16/32 | F7h | | 11-110-xxx | vector | |
| DIV EAX, mem16/32 | F7h | | mm-110-xxx | vector | |
| IDIV mreg8 | F6h | | 11-111-xxx | vector | |
| IDIV mem8 | F6h | | mm-111-xxx | vector | |
| IDIV EAX, mreg16/32 | F7h | | 11-111-xxx | vector | |
| IDIV EAX, mem16/32 | F7h | | mm-111-xxx | vector | |
| IMUL reg16/32, imm16/32 | 69h | | 11-xxx-xxx | vector | |
| IMUL reg16/32, mreg16/32, imm16/32 | 69h | | 11-xxx-xxx | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|---|------------|-------------|-------------|-------------|-------------------|
| IMUL reg16/32, mem16/32, imm16/32 | 69h | | mm-xxx-xxx | vector | |
| IMUL reg16/32, imm8 (sign extended) | 6Bh | | 11-xxx-xxx | vector | |
| IMUL reg16/32, mreg16/32, imm8 (signed) | 6Bh | | 11-xxx-xxx | vector | |
| IMUL reg16/32, mem16/32, imm8 (signed) | 6Bh | | mm-xxx-xxx | vector | |
| IMUL AX, AL, mreg8 | F6h | | 11-101-xxx | vector | |
| IMUL AX, AL, mem8 | F6h | | mm-101-xxx | vector | |
| IMUL EDX:EAX, EAX, mreg16/32 | F7h | | 11-101-xxx | vector | |
| IMUL EDX:EAX, EAX, mem16/32 | F7h | | mm-101-xxx | vector | |
| IMUL reg16/32, mreg16/32 | 0Fh | AFh | 11-xxx-xxx | vector | |
| IMUL reg16/32, mem16/32 | 0Fh | AFh | mm-xxx-xxx | vector | |
| IN AL, imm8 | E4h | | | vector | |
| IN AX, imm8 | E5h | | | vector | |
| IN EAX, imm8 | E5h | | | vector | |
| IN AL, DX | ECh | | | vector | |
| IN AX, DX | EDh | | | vector | |
| IN EAX, DX | EDh | | | vector | |
| INC EAX | 40h | | | short | alu |
| INC ECX | 41h | | | short | alu |
| INC EDX | 42h | | | short | alu |
| INC EBX | 43h | | | short | alu |
| INC ESP | 44h | | | short | alu |
| INC EBP | 45h | | | short | alu |
| INC ESI | 46h | | | short | alu |
| INC EDI | 47h | | | short | alu |
| INC mreg8 | FEh | | 11-000-xxx | vector | |
| INC mem8 | FEh | | mm-000-xxx | long | load, alux, store |
| INC mreg16/32 | FFh | | 11-000-xxx | vector | |
| INC mem16/32 | FFh | | mm-000-xxx | long | load, alu, store |
| INVD | 0Fh | 08h | | vector | |
| INVLPG | 0Fh | 01h | mm-111-xxx | vector | |
| JO short disp8 | 70h | | | short | branch |
| JB/JNAE short disp8 | 71h | | | short | branch |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-----------------------------|------------|-------------|-------------|-------------|-------------------|
| JNO short disp8 | 71h | | | short | branch |
| JNB/JAE short disp8 | 73h | | | short | branch |
| JZ/JE short disp8 | 74h | | | short | branch |
| JNZ/JNE short disp8 | 75h | | | short | branch |
| JBE/JNA short disp8 | 76h | | | short | branch |
| JNBE/JA short disp8 | 77h | | | short | branch |
| JS short disp8 | 78h | | | short | branch |
| JNS short disp8 | 79h | | | short | branch |
| JP/JPE short disp8 | 7Ah | | | short | branch |
| JNP/JPO short disp8 | 7Bh | | | short | branch |
| JL/JNGE short disp8 | 7Ch | | | short | branch |
| JNL/JGE short disp8 | 7Dh | | | short | branch |
| JLE/JNG short disp8 | 7Eh | | | short | branch |
| JNLE/JG short disp8 | 7Fh | | | short | branch |
| JCXZ/JEC short disp8 | E3h | | | vector | |
| JO near disp16/32 | 0Fh | 80h | | short | branch |
| JNO near disp16/32 | 0Fh | 81h | | short | branch |
| JB/JNAE near disp16/32 | 0Fh | 82h | | short | branch |
| JNB/JAE near disp16/32 | 0Fh | 83h | | short | branch |
| JZ/JE near disp16/32 | 0Fh | 84h | | short | branch |
| JNZ/JNE near disp16/32 | 0Fh | 85h | | short | branch |
| JBE/JNA near disp16/32 | 0Fh | 86h | | short | branch |
| JNBE/JA near disp16/32 | 0Fh | 87h | | short | branch |
| JS near disp16/32 | 0Fh | 88h | | short | branch |
| JNS near disp16/32 | 0Fh | 89h | | short | branch |
| JP/JPE near disp16/32 | 0Fh | 8Ah | | short | branch |
| JNP/JPO near disp16/32 | 0Fh | 8Bh | | short | branch |
| JL/JNGE near disp16/32 | 0Fh | 8Ch | | short | branch |
| JNL/JGE near disp16/32 | 0Fh | 8Dh | | short | branch |
| JLE/JNG near disp16/32 | 0Fh | 8Eh | | short | branch |
| JNLE/JG near disp16/32 | 0Fh | 8Fh | | short | branch |
| JMP near disp16/32 (direct) | E9h | | | short | branch |
| JMP far disp32/48 (direct) | EAh | | | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-------------------------------|------------|-------------|-------------|-------------|-------------------|
| JMP disp8 (short) | EBh | | | short | branch |
| JMP far mreg32 (indirect) | EFh | | 11-101-xxx | vector | |
| JMP far mem32 (indirect) | EFh | | mm-101-xxx | vector | |
| JMP near mreg16/32 (indirect) | FFh | | 11-100-xxx | vector | |
| JMP near mem16/32 (indirect) | FFh | | mm-100-xxx | vector | |
| LAHF | 9Fh | | | vector | |
| LAR reg16/32, mreg16/32 | 0Fh | 02h | 11-xxx-xxx | vector | |
| LAR reg16/32, mem16/32 | 0Fh | 02h | mm-xxx-xxx | vector | |
| LDS reg16/32, mem32/48 | C5h | | mm-xxx-xxx | vector | |
| LEA reg16/32, mem16/32 | 8Dh | | mm-xxx-xxx | short | load, alu |
| LEAVE | C9h | | | long | load, alu, alu |
| LES reg16/32, mem32/48 | C4h | | mm-xxx-xxx | vector | |
| LFS reg16/32, mem32/48 | 0Fh | B4h | | vector | |
| LGDT mem48 | 0Fh | 01h | mm-010-xxx | vector | |
| LGS reg16/32, mem32/48 | 0Fh | B5h | | vector | |
| LIDT mem48 | 0Fh | 01h | mm-011-xxx | vector | |
| LLDT mreg16 | 0Fh | 00h | 11-010-xxx | vector | |
| LLDT mem16 | 0Fh | 00h | mm-010-xxx | vector | |
| LMSW mreg16 | 0Fh | 01h | 11-100-xxx | vector | |
| LMSW mem16 | 0Fh | 01h | mm-100-xxx | vector | |
| LODSB AL, mem8 | ACh | | | long | load, alu |
| LODSW AX, mem16 | ADh | | | long | load, alu |
| LODSD EAX, mem32 | ADh | | | long | load, alu |
| LOOP disp8 | E2h | | | short | alu, branch |
| LOOPE/LOOPZ disp8 | E1h | | | vector | |
| LOOPNE/LOOPNZ disp8 | E0h | | | vector | |
| LSL reg16/32, mreg16/32 | 0Fh | 03h | 11-xxx-xxx | vector | |
| LSL reg16/32, mem16/32 | 0Fh | 03h | mm-xxx-xxx | vector | |
| LSS reg16/32, mem32/48 | 0Fh | B2h | mm-xxx-xxx | vector | |
| LTR mreg16 | 0Fh | 00h | 11-011-xxx | vector | |
| LTR mem16 | 0Fh | 00h | mm-011-xxx | vector | |
| MOV mreg8, reg8 | 88h | | 11-xxx-xxx | short | alux |
| MOV mem8, reg8 | 88h | | mm-xxx-xxx | short | store |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-------------------------|------------|-------------|-------------|-------------|-------------------|
| MOV mreg16/32, reg16/32 | 89h | | 11-xxx-xxx | short | alu |
| MOV mem16/32, reg16/32 | 89h | | mm-xxx-xxx | short | store |
| MOV reg8, mreg8 | 8Ah | | 11-xxx-xxx | short | alux |
| MOV reg8, mem8 | 8Ah | | mm-xxx-xxx | short | load |
| MOV reg16/32, mreg16/32 | 8Bh | | 11-xxx-xxx | short | alu |
| MOV reg16/32, mem16/32 | 8Bh | | mm-xxx-xxx | short | load |
| MOV mreg16, segment reg | 8Ch | | 11-xxx-xxx | long | load |
| MOV mem16, segment reg | 8Ch | | mm-xxx-xxx | vector | |
| MOV segment reg, mreg16 | 8Eh | | 11-xxx-xxx | vector | |
| MOV segment reg, mem16 | 8Eh | | mm-xxx-xxx | vector | |
| MOV AL, mem8 | A0h | | | short | load |
| MOV EAX, mem16/32 | A1h | | | short | load |
| MOV mem8, AL | A2h | | | short | store |
| MOV mem16/32, EAX | A3h | | | short | store |
| MOV AL, imm8 | B0h | | | short | limm |
| MOV CL, imm8 | B1h | | | short | limm |
| MOV DL, imm8 | B2h | | | short | limm |
| MOV BL, imm8 | B3h | | | short | limm |
| MOV AH, imm8 | B4h | | | short | limm |
| MOV CH, imm8 | B5h | | | short | limm |
| MOV DH, imm8 | B6h | | | short | limm |
| MOV BH, imm8 | B7h | | | short | limm |
| MOV EAX, imm16/32 | B8h | | | short | limm |
| MOV ECX, imm16/32 | B9h | | | short | limm |
| MOV EDX, imm16/32 | BAh | | | short | limm |
| MOV EBX, imm16/32 | BBh | | | short | limm |
| MOV ESP, imm16/32 | BCh | | | short | limm |
| MOV EBP, imm16/32 | BDh | | | short | limm |
| MOV ESI, imm16/32 | BEh | | | short | limm |
| MOV EDI, imm16/32 | BFh | | | short | limm |
| MOV mreg8, imm8 | C6h | | 11-000-xxx | short | limm |
| MOV mem8, imm8 | C6h | | mm-000-xxx | long | store |
| MOV mreg16/32, imm16/32 | C7h | | 11-000-xxx | short | limm |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|------------------------|------------|-------------|-------------|-------------|-------------------------|
| MOV mem16/32, imm16/32 | C7h | | mm-000-xxx | long | store |
| MOVS mem8, mem8 | A4h | | | long | load, store, alux, alux |
| MOVSD mem16, mem16 | A5h | | | long | load, store, alu, alu |
| MOVSW mem32, mem32 | A5h | | | long | load, store, alu, alu |
| MOVX reg16/32, mreg8 | 0Fh | BEh | 11-xxx-xxx | short | alu |
| MOVX reg16/32, mem8 | 0Fh | BEh | mm-xxx-xxx | short | load, alu |
| MOVX reg32, mreg16 | 0Fh | BFh | 11-xxx-xxx | short | alu |
| MOVX reg32, mem16 | 0Fh | BFh | mm-xxx-xxx | short | load, alu |
| MOVZX reg16/32, mreg8 | 0Fh | B6h | 11-xxx-xxx | short | alu |
| MOVZX reg16/32, mem8 | 0Fh | B6h | mm-xxx-xxx | short | load, alu |
| MOVZX reg32, mreg16 | 0Fh | B7h | 11-xxx-xxx | short | alu |
| MOVZX reg32, mem16 | 0Fh | B7h | mm-xxx-xxx | short | load, alu |
| MUL AL, mreg8 | F6h | | 11-100-xxx | vector | |
| MUL AL, mem8 | F6h | | mm-100-xxx | vector | |
| MUL EAX, mreg16/32 | F7h | | 11-100-xxx | vector | |
| MUL EAX, mem16/32 | F7h | | mm-100-xxx | vector | |
| NEG mreg8 | F6h | | 11-011-xxx | short | alux |
| NEG mem8 | F6h | | mm-011-xxx | vector | |
| NEG mreg16/32 | F7h | | 11-011-xxx | short | alu |
| NEG mem16/32 | F7h | | mm-011-xxx | vector | |
| NOP (XCHG EAX, EAX) | 90h | | | short | limm |
| NOT mreg8 | F6h | | 11-010-xxx | short | alux |
| NOT mem8 | F6h | | mm-010-xxx | vector | |
| NOT mreg16/32 | F7h | | 11-010-xxx | short | alu |
| NOT mem16/32 | F7h | | mm-010-xxx | vector | |
| OR mreg8, reg8 | 08h | | 11-xxx-xxx | short | alux |
| OR mem8, reg8 | 08h | | mm-xxx-xxx | long | load, alux, store |
| OR mreg16/32, reg16/32 | 09h | | 11-xxx-xxx | short | alu |
| OR mem16/32, reg16/32 | 09h | | mm-xxx-xxx | long | load, alu, store |
| OR reg8, mreg8 | 0Ah | | 11-xxx-xxx | short | alux |
| OR reg8, mem8 | 0Ah | | mm-xxx-xxx | short | load, alux |
| OR reg16/32, mreg16/32 | 0Bh | | 11-xxx-xxx | short | alu |
| OR reg16/32, mem16/32 | 0Bh | | mm-xxx-xxx | short | load, alu |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|----------------------------------|------------|-------------|-------------|-------------|-------------------|
| OR AL, imm8 | 0Ch | | | short | alux |
| OR EAX, imm16/32 | 0Dh | | | short | alu |
| OR mreg8, imm8 | 80h | | 11-001-xxx | short | alux |
| OR mem8, imm8 | 80h | | mm-001-xxx | long | load, alux, store |
| OR mreg16/32, imm16/32 | 81h | | 11-001-xxx | short | alu |
| OR mem16/32, imm16/32 | 81h | | mm-001-xxx | long | load, alu, store |
| OR mreg16/32, imm8 (signed ext.) | 83h | | 11-001-xxx | short | alux |
| OR mem16/32, imm8 (signed ext.) | 83h | | mm-001-xxx | long | load, alux, store |
| OUT imm8, AL | E6h | | | vector | |
| OUT imm8, AX | E7h | | | vector | |
| OUT imm8, EAX | E7h | | | vector | |
| OUT DX, AL | EEh | | | vector | |
| OUT DX, AX | EFh | | | vector | |
| OUT DX, EAX | EFh | | | vector | |
| POP ES | 07h | | | vector | |
| POP SS | 17h | | | vector | |
| POP DS | 1Fh | | | vector | |
| POP FS | 0Fh | A1h | | vector | |
| POP GS | 0Fh | A9h | | vector | |
| POP EAX | 58h | | | short | load, alu |
| POP ECX | 59h | | | short | load, alu |
| POP EDX | 5Ah | | | short | load, alu |
| POP EBX | 5Bh | | | short | load, alu |
| POP ESP | 5Ch | | | short | load, alu |
| POP EBP | 5Dh | | | short | load, alu |
| POP ESI | 5Eh | | | short | load, alu |
| POP EDI | 5Fh | | | short | load, alu |
| POP mreg 16/32 | 8Fh | | 11-000-xxx | short | load, alu |
| POP mem 16/32 | 8Fh | | mm-000-xxx | long | load, store, alu |
| POPA/POPAD | 61h | | | vector | |
| POPF/POPFD | 9Dh | | | vector | |
| PUSH ES | 06h | | | long | load, store |
| PUSH CS | 0Eh | | | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|----------------------|------------|-------------|-------------|-------------|-------------------|
| PUSH FS | 0Fh | A0h | | vector | |
| PUSH GS | 0Fh | A8h | | vector | |
| PUSH SS | 16h | | | vector | |
| PUSH DS | 1Eh | | | long | load, store |
| PUSH EAX | 50h | | | short | store |
| PUSH ECX | 51h | | | short | store |
| PUSH EDX | 52h | | | short | store |
| PUSH EBX | 53h | | | short | store |
| PUSH ESP | 54h | | | short | store |
| PUSH EBP | 55h | | | short | store |
| PUSH ESI | 56h | | | short | store |
| PUSH EDI | 57h | | | short | store |
| PUSH imm8 | 6Ah | | | long | store |
| PUSH imm16/32 | 68h | | | long | store |
| PUSH mreg16/32 | FFh | | 11-110-xxx | vector | |
| PUSH mem16/32 | FFh | | mm-110-xxx | long | load, store |
| PUSHA/PUSHAD | 60h | | | vector | |
| PUSHF/PUSHFD | 9Ch | | | vector | |
| RCL mreg8, imm8 | C0h | | 11-010-xxx | vector | |
| RCL mem8, imm8 | C0h | | mm-010-xxx | vector | |
| RCL mreg16/32, imm8 | C1h | | 11-010-xxx | vector | |
| RCL mem16/32, imm8 | C1h | | mm-010-xxx | vector | |
| RCL mreg8, 1 | D0h | | 11-010-xxx | vector | |
| RCL mem8, 1 | D0h | | mm-010-xxx | vector | |
| RCL mreg16/32, 1 | D1h | | 11-010-xxx | vector | |
| RCL mem16/32, 1 | D1h | | mm-010-xxx | vector | |
| RCL mreg8, CL | D2h | | 11-010-xxx | vector | |
| RCL mem8, CL | D2h | | mm-010-xxx | vector | |
| RCL mreg16/32, CL | D3h | | 11-010-xxx | vector | |
| RCL mem16/32, CL | D3h | | mm-010-xxx | vector | |
| RCR mreg8, imm8 | C0h | | 11-011-xxx | vector | |
| RCR mem8, imm8 | C0h | | mm-011-xxx | vector | |
| RCR mreg16/32, imm8 | C1h | | 11-011-xxx | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|----------------------|------------|-------------|-------------|-------------|-------------------|
| RCR mem16/32, imm8 | C1h | | mm-011-xxx | vector | |
| RCR mreg8, 1 | D0h | | 11-011-xxx | vector | |
| RCR mem8, 1 | D0h | | mm-011-xxx | vector | |
| RCR mreg16/32, 1 | D1h | | 11-011-xxx | vector | |
| RCR mem16/32, 1 | D1h | | mm-011-xxx | vector | |
| RCR mreg8, CL | D2h | | 11-011-xxx | vector | |
| RCR mem8, CL | D2h | | mm-011-xxx | vector | |
| RCR mreg16/32, CL | D3h | | 11-011-xxx | vector | |
| RCR mem16/32, CL | D3h | | mm-011-xxx | vector | |
| RET near imm16 | C2h | | | vector | |
| RET near | C3h | | | vector | |
| RET far imm16 | CAh | | | vector | |
| RET far | CBh | | | vector | |
| ROL mreg8, imm8 | C0h | | 11-000-xxx | vector | |
| ROL mem8, imm8 | C0h | | mm-000-xxx | vector | |
| ROL mreg16/32, imm8 | C1h | | 11-000-xxx | vector | |
| ROL mem16/32, imm8 | C1h | | mm-000-xxx | vector | |
| ROL mreg8, 1 | D0h | | 11-000-xxx | vector | |
| ROL mem8, 1 | D0h | | mm-000-xxx | vector | |
| ROL mreg16/32, 1 | D1h | | 11-000-xxx | vector | |
| ROL mem16/32, 1 | D1h | | mm-000-xxx | vector | |
| ROL mreg8, CL | D2h | | 11-000-xxx | vector | |
| ROL mem8, CL | D2h | | mm-000-xxx | vector | |
| ROL mreg16/32, CL | D3h | | 11-000-xxx | vector | |
| ROL mem16/32, CL | D3h | | mm-000-xxx | vector | |
| ROR mreg8, imm8 | C0h | | 11-001-xxx | vector | |
| ROR mem8, imm8 | C0h | | mm-001-xxx | vector | |
| ROR mreg16/32, imm8 | C1h | | 11-001-xxx | vector | |
| ROR mem16/32, imm8 | C1h | | mm-001-xxx | vector | |
| ROR mreg8, 1 | D0h | | 11-001-xxx | vector | |
| ROR mem8, 1 | D0h | | mm-001-xxx | vector | |
| ROR mreg16/32, 1 | D1h | | 11-001-xxx | vector | |
| ROR mem16/32, 1 | D1h | | mm-001-xxx | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-----------------------------------|------------|-------------|-------------|-------------|-------------------|
| ROR mreg8, CL | D2h | | 11-001-xxx | vector | |
| ROR mem8, CL | D2h | | mm-001-xxx | vector | |
| ROR mreg16/32, CL | D3h | | 11-001-xxx | vector | |
| ROR mem16/32, CL | D3h | | mm-001-xxx | vector | |
| SAHF | 9Eh | | | vector | |
| SAR mreg8, imm8 | C0h | | 11-111-xxx | short | alux |
| SAR mem8, imm8 | C0h | | mm-111-xxx | vector | |
| SAR mreg16/32, imm8 | C1h | | 11-111-xxx | short | alu |
| SAR mem16/32, imm8 | C1h | | mm-111-xxx | vector | |
| SAR mreg8, 1 | D0h | | 11-111-xxx | short | alux |
| SAR mem8, 1 | D0h | | mm-111-xxx | vector | |
| SAR mreg16/32, 1 | D1h | | 11-111-xxx | short | alu |
| SAR mem16/32, 1 | D1h | | mm-111-xxx | vector | |
| SAR mreg8, CL | D2h | | 11-111-xxx | short | alux |
| SAR mem8, CL | D2h | | mm-111-xxx | vector | |
| SAR mreg16/32, CL | D3h | | 11-111-xxx | short | alu |
| SAR mem16/32, CL | D3h | | mm-111-xxx | vector | |
| SBB mreg8, reg8 | 18h | | 11-xxx-xxx | vector | |
| SBB mem8, reg8 | 18h | | mm-xxx-xxx | vector | |
| SBB mreg16/32, reg16/32 | 19h | | 11-xxx-xxx | vector | |
| SBB mem16/32, reg16/32 | 19h | | mm-xxx-xxx | vector | |
| SBB reg8, mreg8 | 1Ah | | 11-xxx-xxx | vector | |
| SBB reg8, mem8 | 1Ah | | mm-xxx-xxx | vector | |
| SBB reg16/32, mreg16/32 | 1Bh | | 11-xxx-xxx | vector | |
| SBB reg16/32, mem16/32 | 1Bh | | mm-xxx-xxx | vector | |
| SBB AL, imm8 | 1Ch | | | vector | |
| SBB EAX, imm16/32 | 1Dh | | | vector | |
| SBB mreg8, imm8 | 80h | | 11-011-xxx | vector | |
| SBB mem8, imm8 | 80h | | mm-011-xxx | vector | |
| SBB mreg16/32, imm16/32 | 81h | | 11-011-xxx | vector | |
| SBB mem16/32, imm16/32 | 81h | | mm-011-xxx | vector | |
| SBB mreg16/32, imm8 (signed ext.) | 83h | | 11-011-xxx | vector | |
| SBB mem16/32, imm8 (signed ext.) | 83h | | mm-011-xxx | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|----------------------|------------|-------------|-------------|-------------|-------------------|
| SCASB AL, mem8 | AEh | | | vector | |
| SCASW AX, mem16 | AFh | | | vector | |
| SCASD EAX, mem32 | AFh | | | vector | |
| SETO mreg8 | 0Fh | 90h | 11-xxx-xxx | vector | |
| SETO mem8 | 0Fh | 90h | mm-xxx-xxx | vector | |
| SETNO mreg8 | 0Fh | 91h | 11-xxx-xxx | vector | |
| SETNO mem8 | 0Fh | 91h | mm-xxx-xxx | vector | |
| SETB/SETNAE mreg8 | 0Fh | 92h | 11-xxx-xxx | vector | |
| SETB/SETNAE mem8 | 0Fh | 92h | mm-xxx-xxx | vector | |
| SETNB/SETAE mreg8 | 0Fh | 93h | 11-xxx-xxx | vector | |
| SETNB/SETAE mem8 | 0Fh | 93h | mm-xxx-xxx | vector | |
| SETZ/SETE mreg8 | 0Fh | 94h | 11-xxx-xxx | vector | |
| SETZ/SETE mem8 | 0Fh | 94h | mm-xxx-xxx | vector | |
| SETNZ/SETNE mreg8 | 0Fh | 95h | 11-xxx-xxx | vector | |
| SETNZ/SETNE mem8 | 0Fh | 95h | mm-xxx-xxx | vector | |
| SETBE/SETNA mreg8 | 0Fh | 96h | 11-xxx-xxx | vector | |
| SETBE/SETNA mem8 | 0Fh | 96h | mm-xxx-xxx | vector | |
| SETNBE/SETA mreg8 | 0Fh | 97h | 11-xxx-xxx | vector | |
| SETNBE/SETA mem8 | 0Fh | 97h | mm-xxx-xxx | vector | |
| SETS mreg8 | 0Fh | 98h | 11-xxx-xxx | vector | |
| SETS mem8 | 0Fh | 98h | mm-xxx-xxx | vector | |
| SETNS mreg8 | 0Fh | 99h | 11-xxx-xxx | vector | |
| SETNS mem8 | 0Fh | 99h | mm-xxx-xxx | vector | |
| SETP/SETPE mreg8 | 0Fh | 9Ah | 11-xxx-xxx | vector | |
| SETP/SETPE mem8 | 0Fh | 9Ah | mm-xxx-xxx | vector | |
| SETNP/SETPO mreg8 | 0Fh | 9Bh | 11-xxx-xxx | vector | |
| SETNP/SETPO mem8 | 0Fh | 9Bh | mm-xxx-xxx | vector | |
| SETL/SETNGE mreg8 | 0Fh | 9Ch | 11-xxx-xxx | vector | |
| SETL/SETNGE mem8 | 0Fh | 9Ch | mm-xxx-xxx | vector | |
| SETNL/SETGE mreg8 | 0Fh | 9Dh | 11-xxx-xxx | vector | |
| SETNL/SETGE mem8 | 0Fh | 9Dh | mm-xxx-xxx | vector | |
| SETLE/SETNG mreg8 | 0Fh | 9Eh | 11-xxx-xxx | vector | |
| SETLE/SETNG mem8 | 0Fh | 9Eh | mm-xxx-xxx | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|--------------------------------|------------|-------------|-------------|-------------|-------------------|
| SETNLE/SETG mreg8 | 0Fh | 9Fh | 11-xxx-xxx | vector | |
| SETNLE/SETG mem8 | 0Fh | 9Fh | mm-xxx-xxx | vector | |
| SGDT mem48 | 0Fh | 01h | mm-000-xxx | vector | |
| SIDT mem48 | 0Fh | 01h | mm-001-xxx | vector | |
| SHL/SAL mreg8, imm8 | C0h | | 11-100-xxx | short | alux |
| SHL/SAL mem8, imm8 | C0h | | mm-100-xxx | vector | |
| SHL/SAL mreg16/32, imm8 | C1h | | 11-100-xxx | short | alu |
| SHL/SAL mem16/32, imm8 | C1h | | mm-100-xxx | vector | |
| SHL/SAL mreg8, 1 | D0h | | 11-100-xxx | short | alux |
| SHL/SAL mem8, 1 | D0h | | mm-100-xxx | vector | |
| SHL/SAL mreg16/32, 1 | D1h | | 11-100-xxx | short | alu |
| SHL/SAL mem16/32, 1 | D1h | | mm-100-xxx | vector | |
| SHL/SAL mreg8, CL | D2h | | 11-100-xxx | short | alux |
| SHL/SAL mem8, CL | D2h | | mm-100-xxx | vector | |
| SHL/SAL mreg16/32, CL | D3h | | 11-100-xxx | short | alu |
| SHL/SAL mem16/32, CL | D3h | | mm-100-xxx | vector | |
| SHR mreg8, imm8 | C0h | | 11-101-xxx | short | alux |
| SHR mem8, imm8 | C0h | | mm-101-xxx | vector | |
| SHR mreg16/32, imm8 | C1h | | 11-101-xxx | short | alu |
| SHR mem16/32, imm8 | C1h | | mm-101-xxx | vector | |
| SHR mreg8, 1 | D0h | | 11-101-xxx | short | alux |
| SHR mem8, 1 | D0h | | mm-101-xxx | vector | |
| SHR mreg16/32, 1 | D1h | | 11-101-xxx | short | alu |
| SHR mem16/32, 1 | D1h | | mm-101-xxx | vector | |
| SHR mreg8, CL | D2h | | 11-101-xxx | short | alux |
| SHR mem8, CL | D2h | | mm-101-xxx | vector | |
| SHR mreg16/32, CL | D3h | | 11-101-xxx | short | alu |
| SHR mem16/32, CL | D3h | | mm-101-xxx | vector | |
| SHLD mreg16/32, reg16/32, imm8 | 0Fh | A4h | 11-xxx-xxx | vector | |
| SHLD mem16/32, reg16/32, imm8 | 0Fh | A4h | mm-xxx-xxx | vector | |
| SHLD mreg16/32, reg16/32, CL | 0Fh | A5h | 11-xxx-xxx | vector | |
| SHLD mem16/32, reg16/32, CL | 0Fh | A5h | mm-xxx-xxx | vector | |
| SHRD mreg16/32, reg16/32, imm8 | 0Fh | ACH | 11-xxx-xxx | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-----------------------------------|------------|-------------|-------------|-------------|-------------------|
| SHRD mem16/32, reg16/32, imm8 | 0Fh | ACh | mm-xxx-xxx | vector | |
| SHRD mreg16/32, reg16/32, CL | 0Fh | ADh | 11-xxx-xxx | vector | |
| SHRD mem16/32, reg16/32, CL | 0Fh | ADh | mm-xxx-xxx | vector | |
| SLDT mreg16 | 0Fh | 00h | 11-000-xxx | vector | |
| SLDT mem16 | 0Fh | 00h | mm-000-xxx | vector | |
| SMSW mreg16 | 0Fh | 01h | 11-100-xxx | vector | |
| SMSW mem16 | 0Fh | 01h | mm-100-xxx | vector | |
| STC | F9h | | | vector | |
| STD | FDh | | | vector | |
| STI | FBh | | | vector | |
| STOSB mem8, AL | AAh | | | long | store, alux |
| STOSW mem16, AX | ABh | | | long | store, alux |
| STOSD mem32, EAX | ABh | | | long | store, alux |
| STR mreg16 | 0Fh | 00h | 11-001-xxx | vector | |
| STR mem16 | 0Fh | 00h | mm-001-xxx | vector | |
| SUB mreg8, reg8 | 28h | | 11-xxx-xxx | short | alux |
| SUB mem8, reg8 | 28h | | mm-xxx-xxx | long | load, alux, store |
| SUB mreg16/32, reg16/32 | 29h | | 11-xxx-xxx | short | alu |
| SUB mem16/32, reg16/32 | 29h | | mm-xxx-xxx | long | load, alu, store |
| SUB reg8, mreg8 | 2Ah | | 11-xxx-xxx | short | alux |
| SUB reg8, mem8 | 2Ah | | mm-xxx-xxx | short | load, alux |
| SUB reg16/32, mreg16/32 | 2Bh | | 11-xxx-xxx | short | alu |
| SUB reg16/32, mem16/32 | 2Bh | | mm-xxx-xxx | short | load, alu |
| SUB AL, imm8 | 2Ch | | | short | alux |
| SUB EAX, imm16/32 | 2Dh | | | short | alu |
| SUB mreg8, imm8 | 80h | | 11-101-xxx | short | alux |
| SUB mem8, imm8 | 80h | | mm-101-xxx | long | load, alux, store |
| SUB mreg16/32, imm16/32 | 81h | | 11-101-xxx | short | alu |
| SUB mem16/32, imm16/32 | 81h | | mm-101-xxx | long | load, alu, store |
| SUB mreg16/32, imm8 (signed ext.) | 83h | | 11-101-xxx | short | alux |
| SUB mem16/32, imm8 (signed ext.) | 83h | | mm-101-xxx | long | load, alux, store |
| SYSCALL | 0Fh | 05h | | vector | |
| SYSRET | 0Fh | 07h | | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|--------------------------|------------|-------------|-------------|-------------|-------------------|
| TEST mreg8, reg8 | 84h | | 11-xxx-xxx | short | alux |
| TEST mem8, reg8 | 84h | | mm-xxx-xxx | vector | |
| TEST mreg16/32, reg16/32 | 85h | | 11-xxx-xxx | short | alu |
| TEST mem16/32, reg16/32 | 85h | | mm-xxx-xxx | vector | |
| TEST AL, imm8 | A8h | | | long | alux |
| TEST EAX, imm16/32 | A9h | | | long | alu |
| TEST mreg8, imm8 | F6h | | 11-000-xxx | long | alux |
| TEST mem8, imm8 | F6h | | mm-000-xxx | long | load, alux |
| TEST mreg16/32, imm16/32 | F7h | | 11-000-xxx | long | alu |
| TEST mem16/32, imm16/32 | F7h | | mm-000-xxx | long | load, alu |
| VERR mreg16 | 0Fh | 00h | 11-100-xxx | vector | |
| VERR mem16 | 0Fh | 00h | mm-100-xxx | vector | |
| VERW mreg16 | 0Fh | 00h | 11-101-xxx | vector | |
| VERW mem16 | 0Fh | 00h | mm-101-xxx | vector | |
| WAIT | 9Bh | | | vector | |
| WBINVD | 0Fh | 09h | | vector | |
| XADD mreg8, reg8 | 0Fh | C0h | 11-100-xxx | vector | |
| XADD mem8, reg8 | 0Fh | C0h | mm-100-xxx | vector | |
| XADD mreg16/32, reg16/32 | 0Fh | C1h | 11-101-xxx | vector | |
| XADD mem16/32, reg16/32 | 0Fh | C1h | mm-101-xxx | vector | |
| XCHG reg8, mreg8 | 86h | | 11-xxx-xxx | vector | |
| XCHG reg8, mem8 | 86h | | mm-xxx-xxx | vector | |
| XCHG reg16/32, mreg16/32 | 87h | | 11-xxx-xxx | vector | |
| XCHG reg16/32, mem16/32 | 87h | | mm-xxx-xxx | vector | |
| XCHG EAX, EAX | 90h | | | short | limm |
| XCHG EAX, ECX | 91h | | | long | alu, alu, alu |
| XCHG EAX, EDX | 92h | | | long | alu, alu, alu |
| XCHG EAX, EBX | 93h | | | long | alu, alu, alu |
| XCHG EAX, ESP | 94h | | | long | alu, alu, alu |
| XCHG EAX, EBP | 95h | | | long | alu, alu, alu |
| XCHG EAX, ESI | 96h | | | long | alu, alu, alu |
| XCHG EAX, EDI | 97h | | | long | alu, alu, alu |
| XLAT | D7h | | | vector | |

Table 12. Integer Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations |
|-----------------------------------|------------|-------------|-------------|-------------|-------------------|
| XOR mreg8, reg8 | 30h | | 11-xxx-xxx | short | alux |
| XOR mem8, reg8 | 30h | | mm-xxx-xxx | long | load, alux, store |
| XOR mreg16/32, reg16/32 | 31h | | 11-xxx-xxx | short | alu |
| XOR mem16/32, reg16/32 | 31h | | mm-xxx-xxx | long | load, alu, store |
| XOR reg8, mreg8 | 32h | | 11-xxx-xxx | short | alux |
| XOR reg8, mem8 | 32h | | mm-xxx-xxx | short | load, alux |
| XOR reg16/32, mreg16/32 | 33h | | 11-xxx-xxx | short | alu |
| XOR reg16/32, mem16/32 | 33h | | mm-xxx-xxx | short | load, alu |
| XOR AL, imm8 | 34h | | | short | alux |
| XOR EAX, imm16/32 | 35h | | | short | alu |
| XOR mreg8, imm8 | 80h | | 11-110-xxx | short | alux |
| XOR mem8, imm8 | 80h | | mm-110-xxx | long | load, alux, store |
| XOR mreg16/32, imm16/32 | 81h | | 11-110-xxx | short | alu |
| XOR mem16/32, imm16/32 | 81h | | mm-110-xxx | long | load, alu, store |
| XOR mreg16/32, imm8 (signed ext.) | 83h | | 11-110-xxx | short | alux |
| XOR mem16/32, imm8 (signed ext.) | 83h | | mm-110-xxx | long | load, alux, store |

Table 13. Floating-Point Instructions

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|--|------------|-------------|-------------|-------------|-------------------|------|
| F2XM1 | D9h | F0h | | short | float | |
| FABS | D9h | F1h | | short | float | |
| FADD ST(0), ST(i) | D8h | | 11-000-xxx | short | float | * |
| FADD ST(0), mem32real | D8h | | mm-000-xxx | short | fload, float | |
| FADD ST(i), ST(0) | DCh | | 11-000-xxx | short | float | * |
| FADD ST(0), mem64real | DCh | | mm-000-xxx | short | fload, float | |
| FADDP ST(i), ST(0) | DEh | | 11-000-xxx | short | float | * |
| FBLD | DFh | | mm-100-xxx | vector | | |
| FBSTP | DFh | | mm-110-xxx | vector | | |
| FCHS | D9h | E0h | | short | float | |
| FCLEX | DBh | E2h | | vector | | |
| Note: | | | | | | |
| * The last three bits of the modR/M byte select the stack entry ST(i). | | | | | | |

Table 13. Floating-Point Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|--|------------|-------------|-------------|-------------|-------------------|------|
| FCOM ST(0), ST(i) | D8h | | 11-010-xxx | short | float | * |
| FCOM ST(0), mem32real | D8h | | mm-010-xxx | short | fload, float | |
| FCOM ST(0), mem64real | DCh | | mm-010-xxx | short | fload, float | |
| FCOMP ST(0), ST(i) | D8h | | 11-011-xxx | short | float | * |
| FCOMP ST(0), mem32real | D8h | | mm-011-xxx | short | fload, float | |
| FCOMP ST(0), mem64real | DCh | | mm-011-xxx | short | fload, float | |
| FCOMPP | DEh | D9h | 11-011-001 | short | float | |
| FCOS | D9h | FFh | | short | float | |
| FDECSTP | D9h | F6h | | short | float | |
| FDIV ST(0), ST(i) (single precision) | D8h | | 11-110-xxx | short | float | * |
| FDIV ST(0), ST(i) (double precision) | D8h | | 11-110-xxx | short | float | * |
| FDIV ST(0), ST(i) (extended precision) | D8h | | 11-110-xxx | short | float | * |
| FDIV ST(i), ST(0) (single precision) | DCh | | 11-111-xxx | short | float | * |
| FDIV ST(i), ST(0) (double precision) | DCh | | 11-111-xxx | short | float | * |
| FDIV ST(i), ST(0) (extended precision) | DCh | | 11-111-xxx | short | float | * |
| FDIV ST(0), mem32real | D8h | | mm-110-xxx | short | fload, float | |
| FDIV ST(0), mem64real | DCh | | mm-110-xxx | short | fload, float | |
| FDIVP ST(0), ST(i) | DEh | | 11-111-xxx | short | float | * |
| FDIVR ST(0), ST(i) | D8h | | 11-110-xxx | short | float | * |
| FDIVR ST(i), ST(0) | DCh | | 11-111-xxx | short | float | * |
| FDIVR ST(0), mem32real | D8h | | mm-111-xxx | short | fload, float | |
| FDIVR ST(0), mem64real | DCh | | mm-111-xxx | short | fload, float | |
| FDIVRP ST(i), ST(0) | DEh | | 11-110-xxx | short | float | * |
| FFREE ST(i) | DDh | | 11-000-xxx | short | float | * |
| FIADD ST(0), mem32int | DAh | | mm-000-xxx | short | fload, float | |
| FIADD ST(0), mem16int | DEh | | mm-000-xxx | short | fload, float | |
| FICOM ST(0), mem32int | DAh | | mm-010-xxx | short | fload, float | |
| FICOM ST(0), mem16int | DEh | | mm-010-xxx | short | fload, float | |
| FICOMP ST(0), mem32int | DAh | | mm-011-xxx | short | fload, float | |
| FICOMP ST(0), mem16int | DEh | | mm-011-xxx | short | fload, float | |
| FIDIV ST(0), mem32int | DAh | | mm-110-xxx | short | fload, float | |
| Note: | | | | | | |
| * The last three bits of the modR/M byte select the stack entry ST(i). | | | | | | |

Table 13. Floating-Point Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|--|------------|-------------|-------------|-------------|-------------------|------|
| FIDIV ST(0), mem16int | DEh | | mm-110-xxx | short | fload, float | |
| FIDIVR ST(0), mem32int | DAh | | mm-111-xxx | short | fload, float | |
| FIDIVR ST(0), mem16int | DEh | | mm-111-xxx | short | fload, float | |
| FILD mem16int | DFh | | mm-000-xxx | short | fload, float | |
| FILD mem32int | DBh | | mm-000-xxx | short | fload, float | |
| FILD mem64int | DFh | | mm-101-xxx | short | fload, float | |
| FIMUL ST(0), mem32int | DAh | | mm-001-xxx | short | fload, float | |
| FIMUL ST(0), mem16int | DEh | | mm-001-xxx | short | fload, float | |
| FINCSTP | D9h | F7h | | short | | |
| FINIT | DBh | E3h | | vector | | |
| FIST mem16int | DFh | | mm-010-xxx | short | fload, float | |
| FIST mem32int | DBh | | mm-010-xxx | short | fload, float | |
| FISTP mem16int | DFh | | mm-011-xxx | short | fload, float | |
| FISTP mem32int | DBh | | mm-011-xxx | short | fload, float | |
| FISTP mem64int | DFh | | mm-111-xxx | short | fload, float | |
| FISUB ST(0), mem32int | DAh | | mm-100-xxx | short | fload, float | |
| FISUB ST(0), mem16int | DEh | | mm-100-xxx | short | fload, float | |
| FISUBR ST(0), mem32int | DAh | | mm-101-xxx | short | fload, float | |
| FISUBR ST(0), mem16int | DEh | | mm-101-xxx | short | fload, float | |
| FLD ST(i) | D9h | | 11-000-xxx | short | fload, float | * |
| FLD mem32real | D9h | | mm-000-xxx | short | fload, float | |
| FLD mem64real | DDh | | mm-000-xxx | short | fload, float | |
| FLD mem80real | DBh | | mm-101-xxx | vector | | |
| FLD1 | D9h | E8h | | short | fload, float | |
| FLDCW | D9h | | mm-101-xxx | vector | | |
| FLDENV | D9h | | mm-100-xxx | short | fload, float | |
| FLDL2E | D9h | EAh | | short | float | |
| FLDL2T | D9h | E9h | | short | float | |
| FLDLG2 | D9h | ECh | | short | float | |
| FLDLN2 | D9h | EDh | | short | float | |
| FLDPI | D9h | EBh | | short | float | |
| Note: | | | | | | |
| * The last three bits of the modR/M byte select the stack entry ST(i). | | | | | | |

Table 13. Floating-Point Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|----------------------------|------------|-------------|-------------|-------------|-------------------|------|
| FLDZ | D9h | EEh | | short | float | |
| FMUL ST(0), ST(i) | D8h | | 11-001-xxx | short | float | * |
| FMUL ST(i), ST(0) | DCh | | 11-001-xxx | short | float | * |
| FMUL ST(0), mem32real | D8h | | mm-001-xxx | short | float, float | |
| FMUL ST(0), mem64real | DCh | | mm-001-xxx | short | float, float | |
| FMULP ST(0), ST(i) | DEh | | 11-001-xxx | short | float | * |
| FNOP | D9h | D0h | | short | float | |
| FPATAN | D9h | F3h | | short | float | |
| FPREM | D9h | F8h | | short | float | |
| FPREM1 | D9h | F5h | | short | float | |
| FPTAN | D9h | F2h | | vector | | |
| FRNDINT | D9h | FCh | | short | float | |
| FRSTOR | DDh | | mm-100-xxx | vector | | |
| FSAVE | DDh | | mm-110-xxx | vector | | |
| FSCALE | D9h | FDh | | short | float | |
| FSIN | D9h | FEh | | short | float | |
| FSINCOS | D9h | FBh | | vector | | |
| FSQRT (single precision) | D9h | FAh | | short | float | |
| FSQRT (double precision) | D9h | FAh | | short | float | |
| FSQRT (extended precision) | D9h | FAh | | short | float | |
| FST mem32real | D9h | | mm-010-xxx | short | fstore | |
| FST mem64real | DDh | | mm-010-xxx | short | fstore | |
| FST ST(i) | DDh | | 11-010-xxx | short | fstore | * |
| FSTCW | D9h | | mm-111-xxx | vector | | |
| FSTENV | D9h | | mm-110-xxx | vector | | |
| FSTP mem32real | D9h | | mm-011-xxx | short | fstore | |
| FSTP mem64real | DDh | | mm-011-xxx | short | fstore | |
| FSTP mem80real | D9h | | mm-111-xxx | vector | | |
| FSTP ST(i) | DDh | | 11-011-xxx | short | float | * |
| FSTSW AX | DFh | E0h | | vector | | |
| FSTSW mem16 | DDh | | mm-111-xxx | vector | | |

Note:
* The last three bits of the modR/M byte select the stack entry ST(i).

Table 13. Floating-Point Instructions (continued)

| Instruction Mnemonic | First Byte | Second Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|--|------------|-------------|-------------|-------------|-------------------|------|
| FSUB ST(0), mem32real | D8h | | mm-100-xxx | short | fload, float | |
| FSUB ST(0), mem64real | DCh | | mm-100-xxx | short | fload, float | |
| FSUB ST(0), ST(i) | D8h | | 11-100-xxx | short | float | * |
| FSUB ST(i), ST(0) | DCh | | 11-101-xxx | short | float | * |
| FSUBP ST(0), ST(i) | DEh | | 11-101-xxx | short | float | * |
| FSUBR ST(0), mem32real | D8h | | mm-101-xxx | short | fload, float | |
| FSUBR ST(0), mem64real | DCh | | mm-101-xxx | short | fload, float | |
| FSUBR ST(0), ST(i) | D8h | | 11-100-xxx | short | float | * |
| FSUBR ST(i), ST(0) | DCh | | 11-101-xxx | short | float | * |
| FSUBRP ST(i), ST(0) | DEh | | 11-100-xxx | short | float | * |
| FTST | D9h | E4h | | short | float | |
| FUCOM | DDh | | 11-100-xxx | short | float | |
| FUCOMP | DDh | | 11-101-xxx | short | float | |
| FUCOMPP | DAh | E9h | | short | float | |
| FXAM | D9h | E5h | | short | float | |
| FXCH | D9h | | 11-001-xxx | short | float | |
| FXTRACT | D9h | F4h | | vector | | |
| FYL2X | D9h | F1h | | short | float | |
| FYL2XP1 | D9h | F9h | | short | float | |
| FWAIT | 9Bh | | | vector | | |
| Note: * The last three bits of the modR/M byte select the stack entry ST(i). | | | | | | |

Table 14. MMX™ Instructions

| Instruction Mnemonic | Prefix Byte(s) | First Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|---|----------------|------------|-------------|-------------|-------------------|------|
| EMMS | 0Fh | 77h | | vector | | |
| MOVD mmreg, mreg32 | 0Fh | 6Eh | 11-xxx-xxx | short | meu | ** |
| MOVD mmreg, mem32 | 0Fh | 6Eh | mm-xxx-xxx | short | mload | |
| MOVD mreg32, mmreg | 0Fh | 7Eh | 11-xxx-xxx | short | mstore, load | ** |
| MOVD mem32, mmreg | 0Fh | 7Eh | mm-xxx-xxx | short | mstore | |
| MOVQ mmreg1, mmreg2 | 0Fh | 6Fh | 11-xxx-xxx | short | meu | |
| Note: ** Bits 2, 1, and 0 of the modR/M byte select the integer register. | | | | | | |

Table 14. MMX™ Instructions (continued)

| Instruction Mnemonic | Prefix Byte(s) | First Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|-------------------------|----------------|------------|-------------|-------------|-------------------|------|
| MOVQ mmreg, mem64 | 0Fh | 6Fh | mm-xxx-xxx | short | mload | |
| MOVQ mmreg2, mmreg1 | 0Fh | 7Fh | 11-xxx-xxx | short | meu | |
| MOVQ mem64, mmreg | 0Fh | 7Fh | mm-xxx-xxx | short | mstore | |
| PACKSSDW mmreg1, mmreg2 | 0Fh | 6Bh | 11-xxx-xxx | short | meu | |
| PACKSSDW mmreg, mem64 | 0Fh | 6Bh | mm-xxx-xxx | short | mload, meu | |
| PACKSSWB mmreg1, mmreg2 | 0Fh | 63h | 11-xxx-xxx | short | meu | |
| PACKSSWB mmreg, mem64 | 0Fh | 63h | mm-xxx-xxx | short | mload, meu | |
| PACKUSWB mmreg1, mmreg2 | 0Fh | 67h | 11-xxx-xxx | short | meu | |
| PACKUSWB mmreg, mem64 | 0Fh | 67h | mm-xxx-xxx | short | mload, meu | |
| PADDB mmreg1, mmreg2 | 0Fh | FCh | 11-xxx-xxx | short | meu | |
| PADDB mmreg, mem64 | 0Fh | FCh | mm-xxx-xxx | short | mload, meu | |
| PADD mmreg1, mmreg2 | 0Fh | FEh | 11-xxx-xxx | short | meu | |
| PADD mmreg, mem64 | 0Fh | FEh | mm-xxx-xxx | short | mload, meu | |
| PADDSB mmreg1, mmreg2 | 0Fh | ECh | 11-xxx-xxx | short | meu | |
| PADDSB mmreg, mem64 | 0Fh | ECh | mm-xxx-xxx | short | mload, meu | |
| PADDSW mmreg1, mmreg2 | 0Fh | EDh | 11-xxx-xxx | short | meu | |
| PADDSW mmreg, mem64 | 0Fh | EDh | mm-xxx-xxx | short | mload, meu | |
| PADDUSB mmreg1, mmreg2 | 0Fh | DCh | 11-xxx-xxx | short | meu | |
| PADDUSB mmreg, mem64 | 0Fh | DCh | mm-xxx-xxx | short | mload, meu | |
| PADDUSW mmreg1, mmreg2 | 0Fh | DDh | 11-xxx-xxx | short | meu | |
| PADDUSW mmreg, mem64 | 0Fh | DDh | mm-xxx-xxx | short | mload, meu | |
| PADDW mmreg1, mmreg2 | 0Fh | FDh | 11-xxx-xxx | short | meu | |
| PADDW mmreg, mem64 | 0Fh | FDh | mm-xxx-xxx | short | mload, meu | |
| PAND mmreg1, mmreg2 | 0Fh | DBh | 11-xxx-xxx | short | meu | |
| PAND mmreg, mem64 | 0Fh | DBh | mm-xxx-xxx | short | mload, meu | |
| PANDN mmreg1, mmreg2 | 0Fh | DFh | 11-xxx-xxx | short | meu | |
| PANDN mmreg, mem64 | 0Fh | DFh | mm-xxx-xxx | short | mload, meu | |
| PCMPEQB mmreg1, mmreg2 | 0Fh | 74h | 11-xxx-xxx | short | meu | |
| PCMPEQB mmreg, mem64 | 0Fh | 74h | mm-xxx-xxx | short | mload, meu | |
| PCMPEQD mmreg1, mmreg2 | 0Fh | 76h | 11-xxx-xxx | short | meu | |
| PCMPEQD mmreg, mem64 | 0Fh | 76h | mm-xxx-xxx | short | mload, meu | |

Note:
 ** Bits 2, 1, and 0 of the modR/M byte select the integer register.

Table 14. MMX™ Instructions (continued)

| Instruction Mnemonic | Prefix Byte(s) | First Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|------------------------|----------------|------------|-------------|-------------|-------------------|------|
| PCMPEQW mmreg1, mmreg2 | 0Fh | 75h | 11-xxx-xxx | short | meu | |
| PCMPEQW mmreg, mem64 | 0Fh | 75h | mm-xxx-xxx | short | mload, meu | |
| PCMPGTB mmreg1, mmreg2 | 0Fh | 64h | 11-xxx-xxx | short | meu | |
| PCMPGTB mmreg, mem64 | 0Fh | 64h | mm-xxx-xxx | short | mload, meu | |
| PCMPGTD mmreg1, mmreg2 | 0Fh | 66h | 11-xxx-xxx | short | meu | |
| PCMPGTD mmreg, mem64 | 0Fh | 66h | mm-xxx-xxx | short | mload, meu | |
| PCMPGTW mmreg1, mmreg2 | 0Fh | 65h | 11-xxx-xxx | short | meu | |
| PCMPGTW mmreg, mem64 | 0Fh | 65h | mm-xxx-xxx | short | mload, meu | |
| PMADDWD mmreg1, mmreg2 | 0Fh | F5h | 11-xxx-xxx | short | meu | |
| PMADDWD mmreg, mem64 | 0Fh | F5h | mm-xxx-xxx | short | mload, meu | |
| PMULHW mmreg1, mmreg2 | 0Fh | E5h | 11-xxx-xxx | short | meu | |
| PMULHW mmreg, mem64 | 0Fh | E5h | mm-xxx-xxx | short | mload, meu | |
| PMULLW mmreg1, mmreg2 | 0Fh | D5h | 11-xxx-xxx | short | meu | |
| PMULLW mmreg, mem64 | 0Fh | D5h | mm-xxx-xxx | short | mload, meu | |
| POR mmreg1, mmreg2 | 0Fh | EBh | 11-xxx-xxx | short | meu | |
| POR mmreg, mem64 | 0Fh | EBh | mm-xxx-xxx | short | mload, meu | |
| PSLLD mmreg1, mmreg2 | 0Fh | F2h | 11-xxx-xxx | short | meu | |
| PSLLD mmreg, mem64 | 0Fh | F2h | mm-xxx-xxx | short | mload, meu | |
| PSLLD mmreg, imm8 | 0Fh | 72h | 11-110-xxx | short | meu | |
| PSLLQ mmreg1, mmreg2 | 0Fh | F3h | 11-xxx-xxx | short | meu | |
| PSLLQ mmreg, mem64 | 0Fh | F3h | mm-xxx-xxx | short | mload, meu | |
| PSLLQ mmreg, imm8 | 0Fh | 73h | 11-110-xxx | short | meu | |
| PSLLW mmreg1, mmreg2 | 0Fh | F1h | 11-xxx-xxx | short | meu | |
| PSLLW mmreg, mem64 | 0Fh | F1h | mm-xxx-xxx | short | mload, meu | |
| PSLLW mmreg, imm8 | 0Fh | 71h | 11-110-xxx | short | meu | |
| PSRAD mmreg1, mmreg2 | 0Fh | E2h | 11-xxx-xxx | short | meu | |
| PSRAD mmreg, mem64 | 0Fh | E2h | mm-xxx-xxx | short | mload, meu | |
| PSRAD mmreg, imm8 | 0Fh | 72h | 11-100-xxx | short | meu | |
| PSRAW mmreg1, mmreg2 | 0Fh | E1h | 11-xxx-xxx | short | meu | |
| PSRAW mmreg, mem64 | 0Fh | E1h | mm-xxx-xxx | short | mload, meu | |
| PSRAW mmreg, imm8 | 0Fh | 71h | 11-100-xxx | short | meu | |

Note:
 ** Bits 2, 1, and 0 of the modR/M byte select the integer register.

Table 14. MMX™ Instructions (continued)

| Instruction Mnemonic | Prefix Byte(s) | First Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|--------------------------|----------------|------------|-------------|-------------|-------------------|------|
| PSRLD mmreg1, mmreg2 | 0Fh | D2h | 11-xxx-xxx | short | meu | |
| PSRLD mmreg, mem64 | 0Fh | D2h | mm-xxx-xxx | short | mload, meu | |
| PSRLD mmreg, imm8 | 0Fh | 72h | 11-010-xxx | short | meu | |
| PSRLQ mmreg1, mmreg2 | 0Fh | D3h | 11-xxx-xxx | short | meu | |
| PSRLQ mmreg, mem64 | 0Fh | D3h | mm-xxx-xxx | short | mload, meu | |
| PSRLQ mmreg, imm8 | 0Fh | 73h | 11-010-xxx | short | meu | |
| PSRLW mmreg1, mmreg2 | 0Fh | D1h | 11-xxx-xxx | short | meu | |
| PSRLW mmreg, mem64 | 0Fh | D1h | mm-xxx-xxx | short | mload, meu | |
| PSRLW mmreg, imm8 | 0Fh | 71h | 11-010-xxx | short | meu | |
| PSUBB mmreg1, mmreg2 | 0Fh | F8h | 11-xxx-xxx | short | meu | |
| PSUBB mmreg, mem64 | 0Fh | F8h | mm-xxx-xxx | short | mload, meu | |
| PSUBD mmreg1, mmreg2 | 0Fh | FAh | 11-xxx-xxx | short | meu | |
| PSUBD mmreg, mem64 | 0Fh | FAh | mm-xxx-xxx | short | mload, meu | |
| PSUBSB mmreg1, mmreg2 | 0Fh | E8h | 11-xxx-xxx | short | meu | |
| PSUBSB mmreg, mem64 | 0Fh | E8h | mm-xxx-xxx | short | mload, meu | |
| PSUBSW mmreg1, mmreg2 | 0Fh | E9h | 11-xxx-xxx | short | meu | |
| PSUBSW mmreg, mem64 | 0Fh | E9h | mm-xxx-xxx | short | mload, meu | |
| PSUBUSB mmreg1, mmreg2 | 0Fh | D8h | 11-xxx-xxx | short | meu | |
| PSUBUSB mmreg, mem64 | 0Fh | D8h | mm-xxx-xxx | short | mload, meu | |
| PSUBUSW mmreg1, mmreg2 | 0Fh | D9h | 11-xxx-xxx | short | meu | |
| PSUBUSW mmreg, mem64 | 0Fh | D9h | mm-xxx-xxx | short | mload, meu | |
| PSUBW mmreg1, mmreg2 | 0Fh | F9h | 11-xxx-xxx | short | meu | |
| PSUBW mmreg, mem64 | 0Fh | F9h | mm-xxx-xxx | short | mload, meu | |
| PUNPCKHBW mmreg1, mmreg2 | 0Fh | 68h | 11-xxx-xxx | short | meu | |
| PUNPCKHBW mmreg, mem64 | 0Fh | 68h | mm-xxx-xxx | short | mload, meu | |
| PUNPCKHDQ mmreg1, mmreg2 | 0Fh | 6Ah | 11-xxx-xxx | short | meu | |
| PUNPCKHDQ mmreg, mem64 | 0Fh | 6Ah | mm-xxx-xxx | short | mload, meu | |
| PUNPCKHWD mmreg1, mmreg2 | 0Fh | 69h | 11-xxx-xxx | short | meu | |
| PUNPCKHWD mmreg, mem64 | 0Fh | 69h | mm-xxx-xxx | short | mload, meu | |
| PUNPCKLBW mmreg1, mmreg2 | 0Fh | 60h | 11-xxx-xxx | short | meu | |
| PUNPCKLBW mmreg, mem64 | 0Fh | 60h | mm-xxx-xxx | short | mload, meu | |

Note:
 ** Bits 2, 1, and 0 of the modR/M byte select the integer register.

Table 14. MMX™ Instructions (continued)

| Instruction Mnemonic | Prefix Byte(s) | First Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|--------------------------|----------------|------------|-------------|-------------|-------------------|------|
| PUNPCKLDQ mmreg1, mmreg2 | 0Fh | 62h | 11-xxx-xxx | short | meu | |
| PUNPCKLDQ mmreg, mem64 | 0Fh | 62h | mm-xxx-xxx | short | mload, meu | |
| PUNPCKLWD mmreg1, mmreg2 | 0Fh | 61h | 11-xxx-xxx | short | meu | |
| PUNPCKLWD mmreg, mem64 | 0Fh | 61h | mm-xxx-xxx | short | mload, meu | |
| PXOR mmreg1, mmreg2 | 0Fh | EFh | 11-xxx-xxx | short | meu | |
| PXOR mmreg, mem64 | 0Fh | EFh | mm-xxx-xxx | short | mload, meu | |

Note:
 ** Bits 2, 1, and 0 of the modR/M byte select the integer register.

Table 15. 3DNow!™ Instructions

| Instruction Mnemonic | Prefix Byte(s) | Opcode Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|------------------------|----------------|-------------|-------------|-------------|-------------------|------|
| FEMMS | 0Fh | 0Eh | | vector | | |
| PAVGUSB mmreg1, mmreg2 | 0Fh, 0Fh | BFh | 11-xxx-xxx | short | meu | 3 |
| PAVGUSB mmreg, mem64 | 0Fh, 0Fh | BFh | mm-xxx-xxx | short | mload, meu | 3 |
| PF2ID mmreg1, mmreg2 | 0Fh, 0Fh | 1Dh | 11-xxx-xxx | short | meu | |
| PF2ID mmreg, mem64 | 0Fh, 0Fh | 1Dh | mm-xxx-xxx | short | mload, meu | |
| PFACC mmreg1, mmreg2 | 0Fh, 0Fh | AEh | 11-xxx-xxx | short | meu | |
| PFACC mmreg, mem64 | 0Fh, 0Fh | AEh | mm-xxx-xxx | short | mload, meu | |
| PFADD mmreg1, mmreg2 | 0Fh, 0Fh | 9Eh | 11-xxx-xxx | short | meu | |
| PFADD mmreg, mem64 | 0Fh, 0Fh | 9Eh | mm-xxx-xxx | short | mload, meu | |
| PFCMPEQ mmreg1, mmreg2 | 0Fh, 0Fh | B0h | 11-xxx-xxx | short | meu | |
| PFCMPEQ mmreg, mem64 | 0Fh, 0Fh | B0h | mm-xxx-xxx | short | mload, meu | |
| PFCMPGE mmreg1, mmreg2 | 0Fh, 0Fh | 90h | 11-xxx-xxx | short | meu | |
| PFCMPGE mmreg, mem64 | 0Fh, 0Fh | 90h | mm-xxx-xxx | short | mload, meu | |
| PFCMPGT mmreg1, mmreg2 | 0Fh, 0Fh | A0h | 11-xxx-xxx | short | meu | |
| PFCMPGT mmreg, mem64 | 0Fh, 0Fh | A0h | mm-xxx-xxx | short | mload, meu | |
| PFMAX mmreg1, mmreg2 | 0Fh, 0Fh | A4h | 11-xxx-xxx | short | meu | |
| PFMAX mmreg, mem64 | 0Fh, 0Fh | A4h | mm-xxx-xxx | short | mload, meu | |

Notes:

- For PREFETCH and PREFETCHW, the mem8 value refers to a byte address within the 32-byte line that will be prefetched.
- PREFETCHW will be implemented in a future K86 processor. On the AMD-K6-III processor, this instruction performs in the same manner as the PREFETCH instruction.
- The byte listed in the column titled "First Byte" is actually the immediate byte placed at the end of the instruction.

Table 15. 3DNow![™] Instructions (continued)

| Instruction Mnemonic | Prefix Byte(s) | Opcode Byte | ModR/M Byte | Decode Type | RISC86 Operations | Note |
|--------------------------|----------------|-------------|-------------|-------------|-------------------|------|
| PFCMIN mmreg1, mmreg2 | 0Fh, 0Fh | 94h | 11-xxx-xxx | short | meu | |
| PFCMIN mmreg, mem64 | 0Fh, 0Fh | 94h | mm-xxx-xxx | short | mload, meu | |
| PFCMUL mmreg1, mmreg2 | 0Fh, 0Fh | B4h | 11-xxx-xxx | short | meu | |
| PFCMUL mmreg, mem64 | 0Fh, 0Fh | B4h | mm-xxx-xxx | short | mload, meu | |
| PFCRCPP mmreg1, mmreg2 | 0Fh, 0Fh | 96h | 11-xxx-xxx | short | meu | |
| PFCRCPP mmreg, mem64 | 0Fh, 0Fh | 96h | mm-xxx-xxx | short | mload, meu | |
| PFCRCPIP1 mmreg1, mmreg2 | 0Fh, 0Fh | A6h | 11-xxx-xxx | short | meu | |
| PFCRCPIP1 mmreg, mem64 | 0Fh, 0Fh | A6h | mm-xxx-xxx | short | mload, meu | |
| PFCRCPIP2 mmreg1, mmreg2 | 0Fh, 0Fh | B6h | 11-xxx-xxx | short | meu | |
| PFCRCPIP2 mmreg, mem64 | 0Fh, 0Fh | B6h | mm-xxx-xxx | short | mload, meu | |
| PFCRSQIT1 mmreg1, mmreg2 | 0Fh, 0Fh | A7h | 11-xxx-xxx | short | meu | |
| PFCRSQIT1 mmreg, mem64 | 0Fh, 0Fh | A7h | mm-xxx-xxx | short | mload, meu | |
| PFCRSQRT mmreg1, mmreg2 | 0Fh, 0Fh | 97h | 11-xxx-xxx | short | meu | |
| PFCRSQRT mmreg, mem64 | 0Fh, 0Fh | 97h | mm-xxx-xxx | short | mload, meu | |
| PFCSUB mmreg1, mmreg2 | 0Fh, 0Fh | 9Ah | 11-xxx-xxx | short | meu | |
| PFCSUB mmreg, mem64 | 0Fh, 0Fh | 9Ah | mm-xxx-xxx | short | mload, meu | |
| PFCSUBR mmreg1, mmreg2 | 0Fh, 0Fh | AAh | 11-xxx-xxx | short | meu | |
| PFCSUBR mmreg, mem64 | 0Fh, 0Fh | AAh | mm-xxx-xxx | short | mload, meu | |
| PI2FD mmreg1, mmreg2 | 0Fh, 0Fh | 0Dh | 11-xxx-xxx | short | meu | |
| PI2FD mmreg, mem64 | 0Fh, 0Fh | 0Dh | mm-xxx-xxx | short | mload, meu | |
| PMULHRW mmreg1, mmreg2 | 0Fh, 0Fh | B7h | 11-xxx-xxx | short | meu | 3 |
| PMULHRW mmreg1, mem64 | 0Fh, 0Fh | B7h | mm-xxx-xxx | short | mload, meu | 3 |
| PREFETCH mem8 | 0Fh | 0Dh | mm-000-xxx | vector | load | 1 |
| PREFETCHW mem8 | 0Fh | 0Dh | mm-001-xxx | vector | load | 1, 2 |

Notes:

- For *PREFETCH* and *PREFETCHW*, the *mem8* value refers to a byte address within the 32-byte line that will be prefetched.
- PREFETCHW* will be implemented in a future K86 processor. On the AMD-K6-III processor, this instruction performs in the same manner as the *PREFETCH* instruction.
- The byte listed in the column titled "First Byte" is actually the immediate byte placed at the end of the instruction.

4 Signal Descriptions

4.1 Signal Terminology

The following terminology is used in this chapter:

- *Driven*—The processor actively pulls the signal up to the High-voltage state or pulls the signal down to the Low-voltage state.
- *Floated*—The the signal is not being driven by the processor (high-impedance state), which allows another device to drive this signal.
- *Asserted*—For all active-High signals, the term *asserted* means the signal is in the High-voltage state. For all active-Low signals, the term *asserted* means the signal is in the Low-voltage state.
- *Negated*—For all active-High signals, the term *negated* means the signal is in the Low-voltage state. For all active-Low signals, the term *negated* means the signal is in the High-voltage state.
- *Sampled*—The processor has measured the state of a signal at predefined points in time and will take the appropriate action based on the state of the signal. If a signal is not sampled by the processor, its assertion or negation has no effect on the operation of the processor.

Figure 53 on page 84 shows the signals grouped by function. The arrows in the figure indicate the direction of the signal, either into or out of the processor. Signals with double-headed arrows are bidirectional. Signals with pound signs (#) are active Low.

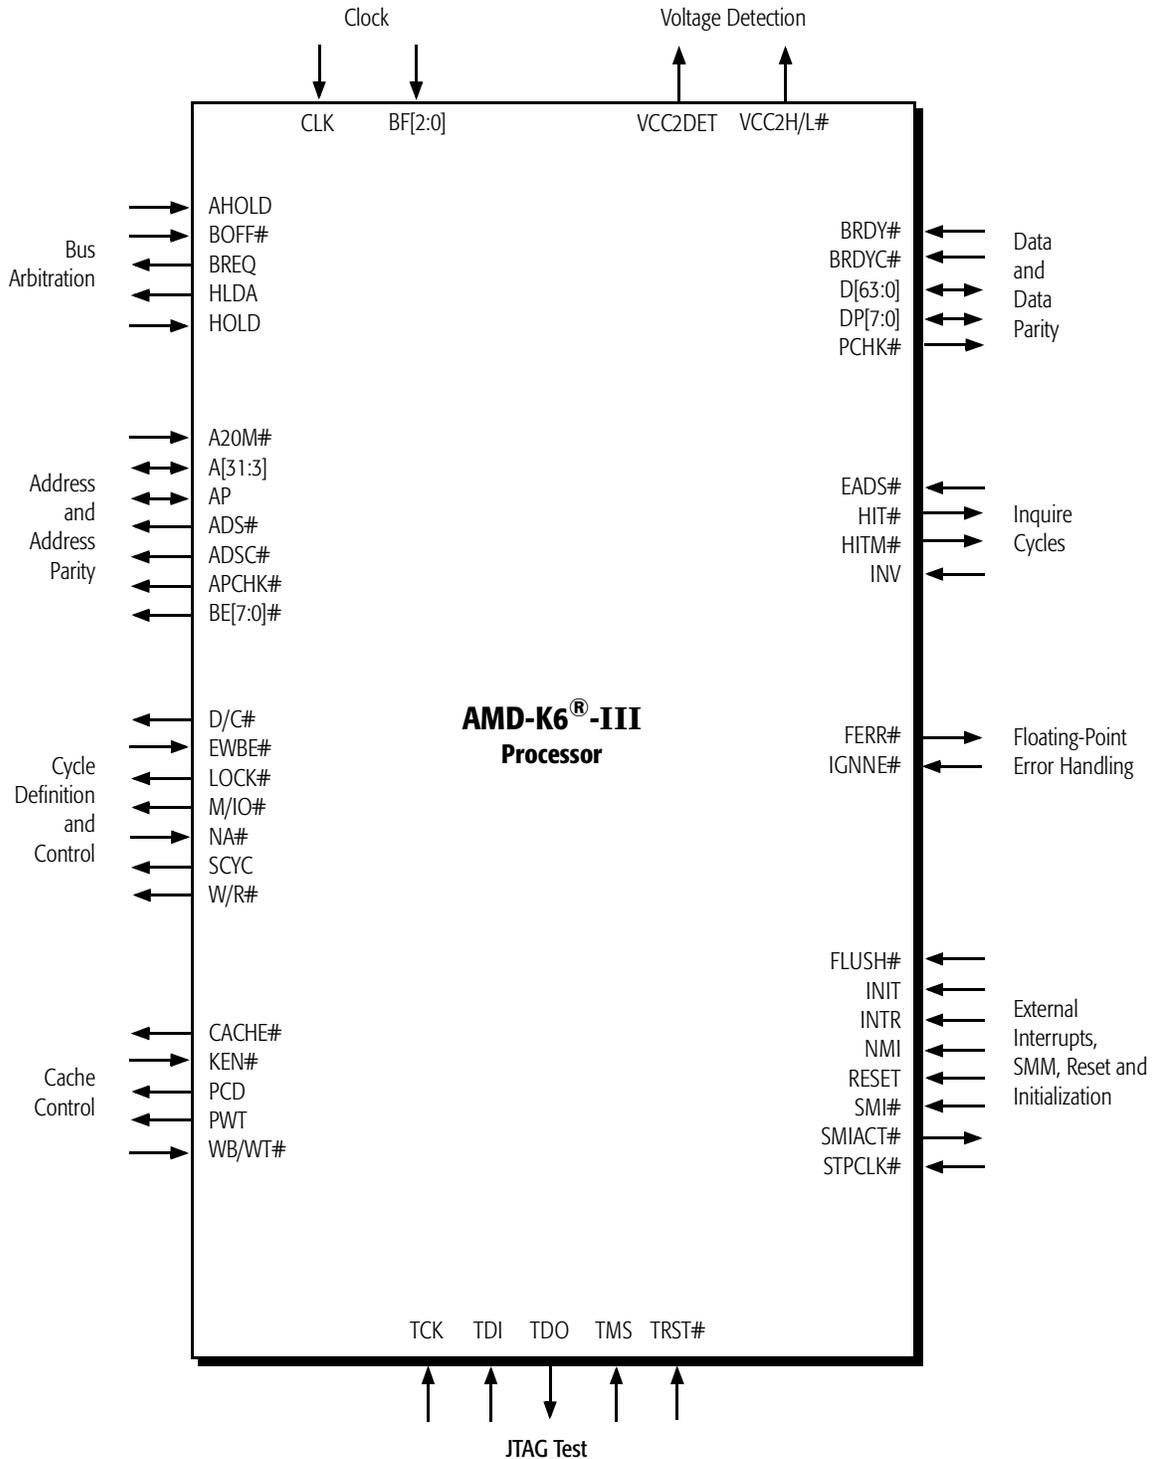


Figure 53. Logic Symbol Diagram

4.2 A20M# (Address Bit 20 Mask)

Input

Summary

A20M# is used to simulate the behavior of the 8086 when running in Real mode. The assertion of A20M# causes the processor to force bit 20 of the physical address to 0 prior to accessing the caches or driving out a memory bus cycle. The clearing of address bit 20 maps addresses that extend above the 8086 1-Mbyte limit to below 1 Mbyte.

Sampled

The processor samples A20M# as a level-sensitive input on every clock edge. The system logic can drive the signal either synchronously or asynchronously. If it is asserted asynchronously, it must be asserted for a minimum pulse width of two clocks.

The following list explains the effects of the processor sampling A20M# asserted under various conditions:

- Inquire cycles and writeback cycles are not affected by the state of A20M#.
- The assertion of A20M# in System Management Mode (SMM) is ignored.
- When A20M# is sampled asserted in Protected mode, it causes unpredictable processor operation. A20M# is only defined in Real mode.
- To ensure that A20M# is recognized before the first ADS# occurs following the negation of RESET, A20M# must be sampled asserted on the same clock edge that RESET is sampled negated or on one of the two subsequent clock edges.
- To ensure A20M# is recognized before the execution of an instruction, a serializing instruction must be executed between the instruction that asserts A20M# and the targeted instruction.

4.3 A[31:3] (Address Bus)

A[31:5] Bidirectional, A[4:3] Output

Summary

A[31:3] contain the physical address for the current bus cycle. The processor drives addresses on A[31:3] during memory and I/O cycles, and cycle definition information during special bus cycles. The processor samples addresses on A[31:5] during inquire cycles.

Driven, Sampled, and Floated

As Outputs: A[31:3] are driven valid off the same clock edge as ADS# and remain in the same state until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted. A[31:3] are driven during memory cycles, I/O cycles, special bus cycles, and interrupt acknowledge cycles. The processor continues to drive the address bus while the bus is idle.

As Inputs: The processor samples A[31:5] during inquire cycles on the clock edge on which EADS# is sampled asserted. Even though A4 and A3 are not used during the inquire cycle, they must be driven to a valid state and must meet the same timings as A[31:5].

A[31:3] are floated off the clock edge that AHOLD or BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in recognition of HOLD.

The processor resumes driving A[31:3] off the clock edge on which the processor samples AHOLD or BOFF# negated and off the clock edge on which the processor negates HLDA.

4.4 ADS# (Address Strobe)

Output

Summary

The assertion of ADS# indicates the beginning of a new bus cycle. The address bus and all cycle definition signals corresponding to this bus cycle are driven valid off the same clock edge as ADS#.

Driven and Floated

ADS# is asserted for one clock at the beginning of each bus cycle. For non-pipelined cycles, ADS# can be asserted as early as the clock edge after the clock edge on which the last expected BRDY# of the cycle is sampled asserted, resulting in a single idle state between cycles. For pipelined cycles if the processor is prepared to start a new cycle, ADS# can be asserted as early as one clock edge after NA# is sampled asserted.

If AHOLD is sampled asserted, ADS# is only driven in order to perform a writeback cycle due to an inquire cycle that hits a modified cache line.

The processor floats ADS# off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in recognition of HOLD.

4.5 ADSC# (Address Strobe Copy)

Output

Summary

ADSC# has the identical function and timing as ADS#. In the event ADS# becomes too heavily loaded due to a large fanout in a system, ADSC# can be used to split the load across two outputs, which can improve system timing.

4.6 AHOLD (Address Hold)

Input

Summary

AHOLD can be asserted by the system to initiate one or more inquire cycles. To allow the system to drive the address bus during an inquire cycle, the processor floats A[31:3] and AP off the clock edge on which AHOLD is sampled asserted. The data bus and all other control and status signals remain under the control of the processor and are not floated. This allows a bus cycle that is in progress when AHOLD is sampled asserted to continue to completion. The processor resumes driving the address bus off the clock edge on which AHOLD is sampled negated.

If AHOLD is sampled asserted, ADS# is only asserted in order to perform a writeback cycle due to an inquire cycle that hits a modified cache line.

Sampled

The processor samples AHOLD on every clock edge. AHOLD is recognized while INIT and RESET are sampled asserted.

4.7 AP (Address Parity)

Bidirectional

Summary

AP contains the even parity bit for cache line addresses driven and sampled on A[31:5]. Even parity means that the total number of 1 bits on AP and A[31:5] is even. (A4 and A3 are not used for the generation or checking of address parity because these bits are not required to address a cache line.) AP is driven by the processor during processor-initiated cycles and is sampled by the processor during inquire cycles. If AP does not reflect even parity during an inquire cycle, the processor asserts APCHK# to indicate an address bus parity check. The processor does not take an internal exception as the result of detecting an address bus parity check, and system logic must respond appropriately to the assertion of this signal.

Driven, Sampled, and Floated

As an Output: The processor drives AP valid off the clock edge on which ADS# is asserted until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted. AP is driven during memory cycles, I/O cycles, special bus cycles, and interrupt acknowledge cycles. The processor continues to drive AP while the bus is idle.

As an Input: The processor samples AP during inquire cycles on the clock edge on which EADS# is sampled asserted.

The processor floats AP off the clock edge that AHOLD or BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in recognition of HOLD.

The processor resumes driving AP off the clock edge on which the processor samples AHOLD or BOFF# negated and off the clock edge on which the processor negates HLDA.

4.8 APCHK# (Address Parity Check)

Output

Summary

If the processor detects an address parity error during an inquire cycle, APCHK# is asserted for one clock. The processor does not take an internal exception as the result of detecting an address bus parity check, and system logic must respond appropriately to the assertion of this signal.

The processor is designed so that APCHK# does not glitch, enabling the signal to be used as a clocking source for system logic.

Driven

APCHK# is driven valid off the clock edge after the clock edge on which the processor samples EADS# asserted. It is negated off the next clock edge.

APCHK# is always driven except in the Tri-State Test mode.

4.9 BE[7:0]# (Byte Enables)

Output

Summary

BE[7:0]# are used by the processor to indicate the valid data bytes during a write cycle and the requested data bytes during a read cycle. The byte enables can be used to derive address bits A[2:0], which are not physically part of the processor's address bus. The processor checks and generates valid data parity for the data bytes that are valid as defined by the byte enables. The eight byte enables correspond to the eight bytes of the data bus as follows:

- BE7#: D[63:56]
- BE6#: D[55:48]
- BE5#: D[47:40]
- BE4#: D[39:32]
- BE3#: D[31:24]
- BE2#: D[23:16]
- BE1#: D[15:8]
- BE0#: D[7:0]

The processor expects data to be driven by the system logic on all eight bytes of the data bus during a burst cache-line read cycle, independent of the byte enables that are asserted.

The byte enables are also used to distinguish between special bus cycles as defined in Table 23 on page 126.

Driven and Floated

BE[7:0]# are driven off the same clock edge as ADS# and remain in the same state until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted. BE[7:0]# are driven during memory cycles, I/O cycles, special bus cycles, and interrupt acknowledge cycles.

The processor floats BE[7:0]# off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in recognition of HOLD. Unlike the address bus, BE[7:0]# are not floated in response to AHOLD.

4.10 BF[2:0] (Bus Frequency)

Inputs, Internal Pullups

Summary

BF[2:0] determine the internal operating frequency of the processor. The frequency of the CLK input signal is multiplied internally by a ratio determined by the state of these signals as defined in Table 16. BF[2:0] have weak internal pullups and default to the 3.5 multiplier if left unconnected.

Table 16. Processor-to-Bus Clock Ratios

| State of BF[2:0] Inputs | Processor-Clock to Bus-Clock Ratio |
|-------------------------|------------------------------------|
| 100b | 2.5x |
| 101b | 3.0x |
| 110b | 6.0x |
| 111b | 3.5x |
| 000b | 4.5x |
| 001b | 5.0x |
| 010b | 4.0x |
| 011b | 5.5x |

Sampled

BF[2:0] are sampled during the falling transition of RESET. They must meet a minimum setup time of 1.0 ns and a minimum hold time of two clocks relative to the negation of RESET.

4.11 BOFF# (Backoff)

Input

Summary

If BOFF# is sampled asserted, the processor unconditionally aborts any cycles in progress and transitions to a bus hold state by floating the following signals: A[31:3], ADS#, ADSC#, AP, BE[7:0]#, CACHE#, D[63:0], D/C#, DP[7:0], LOCK#, M/IO#, PCD, PWT, SCYC, and W/R#. These signals remain floated until BOFF# is sampled negated. This allows an alternate bus master or the system to control the bus.

When BOFF# is sampled negated, any processor cycle that was aborted due to the assertion of BOFF# is restarted from the beginning of the cycle, regardless of the number of transfers that were completed. If BOFF# is sampled asserted on the same clock edge as BRDY# of a bus cycle of any length, then BOFF# takes precedence over the BRDY#. In this case, the cycle is aborted and restarted after BOFF# is sampled negated.

Sampled

BOFF# is sampled on every clock edge. The processor floats its bus signals off the clock edge on which BOFF# is sampled asserted. These signals remain floated until the clock edge on which BOFF# is sampled negated.

BOFF# is recognized while INIT and RESET are sampled asserted.

4.12 BRDY# (Burst Ready)

Input, Internal Pullup

Summary

BRDY# is asserted to the processor by system logic to indicate either that the data bus is being driven with valid data during a read cycle or that the data bus has been latched during a write cycle. If necessary, the system logic can insert bus cycle wait states by negating BRDY# until it is ready to continue the data transfer. BRDY# is also used to indicate the completion of special bus cycles.

Sampled

BRDY# is sampled every clock edge within a bus cycle starting with the clock edge after the clock edge that negates ADS#. BRDY# is ignored while the bus is idle. The processor samples the following inputs on the clock edge on which BRDY# is sampled asserted: D[63:0], DP[7:0], and KEN# during read cycles, EWBE# during write cycles (if not masked off), and WB/WT# during read and write cycles. If NA# is sampled asserted prior to BRDY#, then KEN# and WB/WT# are sampled on the clock edge on which NA# is sampled asserted.

The number of times the processor expects to sample BRDY# asserted depends on the type of bus cycle, as follows:

- One time for a single-transfer cycle, a special bus cycle, or each of two cycles in an interrupt acknowledge sequence
- Four times for a burst cycle (once for each data transfer)

BRDY# can be held asserted for four consecutive clocks throughout the four transfers of the burst, or it can be negated to insert wait states.

4.13 BRDYC# (Burst Ready Copy)

Input, Internal Pullup

Summary

BRDYC# has the identical function as BRDY#. In the event BRDY# becomes too heavily loaded due to a large fanout or loading in a system, BRDYC# can be used to reduce this loading, which improves timing.

Sampled

BRDYC# is sampled every clock edge within a bus cycle starting with the clock edge after the clock edge that negates ADS#.

4.14 BREQ (Bus Request)

Output

Summary

BREQ is asserted by the processor to request the bus in order to complete an internally pending bus cycle. The system logic can use BREQ to arbitrate among the bus participants. If the processor does not own the bus, BREQ is asserted until the processor gains access to the bus in order to begin the pending cycle or until the processor no longer needs to run the pending cycle. If the processor currently owns the bus, BREQ is asserted with ADS#. The processor asserts BREQ for each assertion of ADS# but does not necessarily assert ADS# for each assertion of BREQ.

Driven

BREQ is asserted off the same clock edge on which ADS# is asserted. BREQ can also be asserted off any clock edge, independent of the assertion of ADS#. BREQ can be negated one clock edge after it is asserted.

The processor always drives BREQ except in the Tri-State Test mode.

4.15 CACHE# (Cacheable Access)

Output

Summary

For reads, CACHE# is asserted to indicate the cacheability of the current bus cycle. In addition, if the processor samples KEN# asserted, which indicates the driven address is cacheable, the cycle is a 32-byte burst read cycle. For write cycles, CACHE# is asserted to indicate the current bus cycle is a modified cache-line writeback. KEN# is ignored during writebacks. If CACHE# is not asserted, or if KEN# is sampled negated during a read cycle, the cycle is not cacheable and defaults to a single-transfer cycle.

Driven and Floated

CACHE# is driven off the same clock edge as ADS# and remains in the same state until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted.

CACHE# is floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in recognition of HOLD.

4.16 CLK (Clock)

Input

Summary

The CLK signal is the bus clock for the processor and is the reference for all signal timings under normal operation (except for TDI, TDO, TMS, and TRST#). BF[2:0] determine the internal frequency multiplier applied to CLK to obtain the processor's core operating frequency. See "BF[2:0] (Bus Frequency)" on page 92 for a list of the processor-to-bus clock ratios.

Sampled

The CLK signal must be stable a minimum of 1.0 ms prior to the negation of RESET to ensure the proper operation of the processor. See "CLK Switching Characteristics" on page 267 for details regarding the CLK specifications.

4.17 D/C# (Data/Code)

Output

Summary

The processor drives D/C# during a memory bus cycle to indicate whether it is addressing data or executable code. D/C# is also used to define other bus cycles, including interrupt acknowledge and special cycles. See Table 23 on page 126 for more details.

Driven and Floated

D/C# is driven off the same clock edge as ADS# and remains in the same state until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted. D/C# is driven during memory cycles, I/O cycles, special bus cycles, and interrupt acknowledge cycles.

D/C# is floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in recognition of HOLD.

4.18 D[63:0] (Data Bus)

Bidirectional

Summary

D[63:0] represent the processor's 64-bit data bus. Each of the eight bytes of data that comprise this bus is qualified as valid by its corresponding byte enable. See "BE[7:0]# (Byte Enables)" on page 91.

Driven, Sampled, and Floated

As Outputs: For single-transfer write cycles, the processor drives D[63:0] with valid data one clock edge after the clock edge on which ADS# is asserted and D[63:0] remain in the same state until the clock edge on which BRDY# is sampled asserted. If the cycle is a writeback—in which case four, 8-byte transfers occur—D[63:0] are driven one clock edge after the clock edge on which ADS# is asserted and are subsequently changed off the clock edge on which each BRDY# assertion of the burst cycle is sampled.

If the assertion of ADS# represents a pipelined write cycle that follows a read cycle, the processor does not drive D[63:0] until it is certain that contention on the data bus will not occur. In this case, D[63:0] are driven the clock edge after the last expected BRDY# of the previous cycle is sampled asserted.

As Inputs: During read cycles, the processor samples D[63:0] on the clock edge on which BRDY# is sampled asserted.

The processor always floats D[63:0] except when they are being driven during a write cycle as described above. In addition, D[63:0] are floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in recognition of HOLD.

4.19 DP[7:0] (Data Parity)

Bidirectional

Summary

DP[7:0] are even parity bits for each valid byte of data—as defined by BE[7:0]#—driven and sampled on the D[63:0] data bus. Even parity means that the total number of 1 bits within each byte of data and its respective data parity bit is an even number. DP[7:0] are driven by the processor during write cycles and sampled by the processor during read cycles. If the processor detects bad parity on any valid byte of data during a read cycle, PCHK# is asserted for one clock beginning the clock edge after BRDY# is sampled asserted. The processor does not take an internal exception as the result of detecting a data parity check, and system logic must respond appropriately to the assertion of this signal.

The eight data parity bits correspond to the eight bytes of the data bus as follows:

- DP7: D[63:56]
- DP6: D[55:48]
- DP5: D[47:40]
- DP4: D[39:32]
- DP3: D[31:24]
- DP2: D[23:16]
- DP1: D[15:8]
- DP0: D[7:0]

For systems that do not support data parity, DP[7:0] should be connected to V_{CC3} through pullup resistors.

Driven, Sampled, and Floated

As Outputs: For single-transfer write cycles, the processor drives DP[7:0] with valid parity one clock edge after the clock edge on which ADS# is asserted and DP[7:0] remain in the same state until the clock edge on which BRDY# is sampled asserted. If the cycle is a writeback, DP[7:0] are driven one clock edge after the clock edge on which ADS# is asserted and are subsequently changed off the clock edge on which each BRDY# assertion of the burst cycle is sampled.

As Inputs: During read cycles, the processor samples DP[7:0] on the clock edge BRDY# is sampled asserted.

The processor always floats DP[7:0] except when they are being driven during a write cycle as described above. In addition, DP[7:0] are floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in recognition of HOLD.

4.20 EADS# (External Address Strobe)

Input

Summary

System logic asserts EADS# during a cache inquire cycle to indicate that the address bus contains a valid address. EADS# can only be driven after the system logic has taken control of the address bus by asserting AHOLD or BOFF# or by receiving HLDA. The processor responds to the sampling of EADS# and the address bus by driving HIT#, which indicates if the inquired cache line exists in the processor's caches, and HITM#, which indicates if it is in the modified state.

Sampled

If AHOLD or BOFF# is asserted by the system logic in order to execute a cache inquire cycle, the processor begins sampling EADS# two clock edges after AHOLD or BOFF# is sampled asserted. If the system logic asserts HOLD in order to execute a cache inquire cycle, the processor begins sampling EADS# two clock edges after the clock edge HLDA is asserted by the processor.

EADS# is ignored during the following conditions:

- One clock edge after the clock edge on which EADS# is sampled asserted
- Two clock edges after the clock edge on which ADS# is asserted
- When the processor is driving the address bus
- When the processor asserts HITM#

4.21 EWBE# (External Write Buffer Empty)

Input

Summary

The system logic can negate EWBE# to the processor to indicate that its external write buffers are full and that additional data cannot be stored at this time. This causes the processor to delay the following activities until EWBE# is sampled asserted:

- The commitment of write hit cycles to cache lines in the modified state or exclusive state in the processor's caches
- The decode and execution of an instruction that follows a currently-executing serializing instruction
- The assertion or negation of SMIACK#
- The entering of the Halt state and the Stop Grant state

Negating EWBE# does not prevent the completion of any type of cycle that is currently in progress.

Sampled

The processor samples EWBE# on each clock edge that BRDY# is sampled asserted during all memory write cycles (except writeback cycles), I/O write cycles, and special bus cycles.

If EWBE# is sampled negated, it is sampled on every clock edge until it is asserted, and then it is ignored until BRDY# is sampled asserted in the next write cycle or special cycle.

If EFER[3] is set to 1, then EWBE# is ignored by the processor. For more information on the EFER settings and EWBE#, see "EWBE Control" on page 203.

4.22 FERR# (Floating-Point Error)

Output

Summary

The assertion of FERR# indicates the occurrence of an unmasked floating-point exception resulting from the execution of a floating-point instruction. This signal is provided to allow the system logic to handle this exception in a manner consistent with IBM-compatible PC/AT systems. See “Handling Floating-Point Exceptions” on page 209 for a system logic implementation that supports floating-point exceptions.

The state of the numeric error (NE) bit in CR0 does not affect the FERR# signal.

The processor is designed so that FERR# does not glitch, enabling the signal to be used as a clocking source for system logic.

Driven

The processor asserts FERR# on the instruction boundary of the next floating-point instruction, MMX instruction, 3DNow! instruction, or WAIT instruction that occurs following the floating-point instruction that caused the unmasked floating-point exception—that is, FERR# is not asserted at the time the exception occurs. The IGNNE# signal does not affect the assertion of FERR#.

FERR# is negated during the following conditions:

- Following the successful execution of the floating-point instructions FCLEX, FINIT, FSAVE, and FSTENV
- Under certain circumstances, following the successful execution of the floating-point instructions FLDCW, FLDENV, and FRSTOR, which load the floating-point status word or the floating-point control word
- Following the falling transition of RESET

FERR# is always driven except in the Tri-State Test mode.

See “IGNNE# (Ignore Numeric Exception)” on page 106 for more details on floating-point exceptions.

4.23 FLUSH# (Cache Flush)

Input

Summary

In response to sampling FLUSH# asserted, the processor writes back any cache lines in the L1 data cache or L2 cache that are in the modified state, invalidates all lines in the L1 and L2 caches, and then executes a flush acknowledge special cycle. See Table 23 on page 126 for the bus definition of special cycles.

In addition, FLUSH# is sampled when RESET is negated to determine if the processor enters the Tri-State Test mode. If FLUSH# is 0 during the falling transition of RESET, the processor enters the Tri-State Test mode instead of performing the normal RESET functions.

Sampled

FLUSH# is sampled and latched as a falling edge-sensitive signal. During normal operation (not RESET), FLUSH# is sampled on every clock edge but is not recognized until the next instruction boundary. If FLUSH# is asserted synchronously, it can be asserted for a minimum of one clock. If FLUSH# is asserted asynchronously, it must have been negated for a minimum of two clocks, followed by an assertion of a minimum of two clocks.

FLUSH# is also sampled during the falling transition of RESET. If RESET and FLUSH# are driven synchronously, FLUSH# is sampled on the clock edge prior to the clock edge on which RESET is sampled negated. If RESET is driven asynchronously, the minimum setup and hold time for FLUSH#, relative to the negation of RESET, is two clocks.

4.24 HIT# (Inquire Cycle Hit)

Output

Summary

The processor asserts HIT# during an inquire cycle to indicate that the cache line is valid within the processor's L1 and/or L2 caches (also known as a cache hit). The cache line can be in the modified, exclusive, or shared state.

Driven

HIT# is always driven—except in the Tri-State Test mode—and only changes state the clock edge after the clock edge on which EADS# is sampled asserted. It is driven in the same state until the next inquire cycle.

4.25 HITM# (Inquire Cycle Hit To Modified Line)

Output

Summary

The processor asserts HITM# during an inquire cycle to indicate that the cache line exists in the processor's L1 data cache or L2 cache in the modified state. The processor performs a writeback cycle as a result of this cache hit. If an inquire cycle hits a cache line that is currently being written back, the processor asserts HITM# but does not execute another writeback cycle. The system logic must not expect the processor to assert ADS# each time HITM# is asserted.

Driven

HITM# is always driven—except in the Tri-State Test mode—and, in particular, is driven to represent the result of an inquire cycle the clock edge after the clock edge on which EADS# is sampled asserted. If HITM# is negated in response to the inquire address, it remains negated until the next inquire cycle. If HITM# is asserted in response to the inquire address, it remains asserted throughout the writeback cycle and is negated one clock edge after the last BRDY# of the writeback is sampled asserted.

4.26 HLDA (Hold Acknowledge)

Output

Summary

When HOLD is sampled asserted, the processor completes the current bus cycles, floats the processor bus, and asserts HLDA in an acknowledgment that these events have been completed. The processor does not assert HLDA until the completion of a locked sequence of cycles. While HLDA is asserted, another bus master can drive cycles on the bus, including inquire cycles to the processor. The following signals are floated when HLDA is asserted: A[31:3], ADS#, ADSC#, AP, BE[7:0]#, CACHE#, D[63:0], D/C#, DP[7:0], LOCK#, M/IO#, PCD, PWT, SCYC, and W/R#.

The processor is designed so that HLDA does not glitch.

Driven

HLDA is always driven except in the Tri-State Test mode. If a processor cycle is in progress while HOLD is sampled asserted, HLDA is asserted one clock edge after the last BRDY# of the cycle is sampled asserted. If the bus is idle, HLDA is asserted one clock edge after HOLD is sampled asserted. HLDA is negated one clock edge after the clock edge on which HOLD is sampled negated.

The assertion of HLDA is independent of the sampled state of BOFF#.

The processor floats the bus every clock in which HLDA is asserted.

4.27 HOLD (Bus Hold Request)

Input

Summary

The system logic can assert HOLD to gain control of the processor's bus. When HOLD is sampled asserted, the processor completes the current bus cycles, floats the processor bus, and asserts HLDA in an acknowledgment that these events have been completed.

Sampled

The processor samples HOLD on every clock edge. If a processor cycle is in progress while HOLD is sampled asserted, HLDA is asserted one clock edge after the last BRDY# of the cycle is sampled asserted. If the bus is idle, HLDA is asserted one clock edge after HOLD is sampled asserted. HOLD is recognized while INIT and RESET are sampled asserted.

4.28 IGNNE# (Ignore Numeric Exception)

Input

Summary

IGNNE#, in conjunction with the numeric error (NE) bit in CR0, is used by the system logic to control the effect of an unmasked floating-point exception on a previous floating-point instruction during the execution of a floating-point instruction, MMX instruction, 3DNow! instruction, or the WAIT instruction—hereafter referred to as the target instruction.

If an unmasked floating-point exception is pending and the target instruction is considered error-sensitive, then the relationship between NE and IGNNE# is as follows:

- If NE = 0, then:
 - If IGNNE# is sampled asserted, the processor ignores the floating-point exception and continues with the execution of the target instruction.
 - If IGNNE# is sampled negated, the processor waits until it samples IGNNE#, INTR, SMI#, NMI, or INIT asserted.
 - If IGNNE# is sampled asserted while waiting, the processor ignores the floating-point exception and continues with the execution of the target instruction.
 - If INTR, SMI#, NMI, or INIT is sampled asserted while waiting, the processor handles its assertion appropriately.
- If NE = 1, the processor invokes the INT 10h exception handler.

If an unmasked floating-point exception is pending and the target instruction is considered error-insensitive, then the processor ignores the floating-point exception and continues with the execution of the target instruction.

FERR# is not affected by the state of the NE bit or IGNNE#. FERR# is always asserted at the instruction boundary of the target instruction that follows the floating-point instruction that caused the unmasked floating-point exception.

This signal is provided to allow the system logic to handle exceptions in a manner consistent with IBM-compatible PC/AT systems.

Sampled

The processor samples IGNNE# as a level-sensitive input on every clock edge. The system logic can drive the signal either synchronously or asynchronously. If it is asserted asynchronously, it must be asserted for a minimum pulse width of two clocks.

4.29 INIT (Initialization)**Input****Summary**

The assertion of INIT causes the processor to empty its pipelines, to initialize most of its internal state, and to branch to address FFFF_FFF0h—the same instruction execution starting point used after RESET. Unlike RESET, the processor preserves the contents of its caches, the floating-point state, the MMX state, Model-Specific Registers, the CD and NW bits of the CR0 register, and other specific internal resources.

INIT can be used as an accelerator for 80286 code that requires a reset to exit from Protected mode back to Real mode.

Sampled

INIT is sampled and latched as a rising edge-sensitive signal. INIT is sampled on every clock edge but is not recognized until the next instruction boundary. During an I/O write cycle, it must be sampled asserted a minimum of three clock edges before BRDY# is sampled asserted if it is to be recognized on the boundary between the I/O write instruction and the following instruction.

If INIT is asserted synchronously, it can be asserted for a minimum of one clock. If it is asserted asynchronously, it must have been negated for a minimum of two clocks, followed by an assertion of a minimum of two clocks.

4.30 INTR (Maskable Interrupt)

Input

Summary

INTR is the system's maskable interrupt input to the processor. When the processor samples and recognizes INTR asserted, the processor executes a pair of interrupt acknowledge bus cycles and then jumps to the interrupt service routine specified by the interrupt number that was returned during the interrupt acknowledge sequence. The processor only recognizes INTR if the interrupt flag (IF) in the EFLAGS register equals 1.

Sampled

The processor samples INTR as a level-sensitive input on every clock edge, but the interrupt request is not recognized until the next instruction boundary. The system logic can drive INTR either synchronously or asynchronously. If it is asserted asynchronously, it must be asserted for a minimum pulse width of two clocks. In order to be recognized, INTR must remain asserted until an interrupt acknowledge sequence is complete.

4.31 INV (Invalidation Request)

Input

Summary

During an inquire cycle, the state of INV determines whether an addressed cache line that is found in the processor's L1 and/or L2 caches transitions to the invalid state or the shared state.

If INV is sampled asserted during an inquire cycle, the processor transitions the cache line (if found) to the invalid state, regardless of its previous state. If INV is sampled negated during an inquire cycle, the processor transitions the cache line (if found) to the shared state. In either case, if the cache line is found in the modified state, the processor writes it back to memory before changing its state.

Sampled

INV is sampled on the clock edge on which EADS# is sampled asserted.

4.32 KEN# (Cache Enable)

Input

Summary

If KEN# is sampled asserted, it indicates that the address presented by the processor is cacheable. If KEN# is sampled asserted and the processor intends to perform a cache-line fill (signified by the assertion of CACHE#), the processor executes a 32-byte burst read cycle and expects to sample BRDY# asserted a total of four times. If KEN# is sampled negated during a read cycle, a single-transfer cycle is executed and the processor does not cache the data. For write cycles, CACHE# is asserted to indicate the current bus cycle is a modified cache-line writeback. KEN# is ignored during writebacks.

If PCD is asserted during a bus cycle, the processor does not cache any data read during that cycle, regardless of the state of KEN#. See “PCD (Page Cache Disable)” on page 113 for more details.

If the processor has sampled the state of KEN# during a cycle, and that cycle is aborted due to the sampling of BOFF# asserted, the system logic must ensure that KEN# is sampled in the same state when the processor restarts the aborted cycle.

Sampled

KEN# is sampled on the clock edge on which the first BRDY# or NA# of a read cycle is sampled asserted. If the read cycle is a burst, KEN# is ignored during the last three assertions of BRDY#. KEN# is sampled during read cycles only when CACHE# is asserted.

4.33 LOCK# (Bus Lock)

Output

Summary

The processor asserts LOCK# during a sequence of bus cycles to ensure that the cycles are completed without allowing other bus masters to intervene. Locked operations consist of two to five bus cycles. LOCK# is asserted during the following operations:

- An interrupt acknowledge sequence
- Descriptor Table accesses
- Page Directory and Page Table accesses
- XCHG instruction
- An instruction with an allowable LOCK prefix

In order to ensure that locked operations appear on the bus and are visible to the entire system, any data operands addressed during a locked cycle that reside in the processor's caches are flushed and invalidated from the caches prior to the locked operation. If the cache line is in the modified state, it is written back and invalidated prior to the locked operation. Likewise, any data read during a locked operation is not cached.

The processor is designed so that LOCK# does not glitch.

Driven and Floated

During a locked cycle, LOCK# is asserted off the same clock edge on which ADS# is asserted and remains asserted until the last BRDY# of the last bus cycle is sampled asserted. The processor negates LOCK# for at least one clock between consecutive sequences of locked operations to allow the system logic to arbitrate for the bus.

LOCK# is floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in response to HOLD. When LOCK# is floated due to BOFF# sampled asserted, the system logic is responsible for preserving the lock condition while LOCK# is in the high-impedance state.

4.34 M/IO# (Memory or I/O)

Output

Summary

The processor drives M/IO# during a bus cycle to indicate whether it is addressing the memory or I/O space. If M/IO# = 1, the processor is addressing memory or a memory-mapped I/O port as the result of an instruction fetch or an instruction that loads or stores data. If M/IO# = 0, the processor is addressing an I/O port during the execution of an I/O instruction. In addition, M/IO# is used to define other bus cycles, including interrupt acknowledge and special cycles. See Table 23 on page 126 for more details.

Driven and Floated

M/IO# is driven off the same clock edge as ADS# and remains in the same state until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted. M/IO# is driven during memory cycles, I/O cycles, special bus cycles, and interrupt acknowledge cycles.

M/IO# is floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in response to HOLD.

4.35 NA# (Next Address)

Input

Summary

System logic asserts NA# to indicate to the processor that it is ready to accept another bus cycle pipelined into the previous bus cycle. ADS#, along with address and status signals, can be asserted as early as one clock edge after NA# is sampled asserted if the processor is prepared to start a new cycle. Because the processor allows a maximum of two cycles to be in progress at a time, the assertion of NA# is sampled while two cycles are in progress but ADS# is not asserted until the completion of the first cycle.

Sampled

NA# is sampled every clock edge during bus cycles, starting one clock edge after the clock edge that negates ADS#, until the last expected BRDY# of the last executed cycle is sampled asserted (with the exception of the clock edge after the clock edge that negates the ADS# for a second pending cycle). Because the processor latches NA# when sampled, the system logic only needs to assert NA# for one clock.

4.36 NMI (Non-Maskable Interrupt)

Input

Summary

When NMI is sampled asserted, the processor jumps to the interrupt service routine defined by interrupt number 02h. Unlike the INTR signal, software cannot mask the effect of NMI if it is sampled asserted by the processor. However, NMI is temporarily masked upon entering System Management Mode (SMM). In addition, an interrupt acknowledge cycle is not executed because the interrupt number is predefined.

If NMI is sampled asserted while the processor is executing the interrupt service routine for a previous NMI, the subsequent NMI remains pending until the completion of the execution of the IRET instruction at the end of the interrupt service routine.

Sampled

NMI is sampled and latched as a rising edge-sensitive signal. During normal operation, NMI is sampled on every clock edge but is not recognized until the next instruction boundary. If it is asserted synchronously, it can be asserted for a minimum of one clock. If it is asserted asynchronously, it must have been negated for a minimum of two clocks, followed by an assertion of a minimum of two clocks.

4.37 PCD (Page Cache Disable)

Output

Summary

The processor drives PCD to indicate the operating system's specification of cacheability for the page being addressed. System logic can use PCD to control external caching. If PCD is asserted, the addressed page is not cached. If PCD is negated, the cacheability of the addressed page depends upon the state of CACHE# and KEN#.

The state of PCD depends upon the processor's operating mode and the state of certain bits in its control registers and TLB as follows:

- In Real mode, or in Protected and Virtual-8086 modes while paging is disabled (PG bit in CR0 set to 0):
PCD output = CD bit in CR0
- In Protected and Virtual-8086 modes while caching is enabled (CD bit in CR0 set to 0) and paging is enabled (PG bit in CR0 set to 1):
 - For accesses to I/O space, page directory entries, and other non-paged accesses:
PCD output = PCD bit in CR3
 - For accesses to 4-Kbyte page table entries or 4-Mbyte pages:
PCD output = PCD bit in page directory entry
 - For accesses to 4-Kbyte pages:
PCD output = PCD bit in page table entry

Driven and Floated

PCD is driven off the same clock edge as ADS# and remains in the same state until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted.

PCD is floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in response to HOLD.

4.38 PCHK# (Parity Check)

Output

Summary

The processor asserts PCHK# during read cycles if it detects an even parity error on one or more valid bytes of D[63:0] during a read cycle. (Even parity means that the total number of 1 bits within each byte of data and its respective data parity bit is even.) The processor checks data parity for the data bytes that are valid, as defined by BE[7:0]#, the byte enables.

PCHK# is always driven but is only asserted for memory and I/O read bus cycles and the second cycle of an interrupt acknowledge sequence. PCHK# is not driven during any type of write cycles or special bus cycles. The processor does not take an internal exception as the result of detecting a data parity error, and system logic must respond appropriately to the assertion of this signal.

The processor is designed so that PCHK# does not glitch, enabling the signal to be used as a clocking source for system logic.

Driven

PCHK# is always driven except in the Tri-State Test mode. For each BRDY# returned to the processor during a read cycle with a parity error detected on the data bus, PCHK# is asserted for one clock, one clock edge after BRDY# is sampled asserted.

4.39 PWT (Page Writethrough)

Output

Summary

The processor drives PWT to indicate the operating system's specification of the writeback state or writethrough state for the page being addressed. PWT, together with WB/WT#, specifies the data cache-line state during cacheable read misses and write hits to shared cache lines. See "WB/WT# (Writeback or Writethrough)" on page 123 for more details.

The state of PWT depends upon the processor's operating mode and the state of certain bits in its control registers and TLB as follows:

- In Real mode, or in Protected and Virtual-8086 modes while paging is disabled (PG bit in CR0 set to 0):

PWT output = 0 (writeback state)

- In Protected and Virtual-8086 modes while paging is enabled (PG bit in CR0 set to 1):

- For accesses to I/O space, page directory entries, and other non-paged accesses:

PWT output = PWT bit in CR3

- For accesses to 4-Kbyte page table entries or 4-Mbyte pages:

PWT output = PWT bit in page directory entry

- For accesses to 4-Kbyte pages:

PWT output = PWT bit in page table entry

Driven and Floated

PWT is driven off the same clock edge as ADS# and remains in the same state until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted.

PWT is floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in response to HOLD.

4.40 RESET (Reset)

Input

Summary

When the processor samples RESET asserted, it immediately flushes and initializes all internal resources and its internal state including its pipelines and caches, the floating-point state, the MMX state, the 3DNow! state, and all registers, and then the processor jumps to address FFFF_FFF0h to start instruction execution.

The FLUSH# signal is sampled during the falling transition of RESET to invoke the Tri-State Test mode.

Sampled

RESET is sampled as a level-sensitive input on every clock edge. System logic can drive the signal either synchronously or asynchronously.

During the initial power-on reset of the processor, RESET must remain asserted for a minimum of 1.0 ms after CLK and V_{CC} reach specification before it is negated.

During a warm reset, while CLK and V_{CC} are within their specification, RESET must remain asserted for a minimum of 15 clocks prior to its negation.

4.41 RSVD (Reserved)

Summary

Reserved signals are a special class of pins that can be treated in one of the following ways:

- As no-connect (NC) pins, in which case these pins are left unconnected
- As pins connected to the system logic as defined by the industry-standard Pentium[®] interface (Socket 7)
- Any combination of NC and Socket 7 pins

In any case, if the RSVD pins are treated accordingly, the normal operation of the AMD-K6-III processor is not adversely affected in any manner.

See “Pin Designations” on page 295 for a list of the locations of the RSVD pins.

4.42 SCYC (Split Cycle)

Output

Summary

The processor asserts SCYC during misaligned, locked transfers on the D[63:0] data bus. The processor generates additional bus cycles to complete the transfer of misaligned data.

For purposes of bus cycles, the term *aligned* means:

- Any 1-byte transfers
- 2-byte and 4-byte transfers that lie within 4-byte address boundaries
- 8-byte transfers that lie within 8-byte address boundaries

Driven and Floated

SCYC is asserted off the same clock edge as ADS#, and negated off the clock edge on which NA# or the last expected BRDY# of the entire locked sequence is sampled asserted. SCYC is only valid during locked memory cycles.

SCYC is floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in response to HOLD.

4.43 SMI# (System Management Interrupt)

Input, Internal Pullup

Summary

The assertion of SMI# causes the processor to enter System Management Mode (SMM). Upon recognizing SMI#, the processor performs the following actions, in the order shown:

1. Flushes its instruction pipelines
2. Completes all pending and in-progress bus cycles
3. Acknowledges the interrupt by asserting SMIACT# after sampling EWBE# asserted (if EWBE# is masked off, then SMIACT# is not affected by EWBE#)
4. Saves the internal processor state in SMM memory
5. Disables interrupts by clearing the interrupt flag (IF) in EFLAGS and disables NMI interrupts
6. Jumps to the entry point of the SMM service routine at the SMM base physical address which defaults to 0003_8000h in SMM memory

See “System Management Mode (SMM)” on page 213 for more details regarding SMM.

Sampled

SMI# is sampled and latched as a falling edge-sensitive signal. SMI# is sampled on every clock edge but is not recognized until the next instruction boundary. If SMI# is to be recognized on the instruction boundary associated with a BRDY#, it must be sampled asserted a minimum of three clock edges before the BRDY# is sampled asserted. If it is asserted synchronously, it can be asserted for a minimum of one clock. If it is asserted asynchronously, it must have been negated for a minimum of two clocks followed by an assertion of a minimum of two clocks.

A second assertion of SMI# while in SMM is latched but is not recognized until the SMM service routine is exited.

4.44 SMIACT# (System Management Interrupt Active)

Output

Summary

The processor acknowledges the assertion of SMI# with the assertion of SMIACT# to indicate that the processor has entered System Management Mode (SMM). The system logic can use SMIACT# to enable SMM memory. See “SMI# (System Management Interrupt)” on page 117 for more details.

See “System Management Mode (SMM)” on page 213 for more details regarding SMM.

Driven

The processor asserts SMIACT# after the last BRDY# of the last pending bus cycle is sampled asserted (including all pending write cycles) and after EWBE# is sampled asserted (if EWBE# is masked off, then SMIACT# is not affected by EWBE#). SMIACT# remains asserted until after the last BRDY# of the last pending bus cycle associated with exiting SMM is sampled asserted.

SMIACT# remains asserted during any flush, internal snoop, or writeback cycle due to an inquire cycle.

4.45 STPCLK# (Stop Clock)

Input, Internal Pullup

Summary

The assertion of STPCLK# causes the processor to enter the Stop Grant state, during which the processor's internal clock is stopped. From the Stop Grant state, the processor can subsequently transition to the Stop Clock state, in which the bus clock CLK is stopped. Upon recognizing STPCLK#, the processor performs the following actions, in the order shown:

1. Flushes its instruction pipelines
2. Completes all pending and in-progress bus cycles
3. Acknowledges the STPCLK# assertion by executing a Stop Grant special bus cycle (see Table 23 on page 126)
4. Stops its internal clock after BRDY# of the Stop Grant special bus cycle is sampled asserted and after EWBE# is sampled asserted (if EWBE# is masked off, then entry into the Stop Grant state is not affected by EWBE#)
5. Enters the Stop Clock state if the system logic stops the bus clock CLK (optional)

See “Clock Control” on page 249 for more details regarding clock control.

Sampled

STPCLK# is sampled as a level-sensitive input on every clock edge but is not recognized until the next instruction boundary. System logic can drive the signal either synchronously or asynchronously. If it is asserted asynchronously, it must be asserted for a minimum pulse width of two clocks.

STPCLK# must remain asserted until recognized, which is indicated by the completion of the Stop Grant special cycle.

4.46 TCK (Test Clock)

Input, Internal Pullup

Summary

TCK is the clock for boundary-scan testing using the Test Access Port (TAP). See “Boundary-Scan Test Access Port (TAP)” on page 225 for details regarding the operation of the TAP controller.

Sampled The processor always samples TCK, except while TRST# is asserted.

4.47 TDI (Test Data Input)

Input, Internal Pullup

Summary TDI is the serial test data and instruction input for boundary-scan testing using the Test Access Port (TAP). See “Boundary-Scan Test Access Port (TAP)” on page 225 for details regarding the operation of the TAP controller.

Sampled The processor samples TDI on every rising TCK edge but only while in the Shift-IR and Shift-DR states.

4.48 TDO (Test Data Output)

Output

Summary TDO is the serial test data and instruction output for boundary-scan testing using the Test Access Port (TAP). See “Boundary-Scan Test Access Port (TAP)” on page 225 for details regarding the operation of the TAP controller.

Driven and Floated The processor drives TDO on every falling TCK edge but only while in the Shift-IR and Shift-DR states. TDO is floated at all other times.

4.49 TMS (Test Mode Select)

Input, Internal Pullup

Summary TMS specifies the test function and sequence of state changes for boundary-scan testing using the Test Access Port (TAP). See “Boundary-Scan Test Access Port (TAP)” on page 225 for details regarding the operation of the TAP controller.

Sampled The processor samples TMS on every rising TCK edge. If TMS is sampled High for five or more consecutive clocks, the TAP controller enters its Test-Logic-Reset state, regardless of the controller state. This action is the same as that achieved by asserting TRST#.

4.50 TRST# (Test Reset)

Input, Internal Pullup

Summary

The assertion of TRST# initializes the Test Access Port (TAP) by resetting its state machine to the Test-Logic-Reset state. See “Boundary-Scan Test Access Port (TAP)” on page 225 for details regarding the operation of the TAP controller.

Sampled

TRST# is a completely asynchronous input that does not require a minimum setup and hold time relative to TCK. See Table 62 on page 280 for the minimum pulse width requirement.

4.51 VCC2DET (V_{CC2} Detect)

Output

Summary

VCC2DET is internally tied to V_{SS} (logic level 0) to indicate to the system logic that it must supply the specified dual-voltage requirements to the V_{CC2} and V_{CC3} pins. The V_{CC2} pins supply voltage to the processor core, independent of the voltage supplied to the I/O buffers on the V_{CC3} pins. Upon sampling VCC2DET Low, system logic should sample VCC2H/L# to identify core voltage requirements.

Driven

VCC2DET always equals 0 and is never floated—even during the Tri-State Test mode.

4.52 VCC2H/L# (V_{CC2} High/Low)

Output

Summary

VCC2H/L# is internally tied to V_{SS} (logic level 0) to indicate to the system logic that it must supply the specified processor core voltage to the V_{CC2} pins. The V_{CC2} pins supply voltage to the processor core, independent of the voltage supplied to the I/O buffers on the V_{CC3} pins. Upon sampling VCC2DET Low to identify dual-voltage processor requirements, system logic should sample VCC2H/L# to identify the core voltage requirements for 2.9V and 3.2V products (High) or 2.2V and 2.4V products (Low).

Driven

VCC2H/L# always equals 0 and is never floated for 2.2V and 2.4V products—even during the Tri-State Test mode. To ensure proper operation for 2.9V and 3.2V products, system logic that

samples VCC2H/L# should design a weak pullup resistor for this signal.

Table 17. Output Pin Float Conditions

| Name | Floated At: | Note |
|---|---------------|------|
| VCC2DET | Always Driven | * |
| VCC2H/L# | Always Driven | * |
| Note: | | |
| * All outputs except VCC2DET, VCC2H/L#, and TDO float during the Tri-State Test mode. | | |

4.53 W/R# (Write/Read)

Output

Summary

The processor drives W/R# to indicate whether it is performing a write or a read cycle on the bus. In addition, W/R# is used to define other bus cycles, including interrupt acknowledge and special cycles. See Table 23 on page 126 for more details.

Driven and Floated

W/R# is driven off the same clock edge as ADS# and remains in the same state until the clock edge on which NA# or the last expected BRDY# of the cycle is sampled asserted. W/R# is driven during memory cycles, I/O cycles, special bus cycles, and interrupt acknowledge cycles.

W/R# is floated off the clock edge that BOFF# is sampled asserted and off the clock edge that the processor asserts HLDA in response to HOLD.

4.54 WB/WT# (Writeback or Writethrough)

Input

Summary

WB/WT#, together with PWT, specifies the data cache-line state during cacheable read misses and write hits to shared cache lines.

If WB/WT# = 0 or PWT = 1 during a cacheable read miss or write hit to a shared cache line, the accessed line is cached in the shared state. This is referred to as the writethrough state because all write cycles to this cache line are driven externally on the bus.

If WB/WT# = 1 and PWT = 0 during a cacheable read miss or a write hit to a shared cache line, the accessed line is cached in the exclusive state. Subsequent write hits to the same line cause its state to transition from exclusive to modified. This is referred to as the writeback state because the L1 data cache and the L2 cache can contain modified cache lines that are subject to be written back—referred to as a writeback cycle—as the result of an inquire cycle, an internal snoop, a flush operation, or the WBINVD instruction.

Sampled

WB/WT# is sampled on the clock edge that the first BRDY# or NA# of a bus cycle is sampled asserted. If the cycle is a burst read, WB/WT# is ignored during the last three assertions of BRDY#. WB/WT# is sampled during memory read and non-writeback write cycles and is ignored during all other types of cycles.

Table 18. Input Pin Types

| Name | Type | Note | Name | Type | Note |
|---------|--------------|------|---------|--------------|------|
| A20M# | Asynchronous | 1 | IGNNE# | Asynchronous | 1 |
| AHOLD | Synchronous | | INIT | Asynchronous | 2 |
| BF[2:0] | Synchronous | 4 | INTR | Asynchronous | 1 |
| BOFF# | Synchronous | | INV | Synchronous | |
| BRDY# | Synchronous | | KEN# | Synchronous | |
| BRDYC# | Synchronous | | NA# | Synchronous | |
| CLK | Clock | | NMI | Asynchronous | 2 |
| EADS# | Synchronous | | RESET | Asynchronous | 5, 6 |
| EWBE# | Synchronous | 7 | SMI# | Asynchronous | 2 |
| FLUSH# | Asynchronous | 2, 3 | STPCLK# | Asynchronous | 1 |
| HOLD | Synchronous | | WB/WT# | Synchronous | |

Notes:

1. These level-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must be asserted for a minimum pulse width of two clocks.
2. These edge-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must have been negated at least two clocks prior to assertion and must remain asserted at least two clocks.
3. FLUSH# is also sampled during the falling transition of RESET and can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met relative to the clock edge before the clock edge on which RESET is sampled negated. If asserted asynchronously, FLUSH# must meet a minimum setup and hold time of two clocks relative to the negation of RESET.
4. BF[2:0] are sampled during the falling transition of RESET. They must meet a minimum setup time of 1.0 ms and a minimum hold time of two clocks relative to the negation of RESET.
5. During the initial power-on reset of the processor, RESET must remain asserted for a minimum of 1.0 ms after CLK and V_{CC} reach specification before it is negated.
6. During a warm reset, while CLK and V_{CC} are within their specification, RESET must remain asserted for a minimum of 15 clocks prior to its negation.
7. On the AMD-K6-III processor, if EFER[3] is set to 1, then EWBE# is ignored by the processor.

Table 19. Output Pin Float Conditions

| Name | Floated At: (Note 1) | Note | Name | Floated At: (Note 1) | Note |
|----------|----------------------|------|----------|----------------------|------|
| A[4:3] | HLDA, AHOLD, BOFF# | 2, 3 | HLDA | Always Driven | |
| ADS# | HLDA, BOFF# | 2 | LOCK# | HLDA, BOFF# | 2 |
| ADSC# | HLDA, BOFF# | 2 | M/IO# | HLDA, BOFF# | 2 |
| APCHK# | Always Driven | | PCD | HLDA, BOFF# | 2 |
| BE[7:0]# | HLDA, BOFF# | 2 | PCHK# | Always Driven | |
| BREQ | Always Driven | | PWT | HLDA, BOFF# | 2 |
| CACHE# | HLDA, BOFF# | 2 | SCYC | HLDA, BOFF# | 2 |
| D/C# | HLDA, BOFF# | 2 | SMIACK# | Always Driven | |
| FERR# | Always Driven | | VCC2DET | Always Driven | |
| HIT# | Always Driven | | VCC2H/L# | Always Driven | |
| HITM# | Always Driven | | W/R# | HLDA, BOFF# | 2 |

Notes:

1. All outputs except VCC2DET, VCC2H/L#, and TDO float during the Tri-State Test mode.
2. Floated off the clock edge that BOFF# is sampled asserted and off the clock edge that HLDA is asserted.
3. Floated off the clock edge that AHOLD is sampled asserted.

Table 20. Input/Output Pin Float Conditions

| Name | Floated At: (Note 1) | Note |
|---------|----------------------|------|
| A[31:5] | HLDA, AHOLD, BOFF# | 2,3 |
| AP | HLDA, AHOLD, BOFF# | 2,3 |
| D[63:0] | HLDA, BOFF# | 2 |
| DP[7:0] | HLDA, BOFF# | 2 |

Notes:

1. All outputs except VCC2DET and TDO float during the Tri-State Test mode.
2. Floated off the clock edge that BOFF# is sampled asserted and off the clock edge that HLDA is asserted.
3. Floated off the clock edge that AHOLD is sampled asserted.

Table 21. Test Pins

| Name | Type | Note |
|-------|--------|-----------------------------------|
| TCK | Clock | |
| TDI | Input | Sampled on the rising edge of TCK |
| TDO | Output | Driven on the falling edge of TCK |
| TMS | Input | Sampled on the rising edge of TCK |
| TRST# | Input | Asynchronous (Independent of TCK) |

Table 22. Bus Cycle Definition

| Bus Cycle Initiated | Generated by the Processor | | | | Generated by the System |
|--|----------------------------|------|------|--------|-------------------------|
| | M/IO# | D/C# | W/R# | CACHE# | KEN# |
| Code Read, L1 Instruction Cache and L2 Cache Line Fill | 1 | 0 | 0 | 0 | 0 |
| Code Read, Noncacheable | 1 | 0 | 0 | 1 | x |
| Code Read, Noncacheable | 1 | 0 | 0 | x | 1 |
| Encoding for Special Cycle | 0 | 0 | 1 | 1 | x |
| Interrupt Acknowledge | 0 | 0 | 0 | 1 | x |
| I/O Read | 0 | 1 | 0 | 1 | x |
| I/O Write | 0 | 1 | 1 | 1 | x |
| Memory Read, L1 Data Cache and L2 Cache Line Fill | 1 | 1 | 0 | 0 | 0 |
| Memory Read, Noncacheable | 1 | 1 | 0 | 1 | x |
| Memory Read, Noncacheable | 1 | 1 | 0 | x | 1 |
| Memory Write, L1 Data Cache or L2 Cache Writeback | 1 | 1 | 1 | 0 | x |
| Memory Write, Noncacheable | 1 | 1 | 1 | 1 | x |

Note:
x means "don't care"

Table 23. Special Cycles

| Special Cycle | A4 | BE7# | BE6# | BE5# | BE4# | BE3# | BE2# | BE1# | BE0# | M/IO# | D/C# | W/R# | CACHE# | KEN# |
|--|----|------|------|------|------|------|------|------|------|-------|------|------|--------|------|
| Stop Grant | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | x |
| Flush Acknowledge (FLUSH# sampled asserted) | 0 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | x |
| Writeback (WBINVD instruction) | 0 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | x |
| Halt | 0 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 1 | 0 | 0 | 1 | 1 | x |
| Flush (INVD, WBINVD instruction) | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 1 | 0 | 0 | 1 | 1 | x |
| Shutdown | 0 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 0 | 1 | 1 | x |

Note:
x means "don't care"

5 Bus Cycles

The following sections describe and illustrate the timing and relationship of bus signals during various types of bus cycles. A representative set of bus cycles is illustrated.

5.1 Timing Diagrams

The timing diagrams illustrate the signals on the external local bus as a function of time, as measured by the bus clock (CLK). Throughout this chapter, the term *clock* refers to a single bus-clock cycle. A clock extends from one rising CLK edge to the next rising CLK edge. The processor samples and drives most signals relative to the rising edge of CLK. The exceptions to this rule include the following:

- BF[2:0]—Sampled on the falling edge of RESET
- FLUSH#—Sampled on the falling edge of RESET, also sampled on the rising edge of CLK
- All inputs and outputs are sampled relative to TCK in Boundary-Scan Test Mode. Inputs are sampled on the rising edge of TCK, outputs are driven off of the falling edge of TCK.

For each signal in the timing diagrams, the High level represents 1, the Low level represents 0, and the Middle level represents the floating (high-impedance) state. When both the High and Low levels are shown, the meaning depends on the signal. A single signal indicates ‘don’t care’. In the case of bus activity, if both High and Low levels are shown, it indicates the processor, alternate master, or system logic is driving a value, but this value may or may not be valid. (For example, the value on the address bus is valid only during the assertion of ADS#, but addresses are also driven on the bus at other times.) Figure 54 defines the different waveform representations.



| Waveform | Description |
|--|--|
|  | Don't care or bus is driven |
|  | Signal or bus is changing from Low to High |
|  | Signal or bus is changing from High to Low |
|  | Bus is changing |
|  | Bus is changing from valid to invalid |
|  | Signal or bus is floating |
|  | Denotes multiple clock periods |

Figure 54. Waveform Definitions

For all active-High signals, the term *asserted* means the signal is in the High-voltage state and the term *negated* means the signal is in the Low-voltage state. For all active-Low signals, the term *asserted* means the signal is in the Low-voltage state and the term *negated* means the signal is in the High-voltage state.

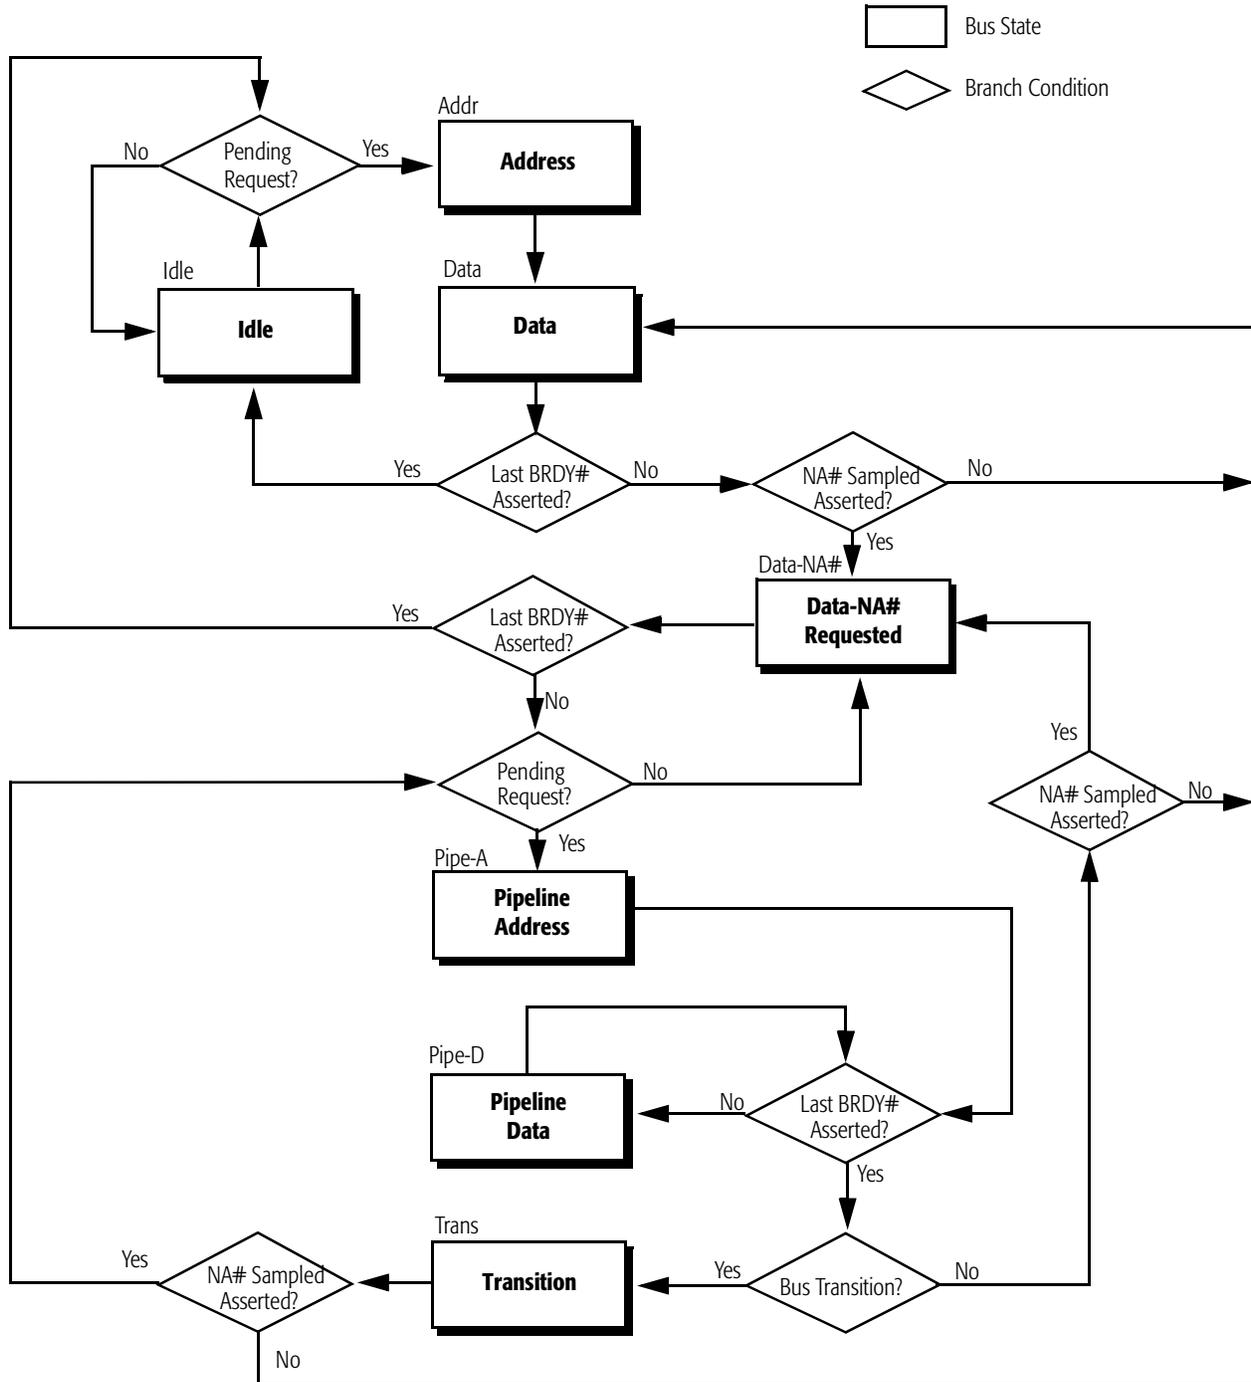5.2 Bus State Machine Diagram



Note: The processor transitions to the IDLE state on the clock edge on which BOFF# or RESET is sampled asserted.

Figure 55. Bus State Machine Diagram

Idle

The processor does not drive the system bus in the Idle state and remains in this state until a new bus cycle is requested. The processor enters this state off the clock edge on which the last BRDY# of a cycle is sampled asserted during the following conditions:

- The processor is in the Data state
- The processor is in the Data-NA# Requested state and no internal pending cycle is requested

In addition, the processor is forced into this state when the system logic asserts RESET or BOFF#. The transition to this state occurs on the clock edge on which RESET or BOFF# is sampled asserted.

Address

In this state, the processor drives ADS# to indicate the beginning of a new bus cycle by validating the address and control signals. The processor remains in this state for one clock and unconditionally enters the Data state on the next clock edge.

Data

In the Data state, the processor drives the data bus during a write cycle or expects data to be returned during a read cycle. The processor remains in this state until either NA# or the last BRDY# is sampled asserted. If the last BRDY# is sampled asserted or both the last BRDY# and NA# are sampled asserted on the same clock edge, the processor enters the Idle state. If NA# is sampled asserted first, the processor enters the Data-NA# Requested state.

Data-NA# Requested

If the processor samples NA# asserted while in the Data state and the current bus cycle is not completed (the last BRDY# is not sampled asserted), it enters the Data-NA# Requested state. The processor remains in this state until either the last BRDY# is sampled asserted or an internal pending cycle is requested. If the last BRDY# is sampled asserted before the processor drives a new bus cycle, the processor enters the Idle state (no internal pending cycle is requested) or the Address state (processor has a internal pending cycle).

Pipeline Address

In this state, the processor drives ADS# to indicate the beginning of a new bus cycle by validating the address and control signals. In this state, the processor is still waiting for the current bus cycle to be completed (until the last BRDY# is

sampled asserted). If the last BRDY# is not sampled asserted, the processor enters the Pipeline Data state.

If the processor samples the last BRDY# asserted in this state, it determines if a bus transition is required between the current bus cycle and the pipelined bus cycle. A bus transition is required when the data bus direction changes between bus cycles, such as a memory write cycle followed by a memory read cycle. If a bus transition is required, the processor enters the Transition state for one clock to prevent data bus contention. If a bus transition is not required, the processor enters the Data state.

The processor does not transition to the Data-NA# Requested state from the Pipeline Address state because the processor does not begin sampling NA# until it has exited the Pipeline Address state.

Pipeline Data

Two bus cycles are concurrently executing in this state. The processor cannot issue any additional bus cycles until the current bus cycle is completed. The processor drives the data bus during write cycles or expects data to be returned during read cycles for the current bus cycle until the last BRDY# of the current bus cycle is sampled asserted.

If the processor samples the last BRDY# asserted in this state, it determines if a bus transition is required between the current bus cycle and the pipelined bus cycle. If the bus transition is required, the processor enters the Transition state for one clock to prevent data bus contention. If a bus transition is not required, the processor enters the Data state (NA# was not sampled asserted) or the Data-NA# Requested state (NA# was sampled asserted).

Transition

The processor enters this state for one clock during data bus transitions and enters the Data state on the next clock edge if NA# is not sampled asserted. The sole purpose of this state is to avoid bus contention caused by bus transitions during pipeline operation.

5.3 Memory Reads and Writes

The AMD-K6-III processor performs single or burst memory bus cycles. The single-transfer memory bus cycle transfers 1, 2, 4, or 8 bytes and requires a minimum of two clocks. Misaligned instructions or operands result in a split cycle, which requires multiple transactions on the bus. A burst cycle consists of four back-to-back 8-byte (64-bit) transfers on the data bus.

Single-Transfer Memory Read and Write

Figure 56 shows a single-transfer read from memory, followed by two single-transfer writes to memory. For the memory read cycle, the processor asserts ADS# for one clock to validate the bus cycle and also drives A[31:3], BE[7:0]#, D/C#, W/R#, and M/IO# to the bus. The processor then waits for the system logic to return the data on D[63:0] (with DP[7:0] for parity checking) and assert BRDY#. The processor samples BRDY# on every clock edge starting with the clock edge after the clock edge that negates ADS#. See “BRDY# (Burst Ready)” on page 94.

During the read cycle, the processor drives PCD, PWT, and CACHE# to indicate its caching and cache-coherency intent for the access. The system logic returns KEN# and WB/WT# to either confirm or change this intent. If the processor asserts PCD and negates CACHE#, the accesses are noncacheable, even though the system logic asserts KEN# during the BRDY# to indicate its support for cacheability. The processor (which drives CACHE#) and the system logic (which drives KEN#) must agree in order for an access to be cacheable.

The processor can drive another cycle (in this example, a write cycle) by asserting ADS# off the next clock edge after BRDY# is sampled asserted. Therefore, an idle clock is guaranteed between any two bus cycles. The processor drives D[63:0] with valid data one clock edge after the clock edge on which ADS# is asserted. To minimize processor idle times, the system logic stores the address and data in write buffers, returns BRDY#, and performs the store to memory later. If the processor samples EWBE# negated during a write cycle, it suspends certain activities until EWBE# is sampled asserted. See “EWBE# (External Write Buffer Empty)” on page 101. In Figure 56, the second write cycle occurs during the execution of a serializing instruction. The processor delays the following cycle until EWBE# is sampled asserted.

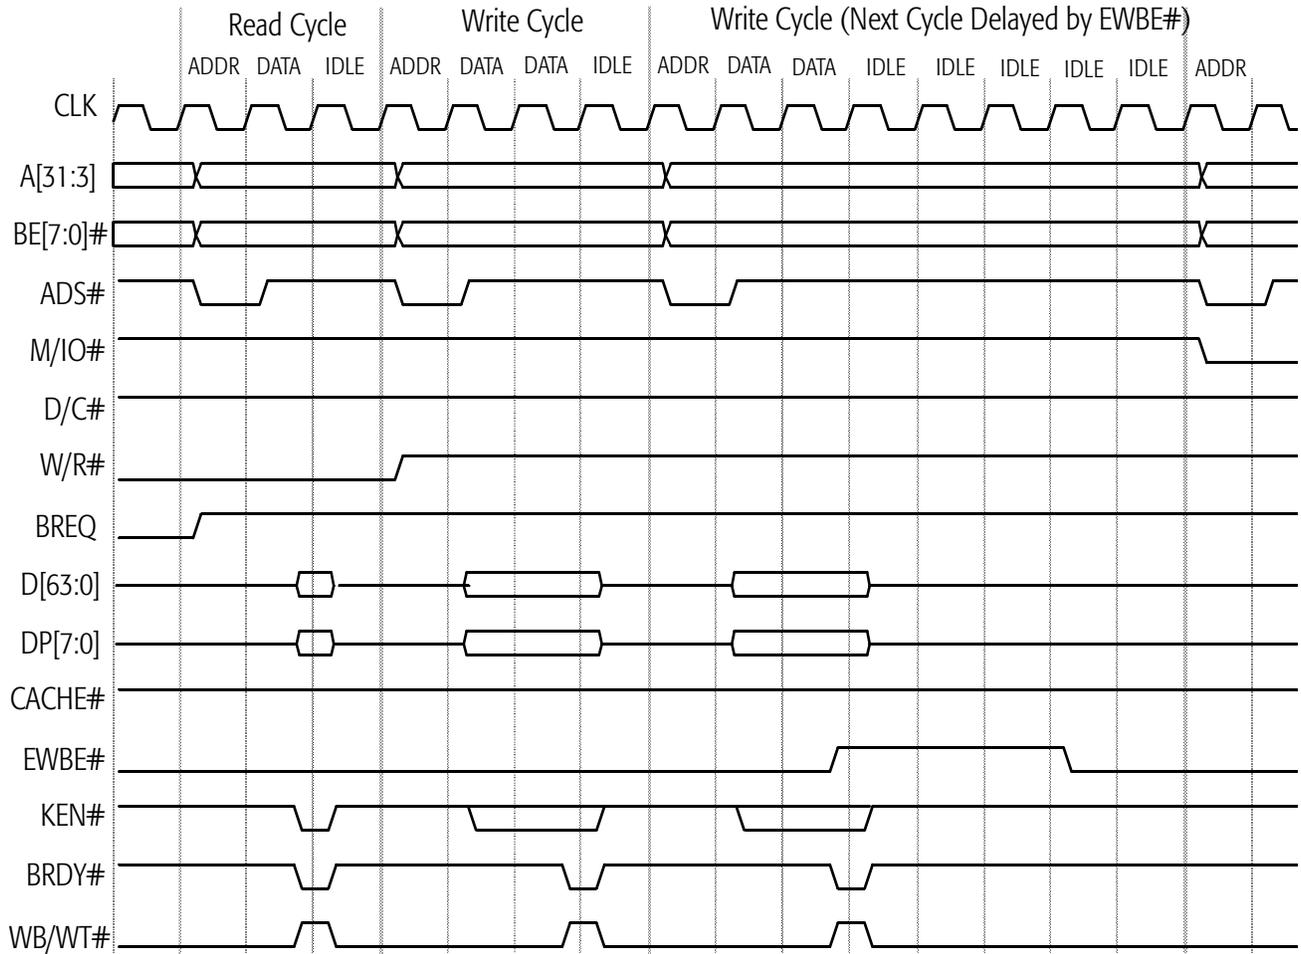


Figure 56. Non-Pipelined Single-Transfer Memory Read/Write and Write Delayed by EWBE#

Misaligned Single-Transfer Memory Read and Write

Figure 57 shows a misaligned (split) memory read followed by a misaligned memory write. Any cycle that is not aligned as defined in “SCYC (Split Cycle)” on page 117 is considered misaligned. When the processor encounters a misaligned access, it determines the appropriate pair of bus cycles—each with its own ADS# and BRDY#—required to complete the access.

The AMD-K6-III processor performs misaligned memory reads and memory writes using least-significant bytes (LSBs) first followed by most-significant bytes (MSBs). Table 24 shows the order. In the first memory read cycle in Figure 57, the processor reads the least-significant bytes. Immediately after the processor samples BRDY# asserted, it drives the second bus cycle to read the most-significant bytes to complete the misaligned transfer.

Table 24. Bus-Cycle Order During Misaligned Transfers

| Type of Access | First Cycle | Second Cycle |
|----------------|-------------|--------------|
| Memory Read | LSBs | MSBs |
| Memory Write | LSBs | MSBs |

Similarly, the misaligned memory write cycle in Figure 57 on page 135 transfers the LSBs to the memory bus first. In the next cycle, after the processor samples BRDY# asserted, the MSBs are written to the memory bus.

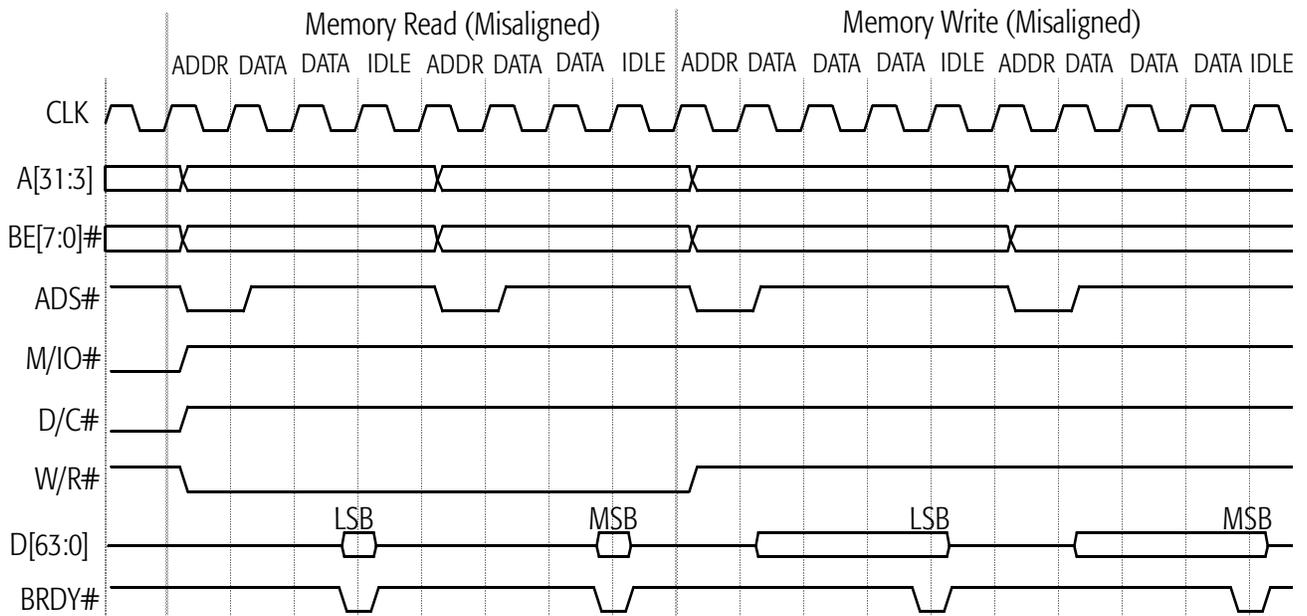


Figure 57. Misaligned Single-Transfer Memory Read and Write

Burst Reads and Pipelined Burst Reads

Figure 58 shows normal burst read cycles and a pipelined burst read cycle. The AMD-K6-III processor drives CACHE# and ADS# together to specify that the current bus cycle is a burst cycle. If the processor samples KEN# asserted with the first BRDY#, it performs burst transfers. During the burst transfers, the system logic must ignore BE[7:0]# and must return all eight bytes beginning at the starting address the processor asserts on A[31:3]. Depending on the starting address, the system logic must determine the successive quadword addresses (A[4:3]) for each transfer in a burst, as shown in Table 25. The processor expects the second, third, and fourth quadwords to occur in the sequences shown in Table 25.

Table 25. A[4:3] Address-Generation Sequence During Bursts

| Address Driven By Processor on A[4:3] | A[4:3] Addresses of Subsequent Quadwords* Generated By System Logic | | |
|---------------------------------------|---|------------|------------|
| Quadword 1 | Quadword 2 | Quadword 3 | Quadword 4 |
| 00b | 01b | 10b | 11b |
| 01b | 00b | 11b | 10b |
| 10b | 11b | 00b | 01b |
| 11b | 10b | 01b | 00b |

Note:
* quadword = 8 bytes

In Figure 58, the processor drives CACHE# throughout all burst read cycles. In the first burst read cycle, the processor drives ADS# and CACHE#, then samples BRDY# on every clock edge starting with the clock edge after the clock edge that negates ADS#. The processor samples KEN# asserted on the clock edge on which the first BRDY# is sampled asserted, executes a 32-byte burst read cycle, and expects a total of four BRDY# signals. An ideal no-wait state access is shown in Figure 58, whereas most system logic solutions add wait states between the transfers.

The second burst read cycle illustrates a similar sequence, but the processor samples NA# asserted on the same clock edge that the first BRDY# is sampled asserted. NA# assertion indicates the system logic is requesting the processor to output the next address early (also known as a pipeline transfer request). Without waiting for the current cycle to complete, the processor drives ADS# and related signals for the next burst cycle. Pipelining can reduce processor cycle-to-cycle idle times.

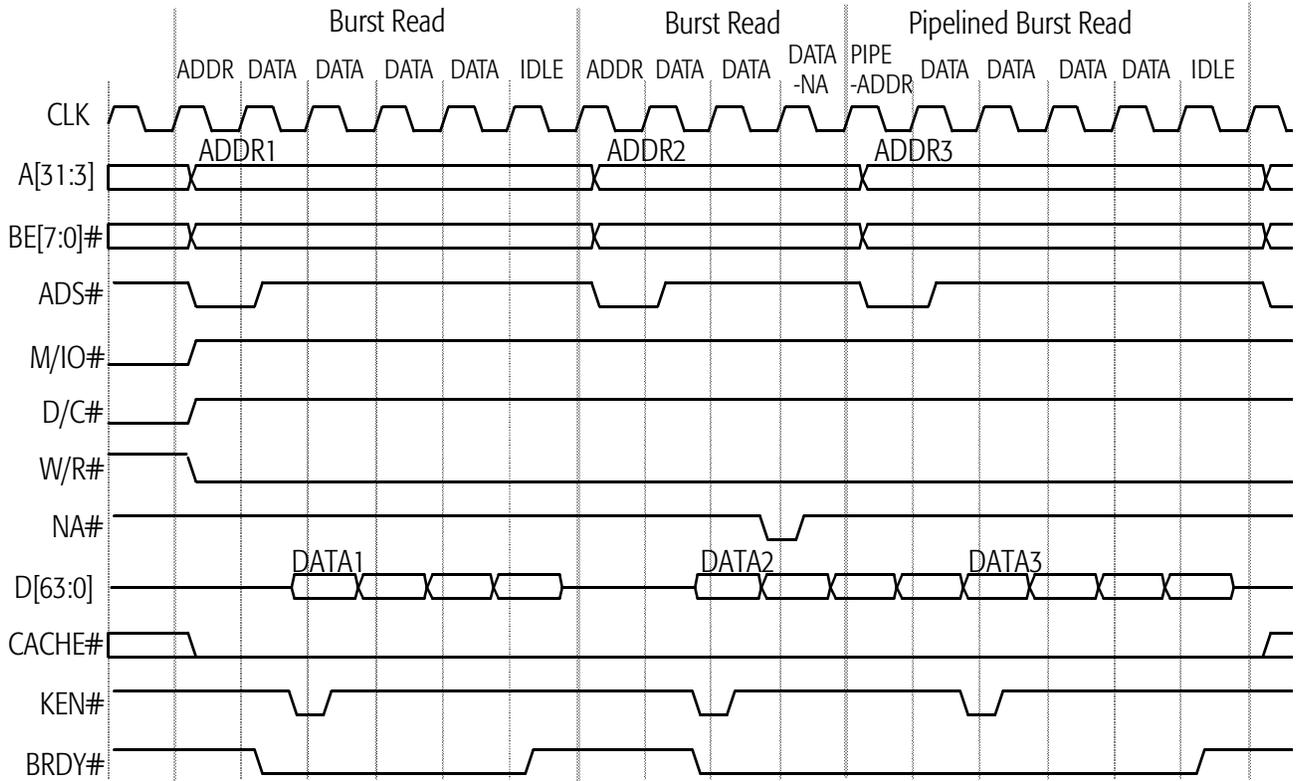


Figure 58. Burst Reads and Pipelined Burst Reads

Burst Writeback

Figure 59 shows a burst read followed by a writeback transaction. The AMD-K6-III processor initiates writebacks under the following conditions:

- *Replacement*—If a cache-line fill is initiated for a cache line currently filled with valid entries, the processor selects a line for replacement based on a least-recently-used (LRU) algorithm for the L1 instruction cache and the L2 cache, and a least-recently-allocated (LRA) algorithm for the L1 data cache. Before a replacement is made to a L1 data cache or L2 cache line that is in the modified state, the modified line is scheduled to be written back to memory.
- *Internal Snoop*—The processor snoops its L1 instruction cache during read or write misses to its L1 data cache, and it snoops its L1 data cache during read misses to its L1 instruction cache. This snooping is performed to determine whether the same address is stored in both caches, a situation that is taken to imply the occurrence of self-modifying code. If an internal snoop hits a L1 data cache line in the modified state, the line is written back to memory before being invalidated.
- *WBINVD Instruction*—When the processor executes a WBINVD instruction, it writes back all modified lines in the L1 data cache and L2 cache, and then invalidates all lines in all caches.
- *Cache Flush*—When the processor samples FLUSH# asserted, it executes a flush acknowledge special cycle and writes back all modified lines in the L1 data cache and L2 cache, and then invalidates all lines in all caches.

The processor drives writeback cycles during inquire or cache flush cycles. The writeback shown in Figure 59 is caused by a cache-line replacement. The processor completes the burst read cycle that fills the cache line. Immediately following the burst read cycle is the burst writeback cycle that represents the modified line to be written back to memory. D[63:0] are driven one clock edge after the clock edge on which ADS# is asserted and are subsequently changed off the clock edge on which each of the four BRDY# signals of the burst cycle are sampled asserted.

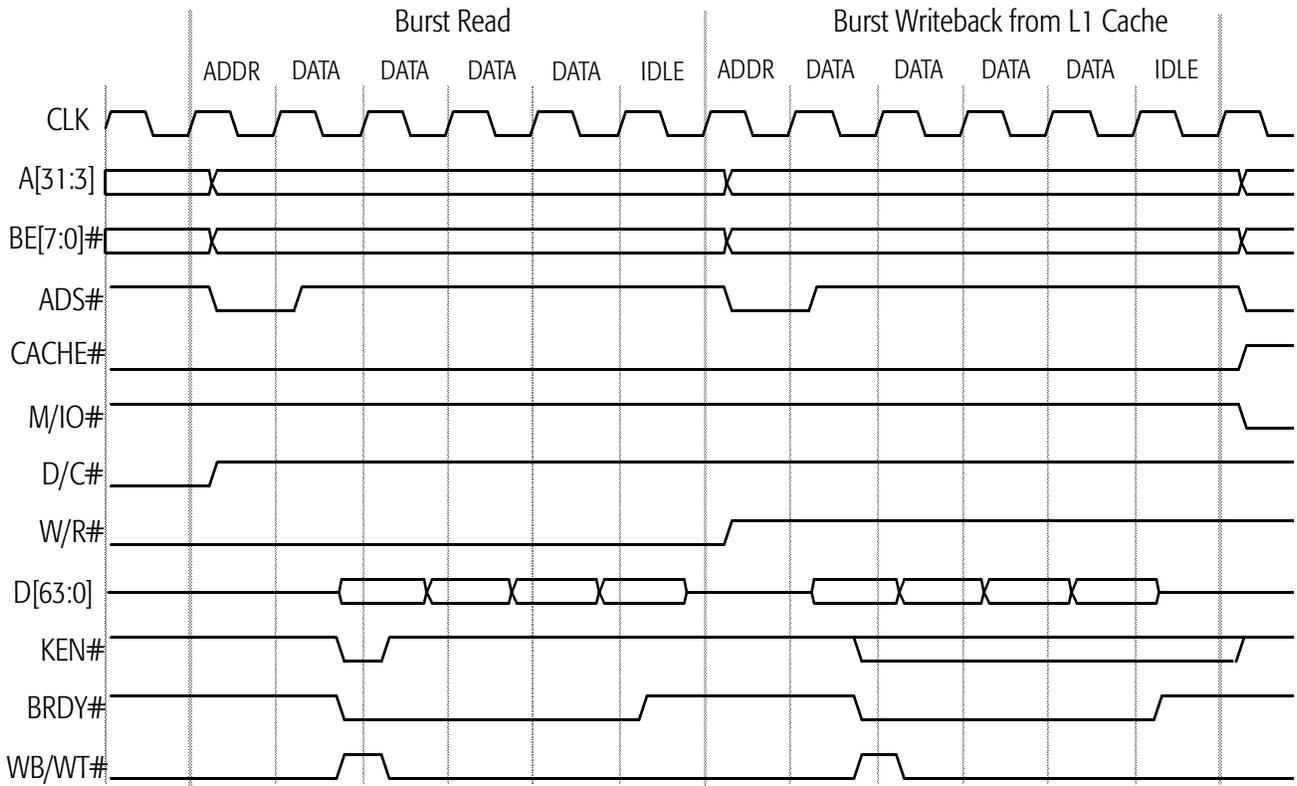


Figure 59. Burst Writeback due to Cache-Line Replacement

5.4 I/O Read and Write

Basic I/O Read and Write

The processor accesses I/O when it executes an I/O instruction (for example, IN or OUT). Figure 60 shows an I/O read followed by an I/O write. The processor drives M/IO# Low and D/C# High during I/O cycles. In this example, the first cycle shows a single wait state I/O read cycle. It follows the same sequence as a single-transfer memory read cycle. The processor drives ADS# to initiate the bus cycle, then it samples BRDY# on every clock edge starting with the clock edge after the clock edge that negates ADS#. The system logic must return BRDY# to complete the cycle. When the processor samples BRDY# asserted, it can assert ADS# for the next cycle off the next clock edge. (In this example, an I/O write cycle.)

The I/O write cycle is similar to a memory write cycle, but the processor drives M/IO# low during an I/O write cycle. The processor asserts ADS# to initiate the bus cycle. The processor drives D[63:0] with valid data one clock edge after the clock edge on which ADS# is asserted. The system logic must assert BRDY# when the data is properly stored to the I/O destination. The processor samples BRDY# on every clock edge starting with the clock edge after the clock edge that negates ADS#. In this example, two wait states are inserted while the processor waits for BRDY# to be asserted.

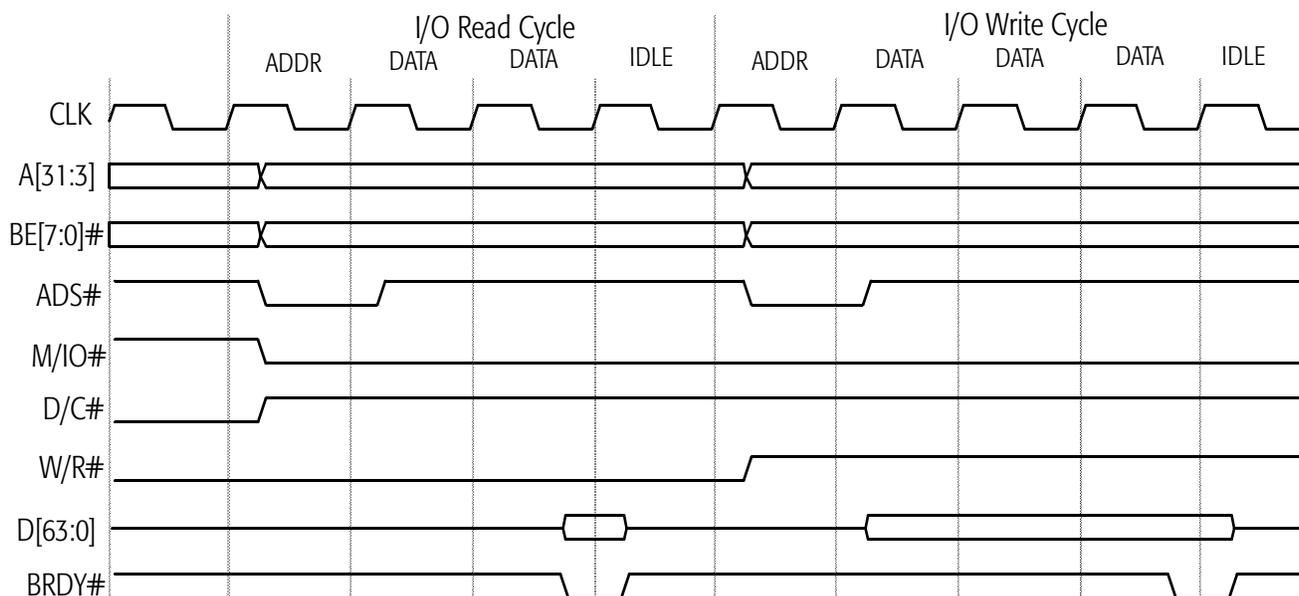


Figure 60. Basic I/O Read and Write

Misaligned I/O Read and Write

Table 26 shows the misaligned I/O read and write cycle order executed by the AMD-K6-III processor. In Figure 61, the least-significant bytes (LSBs) are transferred first. Immediately after the processor samples BRDY# asserted, it drives the second bus cycle to transfer the most-significant bytes (MSBs) to complete the misaligned bus cycle.

Table 26. Bus-Cycle Order During Misaligned I/O Transfers

| Type of Access | First Cycle | Second Cycle |
|----------------|-------------|--------------|
| I/O Read | LSBs | MSBs |
| I/O Write | LSBs | MSBs |

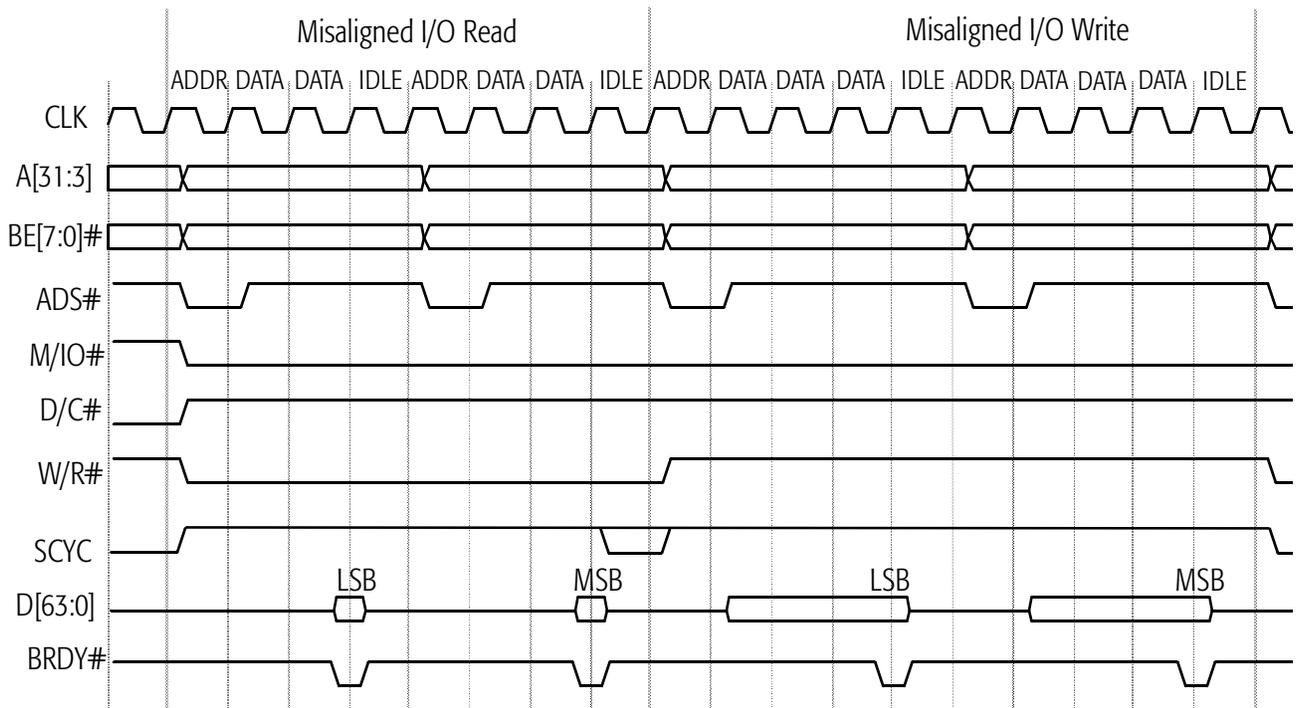


Figure 61. Misaligned I/O Transfer

5.5 Inquire and Bus Arbitration Cycles

The AMD-K6-III processor provides built-in level-one (L1) data and instruction caches, and a unified level-two (L2) cache. Each L1 cache is 32 Kbytes and two-way set-associative. The L2 cache is 256 Kbytes and four-way set-associative. The system logic or other bus master devices can initiate an inquire cycle to maintain cache/memory coherency. In response to the inquire cycle, the processor compares the inquire address with its cache tag addresses in all caches, and, if necessary, updates the MESI state of the cache line and performs writebacks to memory.

An inquire cycle can be initiated by asserting AHOLD, BOFF#, or HOLD. AHOLD is exclusively used to support inquire cycles. During AHOLD-initiated inquire cycles, the processor only floats the address bus. BOFF# provides the fastest access to the bus because it aborts any processor cycle that is in-progress, whereas AHOLD and HOLD both permit an in-progress bus cycle to complete. During HOLD-initiated and BOFF#-initiated inquire cycles, the processor floats all of its bus-driving signals.

Hold and Hold Acknowledge Cycle

The system logic or another bus device can assert HOLD to initiate an inquire cycle or to gain full control of the bus. When the AMD-K6-III processor samples HOLD asserted, it completes any in-progress bus cycle and asserts HLDA to acknowledge release of the bus. The processor floats the following signals off the same clock edge that HLDA is asserted:

- | | |
|------------|-----------|
| ■ A[31:3] | ■ DP[7:0] |
| ■ ADS# | ■ LOCK# |
| ■ AP# | ■ M/IO# |
| ■ BE[7:0]# | ■ PCD |
| ■ CACHE# | ■ PWT |
| ■ D[63:0] | ■ SCYC |
| ■ D/C# | ■ W/R# |

Figure 62 shows a basic HOLD/HLDA operation. In this example, the processor samples HOLD asserted during the memory read cycle. It continues the current memory read cycle until BRDY# is sampled asserted. The processor drives HLDA and floats its outputs one clock edge after the last BRDY# of the cycle is sampled asserted. The system logic can assert HOLD for as long as it needs to utilize the bus. The processor samples

HOLD on every clock edge but does not assert HLDA until any in-progress cycle or sequence of locked cycles is completed.

When the processor samples HOLD negated during a hold acknowledge cycle, it negates HLDA off the next clock edge. The processor regains control of the bus and can assert ADS# off the same clock edge on which HLDA is negated.

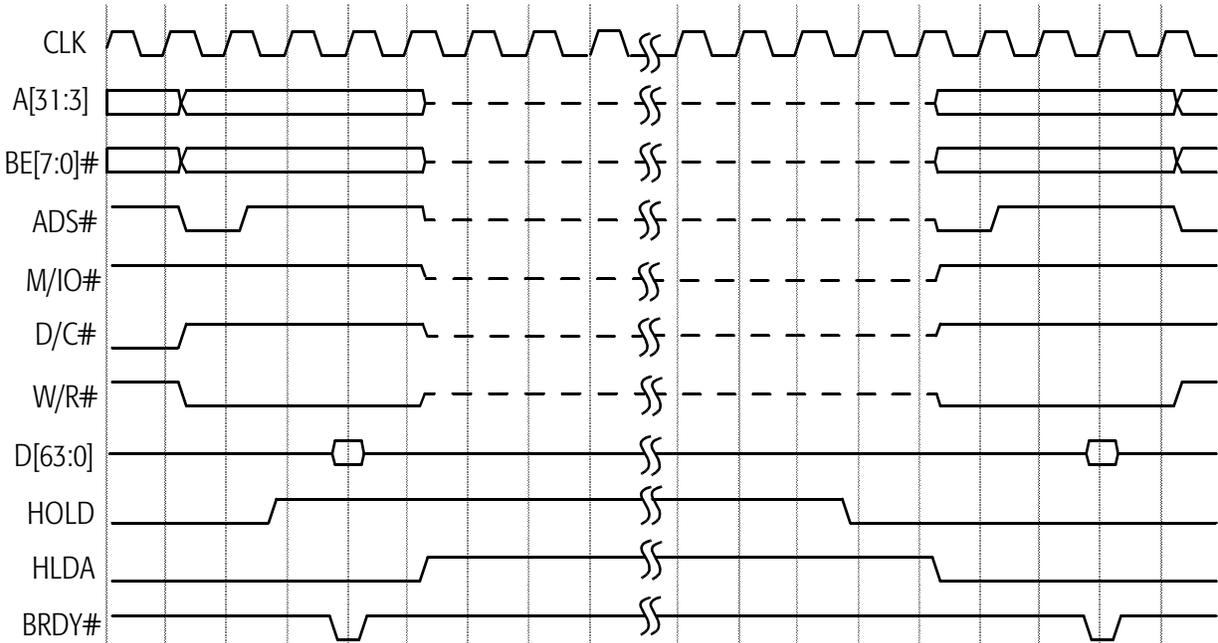


Figure 62. Basic HOLD/HLDA Operation

**HOLD-Initiated
Inquire Hit to Shared
or Exclusive Line**

Figure 63 shows a HOLD-initiated inquire cycle. In this example, the processor samples HOLD asserted during the burst memory read cycle. The processor completes the current cycle (until the last expected BRDY# is sampled asserted), asserts HLDA and floats its outputs as described on page 142.

The system logic drives an inquire cycle within the hold acknowledge cycle. It asserts EADS#, which validates the inquire address on A[31:5]. If EADS# is sampled asserted before HOLD is sampled negated, the processor recognizes it as a valid inquire cycle.

In Figure 63, the processor asserts HIT# and negates HITM# on the clock edge after the clock edge on which EADS# is sampled asserted, indicating the current inquire cycle hit a shared or exclusive cache line. (Shared and exclusive cache lines have not been modified and do not need to be written back.) During an inquire cycle, the processor samples INV to determine whether the addressed cache line found in the processor's caches transitions to the invalid state or the shared state. In this example, the processor samples INV asserted with EADS#, which invalidates the cache line.

The system logic can negate HOLD off the same clock edge on which EADS# is sampled asserted. The processor continues driving HIT# in the same state until the next inquire cycle. HITM# is not asserted unless HIT# is asserted.

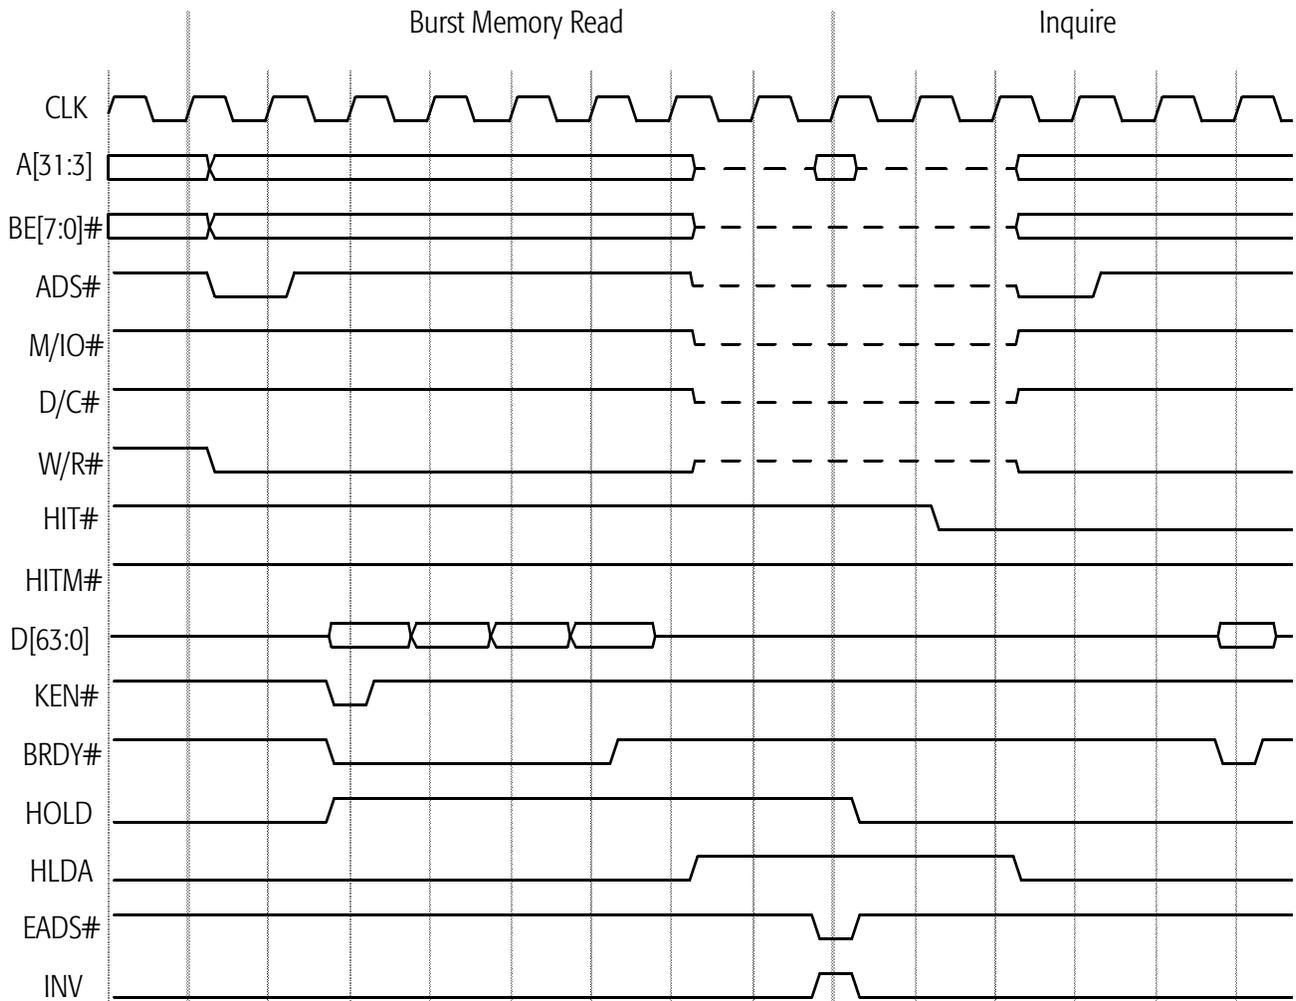


Figure 63. HOLD-Initiated Inquire Hit to Shared or Exclusive Line

**HOLD-Initiated
Inquire Hit to
Modified Line**

Figure 64 shows the same sequence as Figure 63, but in Figure 64 the inquire cycle hits a modified line and the processor asserts both HIT# and HITM#. In this example, the processor performs a writeback cycle immediately after the inquire cycle. It updates the modified cache line to external memory (normally, external cache or DRAM). The processor uses the address (A[31:5]) that was latched during the inquire cycle to perform the writeback cycle. The processor asserts HITM# throughout the writeback cycle and negates HITM# one clock edge after the last expected BRDY# of the writeback is sampled asserted.

When the processor samples EADS# during the inquire cycle, it also samples INV to determine the cache line MESI state after the inquire cycle. If INV is sampled asserted during an inquire cycle, the processor transitions the line (if found) to the invalid state, regardless of its previous state. The cache line invalidation operation is not visible on the bus. If INV is sampled negated during an inquire cycle, the processor transitions the line (if found) to the shared state. In Figure 64 the processor samples INV asserted during the inquire cycle.

In a HOLD-initiated inquire cycle, the system logic can negate HOLD off the same clock edge on which EADS# is sampled asserted. The processor drives HIT# and HITM# on the clock edge after the clock edge on which EADS# is sampled asserted.

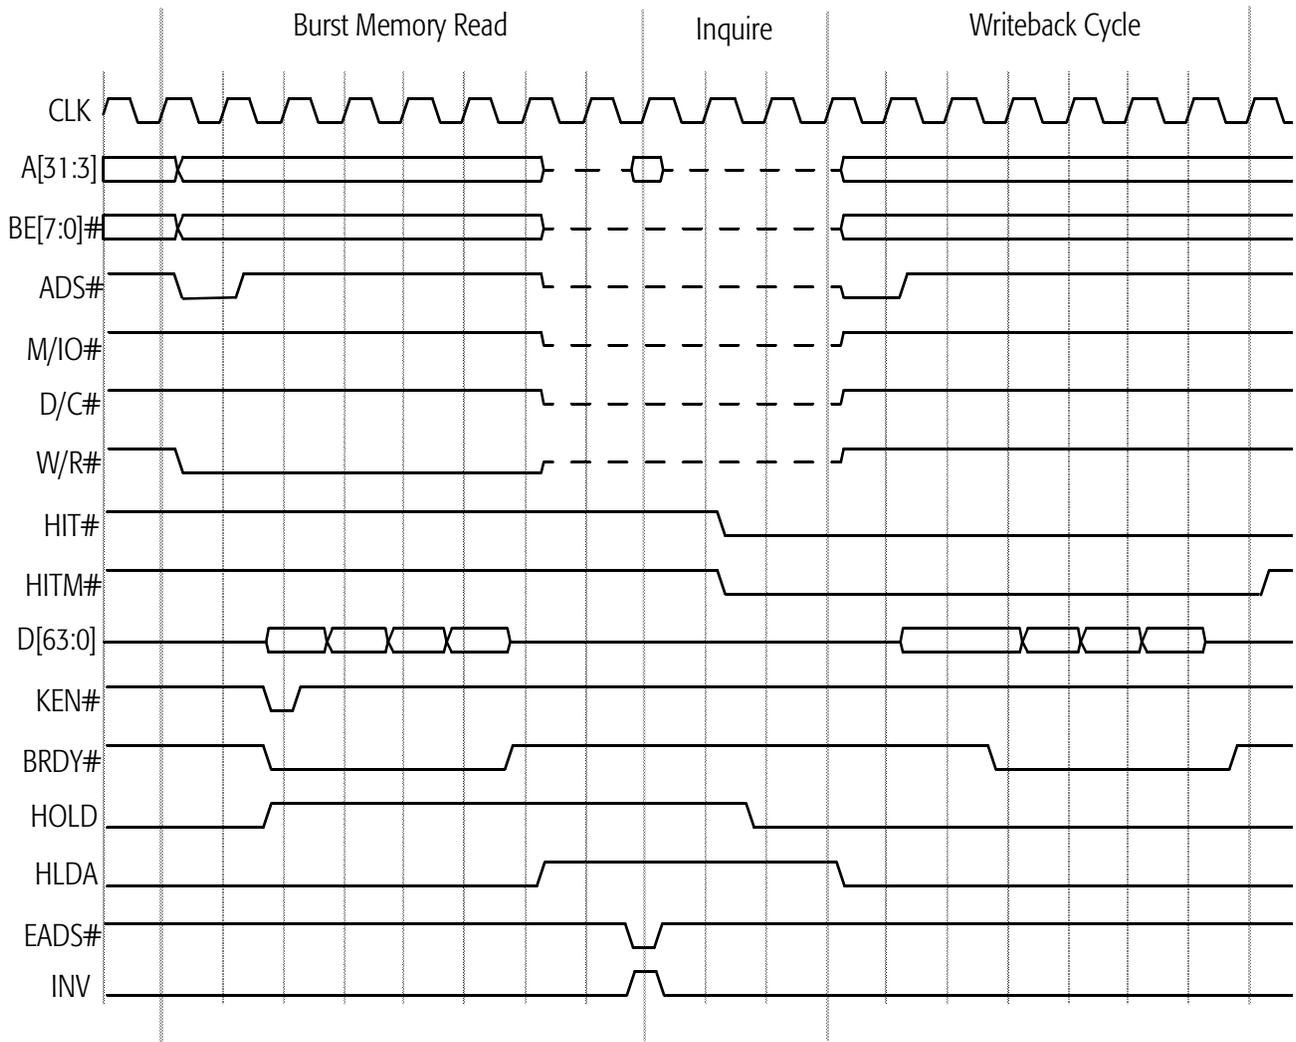


Figure 64. HOLD-Initiated Inquire Hit to Modified Line

**AHOLD-Initiated
Inquire Miss**

AHOLD can be asserted by the system to initiate one or more inquire cycles. To allow the system to drive the address bus during an inquire cycle, the processor floats A[31:3] and AP off the clock edge on which AHOLD is sampled asserted. The data bus and all other control and status signals remain under the control of the processor and are not floated. This functionality allows a bus cycle in progress when AHOLD is sampled asserted to continue to completion. The processor resumes driving the address bus off the clock edge on which AHOLD is sampled negated.

In Figure 65, the processor samples AHOLD asserted during the memory burst read cycle, and it floats the address bus off the same clock edge on which it samples AHOLD asserted. While the processor still controls the bus, it completes the current cycle until the last expected BRDY# is sampled asserted. The system logic drives EADS# with an inquire address on A[31:5] during an inquire cycle. The processor samples EADS# asserted and compares the inquire address to its tag address in the L1 instruction and data caches, and in the L2 cache. In Figure 65, the inquire address misses the tag address in the processor (both HIT# and HITM# are negated). Therefore, the processor proceeds to the next cycle when it samples AHOLD negated. (The processor can drive a new cycle by asserting ADS# off the same clock edge that it samples AHOLD negated.)

For an AHOLD-initiated inquire cycle to be recognized, the processor must sample AHOLD asserted for at least two consecutive clocks before it samples EADS# asserted. If the processor detects an address parity error during an inquire cycle, APCHK# is asserted for one clock. The system logic must respond appropriately to the assertion of this signal.

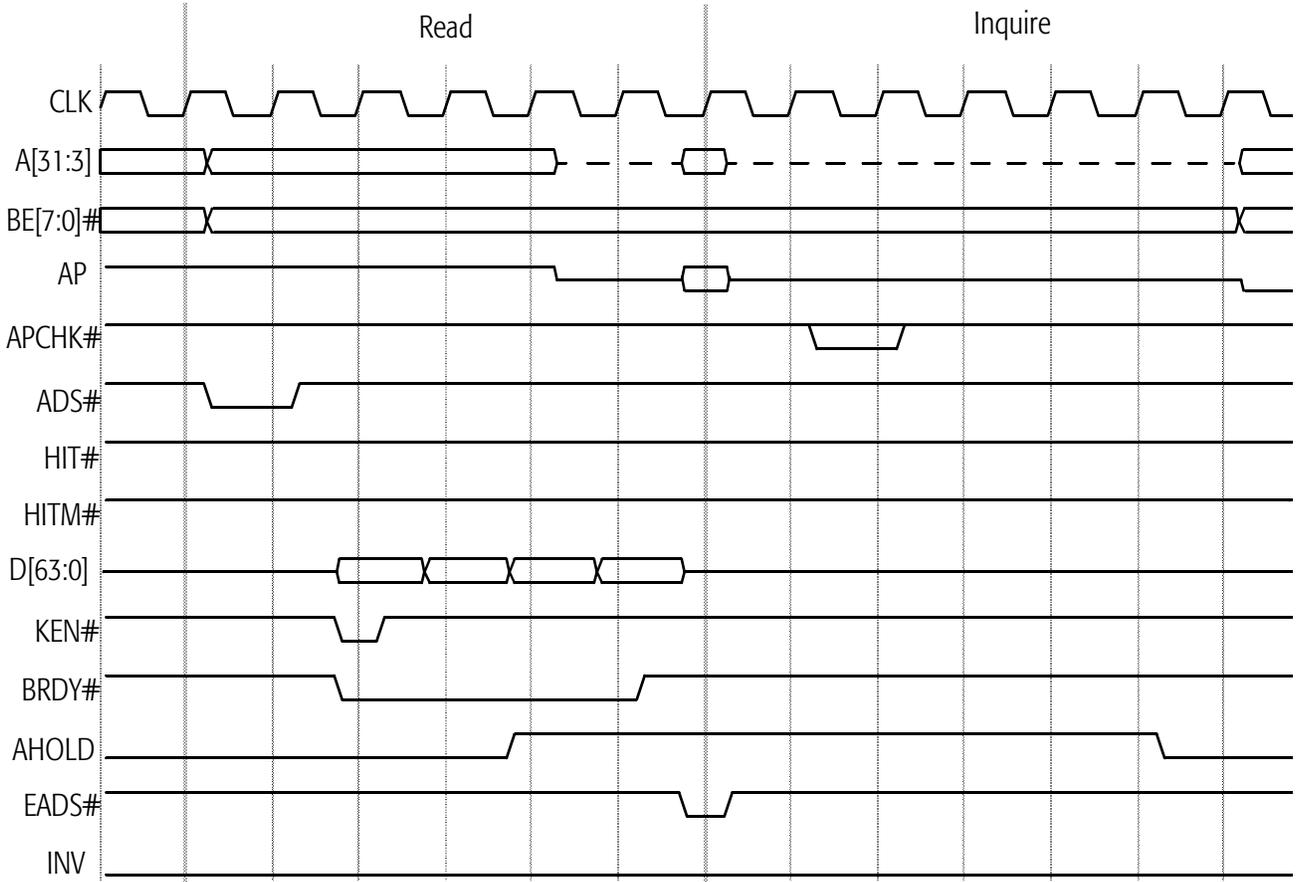


Figure 65. AHOLD-Initiated Inquire Miss

**AHOLD-Initiated
Inquire Hit to Shared
or Exclusive Line**

In Figure 66, the processor asserts HIT# and negates HITM# off the clock edge after the clock edge on which EADS# is sampled asserted, indicating the current inquire cycle hits either a shared or exclusive line. (HIT# is driven in the same state until the next inquire cycle.) The processor samples INV asserted during the inquire cycle and transitions the line to the invalid state regardless of its previous state.

During an AHOLD-initiated inquire cycle, the processor samples AHOLD on every clock edge until it is negated. In Figure 66, the processor asserts ADS# off the same clock on which AHOLD is sampled negated. If the inquire cycle hits a modified line, the processor performs a writeback cycle before it drives a new bus cycle. The next section describes the AHOLD-initiated inquire cycle that hits a modified line.

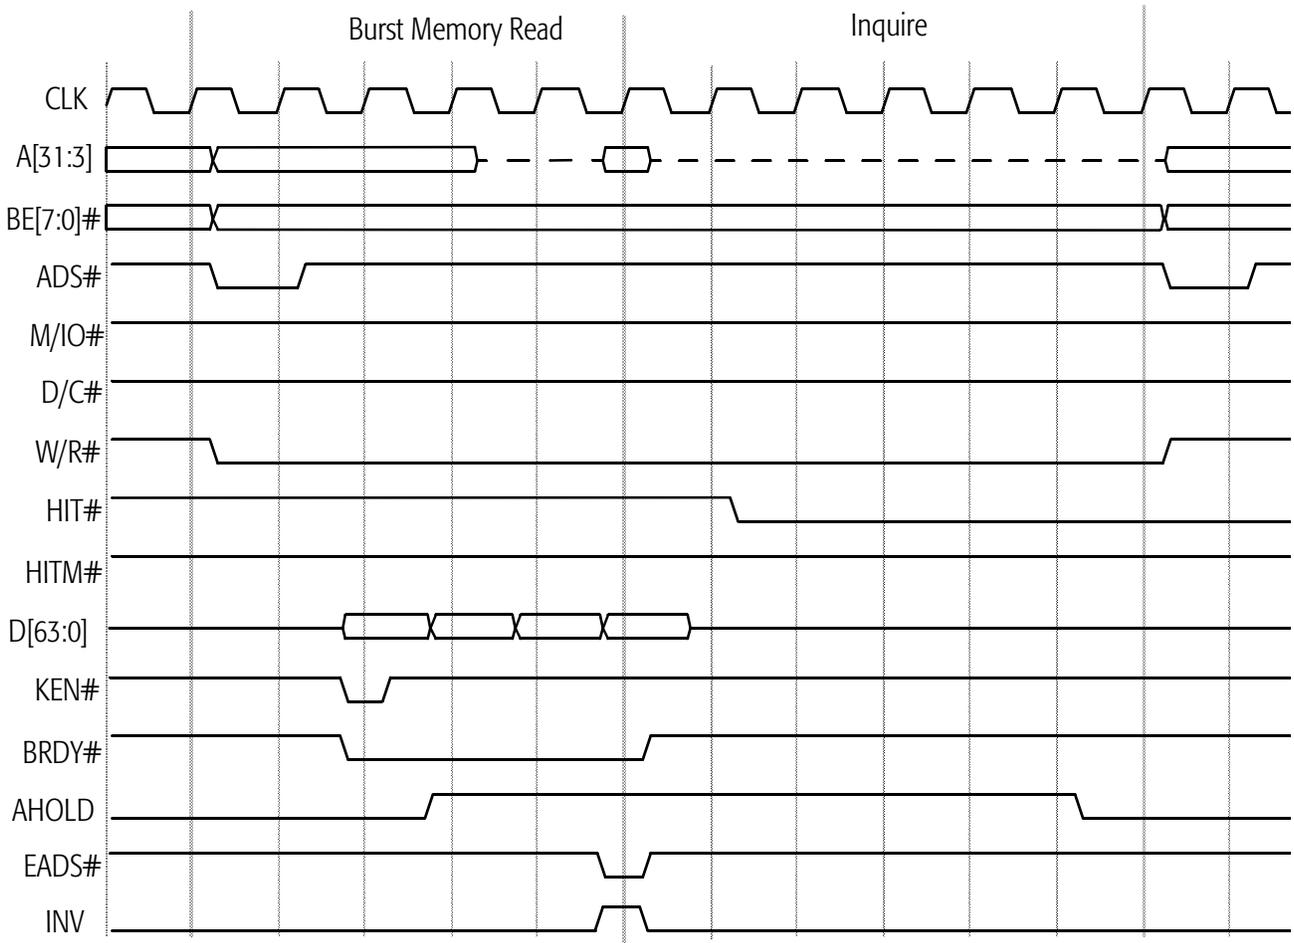


Figure 66. AHOLD-Initiated Inquire Hit to Shared or Exclusive Line

**AHOLD-Initiated
Inquire Hit to
Modified Line**

Figure 67 shows an AHOLD-initiated inquire cycle that hits a modified line. During the inquire cycle in this example, the processor asserts both HIT# and HITM# on the clock edge after the clock edge that it samples EADS# asserted. This condition indicates that the cache line exists in the processor's L1 data cache or L2 cache in the modified state.

If the inquire cycle hits a modified line, the processor performs a writeback cycle immediately after the inquire cycle to update the modified cache line to shared memory (normally external cache or DRAM). In Figure 67, the system logic holds AHOLD asserted throughout the inquire cycle and the processor writeback cycle. In this case, the processor is not driving the address bus during the writeback cycle because AHOLD is sampled asserted. The system logic writes the data to memory by using its latched copy of the inquire cycle address. If the processor samples AHOLD negated before it performs the writeback cycle, it drives the writeback cycle by using the address (A[31:5]) that it latched during the inquire cycle.

If INV is sampled asserted during an inquire cycle, the processor transitions the line (if found) to the invalid state, regardless of its previous state (the cache invalidation operation is not visible on the bus). If INV is sampled negated during an inquire cycle, the processor transitions the line (if found) to the shared state. In either case, if the line is found in the modified state, the processor writes it back to memory before changing its state. Figure 67 shows that the processor samples INV asserted during the inquire cycle and invalidates the cache line after the inquire cycle.

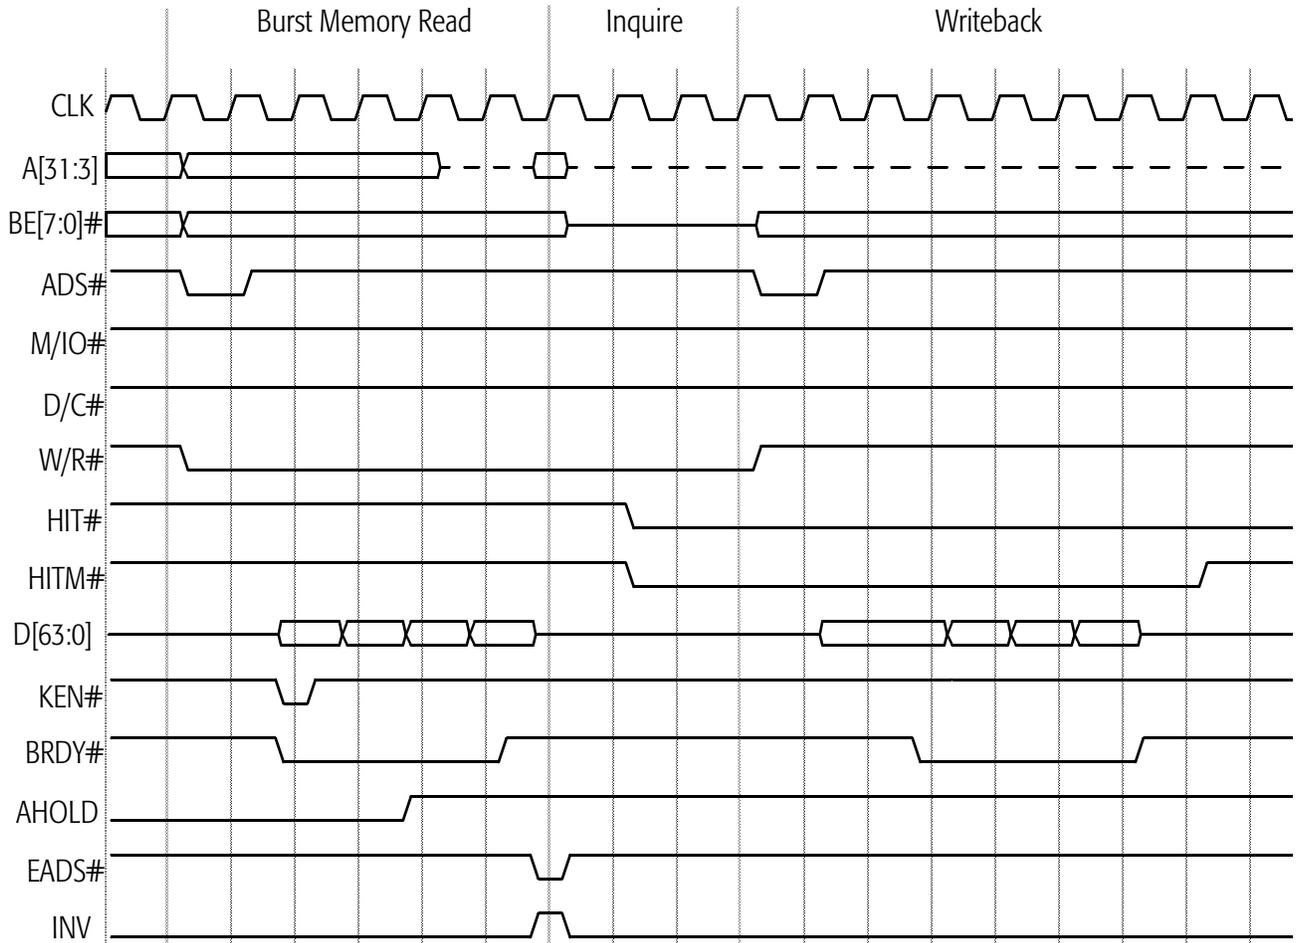


Figure 67. AHOLD-Initiated Inquire Hit to Modified Line

AHOLD Restriction

When the system logic drives an AHOLD-initiated inquire cycle, it must assert AHOLD for at least two clocks before it asserts EADS#. This requirement guarantees the processor recognizes and responds to the inquire cycle properly. The processor's 32 address bus drivers turn on almost immediately after AHOLD is sampled negated. If the processor switches the data bus (D[63:0] and DP[7:0]) during a write cycle off the same clock edge that switches the address bus (A[31:3] and AP), the processor switches 102 drivers simultaneously, which can lead to ground-bounce spikes. Therefore, before negating AHOLD the following restrictions must be observed by the system logic:

- When the system logic negates AHOLD during a write cycle, it must ensure that AHOLD is not sampled negated on the clock edge on which BRDY# is sampled asserted (See Figure 68).
- When the system logic negates AHOLD during a writeback cycle, it must ensure that AHOLD is not sampled negated on the clock edge on which ADS# is negated (See Figure 68).
- When a write cycle is pipelined into a read cycle, AHOLD must not be sampled negated on the clock edge after the clock edge on which the last BRDY# of the read cycle is sampled asserted to avoid the processor simultaneously driving the data bus (for the pending write cycle) and the address bus off this same clock edge.

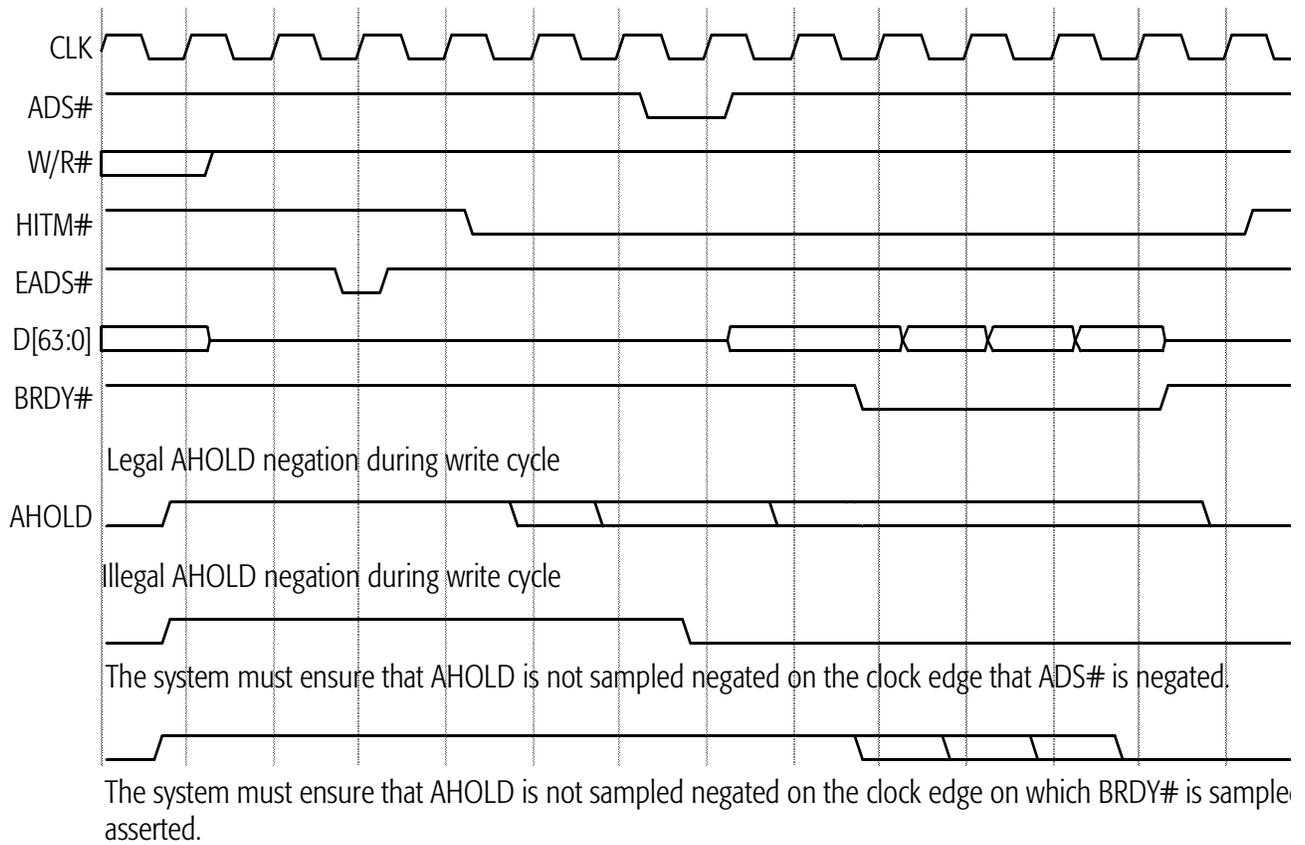


Figure 68. AHOLD Restriction

Bus Backoff (BOFF#)

BOFF# provides the fastest response among bus-hold inputs. Either the system logic or another bus master can assert BOFF# to gain control of the bus immediately. BOFF# is also used to resolve potential deadlock problems that arise as a result of inquire cycles. The processor samples BOFF# on every clock edge. If BOFF# is sampled asserted, the processor unconditionally aborts any cycles in progress and transitions to a bus hold state. (See “BOFF# (Backoff)” on page 93.) Figure 69 shows a read cycle that is aborted when the processor samples BOFF# asserted even though BRDY# is sampled asserted on the same clock edge. The read cycle is restarted after BOFF# is sampled negated (KEN# must be in the same state during the restarted cycle as its state during the aborted cycle).

During a BOFF#-initiated inquire cycle that hits a shared or exclusive line, the processor samples BOFF# negated and restarts any bus cycle that was aborted when BOFF# was asserted. If a BOFF#-initiated inquire cycle hits a modified line, the processor performs a writeback cycle before it restarts the aborted cycle.

If the processor samples BOFF# asserted on the same clock edge that it asserts ADS#, ADS# is floated but the system logic may erroneously interpret ADS# as asserted. In this case, the system logic must properly interpret the state of ADS# when BOFF# is negated.

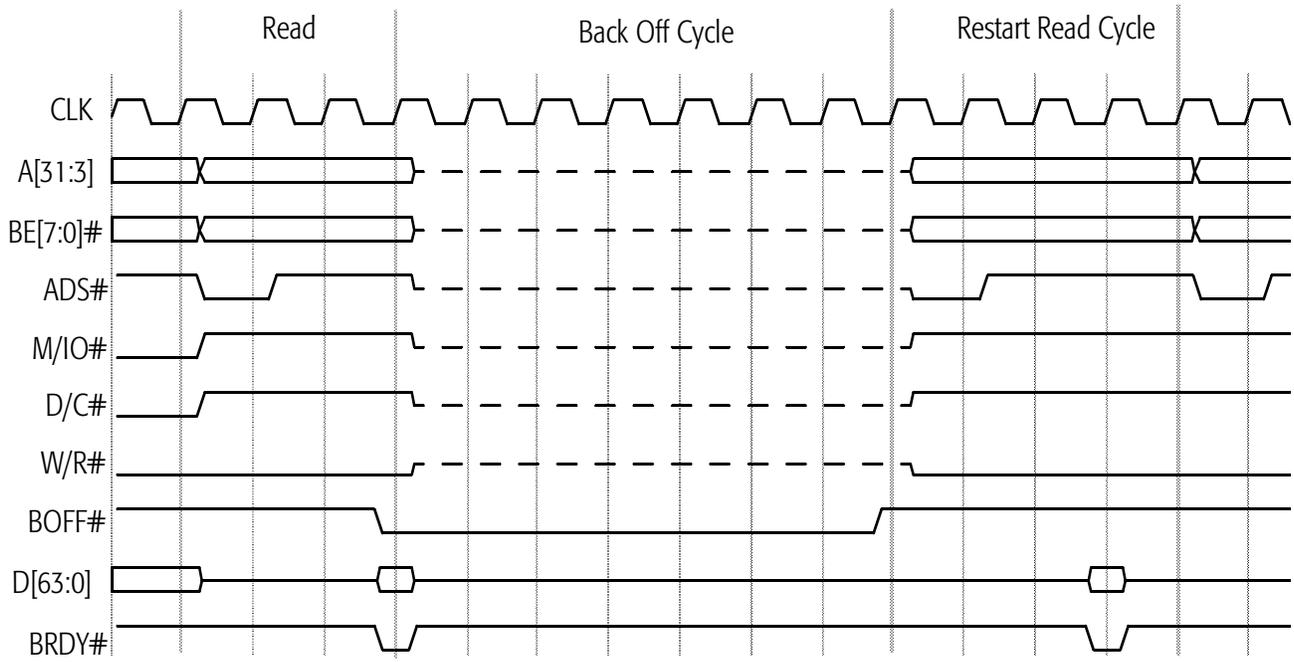


Figure 69. BOFF# Timing

Locked Cycles

The processor asserts LOCK# during a sequence of bus cycles to ensure the cycles are completed without allowing other bus masters to intervene. Locked operations can consist of two to five cycles. LOCK# is asserted during the following operations:

- An interrupt acknowledge sequence
- Descriptor Table accesses
- Page Directory and Page Table accesses
- XCHG instruction
- An instruction with an allowable LOCK prefix

In order to ensure that locked operations appear on the bus and are visible to the entire system, any data operands addressed during a locked cycle that reside in the processor's caches are flushed and invalidated from the caches prior to the locked operation. If the cache line is in the modified state, it is written back and invalidated prior to the locked operation. Likewise, any data read during a locked operation is not cached. The processor negates LOCK# for at least one clock between consecutive sequences of locked operations to allow the system logic to arbitrate for the bus.

The processor asserts SCYC during misaligned locked transfers on the D[63:0] data bus. The processor generates additional bus cycles to complete the transfer of misaligned data.

Basic Locked Operation

Figure 70 shows a pair of read-write bus cycles. It represents a typical read-modify-write locked operation. The processor asserts LOCK# off the same clock edge that it asserts ADS# of the first bus cycle in the locked operation and holds it asserted until the last expected BRDY# of the last bus cycle in the locked operation is sampled asserted. (The processor negates LOCK# off the same clock edge.)

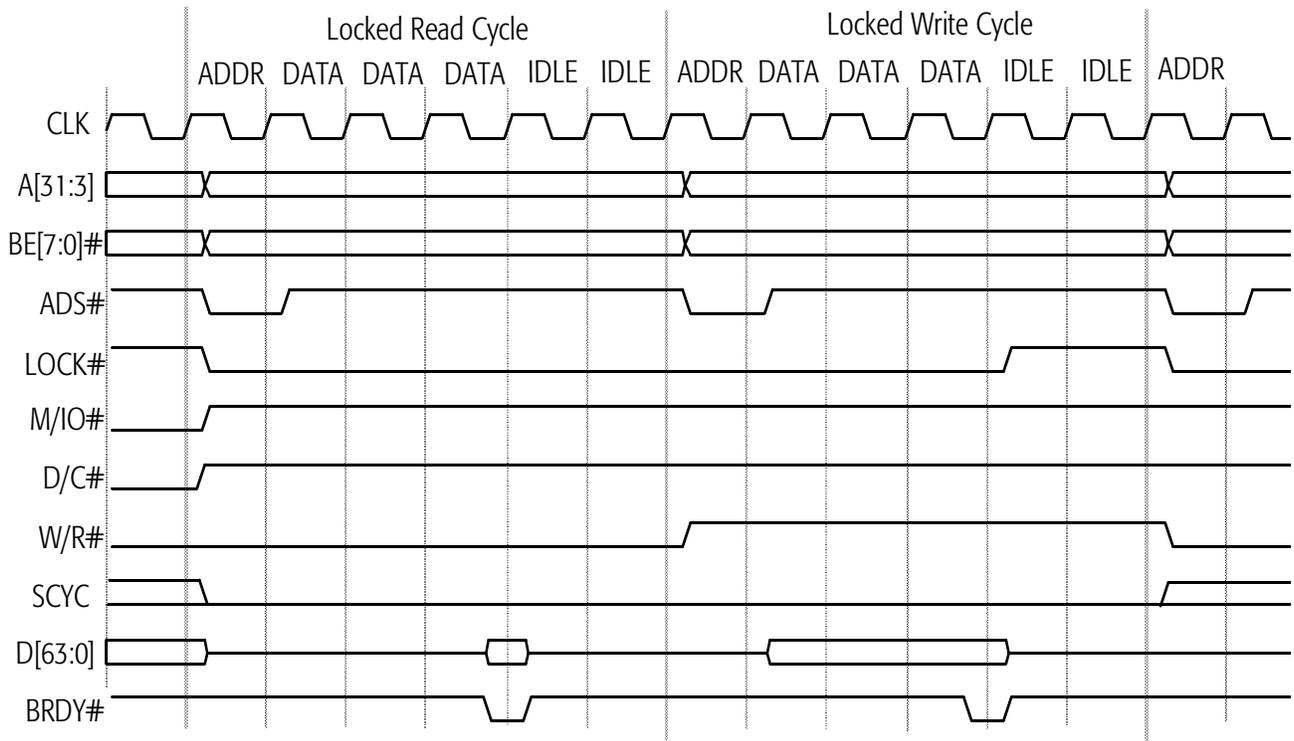


Figure 70. Basic Locked Operation

**Locked Operation
with BOFF#
Intervention**

Figure 71 shows BOFF# asserted within a locked read-write pair of bus cycles. In this example, the processor asserts LOCK# with ADS# to drive a locked memory read cycle followed by a locked memory write cycle. During the locked memory write cycle in this example, the processor samples BOFF# asserted. The processor immediately aborts the locked memory write cycle and floats all its bus-driving signals, including LOCK#. The system logic or another bus master can initiate an inquire cycle or drive a new bus cycle one clock edge after the clock edge on which BOFF# is sampled asserted. If the system logic drives a BOFF#-initiated inquire cycle and hits a modified line, the processor performs a writeback cycle before it restarts the locked cycle (the processor asserts LOCK# during the writeback cycle).

In Figure 71, the processor immediately restarts the aborted locked write cycle by driving the bus off the clock edge on which BOFF# is sampled negated. The system logic must ensure the processor results for interrupted and uninterrupted locked cycles are consistent. That is, the system logic must guarantee the memory accessed by the processor is not modified during the time another bus master controls the bus.

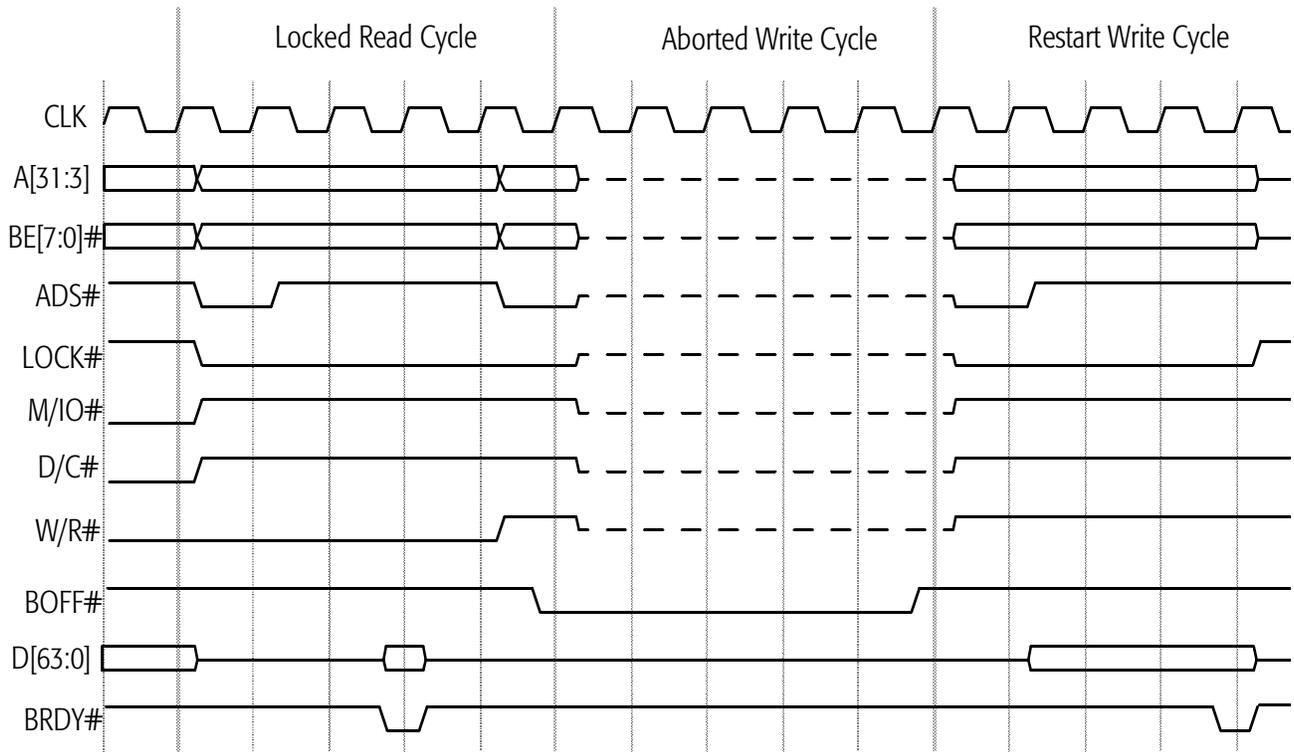


Figure 71. Locked Operation with BOFF# Intervention

Interrupt Acknowledge

In response to recognizing the system's maskable interrupt (INTR), the processor drives an interrupt acknowledge cycle at the next instruction boundary. During an interrupt acknowledge cycle, the processor drives a locked pair of read cycles as shown in Figure 72. The first read cycle is not functional, and the second read cycle returns the interrupt number on D[7:0] (00h–FFh). Table 27 shows the state of the signals during an interrupt acknowledge cycle.

Table 27. Interrupt Acknowledge Operation Definition

| Processor Outputs | First Bus Cycle | Second Bus Cycle |
|-------------------|-----------------|---|
| D/C# | Low | Low |
| M/IO# | Low | Low |
| W/R# | Low | Low |
| BE[7:0]# | EFh | FEh (low byte enabled) |
| A[31:3] | 0000_0000h | 0000_0000h |
| D[63:0] | (ignored) | Interrupt number expected from interrupt controller on D[7:0] |

The system logic can drive INTR either synchronously or asynchronously. If it is asserted asynchronously, it must be asserted for a minimum pulse width of two clocks. To ensure it is recognized, INTR must remain asserted until an interrupt acknowledge sequence is complete.

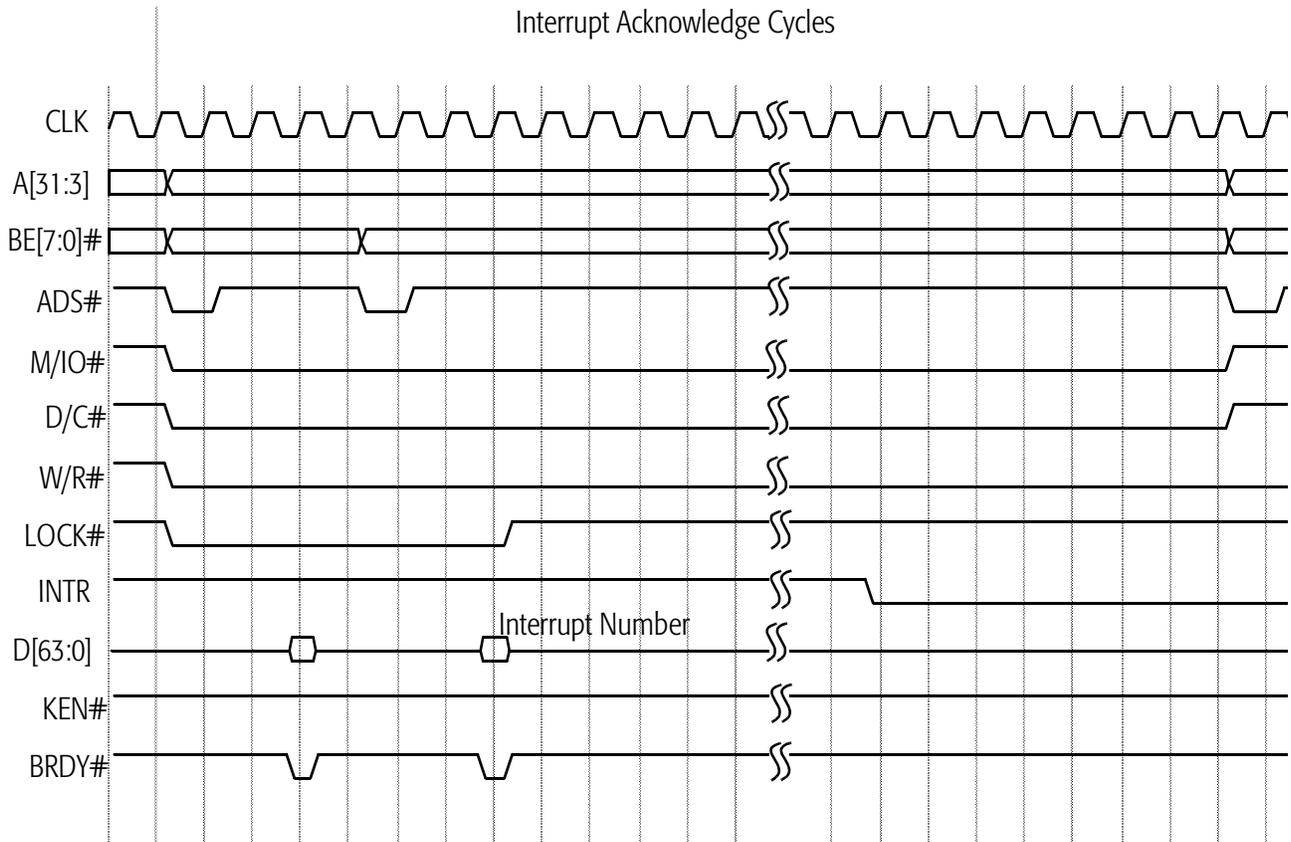


Figure 72. Interrupt Acknowledge Operation

5.6 Special Bus Cycles

The AMD-K6-III processor drives special bus cycles that include stop grant, flush acknowledge, cache writeback invalidation, halt, cache invalidation, and shutdown cycles. During all special cycles, $D/C\# = 0$, $M/IO\# = 0$, and $W/R\# = 1$. $BE[7:0]\#$ and $A[31:3]$ are driven to differentiate among the special cycles, as shown in Table 28. The system logic must return $BRDY\#$ in response to all processor special cycles.

Table 28. Encodings For Special Bus Cycles

| BE[7:0]# | A[4:3]* | Special Bus Cycle | Cause |
|-----------------|---------|-------------------|--------------------------|
| FBh | 10b | Stop Grant | STPCLK# sampled asserted |
| EFh | 00b | Flush Acknowledge | FLUSH# sampled asserted |
| F7h | 00b | Writeback | WBINVD instruction |
| FBh | 00b | Halt | HLT instruction |
| FDh | 00b | Flush | INVD,WBINVD instruction |
| FEh | 00b | Shutdown | Triple fault |
| Note: | | | |
| * $A[31:5] = 0$ | | | |

Basic Special Bus Cycle

Figure 73 shows a basic special bus cycle. The processor drives $D/C\# = 0$, $M/IO\# = 0$, and $W/R\# = 1$ off the same clock edge that it asserts $ADS\#$. In this example, $BE[7:0]\# = FBh$ and $A[31:3] = 0000_0000h$, which indicates that the special cycle is a halt special cycle (See Table 28). A halt special cycle is generated after the processor executes the HLT instruction.

If the processor samples $FLUSH\#$ asserted, it writes back any L1 data cache and L2 cache lines that are in the modified state and invalidates all lines in all caches. The processor then drives a flush acknowledge special cycle.

If the processor executes a WBINVD instruction, it drives a writeback special cycle after the processor completes invalidating and writing back the cache lines.

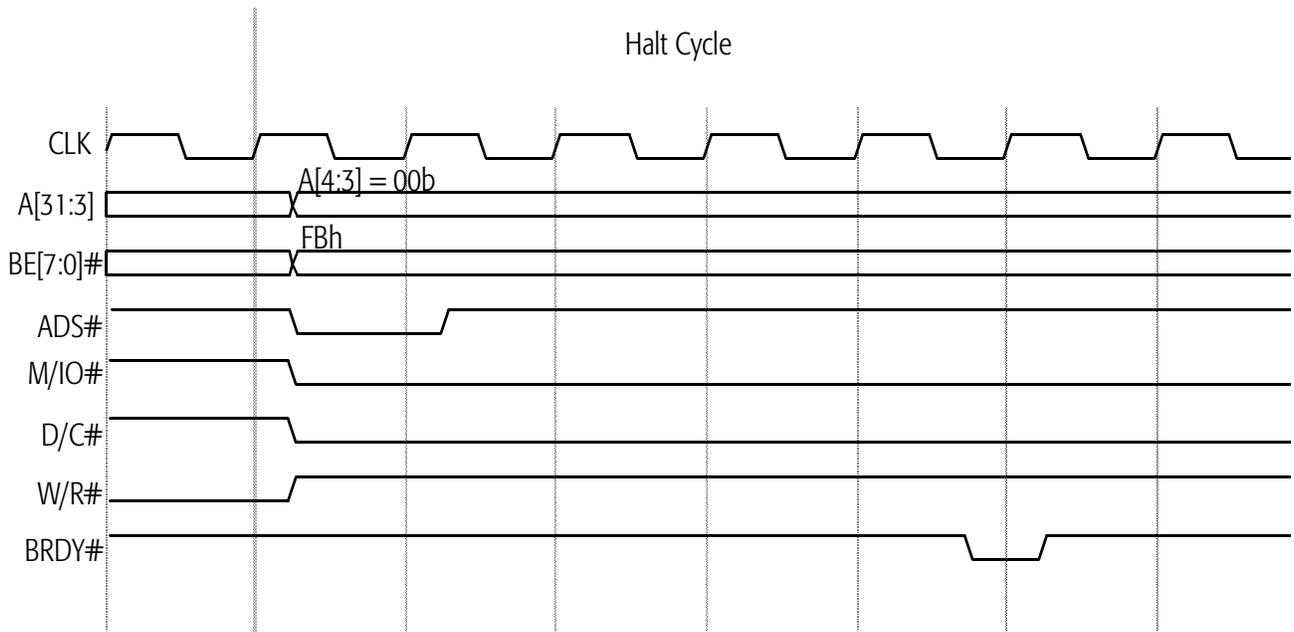


Figure 73. Basic Special Bus Cycle (Halt Cycle)

Shutdown Cycle

In Figure 74, a shutdown (triple fault) occurs in the first half of the waveform, and a shutdown special cycle follows in the second half. The processor enters shutdown when an interrupt or exception occurs during the handling of a double fault (INT 8), which amounts to a triple fault. When the processor encounters a triple fault, it stops its activity on the bus and generates the shutdown special bus cycle (BE[7:0]# = FEh).

The system logic must assert NMI, INIT, RESET, or SMI# to get the processor out of the shutdown state.

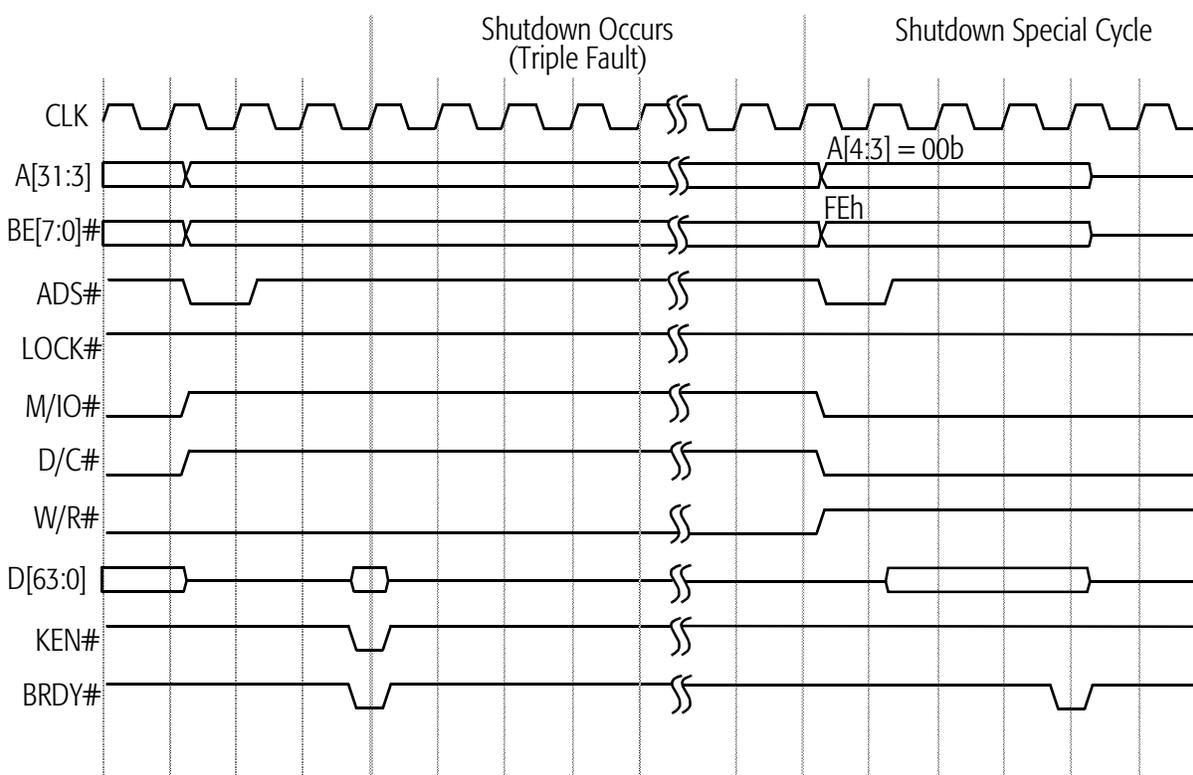


Figure 74. Shutdown Cycle

Stop Grant and Stop Clock States

Figure 75 and Figure 76 show the processor transition from normal execution to the Stop Grant state, then to the Stop Clock state, back to the Stop Grant state, and finally back to normal execution. The series of transitions begins when the processor samples STPCLK# asserted. On recognizing a STPCLK# interrupt at the next instruction retirement boundary, the processor performs the following actions, in the order shown:

1. Its instruction pipelines are flushed
2. All pending and in-progress bus cycles are completed
3. The STPCLK# assertion is acknowledged by executing a Stop Grant special bus cycle
4. Its internal clock is stopped after BRDY# of the Stop Grant special bus cycle is sampled asserted (if EWBE# is masked off, then entry into the Stop Grant state is not affected by EWBE#) and after EWBE# is sampled asserted
5. The Stop Clock state is entered if the system logic stops the bus clock CLK (optional)

STPCLK# is sampled as a level-sensitive input on every clock edge but is not recognized until the next instruction boundary. The system logic drives the signal either synchronously or asynchronously. If it is asserted asynchronously, it must be asserted for a minimum pulse width of two clocks. STPCLK# must remain asserted until recognized, which is indicated by the completion of the Stop Grant special cycle.

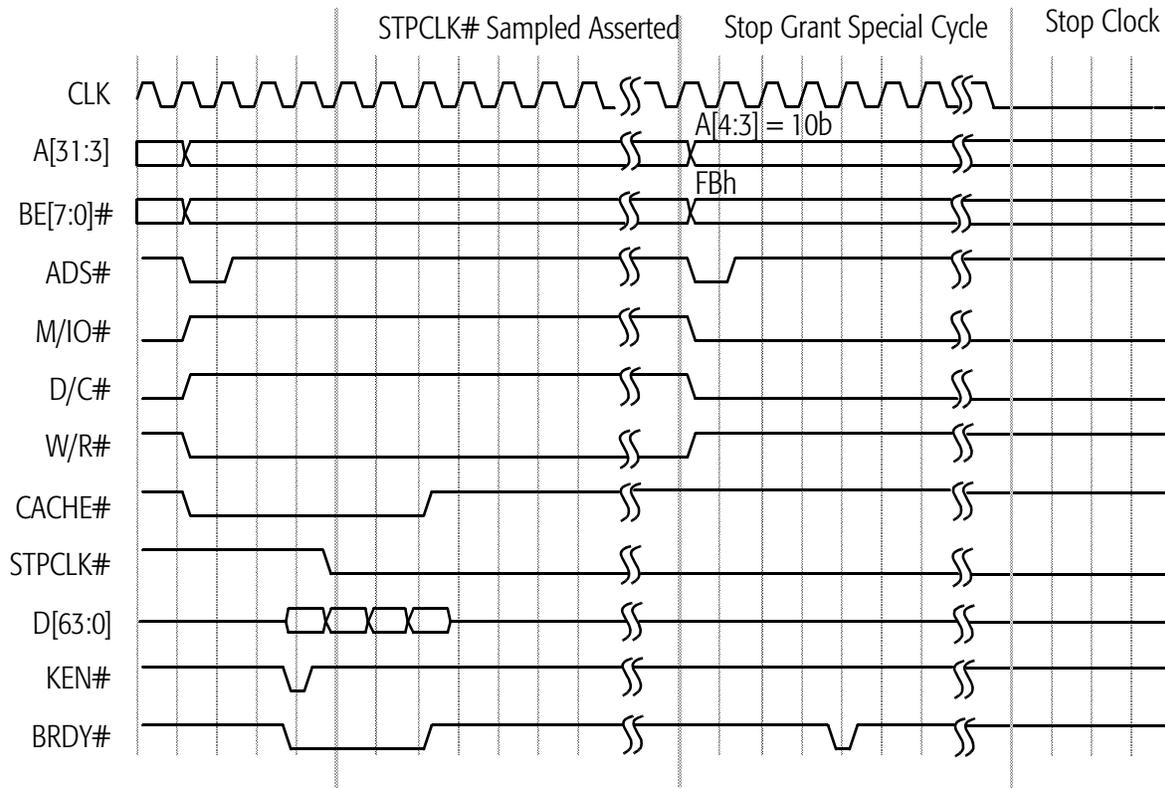


Figure 75. Stop Grant and Stop Clock Modes, Part 1

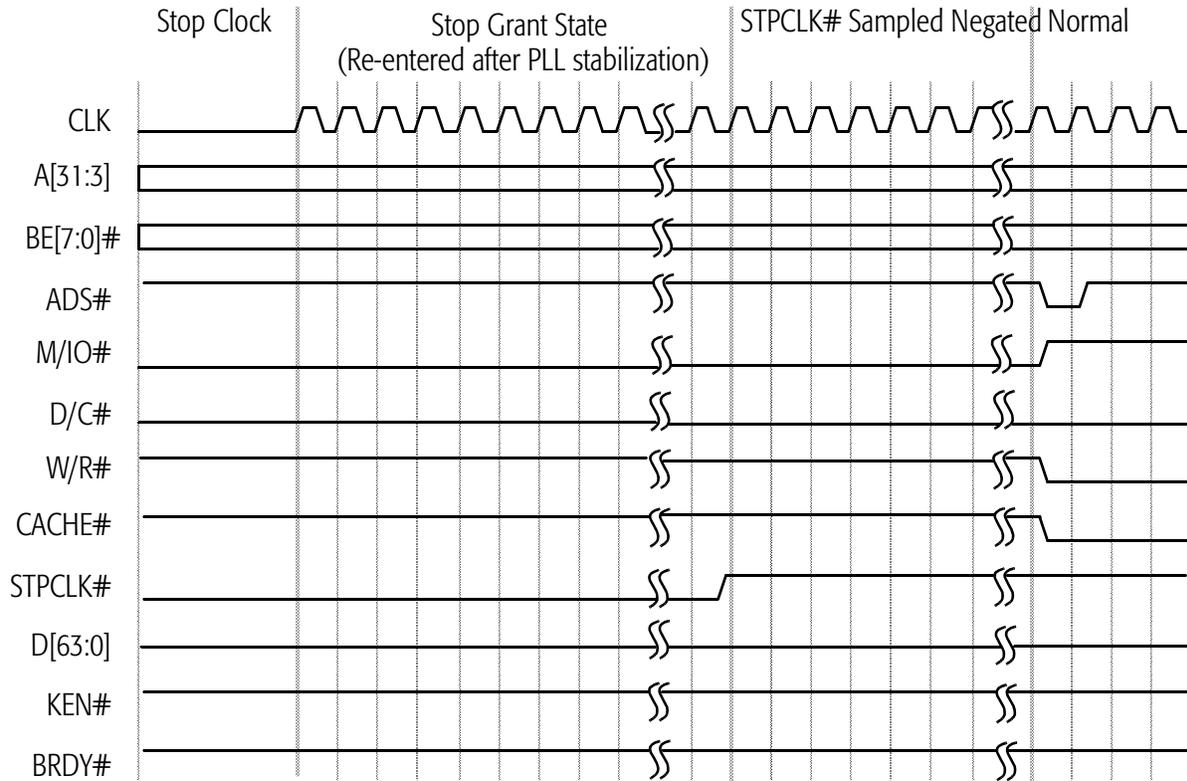


Figure 76. Stop Grant and Stop Clock Modes, Part 2

**INIT-Initiated
Transition from
Protected Mode to
Real Mode**

INIT is typically asserted in response to a BIOS interrupt that writes to an I/O port. This interrupt is often in response to a Ctrl-Alt-Del keyboard input. The BIOS writes to a port (similar to port 64h in the keyboard controller) that asserts INIT. INIT is also used to support 80286 software that must return to Real mode after accessing extended memory in Protected mode.

The assertion of INIT causes the processor to empty its pipelines, initialize most of its internal state, and branch to address FFFF_FFF0h—the same instruction execution starting point used after RESET. Unlike RESET, the processor preserves the contents of its caches, the floating-point state, the MMX state, Model-Specific Registers (MSRs), the CD and NW bits of the CR0 register, the time stamp counter, and other specific internal resources.

Figure 77 shows an example in which the operating system writes to an I/O port, causing the system logic to assert INIT. The sampling of INIT asserted starts an extended microcode sequence that terminates with a code fetch from FFFF_FFF0h, the reset location. INIT is sampled on every clock edge but is not recognized until the next instruction boundary. During an I/O write cycle, it must be sampled asserted a minimum of three clock edges before BRDY# is sampled asserted if it is to be recognized on the boundary between the I/O write instruction and the following instruction. If INIT is asserted synchronously, it can be asserted for a minimum of one clock. If it is asserted asynchronously, it must have been negated for a minimum of two clocks, followed by an assertion of a minimum of two clocks.

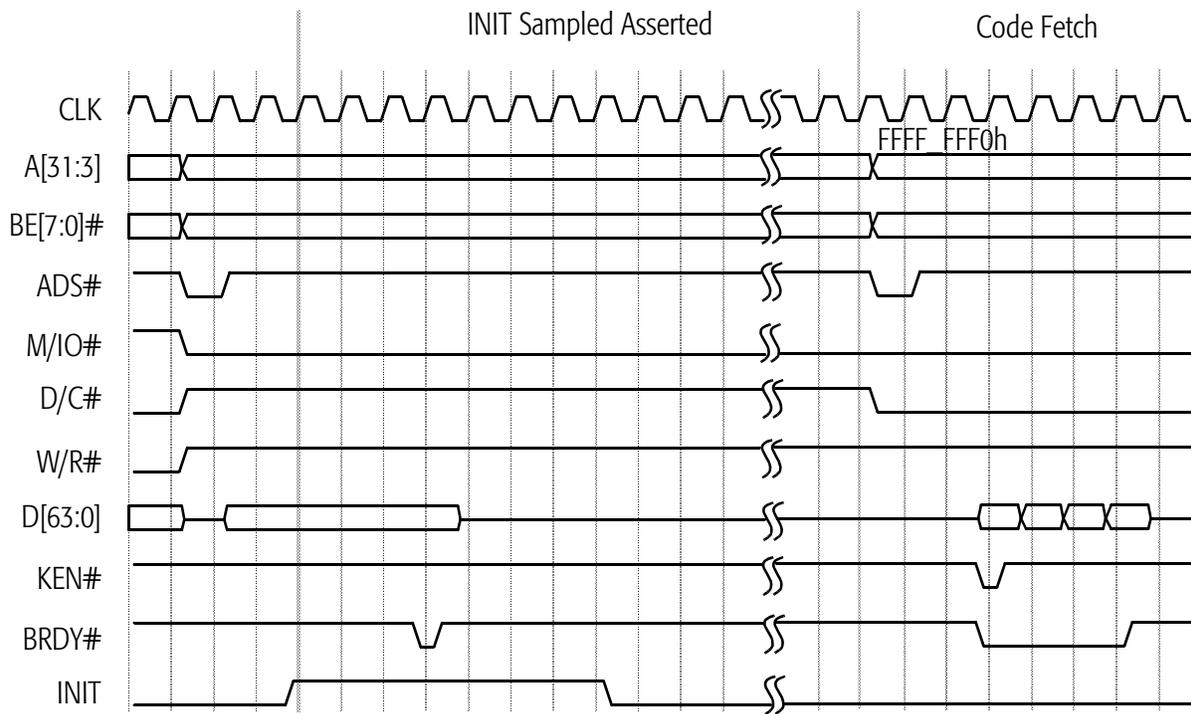


Figure 77. INIT-Initiated Transition from Protected Mode to Real Mode

6 Power-on Configuration and Initialization

On power-on the system logic must reset the AMD-K6-III processor by asserting the RESET signal. When the processor samples RESET asserted, it immediately flushes and initializes all internal resources and its internal state, including its pipelines and caches, the floating-point state, the MMX and 3DNow! states, and all registers. Then the processor jumps to address FFFF_FFF0h to start instruction execution.

6.1 Signals Sampled During the Falling Transition of RESET

FLUSH# FLUSH# is sampled on the falling transition of RESET to determine if the processor begins normal instruction execution or enters Tri-State Test mode. If FLUSH# is High during the falling transition of RESET, the processor unconditionally runs its Built-In Self Test (BIST), performs the normal reset functions, then jumps to address FFFF_FFF0h to start instruction execution. (See “Built-In Self-Test (BIST)” on page 223 for more details.) If FLUSH# is Low during the falling transition of RESET, the processor enters Tri-State Test mode. (See “Tri-State Test Mode” on page 224 and “FLUSH# (Cache Flush)” on page 103 for more details.)

BF[2:0] The internal operating frequency of the processor is determined by the state of the bus frequency signals BF[2:0] when they are sampled during the falling transition of RESET. The frequency of the CLK input signal is multiplied internally by a ratio defined by BF[2:0]. (See “BF[2:0] (Bus Frequency)” on page 92 for the processor-clock to bus-clock ratios.)

6.2 RESET Requirements

During the initial power-on reset of the processor, RESET must remain asserted for a minimum of 1.0 ms after CLK and V_{CC} reach specification. (See “CLK Switching Characteristics” on page 267 for clock specifications. See “Electrical Data” on page 259 for V_{CC} specifications.)

During a warm reset while CLK and V_{CC} are within specification, RESET must remain asserted for a minimum of 15 clocks prior to its negation.

6.3 State of Processor After RESET

Output Signals

Table 29 shows the state of all processor outputs and bidirectional signals immediately after RESET is sampled asserted.

Table 29. Output Signal State After RESET

| Signal | State | Signal | State |
|------------------|----------|----------|----------|
| A[31:3], AP | Floating | LOCK# | High |
| ADS#, ADSC# | High | M/IO# | Low |
| APCHK# | High | PCD | Low |
| BE[7:0]# | Floating | PCHK# | High |
| BREQ | Low | PWT | Low |
| CACHE# | High | SCYC | Low |
| D/C# | Low | SMIACK# | High |
| D[63:0], DP[7:0] | Floating | TDO | Floating |
| FERR# | High | VCC2DET | Low |
| HIT# | High | VCC2H/L# | Low |
| HITM# | High | W/R# | Low |
| HLDA | Low | - | - |

Registers

Table 30 on page 175 shows the state of all architecture registers and Model-Specific Registers (MSRs) after the processor has completed its initialization due to the recognition of the assertion of RESET.

Table 30. Register State After RESET

| Register | State (hex) | Notes |
|---|------------------------------|-------|
| GDTR | base:0000_0000h limit:0FFFFh | |
| IDTR | base:0000_0000h limit:0FFFFh | |
| TR | 0000h | |
| LDTR | 0000h | |
| EIP | FFFF_FFF0h | |
| EFLAGS | 0000_0002h | |
| EAX | 0000_0000h | 1 |
| EBX | 0000_0000h | |
| ECX | 0000_0000h | |
| EDX | 0000_059Xh | 2 |
| ESI | 0000_0000h | |
| EDI | 0000_0000h | |
| EBP | 0000_0000h | |
| ESP | 0000_0000h | |
| CS | F000h | |
| SS | 0000h | |
| DS | 0000h | |
| ES | 0000h | |
| FS | 0000h | |
| GS | 0000h | |
| FPU Stack R7–R0 | 0000_0000_0000_0000_0000h | 3 |
| FPU Control Word | 0040h | 3 |
| FPU Status Word | 0000h | 3 |
| FPU Tag Word | 5555h | 3 |
| FPU Instruction Pointer | 0000_0000_0000h | 3 |
| FPU Data Pointer | 0000_0000_0000h | 3 |
| FPU Opcode Register | 000_0000_0000b | 3 |
| Notes: | | |
| <ol style="list-style-type: none"> 1. The contents of EAX indicate if BIST was successful. If EAX = 0000_0000h, BIST was successful. If EAX is non-zero, BIST failed. 2. EDX contains the AMD-K6-III processor signature, where X indicates the processor Stepping ID. 3. The contents of these registers are preserved following the recognition of INIT. 4. The CD and NW bits of CR0 are preserved following the recognition of INIT 5. "S" represents the Stepping. "B" represents PSOR[3:0], where PSOR[3] equals 0, and PSOR[2:0] is equal to the value of the BF[2:0] signals sampled during the falling transition of RESET. | | |

Table 30. Register State After RESET (continued)

| Register | State (hex) | Notes |
|---|----------------------|-------|
| CR0 | 6000_0010h | 4 |
| CR2 | 0000_0000h | |
| CR3 | 0000_0000h | |
| CR4 | 0000_0000h | |
| DR7 | 0000_0400h | |
| DR6 | FFFF_0FF0h | |
| DR3 | 0000_0000h | |
| DR2 | 0000_0000h | |
| DR1 | 0000_0000h | |
| DR0 | 0000_0000h | |
| MCAR | 0000_0000_0000_0000h | 3 |
| MCTR | 0000_0000_0000_0000h | 3 |
| TR12 | 0000_0000_0000_0000h | 3 |
| TSC | 0000_0000_0000_0000h | 3 |
| EFER | 0000_0000_0000_0002h | 3 |
| STAR | 0000_0000_0000_0000h | 3 |
| WHCR | 0000_0000_0000_0000h | 3 |
| UWCCR | 0000_0000_0000_0000h | |
| PSOR | 0000_0000_0000_01SBh | 5 |
| PFIR | 0000_0000_0000_0000h | |
| Notes: | | |
| <ol style="list-style-type: none"> 1. The contents of EAX indicate if BIST was successful. If EAX = 0000_0000h, BIST was successful. If EAX is non-zero, BIST failed. 2. EDX contains the AMD-K6-III processor signature, where X indicates the processor Stepping ID. 3. The contents of these registers are preserved following the recognition of INIT. 4. The CD and NW bits of CR0 are preserved following the recognition of INIT 5. "S" represents the Stepping. "B" represents PSOR[3:0], where PSOR[3] equals 0, and PSOR[2:0] is equal to the value of the BF[2:0] signals sampled during the falling transition of RESET. | | |

6.4 State of Processor After INIT

The recognition of the assertion of INIT causes the processor to empty its pipelines, to initialize most of its internal state, and to branch to address FFFF_FFF0h—the same instruction execution starting point used after RESET. Unlike RESET, the processor preserves the contents of its caches, the floating-point state, the MMX and 3DNow! states, MSRs, and the CD and NW bits of the CR0 register.

The edge-sensitive interrupts FLUSH# and SMI# are sampled and preserved during the INIT process and are handled accordingly after the initialization is complete. However, the processor resets any pending NMI interrupt upon sampling INIT asserted.

INIT can be used as an accelerator for 80286 code that requires a reset to exit from Protected mode back to Real mode.

7 Cache Organization

The following sections describe the basic architecture and resources of the AMD-K6-III processor internal caches.

The performance of the AMD-K6-III processor is enhanced by writeback level-one (L1) and level-two (L2) caches. The L1 cache is organized as separate 32-Kbyte instruction and data caches, each with two-way set associativity. The L2 cache is 256 Kbytes, and is organized as a unified, four-way set-associative cache (See Figure 78 on page 180).

The cache line size is 32 bytes, and lines are fetched from external memory using an efficient pipelined burst transaction. As the L1 instruction cache is filled from the L2 cache or from external memory, each instruction byte is analyzed for instruction boundaries using predecode logic. Predecoding annotates each instruction byte in the L1 instruction cache with information that later enables the decoders to efficiently decode multiple instructions simultaneously.

Translation lookaside buffers (TLB) are used in conjunction with the L1 cache to translate linear addresses to physical addresses. The L1 instruction cache is associated with a 64-entry TLB while the L1 data cache is associated with a 128-entry TLB.

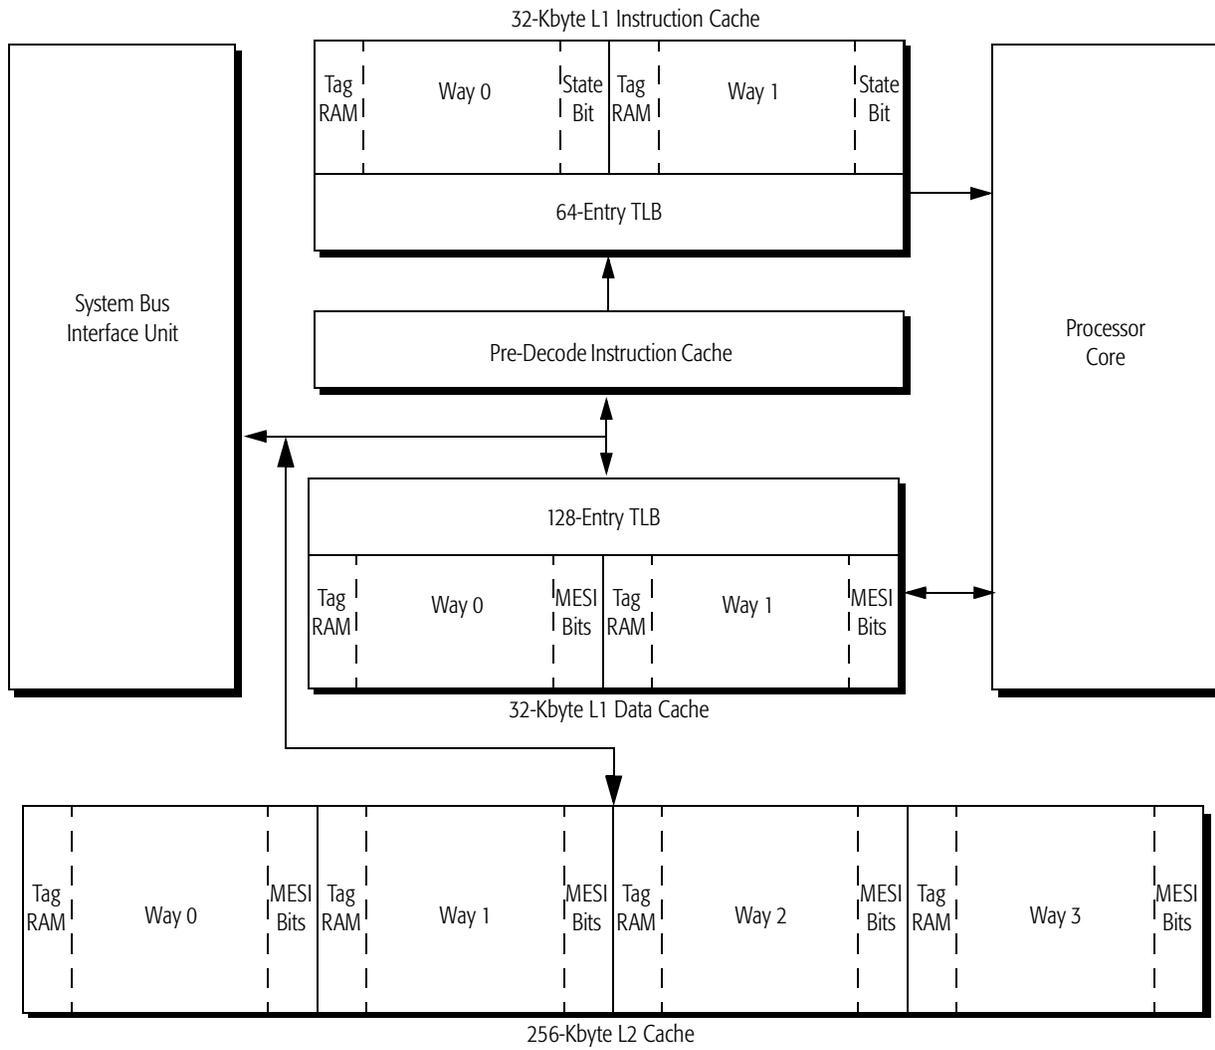


Figure 78. L1 and L2 Cache Organization

The processor cache design takes advantage of a sectored organization (See Figure 79). Each sector consists of 64 bytes configured as two 32-byte cache lines. The two cache lines of a sector share a common tag but have separate MESI (modified, exclusive, shared, invalid) bits that track the state of each cache line.

L1 Instruction Cache Line

| | | | | | | | | | | |
|-------------|--------------|---------|----------------|---------|----------------|-------|-------|--------|----------------|------------|
| Tag Address | Cache Line 0 | Byte 31 | Predecode Bits | Byte 30 | Predecode Bits | | | Byte 0 | Predecode Bits | 1 MESI Bit |
| | Cache Line 1 | Byte 31 | Predecode Bits | Byte 30 | Predecode Bits | | | Byte 0 | Predecode Bits | 1 MESI Bit |

L1 Data Cache Line and L2 Cache Line

| | | | | | | | |
|-------------|--------------|---------|---------|-------|-------|--------|-------------|
| Tag Address | Cache Line 0 | Byte 31 | Byte 30 | | | Byte 0 | 2 MESI Bits |
| | Cache Line 1 | Byte 31 | Byte 30 | | | Byte 0 | 2 MESI Bits |

Note: L1 instruction-cache lines have only two coherency states (valid or invalid) rather than the four MESI coherency states of L1 data-cache and L2 cache lines. Only two states are needed for the L1 instruction cache because these lines are read-only.

Figure 79. L1 Cache Sector Organization

7.1 MESI States in the L1 Data Cache and L2 Cache

The state of each line in the caches is tracked by the MESI bits. The coherency of these states or MESI bits is maintained by internal processor snoops and external inquire cycles by the system logic. The following four states are defined for the L1 data cache and the L2 cache:

- *Modified*—This line has been modified and is different from external memory.
- *Exclusive*—In general, an exclusive line in the L1 data cache or the L2 cache is not modified and is the same as external memory. The exception is the case where a line exists in the modified state in the L1 data cache and also resides in the L2 cache. By design, the line in the L2 cache must be in the exclusive state.
- *Shared*—If a cache line is in the shared state it means that the same line can exist in more than one cache system.
- *Invalid*—The information in this line is not valid.

7.2 Predecode Bits

Decoding x86 instructions is particularly difficult because the instructions vary in length, ranging from 1 to 15 bytes long. Predecode logic supplies the predecode bits associated with each instruction byte. The predecode bits indicate the number of bytes to the start of the next x86 instruction. The predecode bits are passed with the instruction bytes to the decoders where they assist with parallel x86 instruction decoding. The predecode bits use memory separate from the 32-Kbyte L1 instruction cache. The predecode bits are stored in an extended L1 instruction cache alongside each x86 instruction byte as shown in Figure 79 on page 181.

The L2 cache does not store predecode bits. As an instruction cache line is fetched from the L2 cache, the predecode bits are generated and stored alongside the cache line in the L1 instruction cache in the same manner as if the cache line were fetched from the processor's system bus.

7.3 Cache Operation

The operating modes for the caches are configured by software using the not writethrough (NW) and cache disable (CD) bits of control register 0 (CR0 bits 29 and 30, respectively). These bits are used in all operating modes.

When the CD and NW bits are both set to 0, the cache is fully enabled. This is the standard operating mode for the cache. If a L1 cache read miss occurs, the processor determines if the read hits the L2 cache, in which case the cache line is supplied from the L2 cache to the L1 cache. If a read misses both the L1 and the L2 caches, a line fill (32-byte burst read) on the system bus occurs in order to fetch the cache line. The cache line is then filled in both the L1 and the L2 caches. Write hits to the L1 and L2 caches are updated, while write misses and writes to shared lines cause external memory updates. Refer to Table 34 on page 195 for a summary of cache read and write cycles and the effect of these operations on the cache MESI state.

Note: A write allocate operation can modify the behavior of write misses to the caches. See "Write Allocate" on page 189.

The AMD-K6-III processor does not enforce any rules of inclusion or exclusion as part of the protocol defined for the L1 and L2 caches. However, there are certain restrictions imposed by design on the allowable MESI states of a cache line that exists in both the L1 cache and the L2 cache. Refer to Table 35 on page 200 for a list of the valid cache-line states allowed.

When CD is set to 0 and NW is set to 1, an invalid mode of operation exists that causes a general protection fault to occur.

When CD is set to 1 (disabled) and NW is set to 0, the cache fill mechanism is disabled but the contents of the cache are still valid. The processor reads from the caches if the read hits the L1 or the L2 cache. If a read misses both the L1 and the L2 caches, a line fill does not occur on the system bus. Write hits to the L1 or L2 cache are updated, while write misses and writes to shared lines cause external memory updates. If PWT is driven Low and WB/WT# is sampled High, a write hit to a shared line changes the cache-line state to exclusive.

When the CD and NW bits are both set to 1, the cache is fully disabled. Even though the cache is disabled, the contents are not necessarily invalid. The processor reads from the caches if the read hits the L1 or the L2 cache. If a read misses both the L1 and the L2 caches, a line fill does not occur on the system bus. If a write hits the L1 or the L2 cache, the cache is updated but an external memory update does not occur. If a cache line is in the exclusive state during a write hit, the cache-line state is changed to modified. Cache lines in the shared state remain in the shared state after a write hit. Write misses access external memory directly.

The operating system can control the cacheability of a page. The paging mechanism is controlled by CR3, the Page Directory Entry (PDE), and the Page Table Entry (PTE). Within CR3, PDE, and PTE are Page Cache Disable (PCD) and Page Writethrough (PWT) bits. The values of the PCD and PWT bits used in Table 31 and Table 32 are taken from either the PTE or PDE. For more information see the descriptions of PCD and PWT on pages 113 and 115, respectively.

Table 31 describes how the PWT signal is driven based on the values of the PWT bits and the PG bit of CR0.

Table 31. PWT Signal Generation

| PWT Bit* | PG Bit of CR0 | PWT Signal |
|----------|---------------|------------|
| 1 | 1 | High |
| 0 | 1 | Low |
| 1 | 0 | Low |
| 0 | 0 | Low |

Note:
* PWT is taken from PTE or PDE

Table 32 describes how the PCD signal is driven based on the values of the CD bit of CR0, the PCD bits, and the PG bit of CR0.

Table 32. PCD Signal Generation

| CD Bit of CR0 | PCD Bit* | PG Bit of CR0 | PCD Signal |
|---------------|----------|---------------|------------|
| 1 | X | X | High |
| 0 | 1 | 1 | High |
| 0 | 0 | 1 | Low |
| 0 | 1 | 0 | Low |
| 0 | 0 | 0 | Low |

Note:
* PCD is taken from PTE or PDE

Table 33 describes how the CACHE# signal is driven based on the cycle type, the CI bit of TR12, the PCD signal, and the UWCCR model-specific register.

Table 33. CACHE# Signal Generation

| Cycle Type | CI Bit of TR12 | PCD Signal | Access Within WC/UC Range* | CACHE# |
|-----------------------------|----------------|------------|----------------------------|--------|
| Writebacks | X | X | X | Low |
| Unlocked Reads | 0 | 0 | 0 | Low |
| Locked Reads | X | X | X | High |
| Single Writes | X | X | X | High |
| Any Cycle Except Writebacks | 1 | X | X | High |
| Any Cycle Except Writebacks | X | 1 | X | High |
| Any Cycle Except Writebacks | X | X | 1 | High |

Note:
* WC and UC refer to Write-Combining and Uncacheable Memory Ranges as defined in the UWCCR.

Cache-Related Signals Complete descriptions of the signals that control cacheability and cache coherency are given on the following pages:

- CACHE#—page 96
- EADS#—page 100
- FLUSH#—page 103
- HIT#—page 104
- HITM#—page 104
- INV—page 108
- KEN#—page 109
- PCD—page 113
- PWT—page 115
- WB/WT#—page 123

7.4 Cache Disabling and Flushing

L1 and L2 Cache Disabling

To completely disable all accesses to the L1 and the L2 caches, the CD bit must be set to 1 and the caches must be completely flushed.

There are three different methods for flushing the caches. The first method relies on the system logic and the other two methods rely on software.

For the system logic to flush the caches, the processor must sample FLUSH# asserted. In this method, the processor writes back any L1 data cache and L2 cache lines that are in the

modified state, invalidates all lines in all caches, and then executes a flush acknowledge special cycle (See Table 23 on page 126).

The second method for flushing the caches is for software to execute the WBINVD instruction which causes all modified lines to first be written back to memory, then marks all cache lines as invalid. Alternatively, if writing modified lines back to memory is not necessary, the INVD instruction can be used to invalidate all cache lines.

The third and final method for flushing the caches is to make use of the Page Flush/Invalidate Register (PFIR), which allows cache invalidation and optional flushing of a specific 4-Kbyte page from the linear address space (see “PFIR” on page 198). Unlike the previous two methods of flushing the caches, this particular method requires the software to be aware of which specific pages must be flushed and invalidated.

L2 Cache Disabling

The L2 cache in the AMD-K6-III processor can be completely disabled by setting the L2 Disable (L2D) bit (EFER[4]) to 1 (see “Extended Feature Enable Register (EFER)” on page 39). If disabled in this manner, the processor does not access the L2 cache for any purpose, including allocations, read hits, write hits, snoops, inquire cycles, flushing, and read/write attempts by means of the L2AAR. (See “L2 Cache and Tag Array Testing” on page 186.) The L1 cache operation is not affected by disabling the L2 cache.

The L2D bit is provided for debug and testing purposes only. For normal operation and maximum performance, this bit must be set to 0, which is the default setting following reset.

The AMD-K6-III processor does not provide a method for disabling the L1 cache while the L2 cache remains enabled.

7.5 L2 Cache and Tag Array Testing

The AMD-K6-III processor provides the L2AAR MSR that allows for direct access to the L2 cache and L2 tag arrays. For more detailed information, refer to “L2 Cache and Tag Array Testing” on page 237.

7.6 Cache-Line Fills

The processor performs a cache-line fill for any area of system memory defined as cacheable. If an area of system memory is not explicitly defined as uncacheable by the software or system logic, or implicitly treated as uncacheable by the processor, then the memory access is assumed to be cacheable.

Software can prevent caching of certain pages by setting the PCD bit in the PDE or PTE. Additionally, software can define regions of memory as uncacheable or write combinable by programming the MTRRs in the UWCCR MSR (see “Memory Type Range Registers” on page 205). Write-combinable memory is defined as uncacheable.

The system logic also has control of the cacheability of bus cycles. If it determines the address is not cacheable, system logic negates the KEN# signal when asserting the first BRDY# or NA# of a cycle.

The processor does not cache certain memory accesses such as locked operations. In addition, the processor does not cache PDE or PTE memory reads in the L1 cache (referred to as *page table walks*). However, page table walks are cached in the L2 cache if the PDE or PTE is determined to be cacheable.

When the processor needs to read memory, the processor drives a read cycle onto the bus. If the cycle is cacheable, the processor asserts CACHE#. If the cycle is not cacheable, a non-burst, single-transfer read takes place. The processor waits for the system logic to return the data and assert a single BRDY# (See Figure 56 on page 133). If the cycle is cacheable, the processor executes a 32-byte burst read cycle. The processor expects a total of four BRDY# signals for a burst read cycle to take place (See Figure 58 on page 137).

Cache-line fills initiate 32-byte burst read cycles from memory on the system bus for the L1 instruction cache and the L1 data cache. All L1 cache-line fills supplied from the system bus are also filled in the L2 cache.

7.7 Cache-Line Replacements

As programs execute and task switches occur, some cache lines eventually require replacement.

When a cache miss occurs in the L1 cache, the required cache line is filled from either the L2 cache, if the cache line is present (L2 cache hit), or from external memory, if the cache line is not present (L2 cache miss). If the cache line is filled from external memory, the cache line is filled in both the L1 and the L2 caches.

Two forms of cache misses and associated cache fills can take place—a tag-miss cache fill and a tag-hit cache fill. In the case of a tag-miss cache fill, the level-one cache miss is due to a tag mismatch, in which case the required cache line is filled either from the level-two cache or from external memory, and the level-one cache line within the sector that was not required is marked as invalid. In the case of a tag-hit cache fill, the address matches the tag, but the requested cache line is marked as invalid. The required level-one cache line is filled from the level-two cache or from external memory, and the level-one cache line within the sector that is not required remains in the same cache state.

If a L1 data-cache line being filled replaces a modified line, the modified line is written back to the L2 cache if the cache line is present (L2 cache hit). By design, if a cache line is in the modified state in the L1 cache, this cache line can only exist in the L2 cache in the exclusive state. During the writeback, the L2 cache-line state is changed from exclusive to modified, and the writeback does not occur on the system bus. If the replacement writeback does not hit the L2 cache (L2 cache miss), then the modified L1 cache line is written back on the system bus, and the L2 cache is not updated. If the other cache line in this sector is in the modified state, it is also written back in the same manner.

L1 instruction-cache lines and L2 cache lines are replaced using a Least Recently Used (LRU) algorithm. If a line replacement is required, lines are replaced when read cache misses occur.

The L1 data cache uses a slightly different approach to line replacement. If a miss occurs, and a replacement is required, lines are replaced by using a Least Recently Allocated (LRA) algorithm.

7.8 Write Allocate

Write allocate, if enabled, occurs when the processor has a pending memory write cycle to a cacheable line and the line does not currently reside in the L1 data cache. If the line does not exist in the L2 cache, the processor performs a 32-byte burst read cycle on the system bus to fetch the data-cache line addressed by the pending write cycle. If the line does exist in the L2 cache, the data is supplied directly from the L2 cache, in which case a system bus cycle is not executed. The data associated with the pending write cycle is merged with the recently-allocated data-cache line and stored in the processor's L1 data cache. If the data-cache line was fetched from memory (because of a L2 cache miss), the data is stored, without modification, in the L2 cache. The final MESI state of the cache lines depends on the state of the WB/WT# and PWT signals during the burst read cycle and the subsequent L1 data cache write hit (See Table 34 on page 195 to determine the cache-line states and the access types following a cache write miss). If the L1 data cache line is stored in the modified state, then the same cache line is stored in the L2 cache in the exclusive state. If the L1 data cache line is stored in the shared state, then the same cache line is stored in the L2 cache in the shared state.

If a data-cache line fetch from memory is attempted because the write allocate misses the L2 cache, and KEN# is sampled negated, the processor does not perform an allocation. In this case, the pending write cycle is executed as a single write cycle on the system bus.

During write allocates that miss the L2 cache, a 32-byte burst read cycle is executed in place of a non-burst write cycle. While the burst read cycle generally takes longer to execute than the non-burst write cycle, performance gains are realized on subsequent write cycle hits to the write-allocated cache line. Due to the nature of software, memory accesses tend to occur in proximity of each other (principle of locality). The likelihood of additional write hits to the write-allocated cache line is high.

Write allocates that hit the L2 cache increase performance by avoiding accesses to the system bus.

The following is a description of three mechanisms by which the AMD-K6-III processor performs write allocations. A write allocate is performed when any one or more of these mechanisms indicates that a pending write is to a cacheable area of memory.

Write to a Cacheable Page

Every time the processor completes a L1 cache line fill, the address of the page in which the cache line resides is saved in the Cacheability Control Register (CCR). The page address of subsequent write cycles is compared with the page address stored in the CCR. If the two addresses are equal, then the processor performs a write allocate because the page has already been determined to be cacheable.

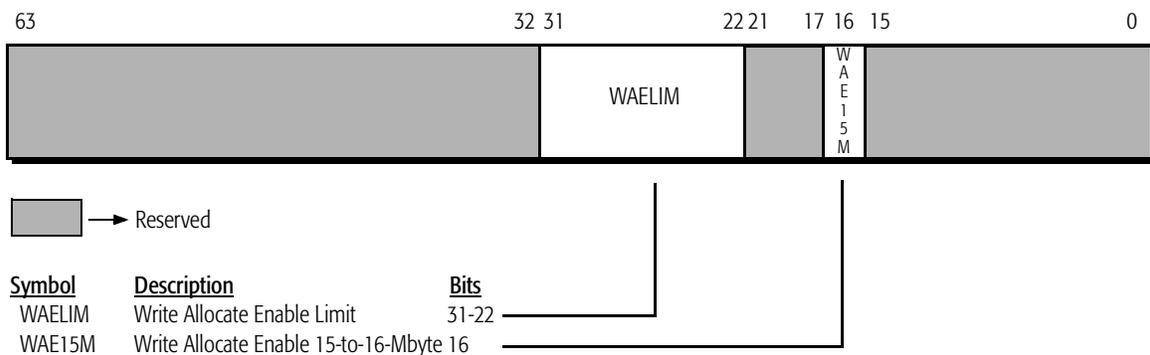
When the processor performs a L1 cache line fill from a different page than the address saved in the CCR, the CCR is updated with the new page address.

Write to a Sector

If the address of a pending write cycle matches the tag address of a valid L1 cache sector, but the addressed cache line within the sector is marked invalid (a sector hit but a cache line miss), then the processor performs a write allocate. The pending write cycle is determined to be cacheable because the sector hit indicates the presence of at least one valid cache line in the sector. The two cache lines within a sector are guaranteed by design to be within the same page.

Write Allocate Limit

The AMD-K6-III processor uses two mechanisms that are programmable within the Write Handling Control Register (WHCR) to enable write allocations for write cycles that address a definable area, or a special 1-Mbyte memory area. The WHCR contains two fields—the Write Allocate Enable Limit (WAE15M) field, and the Write Allocate Enable 15-to-16-Mbyte (WAE15M) bit (see Figure 80).



Note: Hardware RESET initializes this MSR to all zeros.

Figure 80. Write Handling Control Register (WHCR)

Write Allocate Enable Limit. The WAELIM field is 10 bits wide. This field, multiplied by 4 Mbytes, defines an upper memory limit. Any pending write cycle that misses the L1 cache and that addresses memory below this limit causes the processor to perform a write allocate (assuming the address is not within a range where write allocates are disallowed). Write allocate is disabled for memory accesses at and above this limit unless the processor determines a pending write cycle is cacheable by means of one of the other write allocate mechanisms—“Write to a Cacheable Page” and “Write to a Sector.” The maximum value of this limit is $((2^{10}-1) \cdot 4 \text{ Mbytes}) = 4092 \text{ Mbytes}$. When all the bits in this field are set to 0, all memory is above this limit and write allocates due to this mechanism is disabled (even if all bits in the WAELIM field are set to 0, write allocates can still occur due to the “Write to a Cacheable Page” and “Write to a Sector” mechanisms).

Write Allocate Enable 15-to-16-Mbyte. The Write Allocate Enable 15-to-16-Mbyte (WAE15M) bit is used to enable write allocations for memory write cycles that address the 1 Mbyte of memory between 15 Mbytes and 16 Mbytes. This bit must be set to 1 to allow write allocate in this memory area. This bit is provided to account for a small number of uncommon memory-mapped I/O adapters that use this particular memory address space. If the system contains one of these peripherals, the bit should be set to 0 (even if the WAE15M bit is set to 0, write allocates can still occur between 15 Mbytes and 16 Mbytes due to the “Write to a Cacheable Page” and “Write to a Sector” mechanisms). The WAE15M bit is ignored if the value in the WAELIM field is set to less than 16 Mbytes.

By definition a write allocate is not performed in the memory area between 640 Kbytes and 1 Mbyte unless the processor determines a pending write cycle is cacheable by means of one of the other write allocate mechanisms—“Write to a Cacheable Page” and “Write to a Sector.” It is not considered safe to perform write allocations between 640 Kbytes and 1 Mbyte (000A_0000h to 000F_FFFFh) because it is considered a noncacheable region of memory.

If a memory region is defined as write combinable or uncacheable by a MTRR, write allocates are not performed in that region.

Write Allocate Logic Mechanisms and Conditions

Figure 81 shows the logic flow for all the mechanisms involved with write allocate for memory bus cycles. The left side of the diagram (the text) describes the conditions that need to be true in order for the value of that line to be a 1. Items 1 to 4 of the diagram are related to general cache operation and items 5 to 10 are related to the write allocate mechanisms.

For more information about write allocate, see the *Implementation of Write Allocate in the K86™ Processors Application Note*, order# 21326.

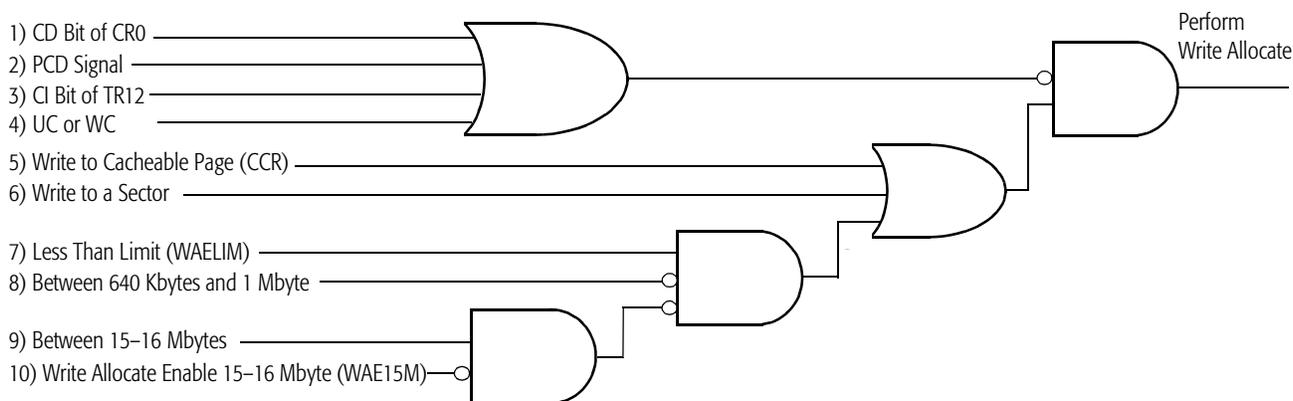


Figure 81. Write Allocate Logic Mechanisms and Conditions

The following list describes the corresponding items in Figure 81:

1. *CD Bit of CR0*—When the cache disable (CD) bit within control register 0 (CR0) is set to 1, the cache fill mechanism for both reads and writes is disabled and write allocate does not occur.
2. *PCD Signal*—When the PCD (page cache disable) signal is driven High, caching for that page is disabled, even if KEN# is sampled asserted, and write allocate does not occur.
3. *CI Bit of TR12*—When the cache inhibit bit of Test Register 12 is set to 1, L1 and L2 cache fills are disabled and write allocate does not occur.
4. *UC or WC*—If a pending write cycle addresses a region of memory defined as write combinable or uncacheable by an MTRR, write allocates are not performed in that region.

5. *Write to a Cacheable Page (CCR)*—A write allocate is performed if the processor knows that a page is cacheable. The CCR is used to store the page address of the last L1 cache fill for a read miss. See “Write to a Cacheable Page” on page 190 for a detailed description of this condition.
6. *Write to a Sector*—A write allocate is performed if the address of a pending write cycle matches the tag address of a valid L1 cache sector but the addressed cache line within the sector is invalid. See “Write to a Sector” on page 190 for a detailed description of this condition.
7. *Less Than Limit (WAELIM)*—The write allocate limit mechanism determines if the memory area being addressed is less than the limit set in the WAELIM field of WHCR. If the address is less than the limit, write allocate for that memory address is performed as long as conditions 8 through 10 do not prevent write allocate (even if conditions 8 and 10 attempt to prevent write allocate, condition 5 or 6 allows write allocate to occur).
8. *Between 640 Kbytes and 1 Mbyte*—Write allocate is not performed in the memory area between 640 Kbytes and 1 Mbyte. It is not considered safe to perform write allocations between 640 Kbytes and 1 Mbyte (000A_0000h to 000F_FFFFh) because this area of memory is considered a noncacheable region of memory (even if condition 8 attempts to prevent write allocate, condition 5 or 6 allows write allocate to occur).
9. *Between 15–16 Mbytes*—If the address of a pending write cycle is in the 1 Mbyte of memory between 15 Mbytes and 16 Mbytes, and the WAE15M bit is set to 1, write allocate for this cycle is enabled.
10. *Write Allocate Enable 15–16 Mbytes (WAE15M)*—This condition is associated with the Write Allocate Limit mechanism and affects write allocate only if the limit specified by the WAELIM field is greater than or equal to 16 Mbytes. If the memory address is between 15 Mbytes and 16 Mbytes, and the WAE15M bit in the WHCR is set to 0, write allocate for this cycle is disabled (even if condition 10 attempts to prevent write allocate, condition 5 or 6 allows write allocate to occur).

7.9 Prefetching

Hardware Prefetching

The AMD-K6-III processor conditionally performs cache prefetching which results in the filling of the required cache line first, and a prefetch of the second cache line making up the other half of the sector. From the perspective of the external bus, the two cache-line fills typically appear as two 32-byte burst read cycles occurring back-to-back or, if allowed, as pipelined cycles. The burst read cycles do not occur back-to-back (wait states occur) if the processor is not ready to start a new cycle, if higher priority data read or write requests exist, or if NA# (next address) was sampled negated. Wait states can also exist between burst cycles if the processor samples AHOLD or BOFF# asserted.

Software Prefetching

The 3DNow! technology includes an instruction called PREFETCH that allows a cache line to be prefetched into the L1 data cache and the L2 cache. Unlike prefetching under hardware control, software prefetching only fetches the cache line specified by the operand of the PREFETCH instruction, and does not attempt to fetch the other cache line in the sector. The PREFETCH instruction format is defined in Table 15, “3DNow![™] Instructions,” on page 81. For more detailed information, see the *3DNow![™] Technology Manual*, order# 21928.

7.10 Cache States

Table 34 shows all the possible cache-line states before and after program-generated accesses to individual cache lines.

Table 34. L1 and L2 Cache States for Read and Write Accesses

| Type | | Cache State Before Access ⁴ | | Access Type | Cache State After Access | |
|------------|-------------------------------|--|----|--|--------------------------|---------------------|
| | | | | | MESI State ¹ | |
| | | L1 | L2 | | L1 | L2 |
| Cache Read | Read Miss L1, Read Miss L2 | I | I | single read from bus | I | I |
| | | I | I | burst read from bus, fill L1 and L2 ² | S or E ³ | S or E ³ |
| | Read Hit L1 | E | – | – | E | – |
| | | S | – | – | S | – |
| | | M | – | – | M | – |
| | Read Miss L1, Read Hit L2 | I | E | fill L1 | E | E |
| | | I | S | fill L1 | S | S |
| | | I | M | fill L1 | M | E |
| | | I | M | fill L1 | E ⁹ | M ⁹ |

Notes:

1. The final MESI state assumes that the state of the WB/WT# signal remains the same for all accesses to a particular cache line.
 2. If CACHE# is driven Low and KEN# is sampled asserted.
 3. If PWT is driven Low and WB/WT# is sampled High, the line is cached in the exclusive (writeback) state. If PWT is driven High or WB/WT# is sampled Low, the line is cached in the shared (writethrough) state.
 4. M = Modified, E = Exclusive, S = Shared, I = Invalid. The exclusive and shared states are indistinguishable in the L1 instruction cache and are treated as "valid" states.
 5. Assumes the write allocate conditions as specified in "Write Allocate" on page 189 are not met.
 6. Assumes the write allocate conditions as specified in "Write Allocate" on page 189 are met.
 7. Assumes PWT is driven Low and WB/WT# is sampled High.
 8. Assumes PWT is driven High or WB/WT# is sampled Low.
 9. This entry only applies to the L1 instruction cache. By design, a cache line cannot exist in the exclusive state in the L1 data cache and in the modified state in the L2 cache.
- Not applicable or none.

Table 34. L1 and L2 Cache States for Read and Write Accesses (continued)

| Type | | Cache State Before Access ⁴ | | Access Type | Cache State After Access | |
|-------------|--------------------------------|--|-----------------------------------|---|--------------------------|---------------------|
| | | | | | MESI State ¹ | |
| | | L1 | L2 | | L1 | L2 |
| Cache Write | Write Miss L1 Write Miss L2 | I | I | single write to bus ⁵ | I | I |
| | | I | I | burst read from bus, fill L1 and L2, write to L1 ⁶ | M ⁷ | E ⁷ |
| | | I | I | burst read from bus, fill L1 and L2, write to L1 and L2, single write to bus ⁶ | S ⁸ | S ⁸ |
| | Write Hit L1 | S | I | write to L1, single write to bus | S or E ³ | I |
| | | S | S | write to L1 and L2, single write to bus | S or E ³ | S or E ³ |
| | | E or M | – | write to L1 | M | – |
| | Write Miss L1 Write Hit L2 | I | E | write to L2 ⁵ | I | M |
| | | I | S | write to L2, single write to bus ⁵ | I | S or E ³ |
| | | I | M | write to L2 ⁵ | I | M |
| | | I | E | fill L1, write to L1 ⁶ | M | E |
| | | I | S | write to L2, single write to bus ⁶ | S or E ³ | S or E ³ |
| | I | M | fill L1, write to L1 ⁶ | M | E | |

Notes:

1. The final MESI state assumes that the state of the WB/WT# signal remains the same for all accesses to a particular cache line.
 2. If CACHE# is driven Low and KEN# is sampled asserted.
 3. If PWT is driven Low and WB/WT# is sampled High, the line is cached in the exclusive (writeback) state. If PWT is driven High or WB/WT# is sampled Low, the line is cached in the shared (writethrough) state.
 4. M = Modified, E = Exclusive, S = Shared, I = Invalid. The exclusive and shared states are indistinguishable in the L1 instruction cache and are treated as "valid" states.
 5. Assumes the write allocate conditions as specified in "Write Allocate" on page 189 are not met.
 6. Assumes the write allocate conditions as specified in "Write Allocate" on page 189 are met.
 7. Assumes PWT is driven Low and WB/WT# is sampled High.
 8. Assumes PWT is driven High or WB/WT# is sampled Low.
 9. This entry only applies to the L1 instruction cache. By design, a cache line cannot exist in the exclusive state in the L1 data cache and in the modified state in the L2 cache.
- Not applicable or none.

7.11 Cache Coherency

Different ways exist to maintain coherency between the system memory and cache memories. Inquire cycles, internal snoops, FLUSH#, WBINVD, INV, and line replacements all prevent inconsistencies between memories.

Inquire Cycles

Inquire cycles are bus cycles initiated by system logic which ensure coherency between the caches and main memory. In systems with multiple bus masters, system logic maintains cache coherency by driving inquire cycles to the processor. System logic initiates inquire cycles by asserting AHOLD, BOFF#, or HOLD to obtain control of the address bus and then driving EADS#, INV (optional), and an inquire address (A[31:5]). This type of bus cycle causes the processor to compare the tags for its L1 instruction and L1 data caches, and L2 cache, with the inquire address. If there is a hit to a shared or exclusive line in the L1 data cache or the L2 cache, or a valid line in the L1 instruction cache, the processor asserts HIT#. If the compare hits a modified line in the L1 data cache or the L2 cache, the processor asserts HIT# and HITM#. If HITM# is asserted, the processor writes the modified line back to memory. If INV was sampled asserted with EADS#, a hit invalidates the line. If INV was sampled negated with EADS#, a hit leaves the line in the shared state or transitions it from the exclusive or modified state to the shared state.

Table 35 on page 200 lists valid combinations of MESI states permitted for a cache line in the L1 and L2 caches, and shows the effects of inquire cycles performed with INV equal to 0 (non-invalidating) and INV equal to 1 (invalidating).

Internal Snooping

Internal snooping is initiated by the processor (rather than system logic) during certain cache accesses. It is used to maintain coherency between the L1 instruction cache and the L1 data cache.

The processor automatically snoops its L1 instruction cache during read or write misses to its L1 data cache, and it snoops its L1 data cache during read misses to its L1 instruction cache. The L2 cache is not snooped during misses to either of the L1 caches. Table 36 on page 201 summarizes the actions taken during this internal snooping.

If an internal snoop hits its target, the processor does the following:

- *L1 data cache snoop during a L1 instruction-cache read miss*—If modified, the line in the L1 data cache is written back. If the writeback hits the L2 cache, the cache line is stored in the L2 cache in the modified state and no writeback occurs on the system bus. If the writeback misses the L2 cache, the cache line is written back on the system bus to external memory. Regardless of its state, the L1 data-cache line is invalidated and the L1 instruction cache performs a read from either the L2 cache (if a L2 hit occurs) or external memory (if a L2 miss occurs).
- *L1 instruction cache snoop during a L1 data cache miss*—The line in the instruction cache is marked invalid, and the L1 data-cache read or write is performed as defined in Table 34 on page 195.

FLUSH#

In response to sampling FLUSH# asserted, the processor writes back any L1 data cache lines and L2 cache lines that are in the modified state and then marks all lines in the L1 instruction cache, the L1 data cache, and the L2 cache as invalid.

PFIR

The AMD-K6-III processor contains the Page Flush/Invalidate Register (PFIR) that allows cache invalidation and optional flushing of a specific 4-Kbyte page from the linear address space (see Figure 82). When the PFIR is written to (using the WRMSR instruction), the invalidation and, optionally, the flushing begins. The total amount of cache in the AMD-K6-III processor is 320 Kbytes. Using this register can result in a much lower cycle count for flushing particular pages versus flushing the entire cache.

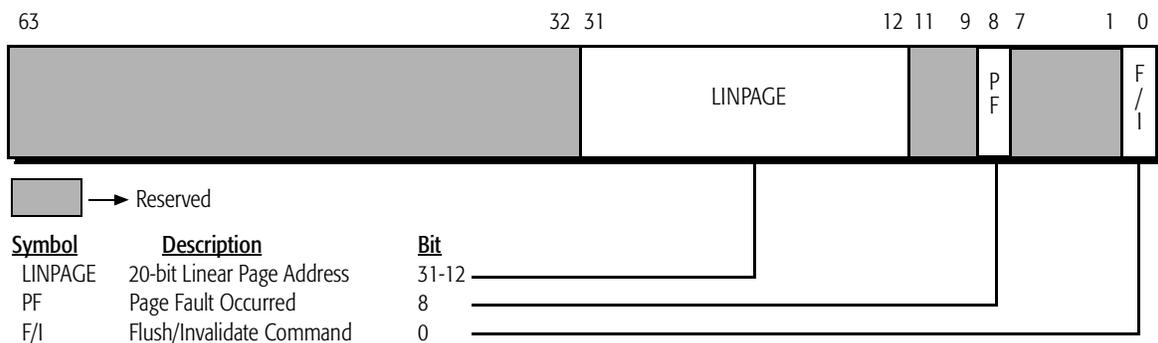


Figure 82. Page Flush/Invalidate Register (PFIR)—MSR C000_0088h

LINPAGE. This 20-bit field must be written with bits 31:12 of the linear address of the 4-Kbyte page that is to be invalidated and optionally flushed from the L1 or the L2 cache.

PF. If an attempt to invalidate or flush a page results in a page fault, the processor sets the PF bit to 1, and the invalidate or flush operation is not performed (even though invalidate operations do not normally generate page faults). In this case, an actual page fault exception is not generated. If the PF bit equals 0 after an invalidate or flush operation, then the operation executed successfully. The PF bit must be read after every write to the PFIR register to determine if the invalidate or flush operation executed successfully.

F/I. This bit is used to control the type of action that occurs to the specified linear page. If a 0 is written to this bit, the operation is a flush, in which case all cache lines in the modified state within the specified page are written back to memory, after which the entire page is invalidated. If a 1 is written to this bit, the operation is an invalidation, in which case the entire page is invalidated without the occurrence of any writebacks.

WBINVD and INVD

These x86 instructions cause all cache lines to be marked as invalid. WBINVD writes back modified lines before marking all cache lines invalid. INVD does not write back modified lines.

Cache-Line Replacement

Replacing lines in the L1 cache and the L2 cache, according to the line replacement algorithms described in “Cache-Line Fills” on page 187, ensures coherency between external memory and the caches.

Table 36 on page 201 shows all possible cache-line states before and after various cache-related operations.

Table 35. Valid L1 and L2 Cache States and Effect of Inquire Cycles

| Cache State Before Inquire ¹ | | Memory Access ² | Cache State After Inquire | | | |
|---|----------------|----------------------------|---------------------------|----|---------|----|
| | | | INV = 0 | | INV = 1 | |
| L1 | L2 | | L1 | L2 | L1 | L2 |
| I | M | writeback L2 to bus | I | S | I | I |
| I | E | – | I | S | I | I |
| I | S | – | I | S | I | I |
| I | I | – | I | I | I | I |
| E ³ | M ³ | writeback L2 to bus | S | S | I | I |
| E | E | – | S | S | I | I |
| E | I | – | S | I | I | I |
| M | E | writeback L1 to bus | S | I | I | I |
| M | I | writeback L1 to bus | S | I | I | I |
| S | S | – | S | S | I | I |
| S | I | – | S | I | I | I |

Notes:

1. M = Modified, E = Exclusive, S = Shared, I = Invalid. The exclusive and shared states are indistinguishable in the L1 instruction cache and are treated as "valid" states.
2. Writeback cycles to the bus are 32-byte burst writes.
3. This entry only applies to the L1 instruction cache. By design, a cache line cannot exist in the exclusive state in the L1 data cache and in the modified state in the L2 cache.

Table 36. L1 and L2 Cache States for Snoops, Flushes, and Invalidation

| Type of Operation | Cache State Before Operation ¹ | | Access Type ² | Cache State After Operation | |
|--------------------|---|----------------|--------------------------|-----------------------------|----|
| | L1 | L2 | | L1 | L2 |
| Internal Snoop | I | M | – | I | M |
| | I | E | – | I | E |
| | I | S | – | I | S |
| | I | I | – | I | I |
| | E ³ | M ³ | – | I | M |
| | E | E | – | I | E |
| | E | I | – | I | I |
| | M | E | writeback L1 to L2 | I | M |
| | M | I | writeback L1 to bus | I | I |
| | S | S | – | I | S |
| | S | I | – | I | I |
| FLUSH# Signal | S or E | | – | I | I |
| | M | – | writeback L1 to bus | I | I |
| | – | M | writeback L2 to bus | I | I |
| PFIR (F/I = 0) | S or E | | – | I | I |
| | M | – | writeback L1 to bus | I | I |
| | – | M | writeback L2 to bus | I | I |
| PFIR (F/I = 1) | – | – | – | I | I |
| WBINVD Instruction | S or E | | – | I | I |
| | M | – | writeback L1 to bus | I | I |
| | – | M | writeback L2 to bus | I | I |
| INVD Instruction | – | – | – | I | I |

Notes:

1. M = Modified, E = Exclusive, S = Shared, I = Invalid. The exclusive and shared states are indistinguishable in the L1 instruction cache and are treated as "valid" states.
 2. Writeback cycles to the bus are 32-byte burst writes.
 3. This entry only applies to the L1 instruction cache. By design, a cache line cannot exist in the exclusive state in the L1 data cache and in the modified state in the L2 cache.
- Not applicable or none.

7.12 Writethrough versus Writeback Coherency States

The terms *writethrough* and *writeback* apply to two related concepts in a read-write cache like the AMD-K6-III processor L1 data cache and the L2 cache. The following conditions apply to both the writethrough and writeback modes:

- *Memory Writes*—A relationship exists between external memory writes and their concurrence with cache updates:
 - An external memory write that occurs concurrently with a cache update to the same location is a writethrough. Writethroughs are driven as single cycles on the bus.
 - An external memory write that occurs after the processor has modified a cache line is a writeback. Writebacks are driven as burst cycles on the bus.
- *Coherency State*—A relationship exists between MESI coherency states and writethrough-writeback coherency states of lines in the cache as follows:
 - Shared and invalid MESI lines are in the writethrough state.
 - Modified and exclusive MESI lines are in the writeback state.

7.13 A20M# Masking of Cache Accesses

Although the processor samples A20M# as a level-sensitive input on every clock edge, it should only be asserted in Real mode. The processor applies the A20M# masking to its tags, through which all programs access the caches. Therefore, assertion of A20M# affects all addresses (cache and external memory), including the following:

- Cache-line fills (caused by read misses or write allocates)
- Cache writethroughs (caused by write misses or write hits to lines in the shared state)

However, A20M# does not mask writebacks or invalidations caused by the following actions:

- Internal snoops
- Inquire cycles
- The FLUSH# signal
- Writing to the PFIR
- The WBINVD instruction

8 Write Merge Buffer

The AMD-K6-III processor contains an 8-byte write merge buffer that allows the processor to conditionally combine data from multiple noncacheable write cycles into this merge buffer. The merge buffer operates in conjunction with the Memory Type Range Registers (MTRRs). Refer to “Memory Type Range Registers” on page 205 for a description of the MTRRs.

Merging multiple write cycles into a single write cycle reduces processor bus utilization and processor stalls, thereby increasing the overall system performance.

8.1 EWBE Control

The presence of the merge buffer creates the potential to perform out-of-order write cycles relative to the processor’s caches. In general, the ordering of write cycles that are driven externally on the system bus and those that hit the processor’s cache can be controlled by the EWBE# signal. See “EWBE# (External Write Buffer Empty)” on page 101 for more information. If EWBE# is sampled negated, the processor delays the commitment of write cycles to cache lines in the modified state or exclusive state in the processor’s caches. Therefore, the system logic can enforce strong ordering by negating EWBE# until the external write cycle is complete, thereby ensuring that a subsequent write cycle that hits a cache does not complete ahead of the external write cycle.

However, the addition of the write merge buffer introduces the potential for out-of-order write cycles to occur between writes to the merge buffer and writes to the processor’s caches. Because these writes occur entirely within the processor and are not sent out to the processor bus, the system logic is not able to enforce strong ordering with the EWBE# signal.

The EWBE control (EWBEC) bits in the EFER register provide a mechanism for enforcing three different levels of write ordering in the presence of the write merge buffer:

- EFER[3] is defined as the Global EWBE Disable (GEWBED). When GEWBED equals 1, the processor does not attempt to enforce any write ordering internally or externally (the EWBE# signal is ignored). This is the maximum performance setting.

- EFER[2] is defined as the Speculative EWBE Disable (SEWBED). SEWBED only affects the processor when GEWBED equals 0. If GEWBED equals 0 and SEWBED equals 1, the processor enforces strong ordering for all internal write cycles with the exception of write cycles addressed to a range of memory defined as uncacheable (UC) or write-combining (WC) by the MTRRs. In addition, the processor samples the EWBE# signal. If EWBE# is sampled negated, the processor delays the commitment of write cycles to processor cache lines in the modified state or exclusive state until EWBE# is sampled asserted.

This setting provides performance comparable to, but slightly less than, the performance obtained when GEWBED equals 1 because some degree of write ordering is maintained.

- If GEWBED equals 0 and SEWBED equals 0, the processor enforces strong ordering for all internal and external write cycles. In this setting, the processor assumes, or *speculates*, that strong order must be maintained between writes to the merge buffer and writes that hit the processor's caches. Once the merge buffer is written out to the processor's bus, the EWBE# signal is sampled. If EWBE# is sampled negated, the processor delays the commitment of write cycles to processor cache lines in the modified state or exclusive state until EWBE# is sampled asserted.

This setting is the default after RESET and provides the lowest performance of the three settings because full write ordering is maintained.

Table 37 summarizes the three settings of the EWBE field for the EFER register, along with the effect of write ordering and performance. For more information on the EFER register, see “Extended Feature Enable Register (EFER)” on page 39.

Table 37. EWBE Settings

| EFER[3] (GEWBED) | EFER[2] (SEWBED) | Write Ordering | Performance |
|---------------------|---------------------|-------------------|---------------|
| 1 | 0 or 1 | None | Best |
| 0 | 1 | All except UC/WC | Close-to-Best |
| 0 | 0 | All | Slowest |

8.2 Memory Type Range Registers

The AMD-K6-III processor provides two variable-range Memory Type Range Registers (MTRRs)—MTRR0 and MTRR1—that each specify a range of memory. Each range can be defined as one of the following memory types:

- **Uncacheable (UC) memory**—Memory read cycles are sourced directly from the specified memory address and the processor does not allocate a cache line. Memory write cycles are targeted at the specified memory address and a write allocation does not occur.
- **Write-Combining (WC) memory**—Memory read cycles are sourced directly from the specified memory address and the processor does not allocate a cache line. The processor conditionally combines data from multiple noncacheable write cycles that are addressed within this range into a merge buffer. Merging multiple write cycles into a single write cycle reduces processor bus utilization and processor stalls, thereby increasing the overall system performance. This memory type is applicable for linear video frame buffers.

UC/WC Cacheability Control Register (UWCCR)

The MTRRs are accessed by addressing the 64-bit MSR known as the UC/WC Cacheability Control Register (UWCCR). The MSR address of the UWCCR is C000_0085h. Following reset, all bits in the UWCCR register are set to 0. MTRR0 (lower 32 bits of the UWCCR register) defines the size and memory type of range 0 and MTRR1 (upper 32 bits) defines the size and memory type of range 1 (see Figure 83).

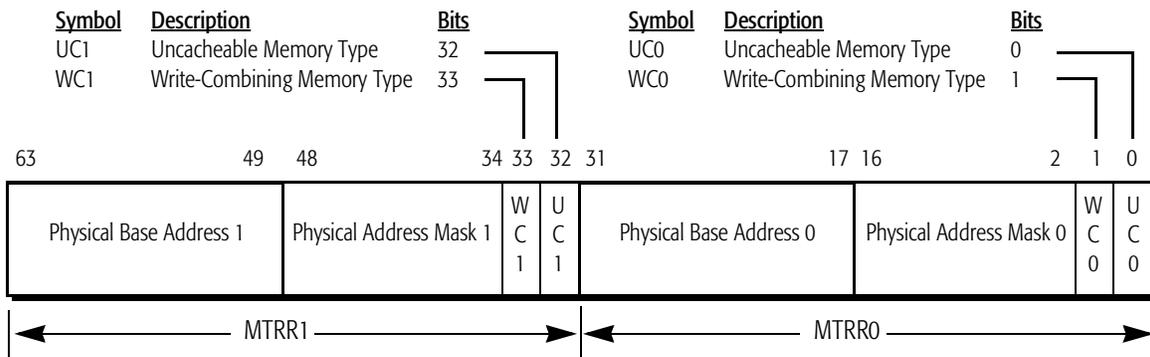


Figure 83. UC/WC Cacheability Control Register (UWCCR)—MSR C000_0085h (Model 8/[F:8])

Physical Base Address n (n=0, 1). This address is the 15 most-significant bits of the physical base address of the memory range. The least-significant 17 bits of the base address are not needed because the base address is by definition always aligned on a 128-Kbyte boundary.

Physical Address Mask n (n=0, 1). This value is the 15 most-significant bits of a physical address mask that is used to define the size of the memory range. This mask is logically ANDed with both the physical base address field of the UWCCR register and the physical address generated by the processor. If the results of the two AND operations are equal, then the generated physical address is considered within the range. That is, if:

$$\text{Mask \& Physical Base Address} = \text{Mask \& Physical Address Generated}$$

then the physical address generated by the processor is in the range.

WCn (n=0, 1). When set to 1, this memory range is defined as write combinable (refer to Table 38). Write-combinable memory is uncacheable.

UCn (n=0, 1). When set to 1, this memory range is defined as uncacheable (refer to Table 38).

Table 38. WC/UC Memory Type

| WCn | UCn | Memory Type |
|--------|-----|--|
| 0 | 0 | No effect on cacheability or write combining |
| 1 | 0 | Write-combining memory range (uncacheable) |
| 0 or 1 | 1 | Uncacheable memory range |

Memory-Range Restrictions. The following rules regarding the address alignment and size of each range must be adhered to when programming the physical base address and physical address mask fields of the UWCCR register:

- The minimum size of each range is 128 Kbytes.
- The physical base address must be aligned on a 128-Kbyte boundary.
- The physical base address must be *range-size aligned*. For example, if the size of the range is 1 Mbyte, then the physical base address must be aligned on a 1-Mbyte boundary.
- All bits set to 1 in the physical address mask must be contiguous. Likewise, all bits set to 0 in the physical address mask must be contiguous. For example:

111_1111_1100_0000b is a valid physical address mask

111_1111_1101_0000b is invalid

Table 39 lists the valid physical address masks and the resulting range sizes that can be programmed in the UWCCR register.

Table 39. Valid Masks and Range Sizes

| Masks | Size |
|---------------------|------------|
| 111_1111_1111_1111b | 128 Kbytes |
| 111_1111_1111_1110b | 256 Kbytes |
| 111_1111_1111_1100b | 512 Kbytes |
| 111_1111_1111_1000b | 1 Mbyte |
| 111_1111_1111_0000b | 2 Mbytes |
| 111_1111_1110_0000b | 4 Mbytes |
| 111_1111_1100_0000b | 8 Mbytes |

Table 39. Valid Masks and Range Sizes (continued)

| Masks | Size |
|---------------------|------------|
| 111_1111_1000_0000b | 16 Mbytes |
| 111_1111_0000_0000b | 32 Mbytes |
| 111_1110_0000_0000b | 64 Mbytes |
| 111_1100_0000_0000b | 128 Mbytes |
| 111_1000_0000_0000b | 256 Mbytes |
| 111_0000_0000_0000b | 512 Mbytes |
| 110_0000_0000_0000b | 1 Gbyte |
| 100_0000_0000_0000b | 2 Gbytes |
| 000_0000_0000_0000b | 4 Gbytes |

Example. Suppose that the range of memory from 16 Mbytes to 32 Mbytes is uncacheable, and the 8-Mbyte range of memory on top of 1 Gbyte is write-combinable. Range 0 is defined as the uncacheable range, and range 1 is defined as the write-combining range.

Extracting the 15 most-significant bits of the 32-bit physical base address that corresponds to 16 Mbytes (0100_0000h) yields a physical base address 0 field of 000_0000_1000_0000b. Because the uncacheable range size is 16 Mbytes, the physical mask value 0 field is 111_1111_1000_0000b, according to Table 39. Bit 1 of the UWCCR register (WC0) is set to 0 and bit 0 of the UWCCR register is set to 1 (UC0).

Extracting the 15 most-significant bits of the 32-bit physical base address that corresponds to 1 Gbyte (4000_0000h) yields a physical base address 1 field of 010_0000_0000_0000b. Because the write-combining range size is 8 Mbytes, the physical mask value 1 field is 111_1111_1100_0000b, according to Table 39. Bit 33 of the UWCCR register (WC1) is set to 1 and bit 32 of the UWCCR register is set to 0 (UC1).

9 Floating-Point and Multimedia Execution Units

9.1 Floating-Point Execution Unit

The AMD-K6-III processor contains an IEEE 754-compatible and 854-compatible floating-point execution unit designed to accelerate the performance of software that utilizes the x86 floating-point instruction set. Floating-point software is typically written to manipulate numbers that are very large or very small, that require a high degree of precision, or that result from complex mathematical operations such as transcendentals. Applications that take advantage of floating-point operations include geometric calculations for graphics acceleration, scientific, statistical, and engineering applications, and business applications that use large amounts of high-precision data.

The high-performance floating-point execution unit contains an adder unit, a multiplier unit, and a divide/square root unit. These low-latency units can execute floating-point instructions in as few as two processor clocks. To increase performance, the processor is designed to simultaneously decode most floating-point instructions with most short-decodeable instructions.

See “Software Environment” on page 21 for a description of the floating-point data types, registers, and instructions.

Handling Floating-Point Exceptions

The AMD-K6-III processor provides the following two types of exception handling for floating-point exceptions:

- If the numeric error (NE) bit in CR0 is set to 1, the processor invokes the interrupt 10h handler. In this manner, the floating-point exception is completely handled by software.
- If the NE bit in CR0 is set to 0, the processor requires external logic to generate an interrupt on the INTR signal in order to handle the exception.

External Logic Support of Floating-Point Exceptions

The processor provides the FERR# (Floating-Point Error) and IGNNE# (Ignore Numeric Error) signals to allow the external logic to generate the interrupt in a manner consistent with IBM-compatible PC/AT systems. The assertion of FERR# indicates the occurrence of an unmasked floating-point exception resulting from the execution of a floating-point

instruction. IGNNE# is used by the external hardware to control the effect of an unmasked floating-point exception. Under certain circumstances, if IGNNE# is sampled asserted, the processor ignores the floating-point exception.

Figure 84 illustrates an implementation of external logic for supporting floating-point exceptions. The following example explains the operation of the external logic in Figure 84:

As the result of a floating-point exception, the processor asserts FERR#. The assertion of FERR# and the sampling of IGNNE# negated indicates the processor has stopped instruction execution and is waiting for an interrupt. The assertion of FERR# leads to the assertion of INTR by the interrupt controller. The processor acknowledges the interrupt and jumps to the corresponding interrupt service routine in which an I/O write cycle to address port F0h leads to the assertion of IGNNE#. When IGNNE# is sampled asserted, the processor ignores the floating-point exception and continues instruction execution. When the processor negates FERR#, the external logic negates IGNNE#.

See “FERR# (Floating-Point Error)” on page 102 and “IGNNE# (Ignore Numeric Exception)” on page 106 for more details.

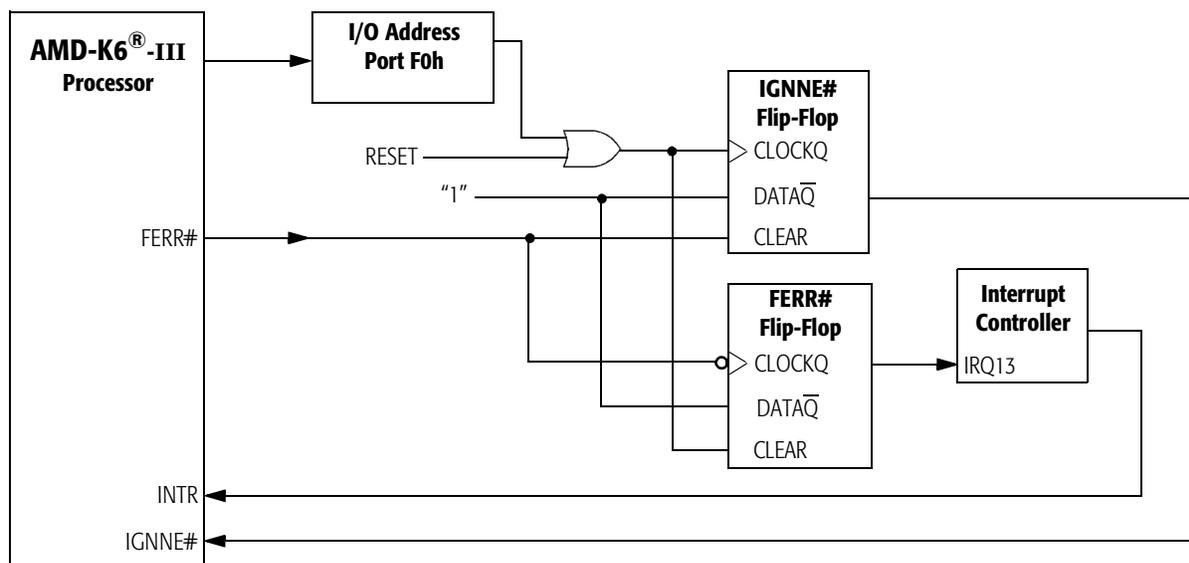


Figure 84. External Logic for Supporting Floating-Point Exceptions

9.2 Multimedia and 3DNow![™] Execution Units

The multimedia and 3DNow! execution units of the AMD-K6-III processor are designed to accelerate the performance of software written using the industry-standard MMX instructions and the new 3DNow! instructions. Applications that can take advantage of the MMX and 3DNow! instructions include graphics, video and audio compression and decompression, speech recognition, and telephony applications.

The multimedia execution unit can execute MMX instructions in a single processor clock. All MMX and 3DNow! arithmetic instructions are pipelined for higher performance. To increase performance, the processor is designed to simultaneously decode all MMX and 3DNow! instructions with most other instructions.

For more information on MMX instructions, see the *AMD-K6[®] Processor Multimedia Technology Manual*, order# 20726. For more information on 3DNow! instructions, see the *3DNow![™] Technology Manual*, order# 21928.

9.3 Floating-Point and MMX[™]/3DNow![™] Instruction Compatibility

Registers

The eight 64-bit MMX registers (which are also utilized by 3DNow! instructions) are mapped on the floating-point stack. This enables backward compatibility with all existing software. For example, the register saving event that is performed by operating systems during task switching requires no changes to the operating system. The same support provided in an operating system's interrupt 7 handler (Device Not Available) for saving and restoring the floating-point registers also supports saving and restoring the MMX registers.

Exceptions

There are no new exceptions defined for supporting the MMX and 3DNow! instructions. All exceptions that occur while decoding or executing an MMX or 3DNow! instruction are handled in existing exception handlers without modification.

FERR# and IGNNE#

MMX instructions and 3DNow! instructions do not generate floating-point exceptions. However, if an unmasked floating-point exception is pending, the processor asserts FERR# at the instruction boundary of the next floating-point

instruction, MMX instruction, 3DNow! instruction or WAIT instruction.

The sampling of IGNNE# asserted only affects processor operation during the execution of an error-sensitive floating-point instruction, MMX instruction, 3DNow! instruction or WAIT instruction when the NE bit in CR0 is set to 0.

10 System Management Mode (SMM)

10.1 Overview

SMM is an alternate operating mode entered by way of a system management interrupt (SMI#) and handled by an interrupt service routine. SMM is designed for system control activities such as power management. These activities appear transparent to conventional operating systems like DOS and Windows. SMM is targeted for use by the Basic Input Output System (BIOS), specialized low-level device drivers, and the operating system. The code and data for SMM are stored in the SMM memory area, which is isolated from main memory.

The processor enters SMM by the assertion of the SMI# interrupt and the processor's acknowledgment by the assertion of SMIACT#. At this point the processor saves its state into the SMM memory state-save area and jumps to the SMM service routine. The processor returns from SMM when it executes the RSM (resume) instruction from within the SMM service routine. Subsequently, the processor restores its state from the SMM save area, negates SMIACT#, and resumes execution with the instruction following the point where it entered SMM.

The following sections summarize the SMM state-save area, entry into and exit from SMM, exceptions and interrupts in SMM, memory allocation and addressing in SMM, and the SMI# and SMIACT# signals.

10.2 SMM Operating Mode and Default Register Values

The software environment within SMM has the following characteristics:

- Addressing and operation in Real mode
- 4-Gbyte segment limits
- Default 16-bit operand, address, and stack sizes, although instruction prefixes can override these defaults
- Control transfers that do not override the default operand size truncate the EIP to 16 bits

- Far jumps or calls cannot transfer control to a segment with a base address requiring more than 20 bits, as in Real mode segment-base addressing
- A20M# is masked
- Interrupt vectors use the Real-mode interrupt vector table
- The IF flag in EFLAGS is cleared (INTR not recognized)
- The TF flag in EFLAGS is cleared
- The NMI and INIT interrupts are disabled
- Debug register DR7 is cleared (debug traps disabled)

Figure 85 shows the default map of the SMM memory area. It consists of a 64-Kbyte area, between 0003_0000h and 0003_FFFFh, of which the top 32 Kbytes (0003_8000h to 0003_FFFFh) must be populated with RAM. The default code-segment (CS) base address for the area—called the SMM base address—is at 0003_0000h. The top 512 bytes (0003_FE00h to 0003_FFFFh) contain a fill-down SMM state-save area. The default entry point for the SMM service routine is 0003_8000h.

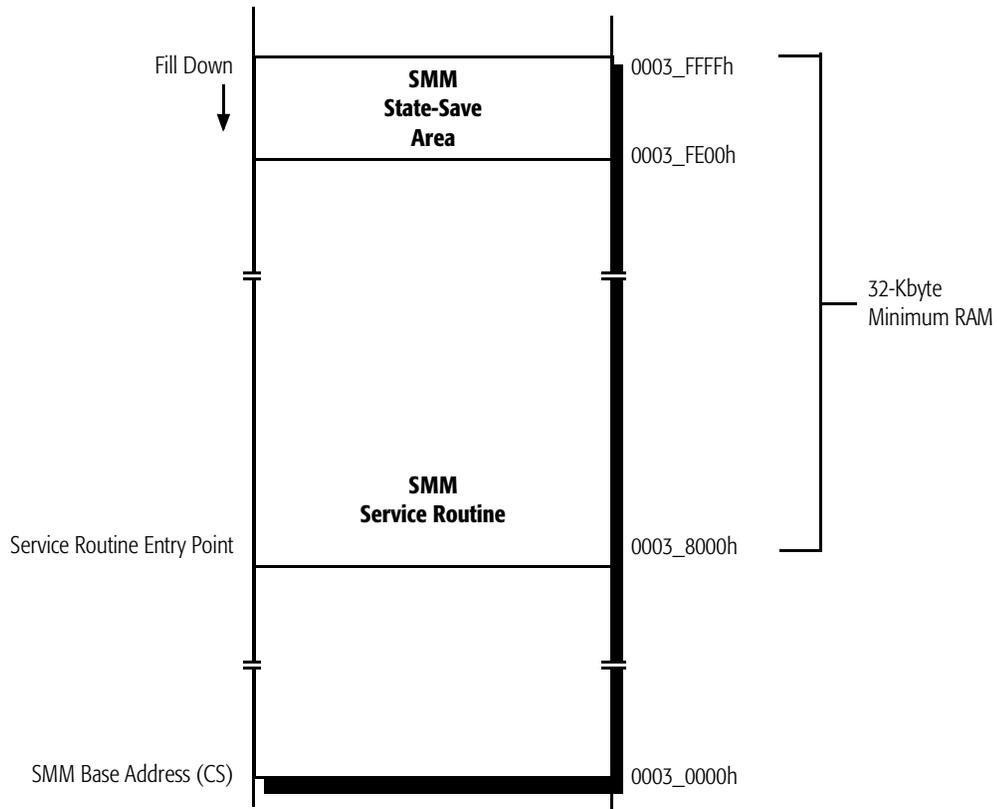


Figure 85. SMM Memory

Table 40 shows the initial state of registers when entering SMM.

Table 40. Initial State of Registers in SMM

| Registers | SMM Initial State |
|-----------------------------|---|
| General Purpose Registers | unmodified |
| EFLAGS | 0000_0002h |
| CR0 | PE, EM, TS, and PG are cleared (bits 0, 2, 3, and 31). The other bits are unmodified. |
| DR7 | 0000_0400h |
| GDTR, LDTR, IDTR, TSSR, DR6 | unmodified |
| EIP | 0000_8000h |
| CS | 0003_0000h |
| DS, ES, FS, GS, SS | 0000_0000h |

10.3 SMM State-Save Area

When the processor acknowledges an SMI# interrupt by asserting SMI^{ACT}#, it saves its state in a 512-byte SMM state-save area shown in Table 41. The save begins at the top of the SMM memory area (SMM base address + FFFFh) and fills down to SMM base address + FE00h.

Table 41 shows the offsets in the SMM state-save area relative to the SMM base address. The SMM service routine can alter any of the read/write values in the state-save area.

Table 41. SMM State-Save Area Map

| Address Offset | Contents Saved |
|---|----------------|
| FFCCh | CR0 |
| FFF8h | CR3 |
| FFF4h | EFLAGS |
| FFF0h | EIP |
| FFECh | EDI |
| FFE8h | ESI |
| FFE4h | EBP |
| FFE0h | ESP |
| FFDCh | EBX |
| FFD8h | EDX |
| FFD4h | ECX |
| FFD0h | EAX |
| FFCCh | DR6 |
| FFC8h | DR7 |
| FFC4h | TR |
| FFC0h | LDTR Base |
| FFBCh | GS |
| FFB8h | FS |
| FFB4h | DS |
| FFB0h | SS |
| FFACh | CS |
| FFA8h | ES |
| Notes: | |
| — No data dump at that address | |
| * Only contains information if SMI# is asserted during a valid I/O bus cycle. | |

Table 41. SMM State-Save Area Map (continued)

| Address Offset | Contents Saved |
|----------------|----------------|
| FFA4h | I/O Trap Dword |
| FFA0h | — |
| FF9Ch | I/O Trap EIP* |
| FF98h | — |
| FF94h | — |
| FF90h | IDT Base |
| FF8Ch | IDT Limit |
| FF88h | GDT Base |
| FF84h | GDT Limit |
| FF80h | TSS Attr |
| FF7Ch | TSS Base |
| FF78h | TSS Limit |
| FF74h | — |
| FF70h | LDT High |
| FF6Ch | LDT Low |
| FF68h | GS Attr |
| FF64h | GS Base |
| FF60h | GS Limit |
| FF5Ch | FS Attr |
| FF58h | FS Base |
| FF54h | FS Limit |
| FF50h | DS Attr |
| FF4Ch | DS Base |
| FF48h | DS Limit |
| FF44h | SS Attr |
| FF40h | SS Base |
| FF3Ch | SS Limit |
| FF38h | CS Attr |
| FF34h | CS Base |
| FF30h | CS Limit |
| FF2Ch | ES Attr |

Notes:

- No data dump at that address
- * Only contains information if SMI# is asserted during a valid I/O bus cycle.

Table 41. SMM State-Save Area Map (continued)

| Address Offset | Contents Saved |
|---|-----------------------|
| FF28h | ES Base |
| FF24h | ES Limit |
| FF20h | — |
| FF1Ch | — |
| FF18h | — |
| FF14h | CR2 |
| FF10h | CR4 |
| FF0Ch | I/O Restart ESI* |
| FF08h | I/O Restart ECX* |
| FF04h | I/O Restart EDI* |
| FF02h | HALT Restart Slot |
| FF00h | I/O Trap Restart Slot |
| FEFCh | SMM RevID |
| FEF8h | SMM Base |
| FEF7h–FE00h | — |
| Notes: | |
| — No data dump at that address | |
| * Only contains information if SMI# is asserted during a valid I/O bus cycle. | |

10.4 SMM Revision Identifier

The SMM revision identifier at offset FEFCh in the SMM state-save area specifies the version of SMM and the extensions that are available on the processor. The SMM revision identifier fields are as follows:

- *Bits 31–18*—Reserved
- *Bit 17*—SMM base address relocation (1 = enabled)
- *Bit 16*—I/O trap restart (1 = enabled)
- *Bits 15–0*—SMM revision level for the AMD-K6-III processor = 0002h

Table 42 shows the format of the SMM Revision Identifier.

Table 42. SMM Revision Identifier

| 31–18 | 17 | 16 | 15–0 |
|----------|---------------------|--------------------|--------------------|
| Reserved | SMM Base Relocation | I/O Trap Extension | SMM Revision Level |
| 0 | 1 | 1 | 0002h |

10.5 SMM Base Address

During RESET, the processor sets the base address of the code-segment (CS) for the SMM memory area—the SMM base address—to its default, 0003_0000h. The SMM base address at offset FEF8h in the SMM state-save area can be changed by the SMM service routine to any address that is aligned to a 32-Kbyte boundary. (Locations not aligned to a 32-Kbyte boundary cause the processor to enter the Shutdown state when executing the RSM instruction.)

In some operating environments it may be desirable to relocate the 64-Kbyte SMM memory area to a high memory area in order to provide more low memory for legacy software. During system initialization, the base of the 64-Kbyte SMM memory area is relocated by the BIOS. To relocate the SMM base address, the system enters the SMM handler at the default address. This handler changes the SMM base address location in the SMM state-save area, copies the SMM handler to the new location, and exits SMM.

The next time SMM is entered, the processor saves its state at the new base address. This new address is used for every SMM entry until the SMM base address in the SMM state-save area is changed or a hardware reset occurs.

10.6 Halt Restart Slot

During entry into SMM, the halt restart slot at offset FF02h in the SMM state-save area indicates if SMM was entered from the Halt state. Before returning from SMM, the halt restart slot (offset FF02h) can be written to by the SMM service routine to specify whether the return from SMM takes the processor back to the Halt state or to the next instruction after the HLT instruction.

Upon entry into SMM, the halt restart slot is defined as follows:

- *Bits 15–1*—Reserved
- *Bit 0*—Point of entry to SMM:
 - 1 = entered from Halt state
 - 0 = not entered from Halt state

After entry into the SMI handler and before returning from SMM, the halt restart slot can be written using the following definition:

- *Bits 15–1*—Reserved
- *Bit 0*—Point of return when exiting from SMM:
 - 1 = return to Halt state
 - 0 = return to next instruction after the HLT instruction

If the return from SMM takes the processor back to the Halt state, the HLT instruction is not re-executed, but the Halt special bus cycle is driven on the bus after the return.

10.7 I/O Trap Dword

If the assertion of SMI# is recognized during the execution of an I/O instruction, the I/O trap dword at offset FFA4h in the SMM state-save area contains information about the instruction. The fields of the I/O trap dword are configured as follows:

- *Bits 31–16*—I/O port address
- *Bits 15–4*—Reserved
- *Bit 3*—REP (repeat) string operation (1 = REP string, 0 = not a REP string)
- *Bit 2*—I/O string operation (1 = I/O string, 0 = not an I/O string)
- *Bit 1*—Valid I/O instruction (1 = valid, 0 = invalid)
- *Bit 0*—Input or output instruction (1 = INx, 0 = OUTx)

Table 43 shows the format of the I/O trap dword.

Table 43. I/O Trap Dword Configuration

| 31–16 | 15–4 | 3 | 2 | 1 | 0 |
|------------------|----------|----------------------|----------------------|-----------------------|-----------------|
| I/O Port Address | Reserved | REP String Operation | I/O String Operation | Valid I/O Instruction | Input or Output |

The I/O trap dword is related to the I/O trap restart slot (see “I/O Trap Restart Slot”). If bit 1 of the I/O trap dword is set by the processor, it means that SMI# was asserted during the execution of an I/O instruction. The SMI handler tests bit 1 to see if there is a valid I/O instruction trapped. If the I/O instruction is valid, the SMI handler is required to ensure the I/O trap restart slot is set properly. The I/O trap restart slot informs the processor whether it should re-execute the I/O instruction after the RSM or execute the instruction following the trapped I/O instruction.

Note: If SMI# is sampled asserted during an I/O bus cycle a minimum of three clock edges before BRDY# is sampled asserted, the associated I/O instruction is guaranteed to be trapped by the SMI handler.

10.8 I/O Trap Restart Slot

The I/O trap restart slot at offset FF00h in the SMM state-save area specifies whether the trapped I/O instruction should be re-executed on return from SMM. This slot in the state-save area is called the *I/O instruction restart* function. Re-executing a trapped I/O instruction is useful, for example, if an I/O write occurs to a disk that is powered down. The system logic monitoring such an access can assert SMI#. Then the SMM service routine would query the system logic, detect a failed I/O write, take action to power-up the I/O device, enable the I/O trap restart slot feature, and return from SMM.

The fields of the I/O trap restart slot are defined as follows:

- *Bits 31–16*—Reserved
- *Bits 15–0*—I/O instruction restart on return from SMM:
 - 0000h = execute the next instruction after the trapped I/O instruction
 - 00FFh = re-execute the trapped I/O instruction

Table 44 shows the format of the I/O trap restart slot.

Table 44. I/O Trap Restart Slot

| 31–16 | 15–0 |
|----------|--|
| Reserved | I/O Instruction restart on return from SMM: <ul style="list-style-type: none"> ■ 0000h = execute the next instruction after the trapped I/O ■ 00FFh = re-execute the trapped I/O instruction |

The processor initializes the I/O trap restart slot to 0000h upon entry into SMM. If SMM was entered due to a trapped I/O instruction, the processor indicates the validity of the I/O instruction by setting or clearing bit 1 of the I/O trap dword at offset FFA4h in the SMM state-save area. The SMM service routine should test bit 1 of the I/O trap dword to determine if a valid I/O instruction was being executed when entering SMM and before writing the I/O trap restart slot. If the I/O instruction is valid, the SMM service routine can safely rewrite the I/O trap restart slot with the value 00FFh, which causes the processor to re-execute the trapped I/O instruction when the RSM instruction is executed. If the I/O instruction is invalid, writing the I/O trap restart slot has undefined results.

If a second SMI# is asserted and a valid I/O instruction was trapped by the first SMM handler, the processor services the second SMI# prior to re-executing the trapped I/O instruction. The second entry into SMM never has bit 1 of the I/O trap dword set, and the second SMM service routine must not rewrite the I/O trap restart slot.

During a simultaneous SMI# I/O instruction trap and debug breakpoint trap, the AMD-K6-III processor first responds to the SMI# and postpones recognizing the debug exception until after returning from SMM via the RSM instruction. If the debug registers DR3–DR0 are used while in SMM, they must be saved and restored by the SMM handler. The processor automatically saves and restores DR7–DR6. If the I/O trap restart slot in the SMM state-save area contains the value 00FFh when the RSM instruction is executed, the debug trap does not occur until after the I/O instruction is re-executed.

10.9 Exceptions, Interrupts, and Debug in SMM

During an SMI# I/O trap, the exception/interrupt priority of the AMD-K6-III processor changes from its normal priority. The normal priority places the debug traps at a priority higher than the sampling of the FLUSH# or SMI# signals. However, during an SMI# I/O trap, the sampling of the FLUSH# or SMI# signals takes precedence over debug traps.

The processor recognizes the assertion of NMI within SMM immediately after the completion of an IRET instruction. Once NMI is recognized within SMM, NMI recognition remains enabled until SMM is exited, at which point NMI masking is restored to the state it was in before entering SMM.

11 Test and Debug

The AMD-K6-III processor implements various test and debug modes to enable the functional and manufacturing testing of systems and boards that use the processor. In addition, the debug features of the processor allow designers to debug the instruction execution of software components. This chapter describes the following test and debug features:

- *Built-In Self-Test (BIST)*—The BIST, which is invoked after the falling transition of RESET, runs internal tests that exercise most on-chip RAM structures.
- *Tri-State Test Mode*—A test mode that causes the processor to float its output and bidirectional pins.
- *Boundary-Scan Test Access Port (TAP)*—The Joint Test Action Group (JTAG) test access function defined by the *IEEE Standard Test Access Port and Boundary-Scan Architecture (IEEE 1149.1-1990)* specification.
- *Cache Inhibit*—A feature that disables the processor's internal L1 and L2 caches.
- *Level-2 Cache Array Access Register (L2AAR)*—The AMD-K6-III processor provides the L2AAR that allows for direct access to the L2 cache and L2 tag arrays.
- *Debug Support*—Consists of all x86-compatible software debug features, including the debug extensions.

11.1 Built-In Self-Test (BIST)

Following the falling transition of RESET, the processor unconditionally runs its BIST. The internal resources tested during BIST include the following:

- L1 instruction and data caches
- L2 cache
- Instruction and Data Translation Lookaside Buffers (TLBs)

The contents of the EAX general-purpose register after the completion of reset indicate if the BIST was successful. If EAX contains 0000_0000h, then BIST was successful. If EAX is non-zero, the BIST failed. Following the completion of the BIST,

the processor jumps to address FFFF_FFF0h to start instruction execution, regardless of the outcome of the BIST.

The BIST takes approximately 5,000,000 processor clocks to complete.

11.2 Tri-State Test Mode

The Tri-State Test mode causes the processor to float its output and bidirectional pins, which is useful for board-level manufacturing testing. In this mode, the processor is electrically isolated from other components on a system board, allowing automated test equipment (ATE) to test components that drive the same signals as those the processor floats.

If the FLUSH# signal is sampled Low during the falling transition of RESET, the processor enters the Tri-State Test mode. (See “FLUSH# (Cache Flush)” on page 103 for the specific sampling requirements.) The signals floated in the Tri-State Test mode are as follows:

- | | | |
|------------|-----------|-----------|
| ■ A[31:3] | ■ D/C# | ■ M/IO# |
| ■ ADS# | ■ D[63:0] | ■ PCD |
| ■ ADSC# | ■ DP[7:0] | ■ PCHK# |
| ■ AP | ■ FERR# | ■ PWT |
| ■ APCHK# | ■ HIT# | ■ SCYC |
| ■ BE[7:0]# | ■ HITM# | ■ SMIACT# |
| ■ BREQ | ■ HLDA | ■ W/R# |
| ■ CACHE# | ■ LOCK# | |

The VCC2DET, VCC2H/L#, and TDO signals are the only outputs not floated in the Tri-State Test mode. VCC2DET and VCC2H/L# must remain Low to ensure the system continues to supply the specified processor core voltage to the V_{CC2} pins. TDO is never floated because the Boundary-Scan Test Access Port must remain enabled at all times, including during the Tri-State Test mode.

The Tri-State Test mode is exited when the processor samples RESET asserted.

11.3 Boundary-Scan Test Access Port (TAP)

The boundary-scan Test Access Port (TAP) is an IEEE standard that defines synchronous scanning test methods for complex logic circuits, such as boards containing a processor. The AMD-K6-III processor supports the TAP standard defined in the *IEEE Standard Test Access Port and Boundary-Scan Architecture (IEEE 1149.1-1990)* specification.

Boundary scan testing uses a shift register consisting of the serial interconnection of boundary-scan cells that correspond to each I/O buffer of the processor. This non-inverting register chain, called a Boundary Scan Register (BSR), can be used to capture the state of every processor pin and to drive every processor output and bidirectional pin to a known state.

Each BSR of every component on a board that implements the boundary-scan architecture can be serially interconnected to enable component interconnect testing.

Test Access Port

The TAP consists of the following:

- *Test Access Port (TAP) Controller*—The TAP controller is a synchronous, finite state machine that uses the TMS and TDI input signals to control a sequence of test operations. See “TAP Controller State Machine” on page 232 for a list of TAP states and their definition.
- *Instruction Register (IR)*—The IR contains the instructions that select the test operation to be performed and the Test Data Register (TDR) to be selected. See “TAP Registers” on page 226 for more details on the IR.
- *Test Data Registers (TDR)*—The three TDRs are used to process the test data. Each TDR is selected by an instruction in the Instruction Register (IR). See “TAP Registers” on page 226 for a list of these registers and their functions.

TAP Signals

The test signals associated with the TAP controller are as follows:

- *TCK*—The Test Clock for all TAP operations. The rising edge of TCK is used for sampling TAP signals, and the falling edge of TCK is used for asserting TAP signals. The state of the TMS signal sampled on the rising edge of TCK causes

the state transitions of the TAP controller to occur. TCK can be stopped in the logic 0 or 1 state.

- *TDI*—The Test Data Input represents the input to the most significant bit of all TAP registers, including the IR and all test data registers. Test data and instructions are serially shifted by one bit into their respective registers on the rising edge of TCK.
- *TDO*—The Test Data Output represents the output of the least significant bit of all TAP registers, including the IR and all test data registers. Test data and instructions are serially shifted by one bit out of their respective registers on the falling edge of TCK.
- *TMS*—The Test Mode Select input specifies the test function and sequence of state changes for boundary-scan testing. If TMS is sampled High for five or more consecutive clocks, the TAP controller enters its reset state.
- *TRST#*—The Test Reset signal is an asynchronous reset that unconditionally causes the TAP controller to enter its reset state.

Refer to “Electrical Data” on page 259 and “Signal Switching Characteristics” on page 267 to obtain the electrical specifications of the test signals.

TAP Registers

The AMD-K6-III processor provides an Instruction Register (IR) and three Test Data Registers (TDR) to support the boundary-scan architecture. The IR and one of the TDRs—the Boundary-Scan Register (BSR)—consist of a shift register and an output register. The shift register is loaded in parallel in the Capture states. (See “TAP Controller State Machine” on page 232 for a description of the TAP controller states.) In addition, the shift register is loaded and shifted serially in the Shift states. The output register is loaded in parallel from its corresponding shift register in the Update states.

Instruction Register (IR). The IR is a 5-bit register, without parity, that determines which instruction to run and which test data register to select. When the TAP controller enters the Capture-IR state, the processor loads the following bits into the IR shift register:

- *01b*—Loaded into the two least significant bits, as specified by the IEEE 1149.1 standard
- *000b*—Loaded into the three most significant bits

Loading 00001b into the IR shift register during the Capture-IR state results in loading the SAMPLE/PRELOAD instruction.

For each entry into the Shift-IR state, the IR shift register is serially shifted by one bit toward the TDO pin. During the shift, the most significant bit of the IR shift register is loaded from the TDI pin.

The IR output register is loaded from the IR shift register in the Update-IR state, and the current instruction is defined by the IR output register. See “TAP Instructions” on page 231 for a list and definition of the instructions supported by the AMD-K6-III processor.

Boundary Scan Register (BSR). The BSR is a Test Data Register consisting of the interconnection of 152 boundary-scan cells. Each output and bidirectional pin of the processor requires a two-bit cell, where one bit corresponds to the pin and the other bit is the output enable for the pin. When a 0 is shifted into the enable bit of a cell, the corresponding pin is floated, and when a 1 is shifted into the enable bit, the pin is driven valid. Each input pin requires a one-bit cell that corresponds to the pin. The last cell of the BSR is reserved and does not correspond to any processor pin.

The total number of bits that comprise the BSR is 281. Table 45 on page 229 lists the order of these bits, where TDI is the input to bit 280, and TDO is driven from the output of bit 0. The entries listed as *pin_E* (where *pin* is an output or bidirectional signal) are the enable bits.

If the BSR is the register selected by the current instruction and the TAP controller is in the Capture-DR state, the processor loads the BSR shift register as follows:

- If the current instruction is SAMPLE/PRELOAD, then the current state of each input, output, and bidirectional pin is loaded. A bidirectional pin is treated as an output if its enable bit equals 1, and it is treated as an input if its enable bit equals 0.
- If the current instruction is EXTEST, then the current state of each input pin is loaded. A bidirectional pin is treated as an input, regardless of the state of its enable.

While in the Shift-DR state, the BSR shift register is serially shifted toward the TDO pin. During the shift, bit 280 of the BSR is loaded from the TDI pin.

The BSR output register is loaded with the contents of the BSR shift register in the Update-DR state. If the current instruction is EXTEST, the processor's output pins, as well as those bidirectional pins that are enabled as outputs, are driven with their corresponding values from the BSR output register.

Table 45. Boundary Scan Bit Definitions

| Bit | Pin/Enable |
|-----|------------|-----|------------|-----|------------|-----|------------|-----|------------|-----|------------|
| 280 | D35_E | 247 | D21 | 214 | D4_E | 181 | A3 | 148 | A20 | 115 | A16 |
| 279 | D35 | 246 | D18_E | 213 | D4 | 180 | A31_E | 147 | A13_E | 114 | FERR_E |
| 278 | D29_E | 245 | D18 | 212 | DP0_E | 179 | A31 | 146 | A13 | 113 | FERR# |
| 277 | D29 | 244 | D19_E | 211 | DP0 | 178 | A21_E | 145 | DP7_E | 112 | HIT_E |
| 276 | D33_E | 243 | D19 | 210 | HOLD | 177 | A21 | 144 | DP7 | 111 | HIT# |
| 275 | D33 | 242 | D16_E | 209 | BOFF# | 176 | A30_E | 143 | BE6_E | 110 | BE7_E |
| 274 | D27_E | 241 | D16 | 208 | AHOLD | 175 | A30 | 142 | BE6# | 109 | BE7# |
| 273 | D27 | 240 | D17_E | 207 | STPCLK# | 174 | A7_E | 141 | A12_E | 108 | NA# |
| 272 | DP3_E | 239 | D17 | 206 | INIT | 173 | A7 | 140 | A12 | 107 | ADSC_E |
| 271 | DP3 | 238 | D15_E | 205 | IGNNE# | 172 | A24_E | 139 | CLK | 106 | ADSC# |
| 270 | D25_E | 237 | D15 | 204 | BF1 | 171 | A24 | 138 | BE4_E | 105 | BE5_E |
| 269 | D25 | 236 | DP1_E | 203 | BF2 | 170 | A18_E | 137 | BE4# | 104 | BE5# |
| 268 | D0_E | 235 | DP1 | 202 | RESET | 169 | A18 | 136 | A10_E | 103 | WB/WT# |
| 267 | D0 | 234 | D13_E | 201 | BF0 | 168 | A5_E | 135 | A10 | 102 | PWT_E |
| 266 | D30_E | 233 | D13 | 200 | FLUSH# | 167 | A5 | 134 | D63_E | 101 | PWT |
| 265 | D30 | 232 | D6_E | 199 | INTR | 166 | A22_E | 133 | D63 | 100 | BE3_E |
| 264 | DP2_E | 231 | D6 | 198 | NMI | 165 | A22 | 132 | BE2_E | 99 | BE3# |
| 263 | DP2 | 230 | D14_E | 197 | SMI# | 164 | EADS# | 131 | BE2# | 98 | BREQ_E |
| 262 | D2_E | 229 | D14 | 196 | A25_E | 163 | A4_E | 130 | A15_E | 97 | BREQ |
| 261 | D2 | 228 | D11_E | 195 | A25 | 162 | A4 | 129 | A15 | 96 | PCD_E |
| 260 | D28_E | 227 | D11 | 194 | A23_E | 161 | HITM_E | 128 | BRDY# | 95 | PCD |
| 259 | D28 | 226 | D1_E | 193 | A23 | 160 | HITM# | 127 | BE1_E | 94 | WR_E |
| 258 | D24_E | 225 | D1 | 192 | A26_E | 159 | A9_E | 126 | BE1# | 93 | W/R# |
| 257 | D24 | 224 | D12_E | 191 | A26 | 158 | A9 | 125 | A14_E | 92 | SMIACT_E |
| 256 | D26_E | 223 | D12 | 190 | A29_E | 157 | SCYC_E | 124 | A14 | 91 | SMIACT# |
| 255 | D26 | 222 | D10_E | 189 | A29 | 156 | SCYC | 123 | BRDYC# | 90 | EWBE# |
| 254 | D22_E | 221 | D10 | 188 | A28_E | 155 | A8_E | 122 | BE0_E | 89 | DC_E |
| 253 | D22 | 220 | D7_E | 187 | A28 | 154 | A8 | 121 | BE0# | 88 | D/C# |
| 252 | D23_E | 219 | D7 | 186 | A27_E | 153 | A19_E | 120 | A17_E | 87 | APCHK_E |
| 251 | D23 | 218 | D8_E | 185 | A27 | 152 | A19 | 119 | A17 | 86 | APCHK# |
| 250 | D20_E | 217 | D8 | 184 | A11_E | 151 | A6_E | 118 | KEN# | 85 | CACHE_E |
| 249 | D20 | 216 | D9_E | 183 | A11 | 150 | A6 | 117 | A20M# | 84 | CACHE# |
| 248 | D21_E | 215 | D9 | 182 | A3_E | 149 | A20_E | 116 | A16_E | 83 | ADS_E |

Table 45. Boundary Scan Bit Definitions (continued)

| Bit | Pin/Enable |
|-----|------------|-----|------------|-----|------------|-----|------------|-----|------------|-----|------------|
| 82 | ADS# | 68 | DP6_E | 54 | D53_E | 40 | D43_E | 26 | D38_E | 12 | D3_E |
| 81 | AP_E | 67 | DP6 | 53 | D53 | 39 | D43 | 25 | D38 | 11 | D3 |
| 80 | AP | 66 | D54_E | 52 | D47_E | 38 | D62_E | 24 | D58_E | 10 | D39_E |
| 79 | INV | 65 | D54 | 51 | D47 | 37 | D62 | 23 | D58 | 9 | D39 |
| 78 | HLDA_E | 64 | D50_E | 50 | D59_E | 36 | D49_E | 22 | D42_E | 8 | D32_E |
| 77 | HLDA | 63 | D50 | 49 | D59 | 35 | D49 | 21 | D42 | 7 | D32 |
| 76 | PCHK_E | 62 | D56_E | 48 | D51_E | 34 | DP4_E | 20 | D36_E | 6 | D5_E |
| 75 | PCHK# | 61 | D56 | 47 | D51 | 33 | DP4 | 19 | D36 | 5 | D5 |
| 74 | LOCK_E | 60 | D55_E | 46 | D45_E | 32 | D46_E | 18 | D60_E | 4 | D37_E |
| 73 | LOCK# | 59 | D55 | 45 | D45 | 31 | D46 | 17 | D60 | 3 | D37 |
| 72 | MIO_E | 58 | D48_E | 44 | D61_E | 30 | D41_E | 16 | D40_E | 2 | D31_E |
| 71 | M/IO# | 57 | D48 | 43 | D61 | 29 | D41 | 15 | D40 | 1 | D31 |
| 70 | D52_E | 56 | D57_E | 42 | DP5_E | 28 | D44_E | 14 | D34_E | 0 | Reserved |
| 69 | D52 | 55 | D57 | 41 | DP5 | 27 | D44 | 13 | D34 | | |

Device Identification Register (DIR). The DIR is a 32-bit Test Data Register selected during the execution of the IDCODE instruction. The fields of the DIR and their values are shown in Table 46 and are defined as follows:

- *Version Code*—This 4-bit field is incremented by AMD manufacturing for each major revision of silicon.
- *Part Number*—This 16-bit field identifies the specific processor model.
- *Manufacturer*—This 11-bit field identifies the manufacturer of the component (AMD).
- *LSB*—The least significant bit (LSB) of the DIR is always set to 1, as specified by the IEEE 1149.1 standard.

Table 46. Device Identification Register

| Version Code (Bits 31–28) | Part Number (Bits 27–12) | Manufacturer (Bits 11–1) | LSB (Bit 0) |
|------------------------------|-----------------------------|-----------------------------|----------------|
| Xh | 0590h | 0000000001b | 1b |

Bypass Register (BR). The BR is a Test Data Register consisting of a 1-bit shift register that provides the shortest path between TDI and TDO. When the processor is not involved in a test operation, the BR can be selected by an instruction to allow the transfer of test data through the processor without having to serially scan the test data through the BSR. This functionality preserves the state of the BSR and significantly reduces test time.

The BR register is selected by the **BYPASS** and **HIGHZ** instructions as well as by any instructions not supported by the AMD-K6-III processor.

TAP Instructions

The processor supports the three instructions required by the IEEE 1149.1 standard—**EXTEST**, **SAMPLE/PRELOAD**, and **BYPASS**—as well as two additional optional instructions—**IDCODE** and **HIGHZ**.

Table 47 shows the complete set of TAP instructions supported by the processor along with the 5-bit Instruction Register encoding and the register selected by each instruction.

Table 47. Supported Tap Instructions

| Instruction | Encoding | Register | Description |
|---------------------|---------------|----------|---|
| EXTEST ¹ | 00000b | BSR | Sample inputs and drive outputs |
| SAMPLE / PRELOAD | 00001b | BSR | Sample inputs and outputs, then load the BSR |
| IDCODE | 00010b | DIR | Read DIR |
| HIGHZ | 00011b | BR | Float outputs and bidirectional pins |
| BYPASS ² | 00100b–11110b | BR | Undefined instruction, execute the BYPASS instruction |
| BYPASS ³ | 11111b | BR | Connect TDI to TDO to bypass the BSR |

Notes:

- Following the execution of the **EXTEST** instruction, the processor must be reset in order to return to normal, non-test operation.
- These instruction encodings are undefined on the AMD-K6-III processor and default to the **BYPASS** instruction.
- Because the TDI input contains an internal pullup, the **BYPASS** instruction is executed if the TDI input is not connected or open during an instruction scan operation. The **BYPASS** instruction does not affect the normal operational state of the processor.

EXTEST. When the **EXTEST** instruction is executed, the processor loads the BSR shift register with the current state of the input and bidirectional pins in the Capture-DR state and drives the output and bidirectional pins with the corresponding values from the BSR output register in the Update-DR state.

SAMPLE/PRELOAD. The SAMPLE/PRELOAD instruction performs two functions. These functions are as follows:

- During the Capture-DR state, the processor loads the BSR shift register with the current state of every input, output, and bidirectional pin.
- During the Update-DR state, the BSR output register is loaded from the BSR shift register in preparation for the next EXTEST instruction.

The SAMPLE/PRELOAD instruction does not affect the normal operational state of the processor.


BYPASS. The BYPASS instruction selects the BR register, which reduces the boundary-scan length through the processor from 281 to one (TDI to BR to TDO). The BYPASS instruction does not affect the normal operational state of the processor.

IDCODE. The IDCODE instruction selects the DIR register, allowing the device identification code to be shifted out of the processor. This instruction is loaded into the IR when the TAP controller is reset. The IDCODE instruction does not affect the normal operational state of the processor.

HIGHZ. The HIGHZ instruction forces all output and bidirectional pins to be floated. During this instruction, the BR is selected and the normal operational state of the processor is not affected.

TAP Controller State Machine

The TAP controller state diagram is shown in Figure 86 on page 233. State transitions occur on the rising edge of TCK. The logic 0 or 1 next to the states represents the value of the TMS signal sampled by the processor on the rising edge of TCK.

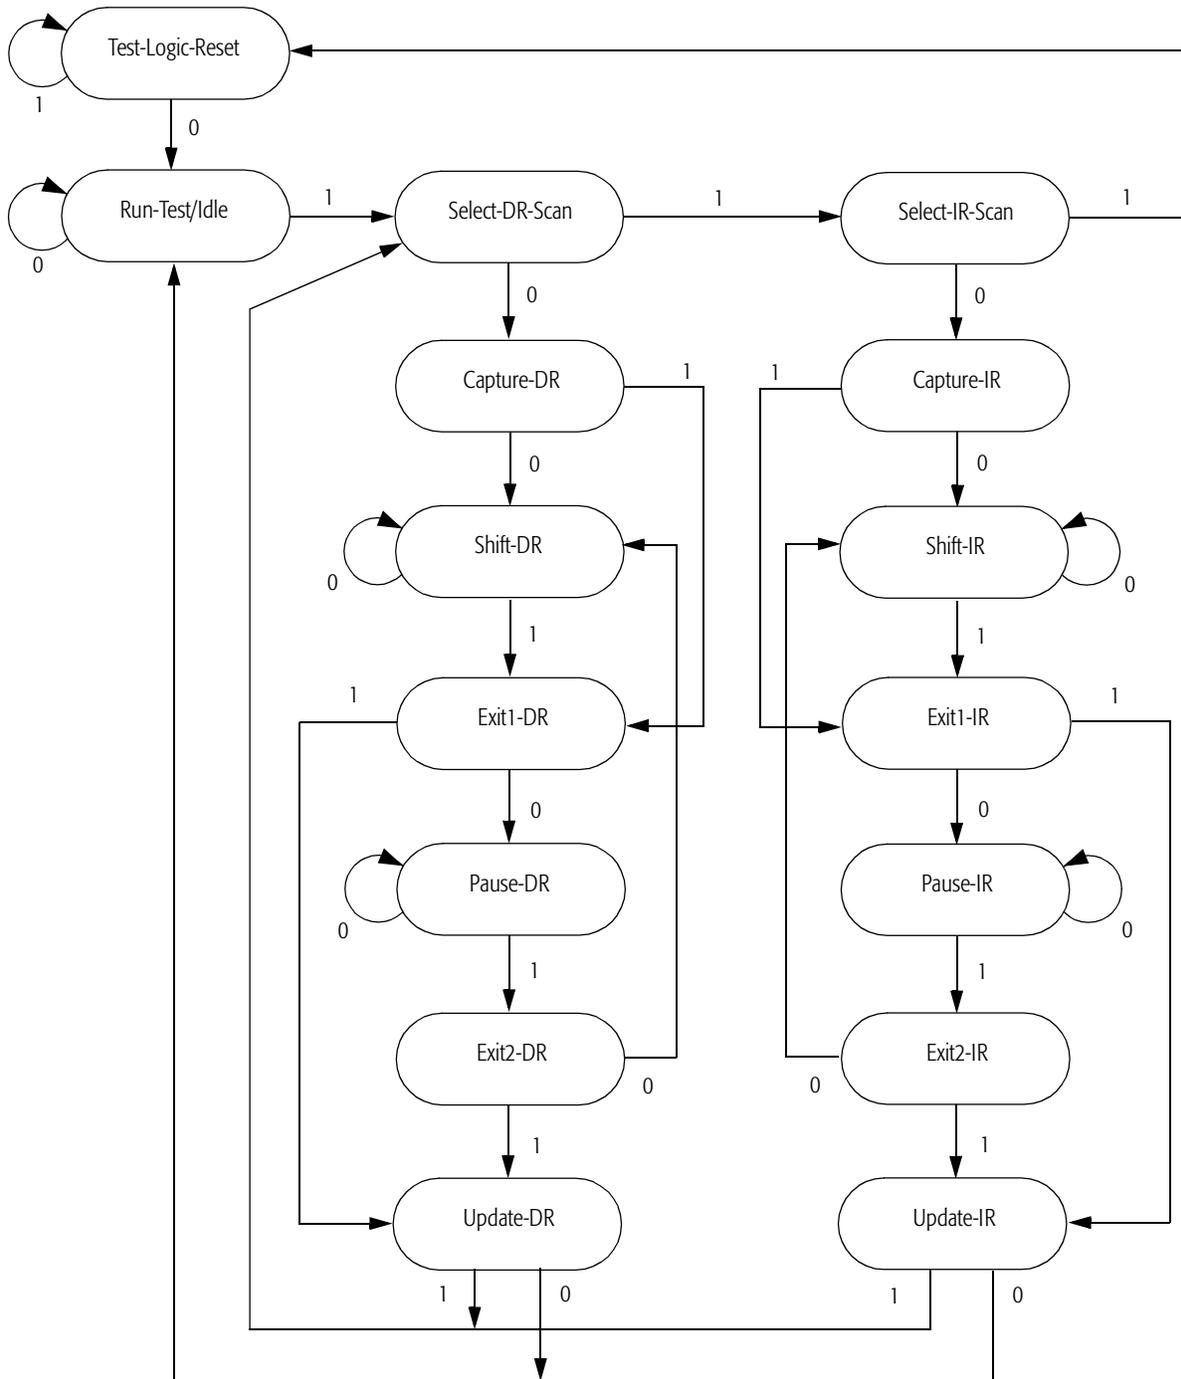

IEEE Std 1149.1-1990, Copyright © 1990. IEEE. All rights reserved

Figure 86. TAP State Diagram

The states of the TAP controller are described as follows:

Test-Logic-Reset. This state represents the initial reset state of the TAP controller and is entered when the processor samples RESET asserted, when TRST# is asynchronously asserted, and when TMS is sampled High for five or more consecutive clocks. In addition, this state can be entered from the Select-IR-Scan state. The IR is initialized with the IDCODE instruction, and the processor's normal operation is not affected in this state.

Capture-DR. During the SAMPLE/PRELOAD instruction, the processor loads the BSR shift register with the current state of every input, output, and bidirectional pin. During the EXTEST instruction, the processor loads the BSR shift register with the current state of every input and bidirectional pin.

Capture-IR. When the TAP controller enters the Capture-IR state, the processor loads 01b into the two least significant bits of the IR shift register and loads 000b into the three most significant bits of the IR shift register.

Shift-DR. While in the Shift-DR state, the selected TDR shift register is serially shifted toward the TDO pin. During the shift, the most significant bit of the TDR is loaded from the TDI pin.

Shift-IR. While in the Shift-IR state, the IR shift register is serially shifted toward the TDO pin. During the shift, the most significant bit of the IR is loaded from the TDI pin.

Update-DR. During the SAMPLE/PRELOAD instruction, the BSR output register is loaded with the contents of the BSR shift register. During the EXTEST instruction, the output pins, as well as those bidirectional pins defined as outputs, are driven with their corresponding values from the BSR output register.

Update-IR. In this state, the IR output register is loaded from the IR shift register, and the current instruction is defined by the IR output register.

The following states have no effect on the normal or test operation of the processor other than as shown in Figure 86 on page 233:

- Run-Test/Idle—This state is an idle state between scan operations.
- Select-DR-Scan—This is the initial state of the test data register state transitions.
- Select-IR-Scan—This is the initial state of the Instruction Register state transitions.
- Exit1-DR—This state is entered to terminate the shifting process and enter the Update-DR state.
- Exit1-IR—This state is entered to terminate the shifting process and enter the Update-IR state.
- Pause-DR—This state is entered to temporarily stop the shifting process of a Test Data Register.
- Pause-IR—This state is entered to temporarily stop the shifting process of the Instruction Register.
- Exit2-DR—This state is entered in order to either terminate the shifting process and enter the Update-DR state or to resume shifting following the exit from the Pause-DR state.
- Exit2-IR—This state is entered in order to either terminate the shifting process and enter the Update-IR state or to resume shifting following the exit from the Pause-IR state.

11.4 Cache Inhibit

Purpose

The AMD-K6-III processor provides a means for inhibiting the normal operation of its internal L1 and L2 caches while still supporting an external cache. This capability allows system designers to disable the L1 and L2 caches during the testing and debug of a L3 cache.

If the Cache Inhibit bit (bit 3) of Test Register 12 (TR12) is set to 0, the processor's L1 and L2 caches are enabled and operate as described in "Cache Organization" on page 179. If the Cache Inhibit bit is set to 1, the L1 and L2 caches are disabled and no new cache lines are allocated. Even though new allocations do not occur, valid L1 and L2 cache lines remain valid and are read by the processor when a requested address hits a cache line. In addition, the processor continues to support inquire cycles

initiated by the system logic, including the execution of writeback cycles when a modified cache line is hit.

While the L1 and L2 are inhibited, the processor continues to drive the PCD output signal appropriately, which system logic can use to control external L3 caching.

In order to completely disable the L1 and L2 caches so no valid lines exist in the cache, the Cache Inhibit bit must be set to 1 and the cache must be flushed in one of the following ways:

- Asserting the FLUSH# input signal
- Executing the WBINVD instruction
- Executing the INVD instruction (modified cache lines are not written back to memory)
- Make use of the Page Flush/Invalidate Register (PFIR) (see “PFIR” on page 198)

11.5 L2 Cache and Tag Array Testing

Level-2 Cache Array Access Register (L2AAR)

The AMD-K6-III processor provides the Level-2 Cache Array Access Register (L2AAR) that allows for direct access to the L2 cache and L2 tag arrays. The 256-Kbyte L2 cache in the AMD-K6-III is organized as shown in Figure 87:

- Four 64-Kbyte ways
- Each way contains 1024 sectors
- Each set contains four 64-byte sectors (one sector in each way)
- Each sector contains two 32-byte cache lines
- Each cache line contains four 8-byte octets
- Each octet contains an upper and lower dword (4 bytes)

Each line within a sector contains its own MESI state bits, and associated with each sector is a tag and LRU (Least Recently Used) information.

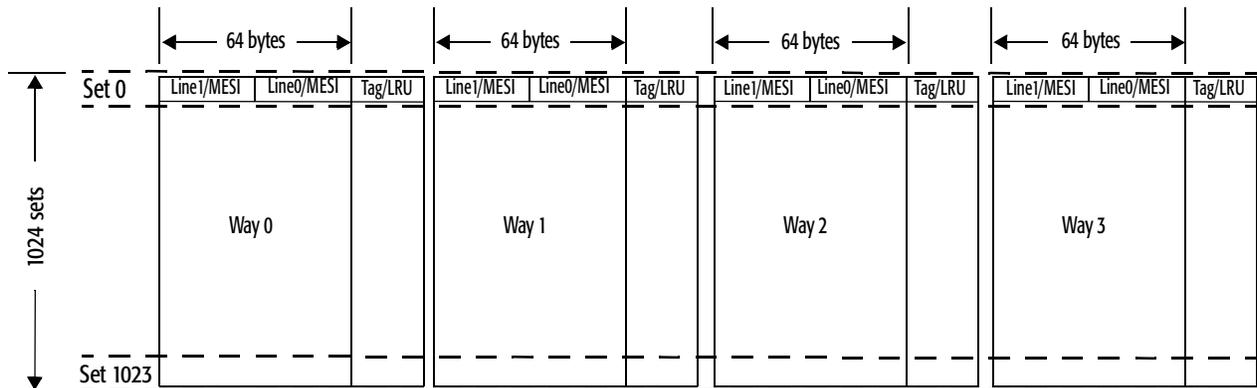


Figure 87. L2 Cache Organization

Figure 88 shows the L2 cache sector and line organization. If bit 5 of the address of a cache line equals 1, then this cache line is stored in Line 1 of a sector. Similarly, if bit 5 of the address of a cache line equals 0, then this cache line is stored in Line 0 of a sector.

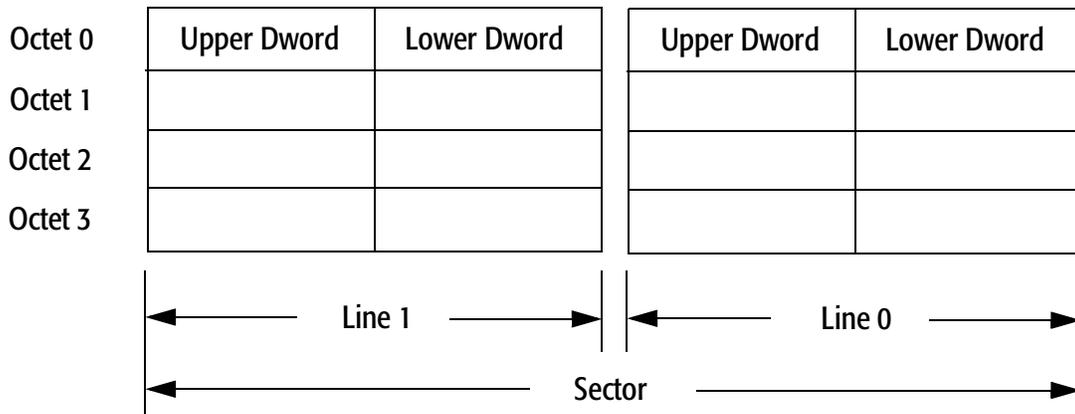


Figure 88. L2 Cache Sector and Line Organization

The L2AAR register is MSR C000_0089h. The operation that is performed on the L2 cache is a function of the instruction executed—RDMSR or WRMSR—and the contents of the EDX register. The EDX register specifies the location of the access, and whether the access is to the L2 cache data or tags (refer to Figure 89). Bit 20 of EDX (T/D) determines whether the access is to the L2 cache data or tag. Table 48 describes the operation that is performed based on the instruction and the T/D bit.

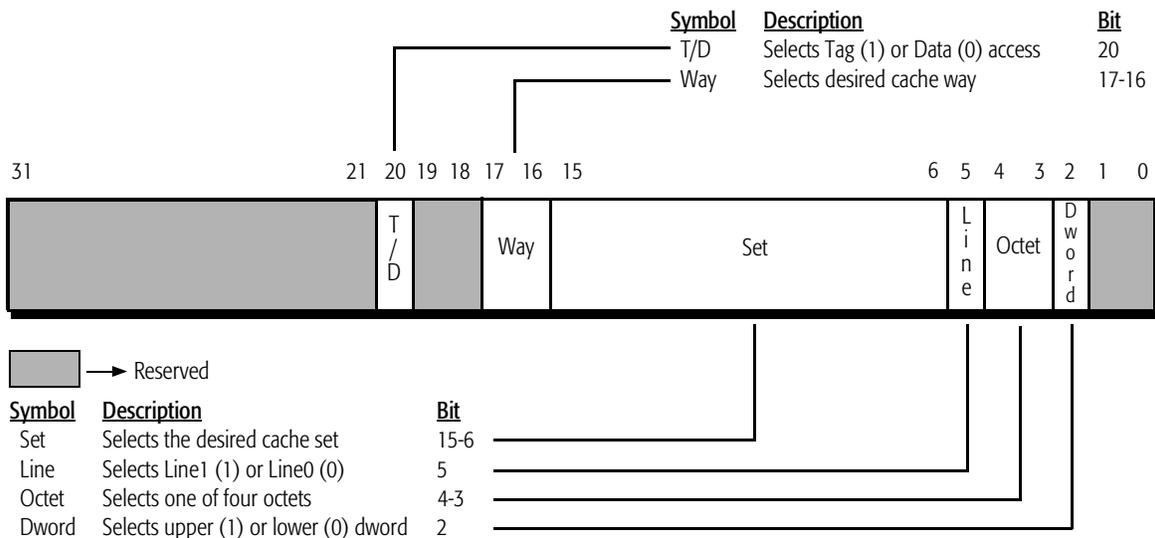


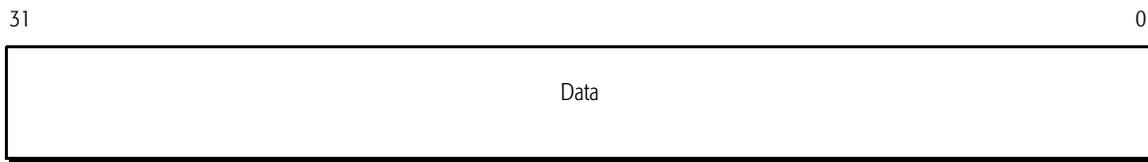
Figure 89. L2 Tag or Data Location - EDX

Table 48. Tag versus Data Selector

| Instruction | T/D (EDX[20]) | Operation |
|-------------|------------------|--|
| RDMSR | 0 | Read dword from L2 data array into EAX. Dword location is specified by EDX. |
| RDMSR | 1 | Read tag, line state and LRU information from L2 tag array into EAX. Location of tag is specified by EDX. |
| WRMSR | 0 | Write dword to the L2 data array using data in EAX. Dword location is specified by EDX. |
| WRMSR | 1 | Write tag, line state and LRU information into L2 tag array from EAX. Location of tag is specified by EDX. |

When the L2AAR is read or written, EDX is left unchanged. This facilitates multiple accesses when testing the entire cache/tag array.

If the L2 cache data is read (as opposed to reading the tag information), the result (dword) is placed in EAX in the format as illustrated in Figure 90. Similarly, if the L2 cache data is written, the write data is taken from EAX.

**Figure 90. L2 Data - EAX**

If the L2 tag is read (as opposed to reading the cache data), the result is placed in EAX in the format as illustrated in Figure 91. Similarly, if the L2 tag is written, the write data is taken from EAX.

When writing to the L2 tag, special consideration must be given to the least significant bit of the Tag field of the EAX register—EAX[15]. The length of the L2 tag required to support the 256-Kbyte L2 cache on the AMD-K6-III processor is 16 bits, which corresponds to bits 31:16 of the EAX register. However, the processor provides a total of 17 bits for storing the L2 tag—that is, 16 bits for the tag (EAX[31:16]), plus an additional bit

for internal purposes (EAX[15]). During normal operation, the processor ensures that this additional bit (bit 15) always corresponds to the set in which the tag resides. Note that bits 15:6 of the address determine the set, in which case bit 15 equal to 0 addresses sets 0 through 511, and bit 15 equal to 1 addresses sets 512 through 1023.

In order to set the full 17-bit L2 tag properly when using the L2AAR register, EAX[15] must likewise correspond to the set in which the tag is being written—that is, EAX[15] must be equal to EDX[15] (refer to Figure 89 and Figure 91).

It is important to note that this special consideration is required if the processor will subsequently be expected to properly execute instructions or access data from the L2 cache following the setup of the L2 cache by means of the L2AAR register. If the intent of using the L2AAR register is solely to test or debug the L2 cache without the subsequent intent of executing instructions or accessing data from the L2 cache, then this consideration is not required.

When accessing the L2 tag, the Line, Octet, and Dword fields of the EDX register are ignored.

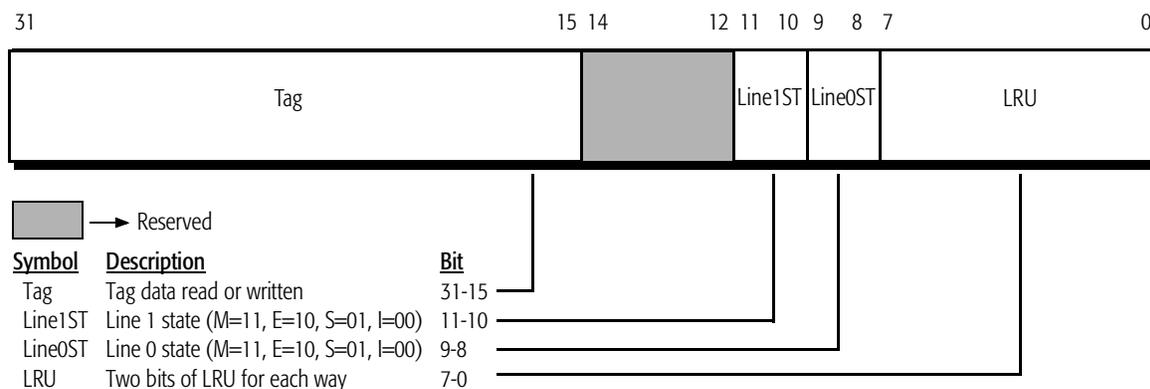
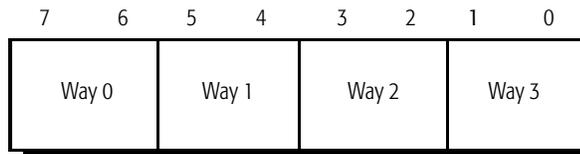


Figure 91. L2 Tag Information - EAX

LRU (Least Recently Used). For the 4-way set associative L2 cache, each way has a 2-bit LRU field for each sector. Values for the LRU field are 00b, 01b, 10b, and 11b, where 00b indicates that the sector is “most recently used,” and 11b indicates that the sector is “least recently used” (see Figure 92). EAX[7:6] indicate LRU information for Way 0, EAX[5:4] for Way 1, EAX[3:2] for Way 2, and EAX[1:0] for Way 3.

LRU Values

00b Most Recently Used

01b Used More Recent Than 10b, But Less Recent Than 00b

10b Used More Recent Than 11b, But Less Recent Than 01b

11b Least Recently Used

Figure 92. LRU Byte

11.6 Debug

The AMD-K6-III processor implements the standard x86 debug functions, registers, and exceptions. In addition, the processor supports the I/O breakpoint debug extension. The debug feature assists programmers and system designers during software execution tracing by generating exceptions when one or more events occur during processor execution. The exception handler, or debugger, can be written to perform various tasks, such as displaying the conditions that caused the breakpoint to occur, displaying and modifying register or memory contents, or single-stepping through program execution.

The following sections describe the debug registers and the various types of breakpoints and exceptions that the processor supports.

Debug Registers

Figures 93 through 96 show the 32-bit debug registers supported by the processor.

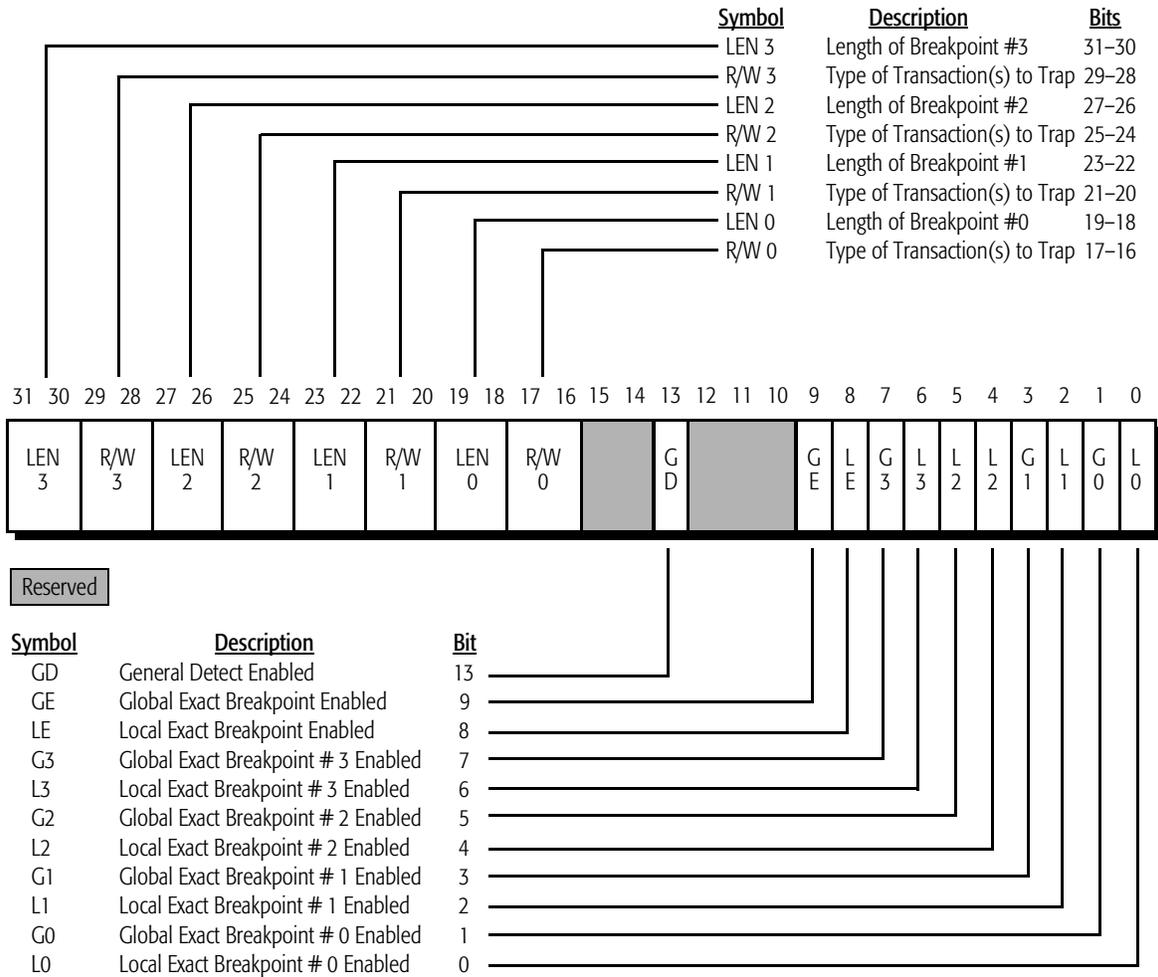


Figure 93. Debug Register DR7


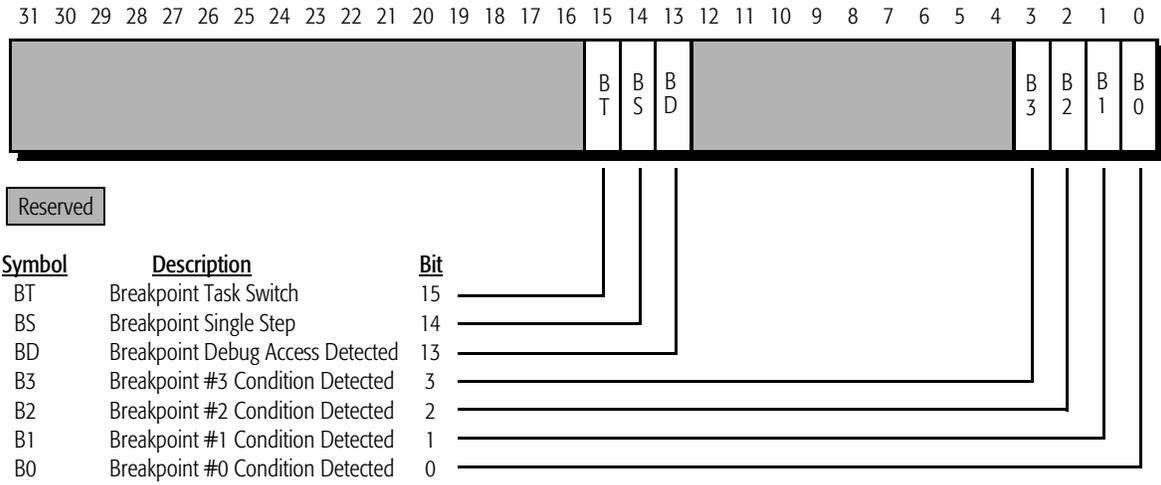


Figure 94. Debug Register DR6

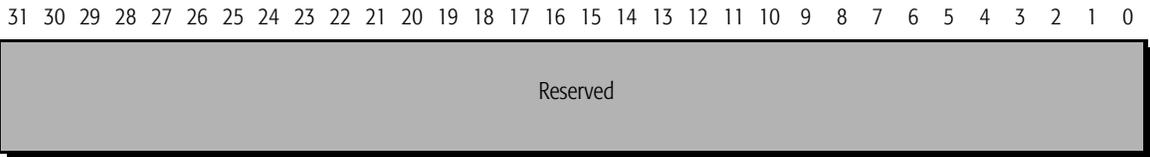DR5



DR4

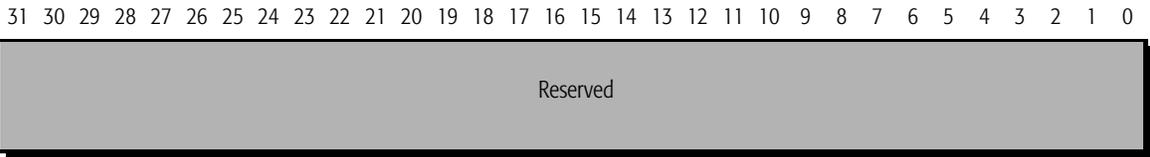


Figure 95. Debug Registers DR5 and DR4

DR3

31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

Breakpoint 3 32-bit Linear Address

DR2

31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

Breakpoint 2 32-bit Linear Address

DR1

31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

Breakpoint 1 32-bit Linear Address

DR0

31 30 29 28 27 26 25 24 23 22 21 20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0

Breakpoint 0 32-bit Linear Address

Figure 96. Debug Registers DR3, DR2, DR1, and DR0

DR3–DR0. The processor allows the setting of up to four breakpoints. DR3–DR0 contain the linear addresses for breakpoint 3 through breakpoint 0, respectively, and are compared to the linear addresses of processor cycles to determine if a breakpoint occurs. Debug register DR7 defines the specific type of cycle that must occur in order for the breakpoint to occur.

DR5–DR4. When debugging extensions are disabled (bit 3 of CR4 is set to 0), the DR5 and DR4 registers are mapped to DR7 and DR6, respectively, in order to be software compatible with previous generations of x86 processors. When debugging

extensions are enabled (bit 3 of CR4 is set to 1), any attempt to load DR5 or DR4 results in an undefined opcode exception. Likewise, any attempt to store DR5 or DR4 also results in an undefined opcode exception.

DR6. If a breakpoint is enabled in DR7, and the breakpoint conditions as defined in DR7 occur, then the corresponding B-bit (B3–B0) in DR6 is set to 1. In addition, any other breakpoints defined using these particular breakpoint conditions are reported by the processor by setting the appropriate B-bits in DR6, regardless of whether these breakpoints are enabled or disabled. However, if a breakpoint is not enabled, a debug exception does not occur for that breakpoint.

If the processor decodes an instruction that writes or reads DR7 through DR0, the BD bit (bit 13) in DR6 is set to 1 (if enabled in DR7) and the processor generates a debug exception. This operation allows control to pass to the debugger prior to debug register access by software.

If the Trap Flag (bit 8) of the EFLAGS register is set to 1, the processor generates a debug exception after the successful execution of every instruction (single-step operation) and sets the BS bit (bit 14) in DR6 to indicate the source of the exception.

When the processor switches to a new task and the debug trap bit (T-bit) in the corresponding Task State Segment (TSS) is set to 1, the processor sets the BT bit (bit 15) in DR6 and generates a debug exception.

DR7. When set to 1, L3–L0 locally enable breakpoints 3 through 0, respectively. L3–L0 are set to 0 whenever the processor executes a task switch. Setting L3–L0 to 0 disables the breakpoints and ensures that these particular debug exceptions are only generated for a specific task.

When set to 1, G3–G0 globally enable breakpoints 3 through 0, respectively. Unlike L3–L0, G3–G0 are not set to 0 whenever the processor executes a task switch. Not setting G3–G0 to 0 allows breakpoints to remain enabled across all tasks. If a breakpoint is enabled globally but disabled locally, the global enable overrides the local enable.

The LE (bit 8) and GE (bit 9) bits in DR7 have no effect on the operation of the processor and are provided in order to be software compatible with previous generations of x86 processors.

When set to 1, the GD bit in DR7 (bit 13) enables the debug exception associated with the BD bit (bit 13) in DR6. This bit is set to 0 when a debug exception is generated.

LEN3–LEN0 and RW3–RW0 are two-bit fields in DR7 that specify the length and type of each breakpoint as defined in Table 49.

Table 49. DR7 LEN and RW Definitions

| LEN Bits ¹ | RW Bits | Breakpoint |
|---|------------------|------------------------------|
| 00b | 00b ² | Instruction Execution |
| 00b | 01b | One-byte Data Write |
| 01b | | Two-byte Data Write |
| 11b | | Four-byte Data Write |
| 00b | 10b ³ | One-byte I/O Read or Write |
| 01b | | Two-byte I/O Read or Write |
| 11b | | Four-byte I/O Read or Write |
| 00b | 11b | One-byte Data Read or Write |
| 01b | | Two-byte Data Read or Write |
| 11b | | Four-byte Data Read or Write |
| Notes: | | |
| 1. LEN bits equal to 10b is undefined. | | |
| 2. When RW equals 00b, LEN must be equal to 00b. | | |
| 3. When RW equals 10b, debugging extensions (DE) must be enabled (bit 3 of CR4 must be set to 1). If DE is set to 0, then RW equal to 10b is undefined. | | |

Debug Exceptions

A debug exception is categorized as either a debug trap or a debug fault. A debug trap calls the debugger following the execution of the instruction that caused the trap. A debug fault calls the debugger prior to the execution of the instruction that caused the fault. All debug traps and faults generate either an Interrupt 01h or an Interrupt 03h exception.

Interrupt 01h. The following events are considered debug traps that cause the processor to generate an Interrupt 01h exception:

- Enabled breakpoints for data and I/O cycles
- Single Step Trap
- Task Switch Trap

The following events are considered debug faults that cause the processor to generate an Interrupt 01h exception:

- Enabled breakpoints for instruction execution
- BD bit in DR6 set to 1

Interrupt 03h. The INT 3 instruction is defined in the x86 architecture as a breakpoint instruction. This instruction causes the processor to generate an Interrupt 03h exception. This exception is a debug trap because the debugger is called following the execution of the INT 3 instruction.

The INT 3 instruction is a one-byte instruction (opcode CCh) typically used to insert a breakpoint in software by writing CCh to the address of the first byte of the instruction to be trapped (the target instruction). Following the trap, if the target instruction is to be executed, the debugger must replace the INT 3 instruction with the first byte of the target instruction.

12 Clock Control

The AMD-K6-III processor supports five modes of clock control. The processor can transition between these modes to maximize performance, to minimize power dissipation, or to provide a balance between performance and power. (See “Power Dissipation” on page 261 for the maximum power dissipation of the AMD-K6-III processor within the normal and reduced-power states.)

The five clock-control states supported are as follows:

- **Normal State:** The processor is running in Real Mode, Virtual-8086 Mode, Protected Mode, or System Management Mode (SMM). In this state, all clocks are running—including the external bus clock CLK and the internal processor clock—and the full features and functions of the processor are available.
- **Halt State:** This low-power state is entered following the successful execution of the HLT instruction. During this state, the internal processor clock is stopped.
- **Stop Grant State:** This low-power state is entered following the recognition of the assertion of the STPCLK# signal. During this state, the internal processor clock is stopped.
- **Stop Grant Inquire State:** This state is entered from the Halt state and the Stop Grant state as the result of a system-initiated inquire cycle.
- **Stop Clock State:** This low-power state is entered from the Stop Grant state when the CLK signal is stopped.

The following sections describe each of the four low-power states. Figure 97 on page 254 illustrates the clock control state transitions.

12.1 Halt State

Enter Halt State

During the execution of the HLT instruction, the AMD-K6-III processor executes a Halt special cycle. After BRDY# is sampled asserted during this cycle, and then EWBE# is also sampled asserted (if not masked off), the processor enters the Halt state in which the processor disables most of its internal clock distribution. In order to support the following operations, the internal phase-lock loop (PLL) still runs, and some internal resources are still clocked in the Halt state:

- **Inquire Cycles:** The processor continues to sample AHOLD, BOFF#, and HOLD in order to support inquire cycles that are initiated by the system logic. The processor transitions to the Stop Grant Inquire state during the inquire cycle. After returning to the Halt state following the inquire cycle, the processor does not execute another Halt special cycle.
- **Flush Cycles:** The processor continues to sample FLUSH#. If FLUSH# is sampled asserted, the processor performs the flush operation in the same manner as it is performed in the Normal state. Upon completing the flush operation, the processor executes the Halt special cycle which indicates the processor is in the Halt state.
- **Time Stamp Counter (TSC):** The TSC continues to count in the Halt state.
- **Signal Sampling:** The processor continues to sample INIT, INTR, NMI, RESET, and SMI#.

After entering the Halt state, all signals driven by the processor retain their state as they existed following the completion of the Halt special cycle.

Exit Halt State

The AMD-K6-III processor remains in the Halt state until it samples INIT, INTR (if interrupts are enabled), NMI, RESET, or SMI# asserted. If any of these signals is sampled asserted, the processor returns to the Normal state and performs the corresponding operation. All of the normal requirements for recognition of these input signals apply within the Halt state.

12.2 Stop Grant State

Enter Stop Grant State

After recognizing the assertion of STPCLK#, the AMD-K6-III processor flushes its instruction pipelines, completes all pending and in-progress bus cycles, and acknowledges the STPCLK# assertion by executing a Stop Grant special bus cycle. After BRDY# is sampled asserted during this cycle, and then EWBE# is also sampled asserted (if not masked off), the processor enters the Stop Grant state. The Stop Grant state is like the Halt state in that the processor disables most of its internal clock distribution in the Stop Grant state. In order to support the following operations, the internal PLL still runs, and some internal resources are still clocked in the Stop Grant state:

- Inquire cycles: The processor transitions to the Stop Grant Inquire state during an inquire cycle. After returning to the Stop Grant state following the inquire cycle, the processor does not execute another Stop Grant special cycle.
- Time Stamp Counter (TSC): The TSC continues to count in the Stop Grant state.
- Signal Sampling: The processor continues to sample INIT, INTR, NMI, RESET, and SMI#.

FLUSH# is not recognized in the Stop Grant state (unlike while in the Halt state).

Upon entering the Stop Grant state, all signals driven by the processor retain their state as they existed following the completion of the Stop Grant special cycle.

Exit Stop Grant State

The AMD-K6-III processor remains in the Stop Grant state until it samples STPCLK# negated or RESET asserted. If STPCLK# is sampled negated, the processor returns to the Normal state in less than 10 bus clock (CLK) periods. After the transition to the Normal state, the processor resumes execution at the instruction boundary on which STPCLK# was initially recognized.

If STPCLK# is recognized as negated in the Stop Grant state and subsequently sampled asserted prior to returning to the Normal state, the AMD-K6-III processor guarantees that a minimum of one instruction is executed prior to re-entering the Stop Grant state.

If INIT, INTR (if interrupts are enabled), FLUSH#, NMI, or SMI# are sampled asserted in the Stop Grant state, the processor latches the edge-sensitive signals (INIT, FLUSH#, NMI, and SMI#), but otherwise does not exit the Stop Grant state to service the interrupt. When the processor returns to the Normal state due to sampling STPCLK# negated, any pending interrupts are recognized after returning to the Normal state. To ensure their recognition, all of the normal requirements for these input signals apply within the Stop Grant state.

If RESET is sampled asserted in the Stop Grant state, the processor immediately returns to the Normal state and the reset process begins.

12.3 Stop Grant Inquire State

Enter Stop Grant Inquire State

The Stop Grant Inquire state is entered from the Stop Grant state or the Halt state when EADS# is sampled asserted during an inquire cycle initiated by the system logic. The AMD-K6-III processor responds to an inquire cycle in the same manner as in the Normal state by driving HIT# and HITM#. If the inquire cycle hits a modified cache line, the processor performs a writeback cycle.

Exit Stop Grant Inquire State

Following the completion of any writeback, the processor returns to the state from which it entered the Stop Grant Inquire state.

12.4 Stop Clock State

Enter Stop Clock State

If the CLK signal is stopped while the AMD-K6-III processor is in the Stop Grant state, the processor enters the Stop Clock state. Because all internal clocks and the PLL are not running in the Stop Clock state, the Stop Clock state represents the minimum-power state of all clock control states. The CLK signal must be held Low while it is stopped.

The Stop Clock state cannot be entered from the Halt state.

INTR is the only input signal that is allowed to change states while the processor is in the Stop Clock state. However, INTR is not sampled until the processor returns to the Stop Grant state. All other input signals must remain unchanged in the Stop Clock state.

Exit Stop Clock State

The AMD-K6-III processor returns to the Stop Grant state from the Stop Clock state after the CLK signal is started and the internal PLL has stabilized. PLL stabilization is achieved after the CLK signal has been running within its specification for a minimum of 1.0 ms.

The frequency of CLK when exiting the Stop Clock state can be different than the frequency of CLK when entering the Stop Clock state.

The state of the BF[2:0] signals when exiting the Stop Clock state is ignored because the BF[2:0] signals are only sampled during the falling transition of RESET.

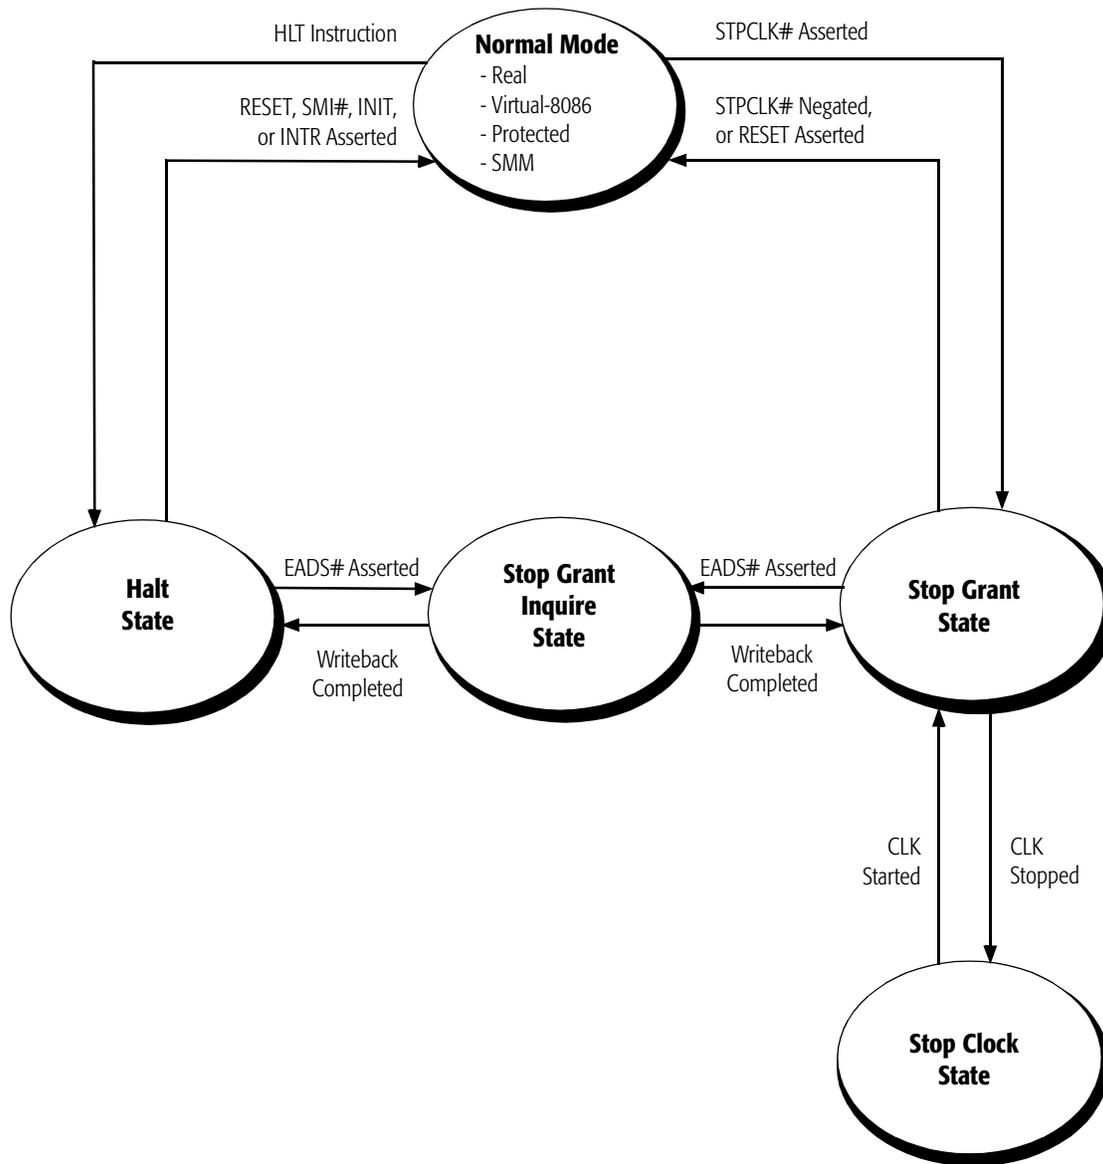


Figure 97. Clock Control State Transitions

13 Power and Grounding

13.1 Power Connections

The AMD-K6-III processor is a dual voltage device. Two separate supply voltages are required: V_{CC2} and V_{CC3} . V_{CC2} provides the core voltage for the processor and V_{CC3} provides the I/O voltage. See “Electrical Data” on page 259 for the value and range of V_{CC2} and V_{CC3} .

There are 28 V_{CC2} , 32 V_{CC3} , and 68 V_{SS} pins on the AMD-K6-III processor. (See “Pin Designations” on page 295 for all power and ground pin designations.) The large number of power and ground pins are provided to ensure that the processor and package maintain a clean and stable power distribution network.

For proper operation and functionality, all V_{CC2} , V_{CC3} , and V_{SS} pins must be connected to the appropriate planes in the circuit board. The power planes have been arranged in a pattern to simplify routing and minimize crosstalk on the circuit board. The isolation region between two voltage planes must be at least 0.254mm if they are in the same layer of the circuit board. (See Figure 98 on page 256.) In order to maintain a low-impedance current sink and reference, the ground plane must never be split.

Although the AMD-K6-III processor has two separate supply voltages, there are no special power sequencing requirements. The best procedure is to minimize the time between which V_{CC2} and V_{CC3} are either both on or both off.

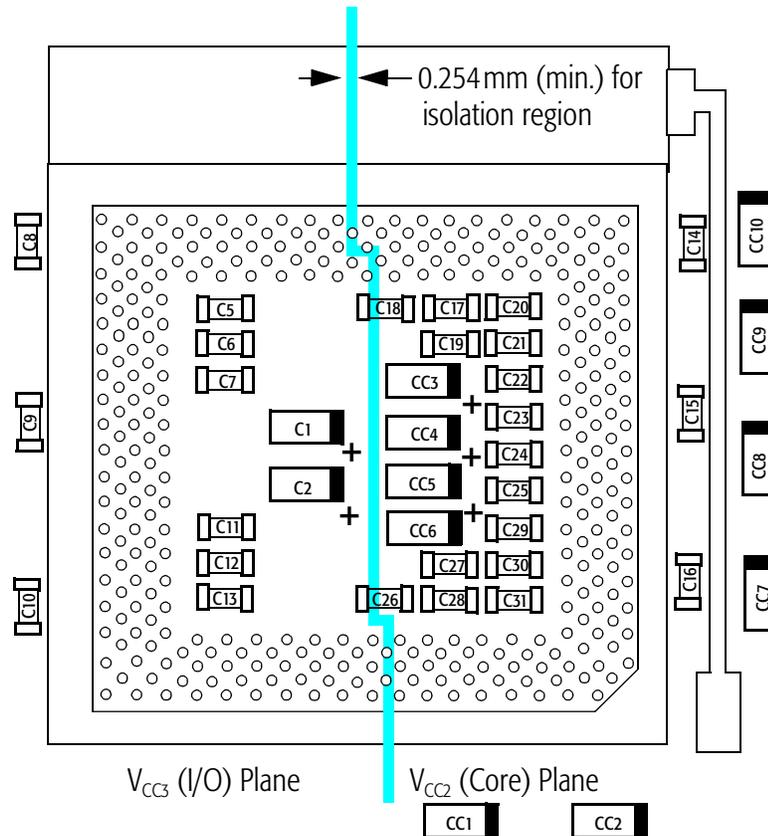


Figure 98. Suggested Component Placement

13.2 Decoupling Recommendations

In addition to the isolation region mentioned in “Power Connections” on page 255, adequate decoupling capacitance is required between the two system power planes and the ground plane to minimize ringing and to provide a low-impedance path for return currents. Suggested decoupling capacitor placement is shown in Figure 98.

Surface mounted capacitors should be used under the processor’s ZIF socket to minimize resistance and inductance in the lead lengths while maintaining minimal height. For information and recommendations about the specific value, quantity, and location of the capacitors, see the *AMD-K6[®] Processor Power Supply Design Application Note*, order# 21103.

13.3 Pin Connection Requirements

For proper operation, the following requirements for signal pin connections must be met:

- Do not drive address and data signals into large capacitive loads at high frequencies. If necessary, use buffer chips to drive large capacitive loads.
- Leave all NC (no-connect) pins unconnected.
- Unused inputs should always be connected to an appropriate signal level.
 - Active Low inputs that are not being used should be connected to V_{CC3} through a 20-kohm pullup resistor.
 - Active High inputs that are not being used should be connected to GND through a pulldown resistor.
- Reserved signals can be treated in one of the following ways:
 - As no-connect (NC) pins, in which case these pins are left unconnected
 - As pins connected to the system logic as defined by the industry-standard Pentium interface (Socket 7)
 - Any combination of NC and Socket 7 pins
- Keep trace lengths to a minimum.

14 Electrical Data

14.1 Operating Ranges

The AMD-K6-III processor is designed to provide functional operation if the voltage and temperature parameters are within the limits defined in Table 50.

Table 50. Operating Ranges

| Parameter | Minimum | Typical | Maximum | Comments |
|--|---------|---------|---------|----------|
| V_{CC2} | 2.3 V | 2.4 V | 2.5 V | Note |
| V_{CC3} | 3.135 V | 3.30 V | 3.6 V | Note |
| T_{CASE} | 0°C | | 65°C | |
| Note: V_{CC2} and V_{CC3} are referenced from V_{SS} | | | | |

14.2 Absolute Ratings

The AMD-K6-III processor is not designed to be operated beyond the operating ranges listed in Table 50. Exposure to conditions outside these operating ranges for extended periods of time can affect long-term reliability. Permanent damage can occur if the absolute ratings listed in Table 51 are exceeded.

Table 51. Absolute Ratings

| Parameter | Minimum | Maximum | Comments |
|--|---------|---------------------------------------|----------|
| V_{CC2} | -0.5 V | 2.6 V | |
| V_{CC3} | -0.5 V | 3.6 V | |
| V_{PIN} | -0.5 V | $V_{CC3} + 0.5 V$ and $\leq 4.0 V$ | Note |
| T_{CASE} (under bias) | -65°C | +110°C | |
| $T_{STORAGE}$ | -65°C | +150°C | |
| Note: V_{PIN} (the voltage on any I/O pin) must not be greater than 0.5 V above the voltage being applied to V_{CC3} . In addition, the V_{PIN} voltage must never exceed 4.0 V. | | | |

14.3 DC Characteristics

The DC characteristics of the AMD-K6-III processor are shown in Table 52.

Table 52. DC Characteristics

| Symbol | Parameter Description | Preliminary Data | | Comments |
|------------|--|------------------|-------------------|-------------------------------|
| | | Min | Max | |
| V_{IL} | Input Low Voltage | -0.3 V | +0.8 V | |
| V_{IH} | Input High Voltage | 2.0 V | $V_{CC3} + 0.3 V$ | Note 1 |
| V_{OL} | Output Low Voltage | | 0.4 V | $I_{OL} = 4.0\text{-mA}$ load |
| V_{OH} | Output High Voltage | 2.4 V | | $I_{OH} = 3.0\text{-mA}$ load |
| I_{CC2} | 2.4 V Power Supply Current | | 12.40 A | 400 MHz, Note 2, 8 |
| | | | 13.50 A | 450 MHz, Note 2, 7 |
| I_{CC3} | 3.3 V Power Supply Current | | 0.62 A | 400 MHz, Note 3, 8 |
| | | | 0.66 A | 450 MHz, Note 3, 7 |
| I_{LI} | Input Leakage Current | | $\pm 15 \mu A$ | Note 4 |
| I_{LO} | Output Leakage Current | | $\pm 15 \mu A$ | Note 4 |
| I_{IL} | Input Leakage Current Bias with Pullup | | -400 μA | Note 5 |
| I_{IH} | Input Leakage Current Bias with Pulldown | | 200 μA | Note 6 |
| C_{IN} | Input Capacitance | | 10 pF | |
| C_{OUT} | Output Capacitance | | 15 pF | |
| C_{OUT} | I/O Capacitance | | 20 pF | |
| C_{CLK} | CLK Capacitance | | 10 pF | |
| C_{TIN} | Test Input Capacitance (TDI, TMS, TRST#) | | 10 pF | |
| C_{TOUT} | Test Output Capacitance (TDO) | | 15 pF | |
| C_{TCK} | TCK Capacitance | | 10 pF | |

Notes:

1. V_{CC3} refers to the voltage being applied to V_{CC3} during functional operation.
2. $V_{CC2} = 2.5 V$ – The maximum power supply current must be taken into account when designing a power supply.
3. $V_{CC3} = 3.6 V$ – The maximum power supply current must be taken into account when designing a power supply.
4. Refers to inputs and I/O without an internal pullup resistor and $0 \leq V_{IN} \leq V_{CC3}$.
5. Refers to inputs with an internal pullup and $V_{IL} = 0.4 V$.
6. Refers to inputs with an internal pulldown and $V_{IH} = 2.4 V$.
7. CLK frequency equals 100 MHz.
8. This specification applies to components using a CLK frequency of 66 MHz or 100 MHz.

14.4 Power Dissipation

Table 53 contains the typical and maximum power dissipation of the AMD-K6-III processor during normal and reduced power states.

Table 53. Typical and Maximum Power Dissipation

| Clock Control State | 400 MHz ⁷ | 450 MHz ⁶ | Comments |
|--|----------------------|----------------------|-----------|
| Normal (Maximum Thermal Power) | 26.80 W | 29.50 W | Note 1, 2 |
| Normal (Typical Thermal Power) | 16.10 W | 17.70 W | Note 3 |
| Stop Grant / Halt (Maximum) | 5.30 W | 5.34 W | Note 4 |
| Stop Clock (Maximum) | 4.80 W | 4.80 W | Note 5 |
| Notes: <ol style="list-style-type: none"> The maximum power dissipated in the normal clock control state must be taken into account when designing a solution for thermal dissipation for the AMD-K6-III processor. Maximum power is determined for the worst-case instruction sequence or function for the listed clock control states with $V_{CC2} = 2.4$ V and $V_{CC3} = 3.3$ V. Typical power is determined for the typical instruction sequences or functions associated with normal system operation with $V_{CC2} = 2.4$ V and $V_{CC3} = 3.3$ V. The CLK signal and the internal PLL are still running but most internal clocking has stopped. The CLK signal, the internal PLL, and all internal clocking has stopped. CLK frequency equals 100 MHz. This specification applies to components using a CLK frequency of 66 MHz or 100 MHz. | | | |

15 I/O Buffer Characteristics

All of the AMD-K6-III processor inputs, outputs, and bidirectional buffers are implemented using a 3.3V buffer design. AMD has developed a model that represents the characteristics of the actual I/O buffer to allow system designers to perform analog simulations of AMD-K6-III processor signals that interface with the system logic. Analog simulations are used to determine a signal's time of flight from source to destination and to ensure that the system's signal quality requirements are met. Signal quality measurements include overshoot, undershoot, slope reversal, and ringing.

15.1 I/O Buffer Model

AMD provides a model of the AMD-K6-III processor I/O buffer for system designers to use in board-level simulations. This I/O buffer model conforms to the *I/O Buffer Information Specification (IBIS)*. The I/O model contains voltage versus current (V/I) and voltage versus time (V/T) data tables for accurate modeling of I/O buffer behavior.

The following list characterizes the properties of the I/O buffer model:

- All data tables contain minimum, typical, and maximum values to allow for worst-case, typical, and best-case simulations, respectively.
- The pullup, pulldown, power clamp, and ground clamp device V/I tables contain enough data points to accurately represent the nonlinear nature of the V/I curves. In addition, the voltage ranges provided in these tables extend beyond the normal operating range of the AMD-K6-III processor for those simulators that yield more accurate results based on this wider range. Figure 99 and Figure 100 on page 264 illustrate the min/typ/max pulldown and pullup V/I curves between 0V and 3.3V.
- The rising and falling ramp rates are specified.
- The min/typ/max V_{CC3} operating range is specified as 3.135V, 3.3V, and 3.6V, respectively.
- $V_{il} = 0.8V$, $V_{ih} = 2.0V$, and $V_{meas} = 1.5V$

- The R/L/C of the package is modeled.
- The capacitance of the silicon die is modeled.
- The model assumes a test load resistance of 50 Ω

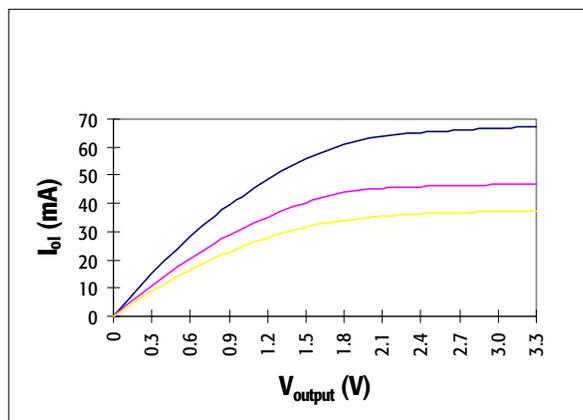


Figure 99. Pulldown V/I Curves

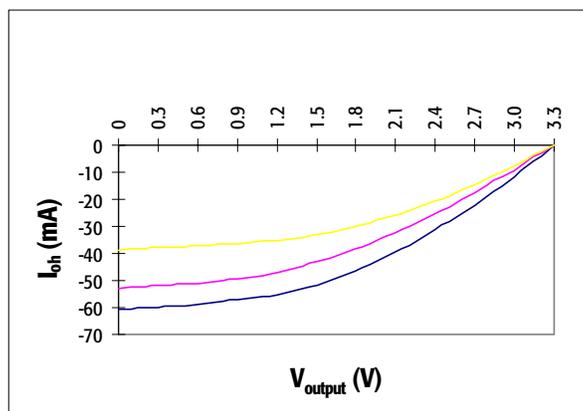


Figure 100. Pullup V/I Curves

15.2 I/O Model Application Note

For the AMD-K6-III processor I/O Buffer IBIS Model and their application, refer to the *AMD-K6[®] Processor I/O Model (IBIS) Application Note*, order# 21084.

15.3 I/O Buffer AC and DC Characteristics

See “Signal Switching Characteristics” on page 267 for the AMD-K6-III processor AC timing specifications.

See “Electrical Data” on page 259 for the AMD-K6-III processor DC specifications.

16 Signal Switching Characteristics

The AMD-K6-III processor signal switching characteristics are presented in Table 54 through Table 63. Valid delay, float, setup, and hold timing specifications are listed. These specifications are provided for the system designer to determine if the timings necessary for the processor to interface with the system logic are met. Table 54 and Table 55 contain the switching characteristics of the CLK input. Table 56 through Table 59 contain the timings for the normal operation signals. Table 60 and Table 61 contain the timings for RESET and the configuration signals. Table 62 and Table 63 contain the timings for the test operation signals.

All signal timings provided are:

- Measured between CLK, TCK, or RESET at 1.5 V and the corresponding signal at 1.5 V—this applies to input and output signals that are switching from Low to High, or from High to Low
- Based on input signals applied at a slew rate of 1 V/ns between 0 V and 3 V (rising) and 3 V to 0 V (falling)
- Valid within the operating ranges given in “Operating Ranges” on page 259
- Based on a load capacitance (C_L) of 0 pF

16.1 CLK Switching Characteristics

Table 54 and Table 55 contain the switching characteristics of the CLK input to the AMD-K6-III processor for 100-MHz and 66-MHz bus operation, respectively, as measured at the voltage levels indicated by Figure 101 on page 269.

The CLK Period Stability specifies the variance (jitter) allowed between successive periods of the CLK input measured at 1.5 V. This parameter must be considered as one of the elements of clock skew between the AMD-K6-III processor and the system logic.

16.2 Clock Switching Characteristics for 100-MHz Bus Operation

Table 54. CLK Switching Characteristics for 100-MHz Bus Operation

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|----------------|-----------------------|------------------|----------|--------|----------------|
| | | Min | Max | | |
| | Frequency | | 100 MHz | | In Normal Mode |
| t ₁ | CLK Period | 10.0 ns | | 101 | In Normal Mode |
| t ₂ | CLK High Time | 3.0 ns | | 101 | |
| t ₃ | CLK Low Time | 3.0 ns | | 101 | |
| t ₄ | CLK Fall Time | 0.15 ns | 1.5 ns | 101 | |
| t ₅ | CLK Rise Time | 0.15 ns | 1.5 ns | 101 | |
| | CLK Period Stability | | ± 250 ps | | Note |

Note:
Jitter frequency power spectrum peaking must occur at frequencies greater than (Frequency of CLK)/3 or less than 500 kHz.

16.3 Clock Switching Characteristics for 66-MHz Bus Operation

Table 55. CLK Switching Characteristics for 66-MHz Bus Operation

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|----------------|-----------------------|------------------|----------|--------|----------------|
| | | Min | Max | | |
| | Frequency | 33.3 MHz | 66.6 MHz | | In Normal Mode |
| t ₁ | CLK Period | 15.0 ns | 30.0 ns | 101 | In Normal Mode |
| t ₂ | CLK High Time | 4.0 ns | | 101 | |
| t ₃ | CLK Low Time | 4.0 ns | | 101 | |
| t ₄ | CLK Fall Time | 0.15 ns | 1.5 ns | 101 | |
| t ₅ | CLK Rise Time | 0.15 ns | 1.5 ns | 101 | |
| | CLK Period Stability | | ± 250 ps | | Note |

Note:
Jitter frequency power spectrum peaking must occur at frequencies greater than (Frequency of CLK)/3 or less than 500 kHz.

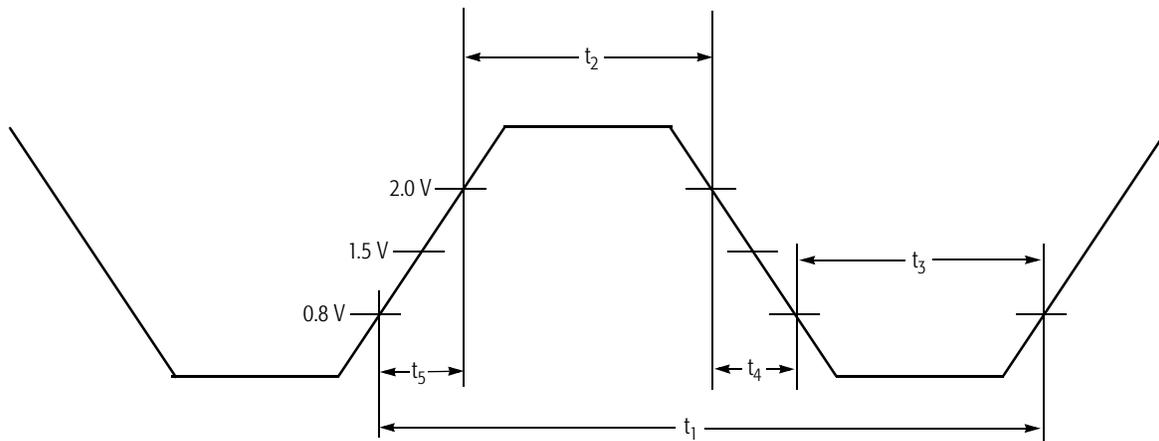


Figure 101. CLK Waveform

16.4 Valid Delay, Float, Setup, and Hold Timings

Valid delay and float timings are given for output signals during functional operation and are given relative to the rising edge of CLK. During boundary-scan testing, valid delay and float timings for output signals are with respect to the falling edge of TCK. The maximum valid delay timings are provided to allow a system designer to determine if setup times to the system logic can be met. Likewise, the minimum valid delay timings are used to analyze hold times to the system logic.

The setup and hold time requirements for the AMD-K6-III processor input signals must be met by the system logic to assure the proper operation of the AMD-K6-III processor. The setup and hold timings during functional and boundary-scan test mode are given relative to the rising edge of CLK and TCK, respectively.

16.5 Output Delay Timings for 100-MHz Bus Operation

Table 56. Output Delay Timings for 100-MHz Bus Operation

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|-----------------|--------------------------------|------------------|--------|--------|----------|
| | | Min | Max | | |
| t ₆ | A[31:3] Valid Delay | 1.1 ns | 4.0 ns | 103 | |
| t ₇ | A[31:3] Float Delay | | 7.0 ns | 104 | |
| t ₈ | ADS# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₉ | ADS# Float Delay | | 7.0 ns | 104 | |
| t ₁₀ | ADSC# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₁₁ | ADSC# Float Delay | | 7.0 ns | 104 | |
| t ₁₂ | AP Valid Delay | 1.0 ns | 5.5 ns | 103 | |
| t ₁₃ | AP Float Delay | | 7.0 ns | 104 | |
| t ₁₄ | APCHK# Valid Delay | 1.0 ns | 4.5 ns | 103 | |
| t ₁₅ | BE[7:0]# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₁₆ | BE[7:0]# Float Delay | | 7.0 ns | 104 | |
| t ₁₇ | BREQ Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₁₈ | CACHE# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₁₉ | CACHE# Float Delay | | 7.0 ns | 104 | |
| t ₂₀ | D/C# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₂₁ | D/C# Float Delay | | 7.0 ns | 104 | |
| t ₂₂ | D[63:0] Write Data Valid Delay | 1.3 ns | 4.5 ns | 103 | |
| t ₂₃ | D[63:0] Write Data Float Delay | | 7.0 ns | 104 | |
| t ₂₄ | DP[7:0] Write Data Valid Delay | 1.3 ns | 4.5 ns | 103 | |
| t ₂₅ | DP[7:0] Write Data Float Delay | | 7.0 ns | 104 | |
| t ₂₆ | FERR# Valid Delay | 1.0 ns | 4.5 ns | 103 | |
| t ₂₇ | HIT# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₂₈ | HITM# Valid Delay | 1.1 ns | 4.0 ns | 103 | |
| t ₂₉ | HLDA Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₃₀ | LOCK# Valid Delay | 1.1 ns | 4.0 ns | 103 | |
| t ₃₁ | LOCK# Float Delay | | 7.0 ns | 104 | |
| t ₃₂ | M/IO# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₃₃ | M/IO# Float Delay | | 7.0 ns | 104 | |

Table 56. Output Delay Timings for 100-MHz Bus Operation (continued)

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|-----------------|-----------------------|------------------|--------|--------|----------|
| | | Min | Max | | |
| t ₃₄ | PCD Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₃₅ | PCD Float Delay | | 7.0 ns | 104 | |
| t ₃₆ | PCHK# Valid Delay | 1.0 ns | 4.5 ns | 103 | |
| t ₃₇ | PWT Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₃₈ | PWT Float Delay | | 7.0 ns | 104 | |
| t ₃₉ | SCYC Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₄₀ | SCYC Float Delay | | 7.0 ns | 104 | |
| t ₄₁ | SMIACK# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₄₂ | W/R# Valid Delay | 1.0 ns | 4.0 ns | 103 | |
| t ₄₃ | W/R# Float Delay | | 7.0 ns | 104 | |

16.6 Input Setup and Hold Timings for 100-MHz Bus Operation

Table 57. Input Setup and Hold Timings for 100-MHz Bus Operation

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|-----------------|------------------------------|------------------|-----|--------|----------|
| | | Min | Max | | |
| t ₄₄ | A[31:5] Setup Time | 3.0 ns | | 105 | |
| t ₄₅ | A[31:5] Hold Time | 1.0 ns | | 105 | |
| t ₄₆ | A20M# Setup Time | 3.0 ns | | 105 | Note 1 |
| t ₄₇ | A20M# Hold Time | 1.0 ns | | 105 | Note 1 |
| t ₄₈ | AHOLD Setup Time | 3.5 ns | | 105 | |
| t ₄₉ | AHOLD Hold Time | 1.0 ns | | 105 | |
| t ₅₀ | AP Setup Time | 1.7 ns | | 105 | |
| t ₅₁ | AP Hold Time | 1.0 ns | | 105 | |
| t ₅₂ | BOFF# Setup Time | 3.5 ns | | 105 | |
| t ₅₃ | BOFF# Hold Time | 1.0 ns | | 105 | |
| t ₅₄ | BRDY# Setup Time | 3.0 ns | | 105 | |
| t ₅₅ | BRDY# Hold Time | 1.0 ns | | 105 | |
| t ₅₆ | BRDYC# Setup Time | 3.0 ns | | 105 | |
| t ₅₇ | BRDYC# Hold Time | 1.0 ns | | 105 | |
| t ₅₈ | D[63:0] Read Data Setup Time | 1.7 ns | | 105 | |
| t ₅₉ | D[63:0] Read Data Hold Time | 1.5 ns | | 105 | |
| t ₆₀ | DP[7:0] Read Data Setup Time | 1.7 ns | | 105 | |
| t ₆₁ | DP[7:0] Read Data Hold Time | 1.5 ns | | 105 | |
| t ₆₂ | EADS# Setup Time | 3.0 ns | | 105 | |
| t ₆₃ | EADS# Hold Time | 1.0 ns | | 105 | |
| t ₆₄ | EWBE# Setup Time | 1.7 ns | | 105 | |
| t ₆₅ | EWBE# Hold Time | 1.0 ns | | 105 | |
| t ₆₆ | FLUSH# Setup Time | 1.7 ns | | 105 | Note 2 |
| t ₆₇ | FLUSH# Hold Time | 1.0 ns | | 105 | Note 2 |

Notes:

1. These level-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must be asserted for a minimum pulse width of two clocks.
2. These edge-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must have been negated at least two clocks prior to assertion and must remain asserted at least two clocks.

Table 57. Input Setup and Hold Timings for 100-MHz Bus Operation (continued)

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|-----------------|-----------------------|------------------|-----|--------|----------|
| | | Min | Max | | |
| t ₆₈ | HOLD Setup Time | 1.7 ns | | 105 | |
| t ₆₉ | HOLD Hold Time | 1.5 ns | | 105 | |
| t ₇₀ | IGNNE# Setup Time | 1.7 ns | | 105 | Note 1 |
| t ₇₁ | IGNNE# Hold Time | 1.0 ns | | 105 | Note 1 |
| t ₇₂ | INIT Setup Time | 1.7 ns | | 105 | Note 2 |
| t ₇₃ | INIT Hold Time | 1.0 ns | | 105 | Note 2 |
| t ₇₄ | INTR Setup Time | 1.7 ns | | 105 | Note 1 |
| t ₇₅ | INTR Hold Time | 1.0 ns | | 105 | Note 1 |
| t ₇₆ | INV Setup Time | 1.7 ns | | 105 | |
| t ₇₇ | INV Hold Time | 1.0 ns | | 105 | |
| t ₇₈ | KEN# Setup Time | 3.0 ns | | 105 | |
| t ₇₉ | KEN# Hold Time | 1.0 ns | | 105 | |
| t ₈₀ | NA# Setup Time | 1.7 ns | | 105 | |
| t ₈₁ | NA# Hold Time | 1.0 ns | | 105 | |
| t ₈₂ | NMI Setup Time | 1.7 ns | | 105 | Note 2 |
| t ₈₃ | NMI Hold Time | 1.0 ns | | 105 | Note 2 |
| t ₈₄ | SMI# Setup Time | 1.7 ns | | 105 | Note 2 |
| t ₈₅ | SMI# Hold Time | 1.0 ns | | 105 | Note 2 |
| t ₈₆ | STPCLK# Setup Time | 1.7 ns | | 105 | Note 1 |
| t ₈₇ | STPCLK# Hold Time | 1.0 ns | | 105 | Note 1 |
| t ₈₈ | WB/WT# Setup Time | 1.7 ns | | 105 | |
| t ₈₉ | WB/WT# Hold Time | 1.0 ns | | 105 | |

Notes:

1. These level-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must be asserted for a minimum pulse width of two clocks.
2. These edge-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must have been negated at least two clocks prior to assertion and must remain asserted at least two clocks.

16.7 Output Delay Timings for 66-MHz Bus Operation

Table 58. Output Delay Timings for 66-MHz Bus Operation

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|-----------------|--------------------------------|------------------|---------|--------|----------|
| | | Min | Max | | |
| t ₆ | A[31:3] Valid Delay | 1.1 ns | 6.3 ns | 103 | |
| t ₇ | A[31:3] Float Delay | | 10.0 ns | 104 | |
| t ₈ | ADS# Valid Delay | 1.0 ns | 6.0 ns | 103 | |
| t ₉ | ADS# Float Delay | | 10.0 ns | 104 | |
| t ₁₀ | ADSC# Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₁₁ | ADSC# Float Delay | | 10.0 ns | 104 | |
| t ₁₂ | AP Valid Delay | 1.0 ns | 8.5 ns | 103 | |
| t ₁₃ | AP Float Delay | | 10.0 ns | 104 | |
| t ₁₄ | APCHK# Valid Delay | 1.0 ns | 8.3 ns | 103 | |
| t ₁₅ | BE[7:0]# Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₁₆ | BE[7:0]# Float Delay | | 10.0 ns | 104 | |
| t ₁₇ | BREQ Valid Delay | 1.0 ns | 8.0 ns | 103 | |
| t ₁₈ | CACHE# Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₁₉ | CACHE# Float Delay | | 10.0 ns | 104 | |
| t ₂₀ | D/C# Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₂₁ | D/C# Float Delay | | 10.0 ns | 104 | |
| t ₂₂ | D[63:0] Write Data Valid Delay | 1.3 ns | 7.5 ns | 103 | |
| t ₂₃ | D[63:0] Write Data Float Delay | | 10.0 ns | 104 | |
| t ₂₄ | DP[7:0] Write Data Valid Delay | 1.3 ns | 7.5 ns | 103 | |
| t ₂₅ | DP[7:0] Write Data Float Delay | | 10.0 ns | 104 | |
| t ₂₆ | FERR# Valid Delay | 1.0 ns | 8.3 ns | 103 | |
| t ₂₇ | HIT# Valid Delay | 1.0 ns | 6.8 ns | 103 | |
| t ₂₈ | HITM# Valid Delay | 1.1 ns | 6.0 ns | 103 | |
| t ₂₉ | HLDA Valid Delay | 1.0 ns | 6.8 ns | 103 | |
| t ₃₀ | LOCK# Valid Delay | 1.1 ns | 7.0 ns | 103 | |
| t ₃₁ | LOCK# Float Delay | | 10.0 ns | 104 | |
| t ₃₂ | M/IO# Valid Delay | 1.0 ns | 5.9 ns | 103 | |
| t ₃₃ | M/IO# Float Delay | | 10.0 ns | 104 | |

Table 58. Output Delay Timings for 66-MHz Bus Operation (continued)

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|-----------------|-----------------------|------------------|---------|--------|----------|
| | | Min | Max | | |
| t ₃₄ | PCD Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₃₅ | PCD Float Delay | | 10.0 ns | 104 | |
| t ₃₆ | PCHK# Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₃₇ | PWT Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₃₈ | PWT Float Delay | | 10.0 ns | 104 | |
| t ₃₉ | SCYC Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₄₀ | SCYC Float Delay | | 10.0 ns | 104 | |
| t ₄₁ | SMIACK# Valid Delay | 1.0 ns | 7.3 ns | 103 | |
| t ₄₂ | W/R# Valid Delay | 1.0 ns | 7.0 ns | 103 | |
| t ₄₃ | W/R# Float Delay | | 10.0 ns | 104 | |

16.8 Input Setup and Hold Timings for 66-MHz Bus Operation

Table 59. Input Setup and Hold Timings for 66-MHz Bus Operation

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|-----------------|------------------------------|------------------|-----|--------|----------|
| | | Min | Max | | |
| t ₄₄ | A[31:5] Setup Time | 6.0 ns | | 105 | |
| t ₄₅ | A[31:5] Hold Time | 1.0 ns | | 105 | |
| t ₄₆ | A20M# Setup Time | 5.0 ns | | 105 | Note 1 |
| t ₄₇ | A20M# Hold Time | 1.0 ns | | 105 | Note 1 |
| t ₄₈ | AHOLD Setup Time | 5.5 ns | | 105 | |
| t ₄₉ | AHOLD Hold Time | 1.0 ns | | 105 | |
| t ₅₀ | AP Setup Time | 5.0 ns | | 105 | |
| t ₅₁ | AP Hold Time | 1.0 ns | | 105 | |
| t ₅₂ | BOFF# Setup Time | 5.5 ns | | 105 | |
| t ₅₃ | BOFF# Hold Time | 1.0 ns | | 105 | |
| t ₅₄ | BRDY# Setup Time | 5.0 ns | | 105 | |
| t ₅₅ | BRDY# Hold Time | 1.0 ns | | 105 | |
| t ₅₆ | BRDYC# Setup Time | 5.0 ns | | 105 | |
| t ₅₇ | BRDYC# Hold Time | 1.0 ns | | 105 | |
| t ₅₈ | D[63:0] Read Data Setup Time | 2.8 ns | | 105 | |
| t ₅₉ | D[63:0] Read Data Hold Time | 1.5 ns | | 105 | |
| t ₆₀ | DP[7:0] Read Data Setup Time | 2.8 ns | | 105 | |
| t ₆₁ | DP[7:0] Read Data Hold Time | 1.5 ns | | 105 | |
| t ₆₂ | EADS# Setup Time | 5.0 ns | | 105 | |
| t ₆₃ | EADS# Hold Time | 1.0 ns | | 105 | |
| t ₆₄ | EWBE# Setup Time | 5.0 ns | | 105 | |
| t ₆₅ | EWBE# Hold Time | 1.0 ns | | 105 | |
| t ₆₆ | FLUSH# Setup Time | 5.0 ns | | 105 | Note 2 |
| t ₆₇ | FLUSH# Hold Time | 1.0 ns | | 105 | Note 2 |

Notes:

1. These level-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must be asserted for a minimum pulse width of two clocks.
2. These edge-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must have been negated at least two clocks prior to assertion and must remain asserted at least two clocks.

Table 59. Input Setup and Hold Timings for 66-MHz Bus Operation (continued)

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|-----------------|-----------------------|------------------|-----|--------|----------|
| | | Min | Max | | |
| t ₆₈ | HOLD Setup Time | 5.0 ns | | 105 | |
| t ₆₉ | HOLD Hold Time | 1.5 ns | | 105 | |
| t ₇₀ | IGNNE# Setup Time | 5.0 ns | | 105 | Note 1 |
| t ₇₁ | IGNNE# Hold Time | 1.0 ns | | 105 | Note 1 |
| t ₇₂ | INIT Setup Time | 5.0 ns | | 105 | Note 2 |
| t ₇₃ | INIT Hold Time | 1.0 ns | | 105 | Note 2 |
| t ₇₄ | INTR Setup Time | 5.0 ns | | 105 | Note 1 |
| t ₇₅ | INTR Hold Time | 1.0 ns | | 105 | Note 1 |
| t ₇₆ | INV Setup Time | 5.0 ns | | 105 | |
| t ₇₇ | INV Hold Time | 1.0 ns | | 105 | |
| t ₇₈ | KEN# Setup Time | 5.0 ns | | 105 | |
| t ₇₉ | KEN# Hold Time | 1.0 ns | | 105 | |
| t ₈₀ | NA# Setup Time | 4.5 ns | | 105 | |
| t ₈₁ | NA# Hold Time | 1.0 ns | | 105 | |
| t ₈₂ | NMI Setup Time | 5.0 ns | | 105 | Note 2 |
| t ₈₃ | NMI Hold Time | 1.0 ns | | 105 | Note 2 |
| t ₈₄ | SMI# Setup Time | 5.0 ns | | 105 | Note 2 |
| t ₈₅ | SMI# Hold Time | 1.0 ns | | 105 | Note 2 |
| t ₈₆ | STPCLK# Setup Time | 5.0 ns | | 105 | Note 1 |
| t ₈₇ | STPCLK# Hold Time | 1.0 ns | | 105 | Note 1 |
| t ₈₈ | WB/WT# Setup Time | 4.5 ns | | 105 | |
| t ₈₉ | WB/WT# Hold Time | 1.0 ns | | 105 | |

Notes:

1. These level-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must be asserted for a minimum pulse width of two clocks.
2. These edge-sensitive signals can be asserted synchronously or asynchronously. To be sampled on a specific clock edge, setup and hold times must be met. If asserted asynchronously, they must have been negated at least two clocks prior to assertion and must remain asserted at least two clocks.

16.9 RESET and Test Signal Timing

Table 60. RESET and Configuration Signals for 100-MHz Bus Operation

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|------------------|---|------------------|-----|--------|----------|
| | | Min | Max | | |
| t ₉₀ | RESET Setup Time | 1.7 ns | | 106 | |
| t ₉₁ | RESET Hold Time | 1.0 ns | | 106 | |
| t ₉₂ | RESET Pulse Width, V _{CC} and CLK Stable | 15 clocks | | 106 | |
| t ₉₃ | RESET Active After V _{CC} and CLK Stable | 1.0 ms | | 106 | |
| t ₉₄ | BF[2:0] Setup Time | 1.0 ms | | 106 | Note 3 |
| t ₉₅ | BF[2:0] Hold Time | 2 clocks | | 106 | Note 3 |
| t ₉₆ | Intentionally left blank | | | | |
| t ₉₇ | Intentionally left blank | | | | |
| t ₉₈ | Intentionally left blank | | | | |
| t ₉₉ | FLUSH# Setup Time | 1.7 ns | | 106 | Note 1 |
| t ₁₀₀ | FLUSH# Hold Time | 1.0 ns | | 106 | Note 1 |
| t ₁₀₁ | FLUSH# Setup Time | 2 clocks | | 106 | Note 2 |
| t ₁₀₂ | FLUSH# Hold Time | 2 clocks | | 106 | Note 2 |

Notes:

1. To be sampled on a specific clock edge, setup and hold times must be met the clock edge before the clock edge on which RESET is sampled negated.
2. If asserted asynchronously, these signals must meet a minimum setup and hold time of two clocks relative to the negation of RESET.
3. BF[2:0] must meet a minimum setup time of 1.0 ms and a minimum hold time of two clocks relative to the negation of RESET.

Table 61. RESET and Configuration Signals for 66-MHz Bus Operation

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|------------------|---|------------------|-----|--------|----------|
| | | Min | Max | | |
| t ₉₀ | RESET Setup Time | 5.0 ns | | 106 | |
| t ₉₁ | RESET Hold Time | 1.0 ns | | 106 | |
| t ₉₂ | RESET Pulse Width, V _{CC} and CLK Stable | 15 clocks | | 106 | |
| t ₉₃ | RESET Active After V _{CC} and CLK Stable | 1.0 ms | | 106 | |
| t ₉₄ | BF[2:0] Setup Time | 1.0 ms | | 106 | Note 3 |
| t ₉₅ | BF[2:0] Hold Time | 2 clocks | | 106 | Note 3 |
| t ₉₆ | Intentionally left blank | | | | |
| t ₉₇ | Intentionally left blank | | | | |
| t ₉₈ | Intentionally left blank | | | | |
| t ₉₉ | FLUSH# Setup Time | 5.0 ns | | 106 | Note 1 |
| t ₁₀₀ | FLUSH# Hold Time | 1.0 ns | | 106 | Note 1 |
| t ₁₀₁ | FLUSH# Setup Time | 2 clocks | | 106 | Note 2 |
| t ₁₀₂ | FLUSH# Hold Time | 2 clocks | | 106 | Note 2 |

Notes:

1. To be sampled on a specific clock edge, setup and hold times must be met the clock edge before the clock edge on which RESET is sampled negated.
2. If asserted asynchronously, these signals must meet a minimum setup and hold time of two clocks relative to the negation of RESET.
3. BF[2:0] must meet a minimum setup time of 1.0 ms and a minimum hold time of two clocks relative to the negation of RESET.

Table 62. TCK Waveform and TRST# Timing at 25 MHz

| Symbol | Parameter Description | Preliminary Data | | Figure | Comments |
|------------------|-----------------------|------------------|--------|--------|--------------|
| | | Min | Max | | |
| | TCK Frequency | | 25 MHz | 107 | |
| t ₁₀₃ | TCK Period | 40.0 ns | | 107 | |
| t ₁₀₄ | TCK High Time | 14.0 ns | | 107 | |
| t ₁₀₅ | TCK Low Time | 14.0 ns | | 107 | |
| t ₁₀₆ | TCK Fall Time | | 5.0 ns | 107 | Note 1, 2 |
| t ₁₀₇ | TCK Rise Time | | 5.0 ns | 107 | Note 1, 2 |
| t ₁₀₈ | TRST# Pulse Width | 30.0 ns | | 108 | Asynchronous |

Notes:

1. Rise/Fall times can be increased by 1.0 ns for each 10 MHz that TCK is run below its maximum frequency of 25 MHz.
2. Rise/Fall times are measured between 0.8 V and 2.0 V.

Table 63. Test Signal Timing at 25 MHz


| Symbol | Parameter Description | Preliminary Data | | Figure | Notes |
|------------------|------------------------------------|------------------|---------|--------|--------|
| | | Min | Max | | |
| t ₁₀₉ | TDI Setup Time | 5.0 ns | | 109 | Note 2 |
| t ₁₁₀ | TDI Hold Time | 9.0 ns | | 109 | Note 2 |
| t ₁₁₁ | TMS Setup Time | 5.0 ns | | 109 | Note 2 |
| t ₁₁₂ | TMS Hold Time | 9.0 ns | | 109 | Note 2 |
| t ₁₁₃ | TDO Valid Delay | 3.0 ns | 13.0 ns | 109 | Note 1 |
| t ₁₁₄ | TDO Float Delay | | 16.0 ns | 109 | Note 1 |
| t ₁₁₅ | All Outputs (Non-Test) Valid Delay | 3.0 ns | 13.0 ns | 109 | Note 1 |
| t ₁₁₆ | All Outputs (Non-Test) Float Delay | | 16.0 ns | 109 | Note 1 |
| t ₁₁₇ | All Inputs (Non-Test) Setup Time | 5.0 ns | | 109 | Note 2 |
| t ₁₁₈ | All Inputs (Non-Test) Hold Time | 9.0 ns | | 109 | Note 2 |

Notes:

1. Parameter is measured from the TCK falling edge.
2. Parameter is measured from the TCK rising edge.


| WAVEFORM | INPUTS | OUTPUTS |
|----------|----------------------------------|-------------------------------------|
| | Must be steady | Steady |
| | Can change from High to Low | Changing from High to Low |
| | Can change from Low to High | Changing from Low to High |
| | Don't care, any change permitted | Changing, State Unknown |
| | (Does not apply) | Center line is high impedance state |

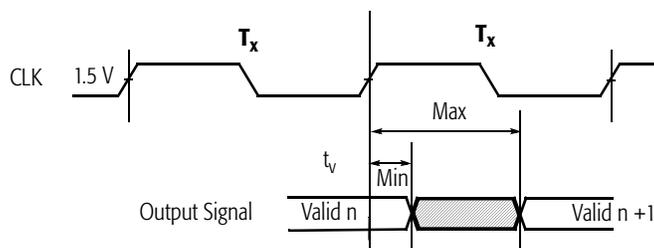Figure 102. Diagrams Key



v = 6, 8, 10, 12, 14, 15, 17, 18, 20, 22, 24, 26, 27, 28, 29, 30, 32, 34, 36, 37, 39, 41, 42

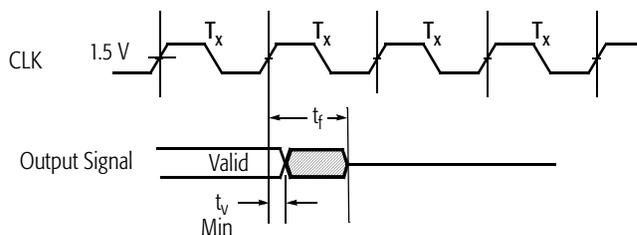
Figure 103. Output Valid Delay Timing



v = 6, 8, 10, 12, 15, 18, 20, 22, 24, 30, 32, 34, 37, 39, 42

f = 7, 9, 11, 13, 16, 19, 21, 23, 25, 31, 33, 35, 38, 40, 43

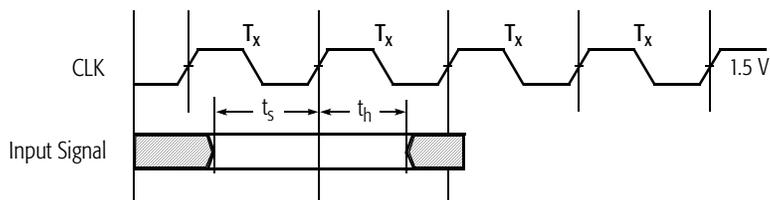Figure 104. Maximum Float Delay Timing



s = 44, 46, 48, 50, 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84, 86, 88

h = 45, 47, 49, 51, 53, 55, 57, 59, 61, 63, 65, 67, 69, 71, 73, 75, 77, 79, 81, 83, 85, 87, 89

Figure 105. Input Setup and Hold Timing

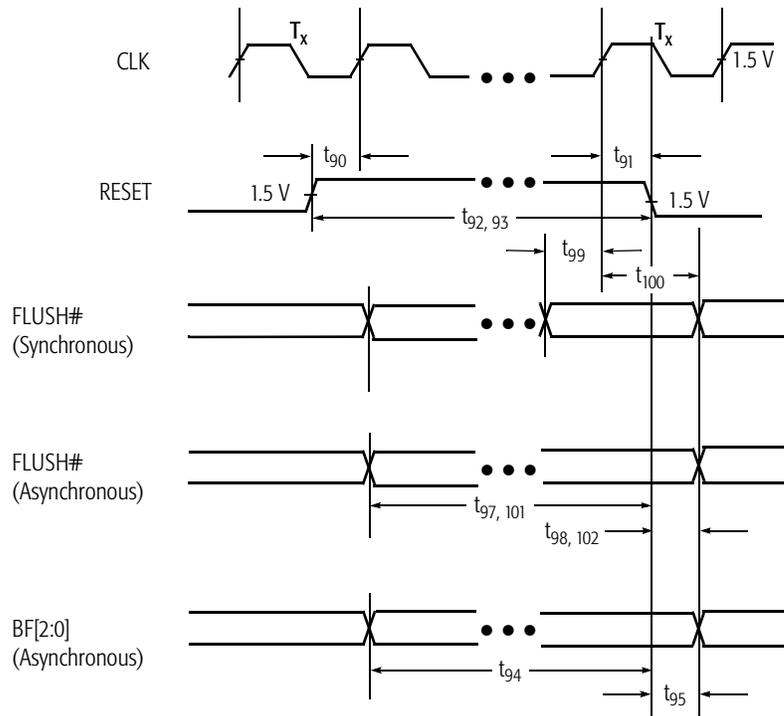


Figure 106. Reset and Configuration Timing

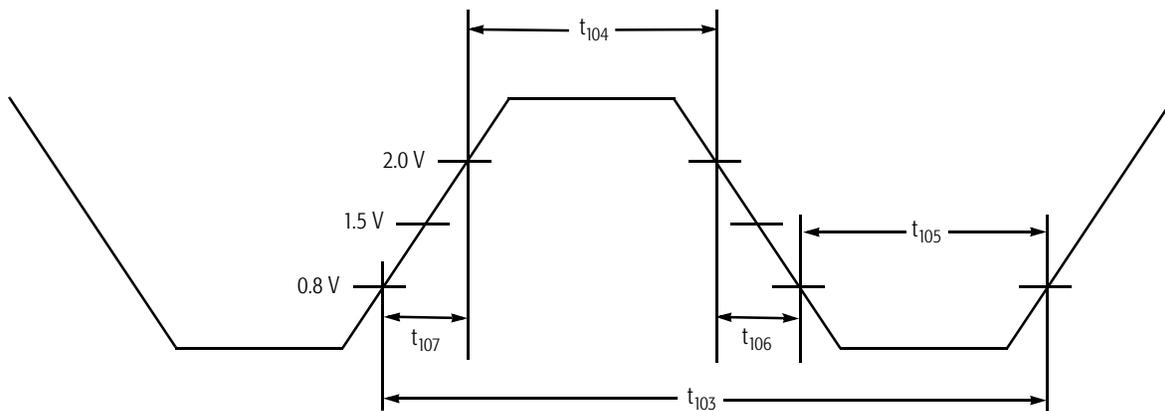


Figure 107. TCK Waveform

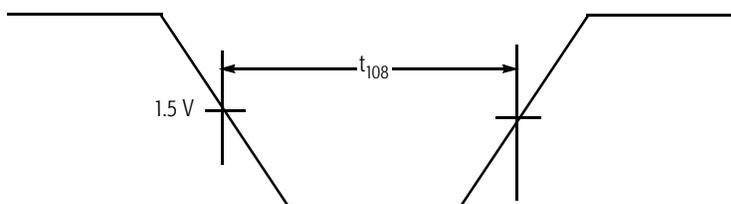


Figure 108. TRST# Timing

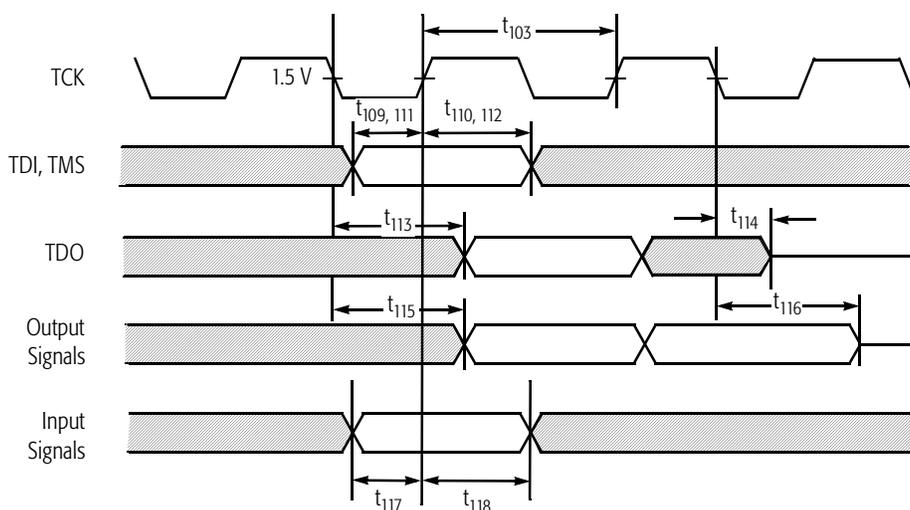


Figure 109. Test Signal Timing Diagram

17 Thermal Design

17.1 Package Thermal Specifications

The AMD-K6-III processor operating specification calls for the case temperature (T_C) to be in the range of 0°C to 65°C. The ambient temperature (T_A) is not specified as long as the case temperature is not violated. The case temperature must be measured on the top center of the package. Table 64 shows the AMD-K6-III processor thermal specifications.

Table 64. Package Thermal Specification

| T_C Case Temperature | θ_{JC} Junction-Case | Maximum Thermal Power | |
|------------------------|-----------------------------|-----------------------|---------|
| | | 2.4 V Component | |
| | | 400 MHz | 450 MHz |
| 0°C–65°C | 1.0 °C/W | 26.80 W | 29.50 W |
| Stop Grant Mode | | 5.30 W | 5.34 W |
| Stop Clock Mode | | 4.80 W | 4.80 W |

Figure 110 on page 286 shows the thermal model of a processor with a passive thermal solution. The case-to-ambient temperature (T_{CA}) can be calculated from the following equation:

$$\begin{aligned}
 T_{CA} &= P_{MAX} \cdot \theta_{CA} \\
 &= P_{MAX} \cdot (\theta_{IF} + \theta_{SA})
 \end{aligned}$$

Where:

- P_{MAX} = Maximum Power Consumption
- θ_{CA} = Case-to-Ambient Thermal Resistance
- θ_{IF} = Interface Material Thermal Resistance
- θ_{SA} = Sink-to-Ambient Thermal Resistance

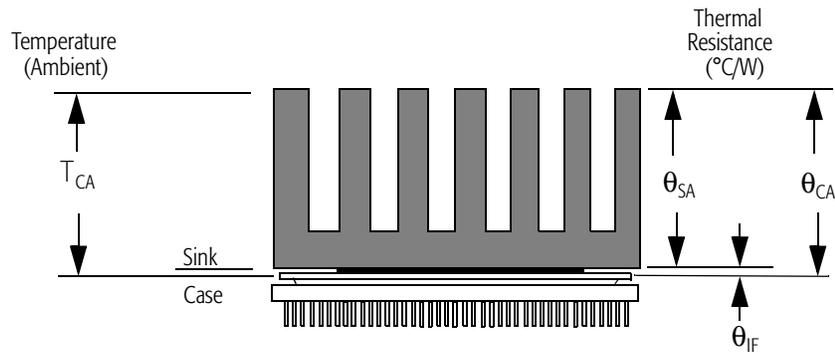


Figure 110. Thermal Model

Figure 111 illustrates the case-to-ambient temperature (T_{CA}) in relation to the power consumption (X-axis) and the thermal resistance (Y-axis). If the power consumption and case temperature are known, the thermal resistance (θ_{CA}) requirement can be calculated for a given ambient temperature (T_A) value.

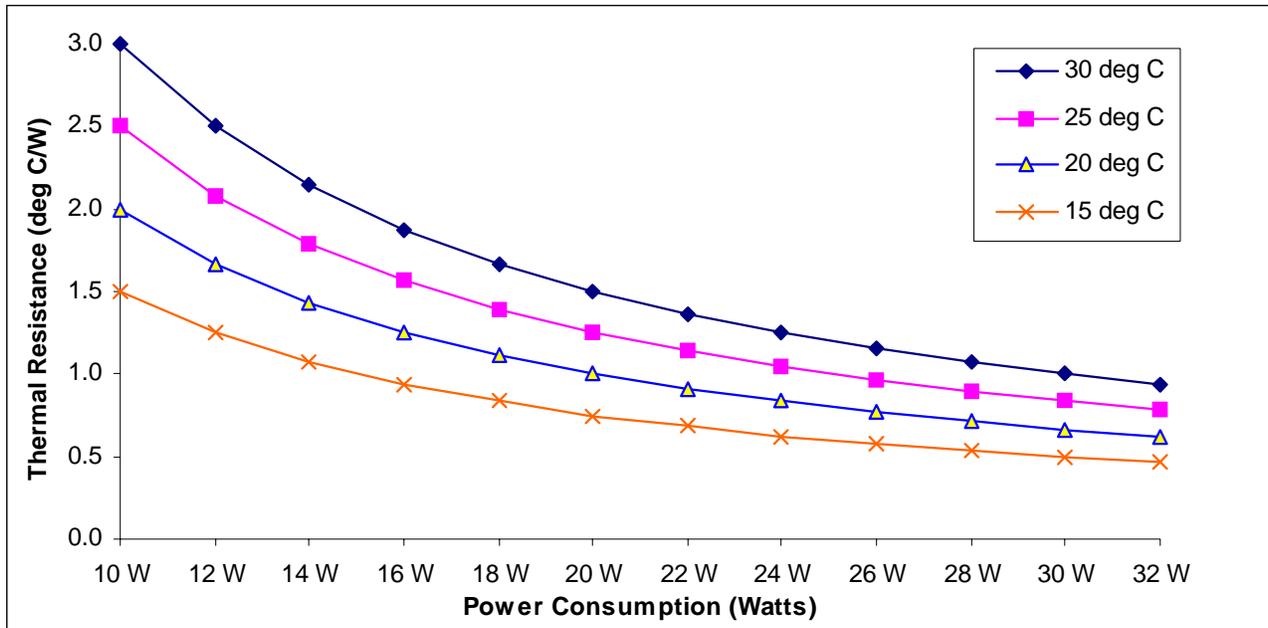


Figure 111. Power Consumption versus Thermal Resistance

The thermal resistance of a heatsink is determined by the heat dissipation surface area, the material and shape of the heatsink, and the airflow volume across the heatsink. In general, the larger the surface area the lower the thermal resistance.

The required thermal resistance of a heatsink (θ_{SA}) can be calculated using the following example:

If:

$$\begin{aligned} T_C &= 65^\circ\text{C} \\ T_A &= 45^\circ\text{C} \\ P_{MAX} &= 29.50\text{W} \end{aligned}$$

Then:

$$\theta_{CA} \leq \left(\frac{T_C - T_A}{P_{MAX}} \right) = \frac{20^\circ\text{C}}{29.5\text{W}} = 0.678^\circ\text{C/W}$$

Thermal grease is recommended as interface material because it provides the lowest thermal resistance ($\cong 0.20^\circ\text{C/W}$). The required thermal resistance (θ_{SA}) of the heatsink in this example is calculated as follows:

$$\theta_{SA} = \theta_{CA} - \theta_{IF} = 0.678 - 0.20 = 0.478(^\circ\text{C/W})$$

Heat Dissipation Path

Figure 112 illustrates the heat dissipation path of the processor. Due to the lower thermal resistance between the processor die junction and case, most of the heat generated by the processor is transferred from the top surface of the case. The small amount of heat generated from the bottom side of the processor where the processor socket blocks the convection can be safely ignored.

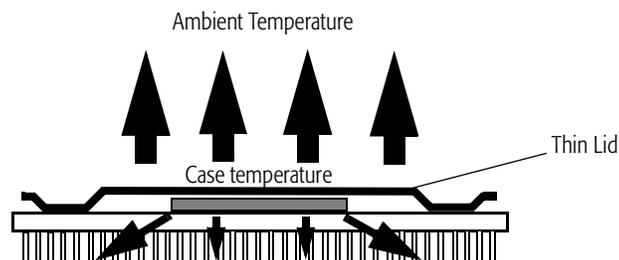


Figure 112. Processor Heat Dissipation Path

Measuring Case Temperature

The processor case temperature is measured to ensure that the thermal solution meets the processor's operational specification. This temperature should be measured on the top center of the package, where most of the heat is dissipated. Figure 113 shows the correct location for measuring the case temperature. The tip of the thermocouple should be secured to the package surface with a small amount of thermally conductive epoxy. It is also recommended to secure a second location along the thermocouple to avoid any movement during testing. If a heatsink is installed while measuring, the thermocouple must be installed into the heatsink via a small hole drilled through the heatsink base (for example, 1/16 of an inch). Secure the thermocouple to the base of the heatsink by filling the small hole with thermal epoxy, allowing the tip of the thermocouple to protrude the epoxy and touch the top of the processor case.

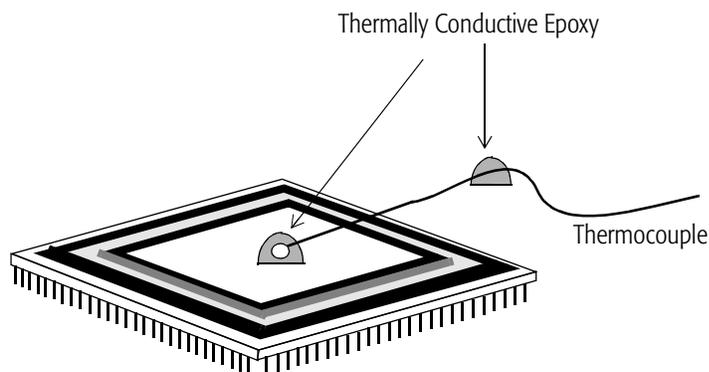


Figure 113. Measuring Case Temperature

17.2 Layout and Airflow Considerations

Voltage Regulator

A voltage regulator is required to support the lower voltage (3.3 V and lower) to the processor. In most applications, the voltage regulator is designed with power transistors. As a result, additional heatsinks are required to dissipate the heat from the power transistors. Figure 114 shows the voltage regulator placed parallel to the processor with the airflow aligned with the devices. With this alignment, the heat generated by the voltage regulator has minimal effect on the processor.

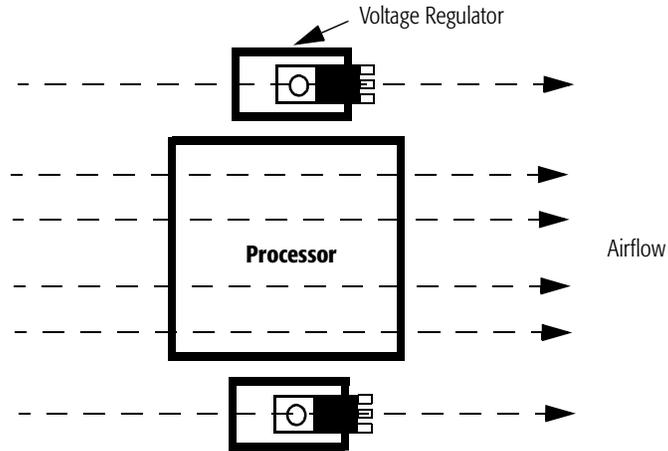


Figure 114. Voltage Regulator Placement

A heatsink and fan combination can deliver much better thermal performance than a heatsink alone. More importantly, with a fan/sink the airflow requirements in a system design are not as critical. A unidirectional heatsink with a fan moves air from the top of the heatsink to the side. In this case, the best location for the voltage regulator is on the side of the processor in the path of the airflow exiting the fan sink (see Figure 115). This location guarantees that the heatsinks on both the processor and the regulator receive adequate air circulation.

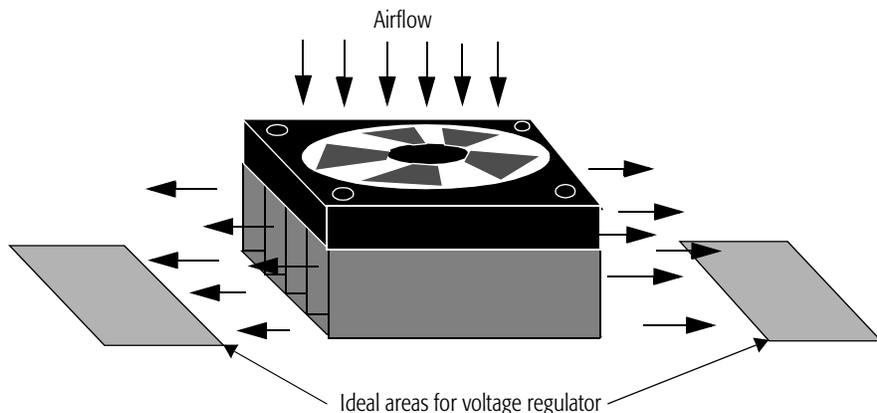


Figure 115. Airflow for a Heatsink with Fan

Airflow Management in a System Design

Complete airflow management in a system is important. In addition to the volume of air, the path of the air is also important. Figure 116 shows the airflow in a dual-fan system. The fan in the front end pulls cool air into the system through intake slots in the chassis. The power supply fan forces the hot air out of the chassis. The thermal performance of the heatsink can be maximized if it is located in the shaded area, where it receives greatest benefit from this air exchange system.

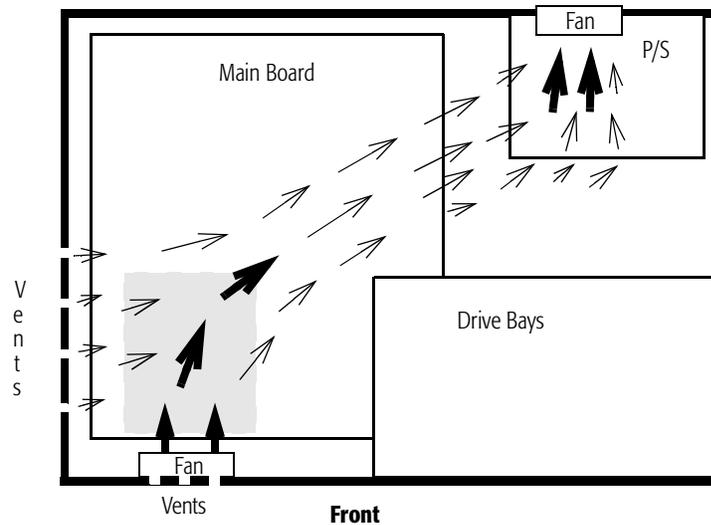


Figure 116. Airflow Path in a Dual-Fan System

Figure 117 shows the airflow management in a system using the ATX form-factor. The orientation of the power supply fan and the motherboard are modified in the ATX platform design. The power supply fan pulls cool air through the chassis and across the processor. The processor is located near the power supply fan, where it can receive adequate airflow without an auxiliary fan. The arrangement significantly improves the airflow across the processor with minimum installation cost.

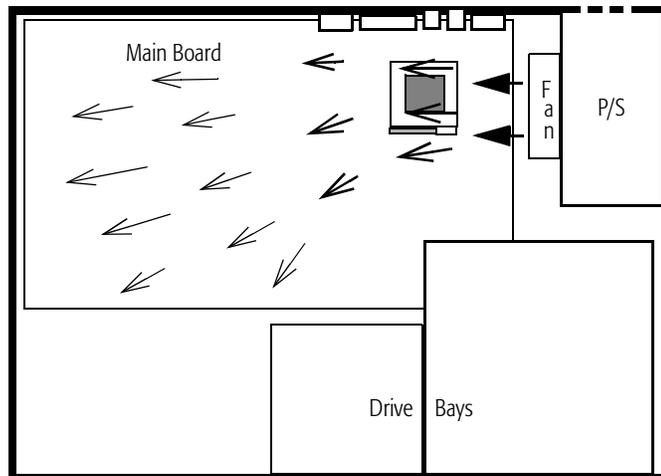


Figure 117. Airflow Path in an ATX Form-Factor System

For more information about thermal design considerations, see the *AMD-K6[®] Processor Thermal Solution Design Application Note*, order# 21085.

18 Pin Description Diagram

- Control/Parity Pins
- Address Pins
- ⊖ V_{ss} Pins
- ⊕ V_{cc2} Pins
- △ V_{cc3} Pins
- Data Pins
- ⊔ Test Pins
- ∅ NC, INC (Internal No Connect) Pins
- ⊗ RSVD (Reserved) Pins
- Chip Positioning Key Pin

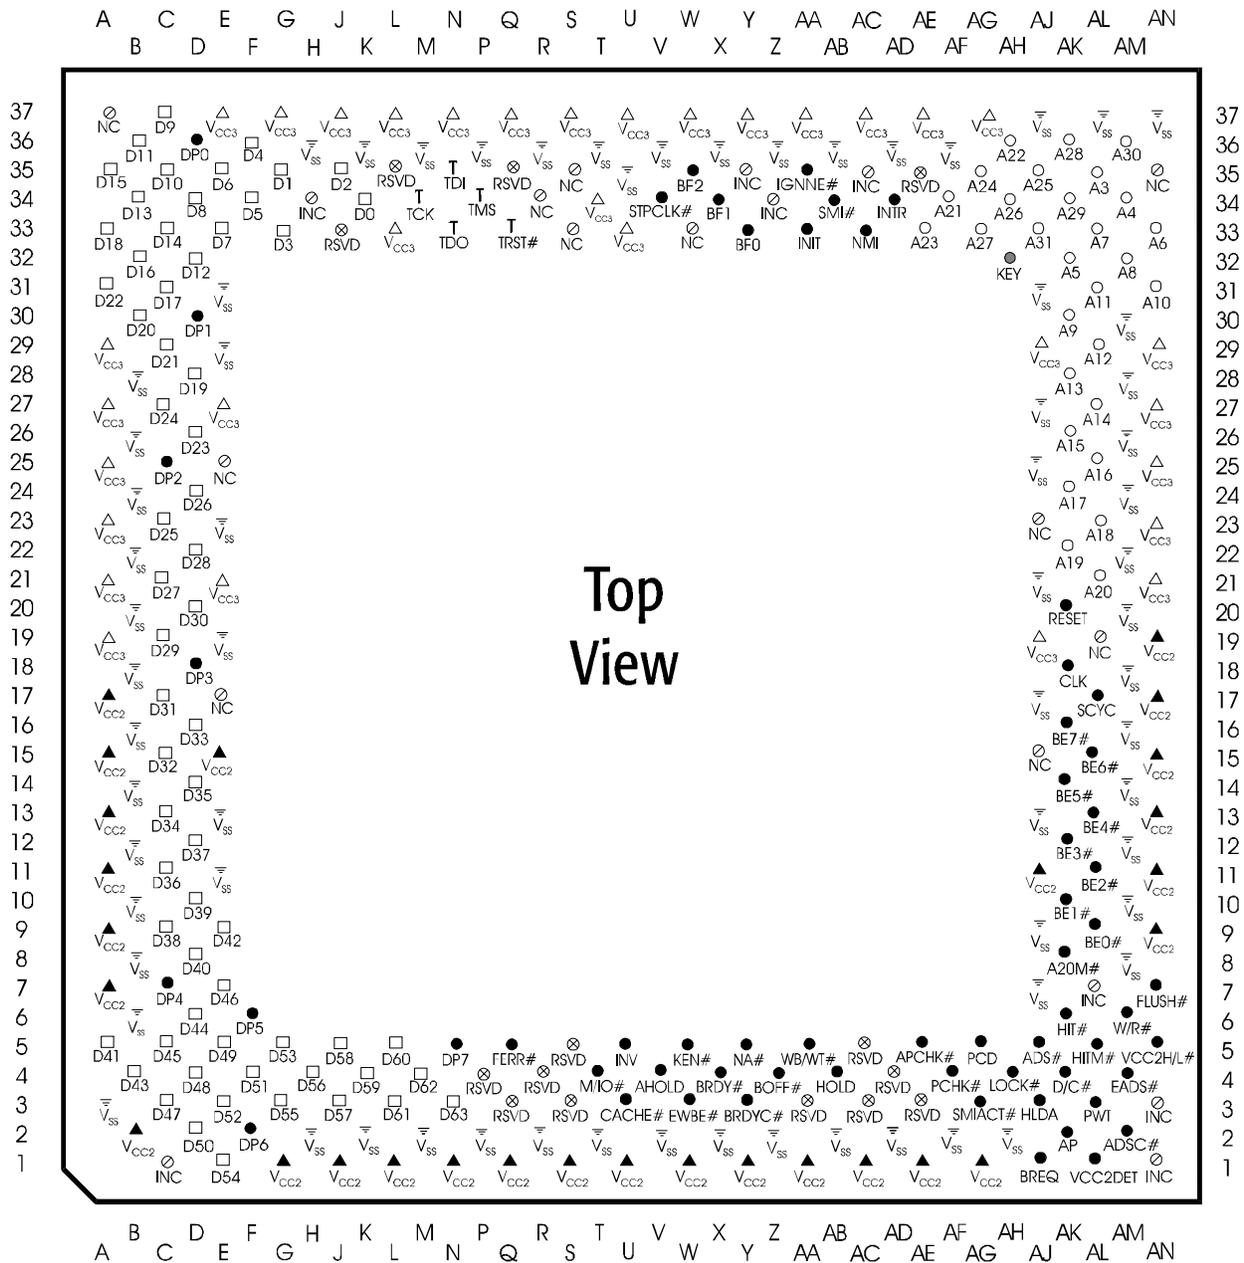


Figure 118. AMD-K6®-III Processor Top-Side View

19 Pin Designations

AMD-K6®-III Processor Functional Grouping

| Address | | Data | | Control | | Test | | NC | V _{cc2} | V _{cc3} | V _{ss} | |
|----------|---------|----------|---------|----------|---------|----------|---------|---------|------------------|------------------|-----------------|-------|
| Pin Name | Pin No. | Pin No. | Pin No. | Pin No. | Pin No. | |
| A3 | AL-35 | D0 | K-34 | A20M# | AK-08 | TCK | M-34 | A-37 | A-07 | A-19 | A-03 | AM-20 |
| A4 | AM-34 | D1 | G-35 | ADS# | AJ-05 | TDI | N-35 | E-17 | A-09 | A-21 | B-06 | AM-22 |
| A5 | AK-32 | D2 | J-35 | ADSC# | AM-02 | TDO | N-33 | E-25 | A-11 | A-23 | B-08 | AM-24 |
| A6 | AN-33 | D3 | G-33 | AHOLD | V-04 | TMS | P-34 | R-34 | A-13 | A-25 | B-10 | AM-26 |
| A7 | AL-33 | D4 | F-36 | APCHK# | AE-05 | TRST# | Q-33 | S-33 | A-15 | A-27 | B-12 | AM-28 |
| A8 | AM-32 | D5 | F-34 | BE0# | AL-09 | | | S-35 | A-17 | A-29 | B-14 | AM-30 |
| A9 | AK-30 | D6 | E-35 | BE1# | AK-10 | | | W-33 | B-02 | E-21 | B-16 | AN-37 |
| A10 | AN-31 | D7 | E-33 | BE2# | AL-11 | | | AJ-15 | E-15 | E-27 | B-18 | |
| A11 | AL-31 | D8 | D-34 | BE3# | AK-12 | | | AJ-23 | G-01 | E-37 | B-20 | |
| A12 | AL-29 | D9 | C-37 | BE4# | AL-13 | | | AL-19 | J-01 | G-37 | B-22 | |
| A13 | AK-28 | D10 | C-35 | BE5# | AK-14 | | | AN-35 | L-01 | J-37 | B-24 | |
| A14 | AL-27 | D11 | B-36 | BE6# | AL-15 | | | | N-01 | L-33 | B-26 | |
| A15 | AK-26 | D12 | D-32 | BE7# | AK-16 | AP | AK-02 | | Q-01 | L-37 | B-28 | |
| A16 | AL-25 | D13 | B-34 | BFO | Y-33 | DP0 | D-36 | | S-01 | N-37 | E-11 | |
| A17 | AK-24 | D14 | C-33 | BF1 | X-34 | DP1 | D-30 | | U-01 | Q-37 | E-13 | |
| A18 | AL-23 | D15 | A-35 | BF2 | W-35 | DP2 | C-25 | | W-01 | S-37 | E-19 | |
| A19 | AK-22 | D16 | B-32 | BOFF# | Z-04 | DP3 | D-18 | | Y-01 | T-34 | E-23 | |
| A20 | AL-21 | D17 | C-31 | BRDY# | X-04 | DP4 | C-07 | | AA-01 | U-33 | E-29 | |
| A21 | AF-34 | D18 | A-33 | BRDYC# | Y-03 | DP5 | F-06 | | AC-01 | U-37 | E-31 | |
| A22 | AH-36 | D19 | D-28 | BREQ | AJ-01 | DP6 | F-02 | | AE-01 | W-37 | H-02 | |
| A23 | AE-33 | D20 | B-30 | CACHE# | U-03 | DP7 | N-05 | | AC-35 | Y-37 | H-36 | |
| A24 | AG-35 | D21 | C-29 | CLK | AK-18 | | | | AL-07 | AA-37 | K-02 | |
| A25 | AJ-35 | D22 | A-31 | D/C# | AK-04 | | | | AN-01 | AN-09 | K-36 | |
| A26 | AH-34 | D23 | D-26 | EADS# | AM-04 | | | | AN-03 | AN-11 | M-02 | |
| A27 | AG-33 | D24 | C-27 | EWBE# | W-03 | | | | AN-13 | AG-37 | M-36 | |
| A28 | AK-36 | D25 | C-23 | FERR# | Q-05 | | | | AN-15 | AJ-19 | P-02 | |
| A29 | AK-34 | D26 | D-24 | FLUSH# | AN-07 | | | | AN-17 | AJ-29 | P-36 | |
| A30 | AM-36 | D27 | C-21 | HIT# | AK-06 | | | | AN-19 | AN-21 | R-02 | |
| A31 | AJ-33 | D28 | D-22 | HITM# | AL-05 | | | | | AN-23 | R-36 | |
| | | D29 | C-19 | HLDA | AJ-03 | | | | J-33 | AN-25 | T-02 | |
| | | D30 | D-20 | HOLD | AB-04 | | | | L-35 | AN-27 | T-36 | |
| | | D31 | C-17 | IGNNE# | AA-35 | | | | P-04 | AN-29 | U-35 | |
| | | D32 | C-15 | INIT | AA-33 | | | | Q-03 | | V-02 | |
| | | D33 | D-16 | INTR | AD-34 | | | | Q-35 | | V-36 | |
| | | D34 | C-13 | INV | U-05 | | | | R-04 | | X-02 | |
| | | D35 | D-14 | KEN# | W-05 | | | | S-03 | | X-36 | |
| | | D36 | C-11 | LOCK# | AH-04 | | | | S-05 | | Z-02 | |
| | | D37 | D-12 | M/IO# | T-04 | | | | AA-03 | | Z-36 | |
| | | D38 | C-09 | NA# | Y-05 | | | | AC-03 | | AB-02 | |
| | | D39 | D-10 | NMI | AC-33 | | | | AC-05 | | AB-36 | |
| | | D40 | D-08 | PCD | AG-05 | | | | AD-04 | | AD-02 | |
| | | D41 | A-05 | PCHK# | AF-04 | | | | AE-03 | | AD-36 | |
| | | D42 | E-09 | PWT | AL-03 | | | | AE-35 | | AF-02 | |
| | | D43 | B-04 | RESET | AK-20 | | | | | | AF-36 | |
| | | D44 | D-06 | SCYC | AL-17 | | | | | | AH-02 | |
| | | D45 | C-05 | SMI# | AB-34 | | | | | | AJ-07 | |
| | | D46 | E-07 | SMIACT# | AG-03 | | | | | | AJ-09 | |
| | | D47 | C-03 | STPCLK# | V-34 | | | | | | AJ-13 | |
| | | D48 | D-04 | VCC2DET | AL-01 | | | | | | AJ-17 | |
| | | D49 | E-05 | VCC2H/L# | AN-05 | | | | | | AJ-21 | |
| | | D50 | D-02 | W/R# | AM-06 | | | | | | AJ-25 | |
| | | D51 | F-04 | WB/WT# | AA-05 | | | | | | AJ-27 | |
| | | D52 | E-03 | | | | | | | | AJ-31 | |
| | | D53 | G-05 | | | | | | | | AJ-37 | |
| | | D54 | E-01 | | | | | | | | AL-37 | |
| | | D55 | G-03 | | | | | | | | AM-08 | |
| | | D56 | H-04 | | | | | | | | AM-10 | |
| | | D57 | J-03 | | | | | | | | AM-12 | |
| | | D58 | J-05 | | | | | | | | AM-14 | |
| | | D59 | K-04 | | | | | | | | AM-16 | |
| | | D60 | L-05 | | | | | | | | AM-18 | |
| | | D61 | L-03 | | | | | | | | | |
| | | D62 | M-04 | | | | | | | | | |
| | | D63 | N-03 | | | | | | | | | |

20 Package Specifications

20.1 321-Pin Staggered CPGA Package Specification

Table 65. 321-Pin Staggered CPGA Package Specification

| Symbol | Millimeters | | | Inches | | |
|--------|-------------|-------|----------|--------|-------|----------|
| | Min | Max | Notes | Min | Max | Notes |
| A | 49.28 | 49.78 | | 1.940 | 1.960 | |
| B | 45.59 | 45.85 | | 1.795 | 1.805 | |
| C | 31.01 | 32.89 | | 1.221 | 1.295 | |
| D | 44.90 | 45.10 | | 1.768 | 1.776 | |
| E | 2.91 | 3.63 | | 0.115 | 0.143 | |
| F | 1.30 | 1.52 | | 0.051 | 0.060 | |
| G | 3.05 | 3.30 | | 0.120 | 0.130 | |
| H | 0.43 | 0.51 | | 0.017 | 0.020 | |
| M | 2.29 | 2.79 | | 0.090 | 0.110 | |
| N | 1.14 | 1.40 | | 0.045 | 0.055 | |
| d | 1.52 | 2.29 | | 0.060 | 0.090 | |
| e | 1.52 | 2.54 | | 0.060 | 0.100 | |
| f | — | 0.13 | Flatness | — | 0.005 | Flatness |

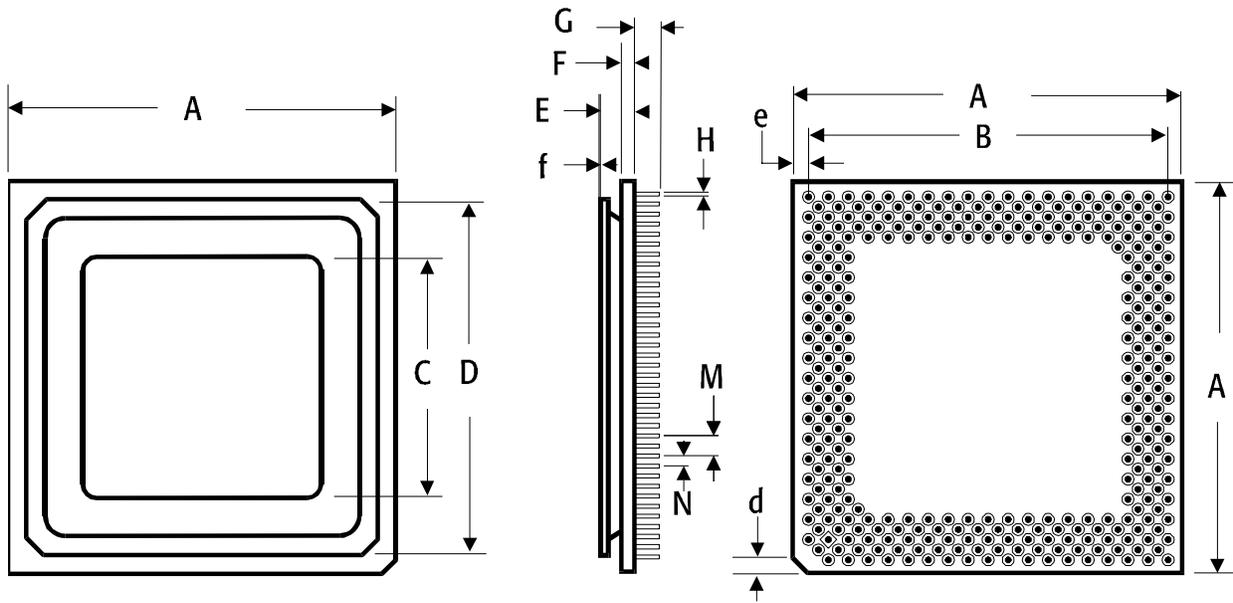


Figure 120. 321-Pin Staggered CPGA Package Specification

21 Ordering Information

Standard AMD-K6[®]-III Processor Model 9 Products

AMD standard products are available in several operating ranges. The ordering part number (OPN) is formed by a combination of the elements below.

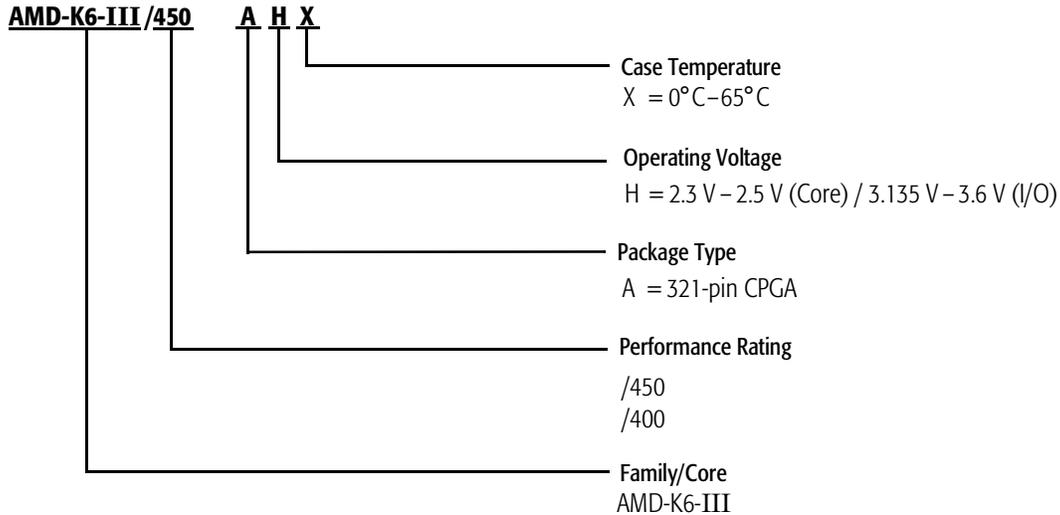


Table 66. Valid Ordering Part Number Combinations

| OPN | Package Type | Operating Voltage | Case Temperature |
|--|--------------|---------------------------------------|------------------|
| AMD-K6-III/450AHX | 321-pin CPGA | 2.3V–2.5V (Core) 3.135V–3.6V (I/O) | 0°C–65°C |
| AMD-K6-III/400AHX | 321-pin CPGA | 2.3V–2.5V (Core) 3.135V–3.6V (I/O) | 0°C–65°C |
| Note: <i>This table lists configurations planned to be supported in volume for this device. Consult the local AMD sales office to confirm availability of specific valid combinations and to check on newly-released combinations.</i> | | | |

Index

Numerics

| | |
|---|--|
| 100-MHz Bus | 1, 3 |
| clock switching characteristics | 268 |
| input setup and hold timings | 272 |
| output delay timings | 270 |
| 321-Pin Staggered CPGA Package | 1 |
| specification | 297 |
| 3DNow! Technology | 1–3, 7, 10, 13–17, 21, 54, 116, 173, 177, 194 |
| execution unit | 16–17 |
| instruction compatibility, floating-point and | 211 |
| instructions | 81, 212 |
| register operation | 8 |
| registers | 29 |
| technology | 1, 9 |
| 66-MHz Bus | |
| clock switching characteristics | 268 |
| input setup and hold timings | 276 |
| output delay timings | 274 |

A

| | |
|--|-------------------------------------|
| A[31:3] | 86 |
| A20M# | 85, 214 |
| A20M# Masking of Cache Accesses | 202 |
| Absolute Ratings | 259 |
| Accelerated Graphic Port (AGP) | 1, 3 |
| Acknowledge, Interrupt | 162 |
| Address | |
| bus | 86–91, 100, 127, 148, 152, 154, 197 |
| hold | 88 |
| parity | 89 |
| parity check | 90 |
| stack, return | 18 |
| ADS# | 87 |
| ADSC# | 87 |
| AGP | 1, 3 |
| AHOLD | 88, 250 |
| -initiated inquire hit to modified line | 152 |
| -initiated inquire hit to shared or exclusive line | 150 |
| -initiated inquire miss | 148 |
| restriction | 154 |
| Airflow | |
| consideration, layout and | 288 |
| management | 290 |
| Allocate, Write | 189 |
| AP | 89 |
| APCHK# | 90 |
| Architecture | 2 |
| internal | 5–19 |
| Asserted | 83 |

B

| | |
|---------------------------------|--|
| Backoff | 93 |
| Base Address, SMM | 219 |
| BE[7:0]# | 91 |
| BF[2:0] | 92, 173, 253 |
| BIST | 223 |
| Bits, Predecode | 10, 182 |
| Block Diagram | 6 |
| BOFF# | 93, 156 |
| locked operation with | 160 |
| Boundary Scan | |
| register (BSR) | 227 |
| test access port (TAP) | 225 |
| BR | 231 |
| Branch | |
| execution unit | 19 |
| history table | 18 |
| logic | 8 |
| prediction | 1–2, 9, 19 |
| prediction logic | 17–18 |
| target cache | 18 |
| BRDY# | 94 |
| BRDYC# | 95, 174 |
| BREQ | 95 |
| BSR | 227 |
| Buffer Characteristics, I/O | 263 |
| Buffer Model, I/O | 263 |
| Built-In Self-Test | 223 |
| Burst | |
| reads | 136 |
| reads, pipelined | 136 |
| ready | 94 |
| ready copy | 95, 174 |
| writeback | 138 |
| Bus | |
| 100-MHz | 1, 3 |
| address | 88–91, 100, 127, 148, 152, 154, 197 |
| arbitration cycles, inquire and | 142 |
| backoff | 156 |
| cycles | 127 |
| cycles, special | 164 |
| data | 88, 91, 94, 98–99, 114, 117, 130–132, 148, 154, 158 |
| enables | 91 |
| frequency | 92 |
| hold request | 105 |
| lock | 110 |
| request | 95 |
| state machine diagram | 129 |
| Bus States | |
| address | 130 |
| data | 130 |
| data-NA# requested | 130 |
| idle | 130 |
| pipeline address | 130 |
| pipeline data | 131 |
| transition | 131 |
| BYPASS Instruction | 232 |
| Bypass Register | 231 |

C

| | |
|--|--|
| Cache | 9 |
| branch target | 18 |
| coherency | 197 |
| disabling | 185 |
| enable | 109 |
| flush | 103 |
| L1 | 1, 9–10, 38, 138, 142, 148, 152, 164, 179, 188–189, 192, 197, 202, 223 |
| L2 | 1, 3, 9–10, 39, 42–43, 138, 142, 148, 152, 164, 179, 188, 237–240 |
| L3 | 1, 3, 235–236 |
| MESI states in the data | 181 |
| operation | 182 |
| organization | 179, 203 |
| states | 194 |
| trilevel design | 1 |
| writeback | 6, 9 |
| CACHE# | 96, 184 |
| Cacheable | |
| access | 96 |
| page, write to a | 190 |
| Cache-Line | |
| fills | 186–187, 237 |
| replacement | 188, 199 |
| Capture-DR state | 234 |
| Capture-IR state | 234 |
| Case Temperature | 288 |
| Centralized Scheduler | 14 |
| Ceramic Pin Grid Array (CPGA) | 1–2, 297 |
| Characteristics | |
| I/O buffer | 263 |
| I/O Buffer AC and DC | 265 |
| CLK | 96 |
| Clock | 96 |
| control | 249 |
| Clock States | |
| halt | 250 |
| stop clock | 167, 252–253 |
| stop grant | 167, 251 |
| stop grant inquire | 252 |
| Coherency States, Writethrough versus Writeback | 202 |
| Coherency, Cache | 197 |
| Compatibility, Floating-Point, MMX, and 3DNow! Instructions | 211 |
| Configuration and Initialization, Power-on | 173 |
| Connection Requirements, Pin | 257 |
| Connections, Power | 255 |
| Control | |
| register | 32 |
| unit, scheduler/instruction | 8 |
| Counter, Time Stamp | 38 |
| CPGA | 1–2, 297 |
| Cycle | |
| hold and hold acknowledge | 142 |
| shutdown | 166 |
| Cycles | |
| bus | 127 |
| inquire | 85–90, 100, 104–105, 118, 123, 138, 142, 144, 146, 148, 150–152, 154, 156, 160, 197, 202, 235, 249–252 |
| inquire and bus arbitration | 142 |
| interrupt acknowledge | 86, 89, 91, 97, 112, 122 |
| locked | 158 |

| | |
|-----------------|---|
| pipelined | 10, 87 |
| pipelined write | 98 |
| special bus | 164 |
| writeback | 85, 87–88, 101, 104, 123, 138, 146, 150, 152, 154, 156, 160, 184, 236, 252 |

D

| | |
|--------------------------------|--|
| D/C# | 97 |
| D[63:0] | 98 |
| Data | |
| bus | 88, 91, 94, 98–99, 114, 117, 130–132, 148, 154, 158 |
| cache, MESI states in the | 181 |
| parity | 99 |
| Data Types | |
| 3DNow! | 30 |
| floating-point register | 28 |
| integer | 23 |
| MMX | 29 |
| Data/Code | 97 |
| DC Characteristics | 260 |
| Debug | 241 |
| exceptions | 246 |
| Debug Registers | 34, 241 |
| DR3–DR0 | 244 |
| DR5–DR4 | 244 |
| DR6 | 245 |
| DR7 | 245 |
| Decode, Instruction | 12 |
| Decoders | 7 |
| Decoupling Recommendations | 256 |
| Descriptions, Signal | 83 |
| Design, Thermal | 285 |
| Designations, Pin | 295 |
| Device Identification Register | 230 |
| Diagram, Pin Description | 293 |
| Diagrams, Timing | 127 |
| DIR | 230 |
| Disabling, Cache | 185 |
| Dissipation, Power | 261 |
| DP[7:0] | 99 |
| DR3–DR0 | 244 |
| DR5–DR4 | 244 |
| DR6 | 245 |
| DR7 | 245 |
| Drive Strength, Selectable | 263 |
| Driven | 83 |

E

| | |
|-----------------------|---|
| EADS# | 100 |
| EFER | 37, 176, 203 |
| EFLAGS Register | 31 |
| Electrical Data | 259 |
| Environment, Software | 21 |
| EWBE Control (EWBEC) | 203 |
| EWBE# | 101, 203, 250 |
| Exception | 89–90, 99, 102, 114, 166, 211, 222, 245–247 |
| flags | 26–27 |
| floating-point | 102, 106, 209–211 |
| handler | 241 |
| machine check | 37 |

| | | | |
|---|-------------------------|--|--|
| Exceptions | | HITM# | 104 |
| and interrupts | 53 | HLDA | 105 |
| debug | 246 | HOLD | 105 |
| floating-point | 209 | -initiated inquire hit to modified line | 146 |
| handling floating-point | 209 | -initiated inquire hit to shared or exclusive line | 144 |
| interrupts, and debug in SMM | 222 | Hold | |
| MMX | 211 | acknowledge | 105, 142–144 |
| Execution Unit | | and hold acknowledge cycle | 142 |
| 3DNow! | 7, 16–17 | timing | 267, 282 |
| branch | 7, 14, 19 | | |
| floating-point | 2, 7, 14, 209 | I | |
| load | 7, 14 | I/O | |
| multimedia | 2, 7, 14, 16–17, 211 | buffer AC and DC characteristics | 265 |
| register X | 7, 14, 16–17 | buffer characteristics | 263 |
| register Y | 7, 14, 16–17 | buffer model | 263 |
| store | 7, 14 | misaligned read and write | 141 |
| Execution Units | 1, 6–8, 15 | model application note | 264 |
| External | | read and write | 140 |
| address strobe | 100 | trap dword | 220 |
| write buffer empty | 101 | trap restart slot | 221 |
| EXTTEST Instruction | 231 | IBIS | 263 |
| | | IDCODE Instruction | 232 |
| F | | IEEE 1149.1 | 1, 225 |
| FEERR# | 102, 210–211 | IEEE 754 | 1, 25, 209 |
| Fetch, Instruction | 11 | IEEE 854 | 209 |
| Float Conditions | 122, 125 | IGNNE# | 106, 210–211 |
| Floated | 83 | Ignore Numeric Exception | 106 |
| Floating-Point | | INIT | 107, 250 |
| and MMX/3DNow! instruction compatibility | 211 | -initiated transition from protected mode to | |
| and multimedia execution units | 209 | real mode | 170 |
| error | 102 | state of processor after | 177 |
| execution unit | 209 | Initialization | 107 |
| handling exceptions | 209 | power-on configuration and | 173 |
| register data types | 28 | Input Setup and Hold Timings for | |
| registers | 25 | 100-MHz bus operation | 272 |
| FLUSH# | 103, 173, 198, 224, 250 | 66-MHz bus operation | 276 |
| Frequency | 253, 268, 280 | Inquire | 145, 147, 149, 249 |
| operating | 92, 96, 173 | and bus arbitration cycles | 142 |
| Frequency Multiplier | 96 | cycle hit | 104 |
| Functional Unit | 16 | cycle hit to modified line | 104 |
| multimedia | 16 | cycles | 85–90, 100, 104–105, 118, 123, 138, 142, |
| | | 144, 146, 148, 150–152, 154, 156, | |
| | | 160, 197, 202, 235, 249–252 | |
| | | miss, AHOLD-initiated | 148 |
| G | | Instruction | |
| Gate Descriptor | 50, 53 | decode | 12 |
| General-Purpose Registers | 22 | fetch | 11 |
| Global EWBE Disable (GEWBED) | 203 | pointer | 25 |
| Grounding, Power and | 255 | prefetch | 9 |
| | | Instructions | 54 |
| | | 3DNow! | 81, 211 |
| | | EMMS | 14 |
| | | FEMMS | 14 |
| | | INVD | 199 |
| | | MMX | 77, 211 |
| | | PREFETCH | 10, 194 |
| | | TAP | 231 |
| | | WBINVD | 199 |
| | | Integer Data Types | 23 |
| | | Internal | |
| | | architecture | 5–19 |
| | | snoothing | 197 |
| H | | | |
| Halt State | 250 | | |
| Handling Floating-Point Exceptions | 209 | | |
| Heat Dissipation Path | 287 | | |
| HIGHZ Instruction | 232 | | |
| History Table, Branch | 18 | | |
| Hit to | | | |
| modified line | 104 | | |
| modified line, AHOLD-initiated inquire | 152 | | |
| modified line, HOLD-initiated inquire | 146 | | |
| shared or exclusive line, AHOLD-initiated inquire | 150 | | |
| shared or exclusive line, HOLD-initiated inquire | 144 | | |
| HIT# | 104 | | |

Interrupt 108, 117, 162, 166–167, 170, 177,
 209–211, 214, 222, 246, 252
 acknowledge 86, 94, 97, 108, 110, 114, 158, 162
 acknowledge cycles 86, 89, 91, 97, 112, 122
 descriptor table register 45
 flag 108, 117
 flags 31
 gate 52
 redirection bitmap 46
 request 108
 service routine 108, 112, 210, 213
 system management 213
 type of 53

Interrupts

01h 247
 03h 247
 10h 209
 exceptions and 53
 INTR 108
 IRQ13 210
 NMI 112

INTR 108, 250
 INV 108
 Invalidation Request 108
 INVD Instruction 199

K

KEN# 109

L

L1 Cache 1, 9–10, 38, 138, 142, 148, 152,
 164, 179, 188–189, 192, 197, 202

L2 Cache 1, 3–4, 9–10, 39, 42–43, 103–104, 123, 126,
 138, 142, 148, 152, 164, 179–183, 185–189,
 192, 194–195, 197–202, 223, 235, 237–240

L2AAR 37, 42, 186, 223, 237–240

L3 Cache 1, 3, 235–236

Limit, Write Allocate 190

Line Fills, Cache- 186–187, 237

LOCK# 110

Locked

cycles 158
 operation with BOFF# intervention 160
 operation, basic 158

Logic

branch 8
 branch-prediction 17–18
 external support of floating-point exceptions 209

M

MIO# 111

Machine Check Exception 37

Maskable Interrupt 108

MCAR 37, 176

MCTR 37–38, 176

Memory

or I/O 111
 read and write, misaligned single-transfer 134
 read and write, single-transfer 132
 reads and writes 132
 type range register (MTRR) 41, 205

MESI 1, 9, 142, 146, 181, 202
 bit 10, 181, 183
 states in the data cache 181

Microarchitecture 2
 enhanced RISC86 6
 overview 5

Misaligned

I/O read and write 141
 single-transfer memory read and write 134

MMX Technology 13–17, 21, 54, 116, 173, 177
 exceptions 211
 instruction compatibility, floating-point and 211
 instructions 77, 212
 register operation 8
 registers 29

Mode, Tri-State Test 224

Model-Specific Registers (MSR) 37

MSR 37

MTRR 41, 205

Multimedia

execution unit 16–17, 211
 functional unit 16

N

NA# 112

Negated 83

Next Address 112

NMI 112, 250

No-Connect Pins 116, 257

Non-Maskable Interrupt 112

Non-Pipelined 133

O

Operating Ranges 259

Operation, Cache 182

Organization, Cache 179, 203

Output Delay Timings

for 100-MHz bus operation 270
 for 66-MHz bus operation 274

Output Signals 174

P

Package

specifications 297
 thermal specifications 285

Page

cache disable 113
 directory entry (PDE) 48–49, 183
 table entry (PTE) 48, 50, 183
 writethrough 115

Paging 47

Parity 84, 89, 91, 99, 114, 132
 bit 89, 99, 114
 check 89–90, 99, 114
 error 90, 114, 148, 226
 flags 31

PCD 113, 183, 192

PCHK# 114

PFIR 41–42, 176

| | |
|---|---|
| Pin | |
| connection requirements | 257 |
| description diagram | 293 |
| designations | 295 |
| Pipeline | 18, 130–131, 136 |
| control | 16 |
| register X and Y | 16 |
| six-stage | 6, 8 |
| Pipelined | 9, 16, 112, 131, 136–137, 154, 179, 194 |
| burst reads | 136 |
| cycles | 10, 87, 98 |
| design | 15 |
| Pointer, Instruction | 25 |
| Power | |
| and grounding | 255 |
| connections | 255 |
| dissipation | 261 |
| Power-on Configuration and Initialization | 173 |
| Predecode Bits | 9–10, 182 |
| Prefetching | 10, 194 |
| PSOR | 41, 176 |
| PWT Instruction | 115 |
| R | |
| Ranges, Operating | 259 |
| Ratings, Absolute | 259 |
| Read and Write | |
| basic I/O | 140 |
| misaligned I/O | 141 |
| Reads, Burst Reads and Pipelined Burst | 136 |
| Register | |
| boundary scan | 227 |
| bypass (BR) | 231 |
| control | 32 |
| data Types, floating-point | 28 |
| debug | 34, 241 |
| floating-point | 25 |
| general-purpose | 22 |
| Register X | 16 |
| execution unit | 17 |
| Register X and Y | |
| pipelines | 16 |
| Register Y | 16 |
| execution unit | 17 |
| Registers | 8, 21, 174, 211 |
| 3DNow! | 21, 29 |
| descriptors and gates | 50 |
| device identification (DIR) | 230 |
| DR3–DR0 | 244 |
| DR5–DR4 | 244 |
| DR6 | 245 |
| DR7 | 245 |
| EFLAGS | 31 |
| IR | 226 |
| MCAR | 37 |
| MMX | 21, 29 |
| PFIR | 42 |
| PSOR | 41 |
| segment | 24 |
| TAP | 226 |
| TR12 | 38 |
| UWCCR | 41 |
| X and Y | 14–16 |
| Regulator, Voltage | 288 |
| Replacement, Cache-Line | 187, 199 |
| Requirements, Pin Connection | 257 |
| Reserved | 116 |
| RESET | 116, 174, 250 |
| and Test Signal Timing | 278 |
| signals sampled during | 173 |
| state of processor after | 174 |
| Return Address Stack | 18 |
| Revision Identifier, SMM | 218 |
| RISC86 Microarchitecture | 6 |
| RSM Instruction | 219, 222 |
| RSVD | 116 |
| S | |
| SAMPLE/PRELOAD Instruction | 232 |
| Sampled | 83 |
| Scheduler | |
| centralized | 14 |
| instruction control unit | 8 |
| SCYC | 117 |
| Sector, Write to a | 190, 194 |
| Segment | |
| descriptor | 24, 50–52 |
| registers | 24 |
| task state | 46 |
| usage | 24 |
| Selectable Drive Strength | 263 |
| Shift-DR state | 234 |
| Shift-IR state | 234 |
| Shutdown Cycle | 166 |
| Signal | |
| descriptions | 83 |
| switching characteristics | 267 |
| terminology | 83 |
| timing, RESET and test | 278 |
| Signals | |
| A[31:3] | 86 |
| A20M# | 85, 214 |
| ADS# | 87 |
| ADSC# | 87 |
| AHOLD | 88, 250 |
| AP | 89 |
| APCHK# | 90 |
| BE[7:0]# | 91 |
| BF[2:0] | 92, 253 |
| BOFF# | 93, 156 |
| BRDY# | 94 |
| BRDYC# | 95 |
| BREQ | 95 |
| CACHE# | 96, 184 |
| CLK | 96 |
| D/C# | 97 |
| D[63:0] | 98 |
| DP[7:0] | 99 |
| EADS# | 100 |
| EWBE# | 101, 203, 250 |
| FERR# | 102, 211 |
| FLUSH# | 103, 173, 198, 224, 250 |
| HIT# | 104 |
| HITM# | 104 |
| HLDA | 105 |
| HOLD | 105 |
| IGNNE# | 106, 211 |
| INIT | 107, 250 |

| | |
|--|--|
| INTR | 108, 250 |
| INV | 108 |
| KEN# | 109 |
| LOCK# | 110 |
| M/IO# | 111 |
| NA# | 112 |
| NMI | 112, 250 |
| output | 174 |
| PCD | 113 |
| PCHK# | 114 |
| PWT | 115 |
| RESET | 116, 250 |
| RSVD | 116 |
| sampled during RESET | 173 |
| SCYC | 117 |
| SMI# | 117, 213, 250 |
| SMIACT# | 118, 213 |
| STPCLK# | 119, 251 |
| TAP | 225 |
| TCK | 119 |
| TDI | 120 |
| TDO | 120 |
| TMS | 120 |
| TRST# | 121 |
| VCC2DET | 121 |
| VCC2H/L# | 121 |
| W/R# | 122 |
| WB/WT# | 123 |
| SIMD | 2, 9 |
| Single Instruction Multiple Data (SIMD) | 2, 9 |
| Single-Transfer Memory Read and Write | 132 |
| SMI# | 117, 213, 250 |
| SMIACT# | 118, 213 |
| SMM | 213 |
| base address | 219 |
| default register values | 213 |
| halt restart slot | 219 |
| I/O trap DWORD | 220 |
| I/O trap restart slot | 221 |
| operating mode | 213 |
| revision identifier | 218 |
| state-save area | 216 |
| Snoop | 118, 123, 138, 198, 201 |
| Snooping | |
| internal | 197 |
| Software Environment | 21 |
| Special | |
| bus cycle | 94, 119, 164–167, 220, 251 |
| cycle | 101, 103, 119, 126, 138, 164, 166–167, 186, 250–251 |
| Specifications | |
| package | 297 |
| package thermal | 285 |
| Speculative EWBE Disable (SEWBED) | 204 |
| Split Cycle | 117 |
| Stack, Return Address | 18 |
| State Machine Diagram, Bus | 129 |
| State of Processor | |
| after INIT | 177 |
| after RESET | 174 |
| States, Cache | 194 |
| State-Save Area, SMM | 216 |
| Stop | |
| clock | 119 |
| clock state | 167, 252–253 |
| grant inquire state | 249–252 |
| grant state | 167, 251–252 |
| STPCLK# | 119, 251 |
| Super7 Platform | 1, 3–4 |
| initiative | 3 |
| Switching Characteristics | 267 |
| 100-MHz bus operation | 268 |
| 66-MHz bus operation | 268 |
| input setup and hold timings for 100-MHz bus | 272 |
| input setup and hold timings for 66-MHz bus | 276 |
| output delay timings for 100-MHz bus | 270 |
| output delay timings for 66-MHz bus | 274 |
| signal | 267 |
| valid delay, float, setup, and hold timings | 269 |
| SYSCALL | 71 |
| SYSCALL/SYSRET Target Address Register (STAR) | 37, 40, 176 |
| SYSRET | 71 |
| System | |
| design, airflow management in a | 290 |
| management interrupt | 117 |
| management interrupt active | 118 |
| management mode (SMM) | 213 |
| T | |
| Table, Branch History | 18 |
| TAP | 225 |
| TAP Controller States | |
| capture-DR | 234 |
| capture-IR | 234 |
| shift-DR | 234 |
| shift-IR | 234 |
| state machine | 232 |
| test-logic-reset | 234 |
| update-DR | 234 |
| update-IR | 234 |
| TAP Instructions | 231 |
| BYPASS | 232 |
| EXTEST | 231 |
| HIGHZ | 232 |
| IDCODE | 232 |
| SAMPLE/PRELOAD | 232 |
| TAP Registers | 226 |
| instruction register (IR) | 226 |
| TAP Signals | 225 |
| Target Cache, Branch | 18 |
| Task State Segment | 46 |
| TCK | 119 |
| TDI | 120 |
| TDO | 120 |
| Temperature | 259, 285–286 |
| case | 288 |
| Terminology, Signals | 83 |
| Test | |
| access port, boundary-scan | 225 |
| and debug | 223 |
| clock | 119 |
| data input | 120 |
| data output | 120 |
| -logic-reset state | 234 |
| mode select | 120 |
| mode, tri-state | 224 |
| register 12 (TR12) | 38 |
| reset | 121 |
| Thermal | 261, 286, 289–290 |
| design | 285 |
| heat dissipation path | 287 |
| layout and airflow consideration | 288 |

| | |
|--|---------------------------|
| measuring case temperature | 288 |
| package specifications | 285 |
| Time Stamp Counter | 38 |
| Timing Diagram | |
| test signal | 284 |
| Timing Diagrams | 127, 133–171 |
| TLB | 180 |
| TMS | 120 |
| TR12 | 37–38, 176, 184, 192, 235 |
| Transition from Protected Mode to Real Mode, | |
| INIT-Initiated | 170 |
| Translation Lookaside Buffer (TLB) | 179 |
| Trap Dword, I/O | 220 |
| TriLevel Cache | 1 |
| Tri-State Test Mode | 224 |
| TRST# | 121 |
| TSC | 37–38, 176, 250–251 |
| TSS | 46, 52–53, 217, 245 |

U

| | |
|------------------------------|-------------------|
| UC | 41 |
| Uncacheable Memory | 41, 204–205 |
| UWCCR | 41, 174, 176, 205 |

V

| | |
|---------------------|----------------------------------|
| VCC2DET | 121 |
| VCC2H/L# | 121 |
| Voltage | 121, 128, 255, 259–260, 263, 267 |
| ranges | 263 |
| regulator | 288–289 |

W

| | |
|--|--|
| W/R# | 122 |
| WB/WT# | 123 |
| WBINVD Instruction | 199 |
| WC | 41 |
| WHCR | 37, 40, 176, 193 |
| Write | |
| to a cacheable page | 190 |
| to a sector | 190, 194 |
| Write Allocate | 182, 189, 192–193, 195 |
| limit | 190 |
| logic mechanisms and conditions | 192 |
| Write Merge Buffer | 203 |
| Write/Read | 122 |
| Writeback | 96, 98–99, 109, 115, 118, 123, 126, |
| | 138–139, 164, 179, 202, 254 |
| burst | 138 |
| cache | 6, 9 |
| cycles | 85, 87–88, 101, 104, 123, 138, 146, 150, |
| | 152, 154, 156, 160, 184, 236, 252 |
| or writethrough | 123 |
| Write-combining Memory | 41, 204–205 |
| Writethrough versus Writeback Coherency States | 202 |

