
Macintosh Portable Internal 40SC Hard Disk



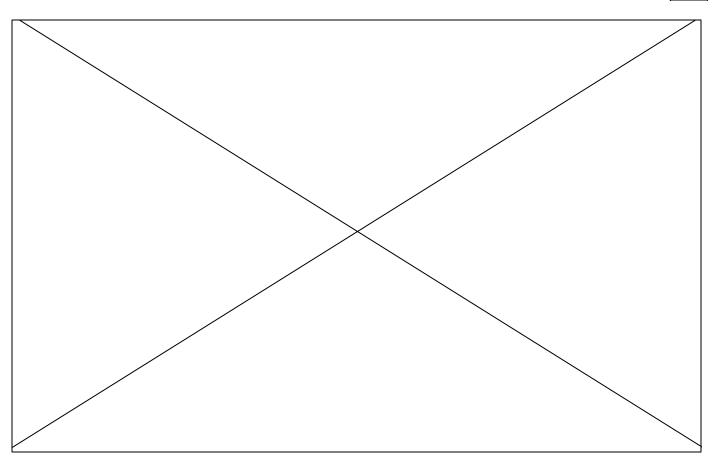

Overview

The Macintosh® Portable Internal 40SCHardDiskprovidesfast, convenientaccesstohigh-performancestorageandlarge-capacity applications. Only one inch high andweighing 1.1 pounds, the MacintoshInternal40SCHard Diskhasbeendesignedespecially foruse with the Apple® Macintosh Portablepersonal computer. It drawslittlepowerfromyour batteries, and virtually eliminates diskswappingbecauseitcan accommodatemultipleapplications, complex documents, and largedatabasesinoneconvenient location.

Features

Benefits

- 40 megabytes of internal disk storage · Putslargedocumentsanddozensof applications at your fingertips.
 - Offers50timesthecapacityofan800K
 - Virtuallyeliminatesdisksswapping.
 - Isconvenientlyportable; the disk fits inside the computer.

Rapiddataaccessing

Accesses data as quickly as most desktop disk drives of the same size.

Power-efficient design

- Extends the life of your portable battery.
- Letsyouuseyourcomputerlongerbefore recharging.

Ruggeddesign

- Resistsshockandimpact.
- Protectsyourdata.
- Industry-standardSmallComputerSystem Interface(SCSI)
- Transmitsdatafasterthanaserialinterface. atupto 1.25 megabytes per second.
- Letsyouexpandyoursystemwithuptosix additional SCSI harddisks, tape backup drives, orotherSCSIdevices.



Macintosh Portable Internal 40SC Hard Disk

| System Requirements | TouseaMacintoshPortable Internal 40SC Hard Disk, you will needaMacintoshPortable | personalcomputerandSystem Software Version 6.0.4 (or later). | |
|--------------------------|---|--|--|
| Technical Specifications | Capacity Datacapacity: 40megabytes(formatted) Datasurfaces:2 Heads/surface:1 Blocksize:512bytes Totaldiskblocks:82,080 Blocks/track:40 Characteristics Averageseektime:25 milliseconds Rotationalspeed:3,557rpm Startuptime:20seconds (maximum) Typicalstartuptime (from sleep):6seconds Spin-downtime:10seconds (maximum) | Typicalspin-downtime:5 seconds Automatically retracks to the inner stop (nondata area) upon power down to protect data area during travel and startup Interface Connects directly to the Macintosh Portable via the SCSI34-pin connector (inside the case) Electrical requirements (system) Line voltage: 70 to 270 volts AC Frequency: 40 to 70 hertz Maximum power: 15 watts | Environmental requirements (system) Operating temperature: 50° to 104° F (10° to 40° C) Storage temperature: -40° to 140° F (-25° to 60° C) (for a period not to exceed three days; storage for longer periods must be within operating temperature range) Relative humidity: 5% to 95% noncondensing Operating altitude: 0 to 10,000 ft. (0 to 3,048 m) Size and weight Height: 1 in. (2.5 cm) Depth: 5.75 in. (14.38 cm) Width: 4 in. (10.0 cm) Weight: 1.1 lbs. (0.5 kg) |
| Ordering Information | MacintoshPortable Internal 40SC Hard Disk* | OrderNo.M0268 | Withyourorder, you'll receive: Macintosh Portable Internal 40SC Hard Disk Limited warranty statement Customer referral sheet |
| | *Requires installation by an authorized Apple dealer. | | |

September 1989. Product specifications are subject to change without notice. Printed in the $U.S.A.\ MO344 LL/A$