



AppleColorRGBMonitor

Product Details

RGBVideo

The AppleColorRGBMonitor uses the RGB (red-green-blue) color standard, instead of the composite standard used in colortelevision sets and most computer monitors.

Composite color combines all the video information coming from the computer. By contrast, the RGB standard uses separate signals for the three primary colors used in color video, so it can convey more information and produce higher-resolution images on the screen.

Additionally, the AppleColorRGBMonitor is an analog RGB device, so it provides a much wider range of colors than is possible with digital (TTL) RGB displays.

System Requirements

To use the AppleColorRGB Monitor, you'll need an Apple IIgs personal computer.

Technical Specifications

Picture tube

- 12-inch diagonal (11.5-inch viewable area)
- High-contrast black matrix

Display capabilities

- 640 dots horizontally by 200 dots vertically (when used with the Apple IIgs)

Dot pitch

- 0.37-millimeter tri-dot pattern

Active display area

- 200 millimeters horizontal by 150 millimeters vertical (remainder of display area is used for border)

Interface

- 15-pin D-style connector
- Direct connection to Apple IIgs via supplied cable; no adapter required

Input synchronization signal

- Composite vertical (field) and horizontal (line) pulses negative going, 3.0 volts (minimum) peak-to-peak into a 2,200-ohm termination

Input video signal

- Composite video signal, 1.0 (± 0.1) volt peak-to-peak negative, into 75-ohm termination

Video bandwidth

- Flat within 1.5 decibels to 6.5 megahertz
- Less than 3 decibels down at 8 megahertz

Scan rates

- 15.7 kilohertz horizontal
- 60 hertz vertical

Text display mode

- Up to 80 characters by 25 lines

Controls

- Slide
- Power on/off
- Contrast

-Brightness

- Rear
- Horizontal hold
- Vertical hold
- Height

Electrical requirements

- Line voltage: 108 to 132 volts AC
- Frequency: 50 to 60 hertz
- Power consumption
- Typical: less than 65 watts
- Maximum: 90 watts

Environmental requirements

- Operating temperature: 32° to 122° F (0° to 50° C)
- Maximum humidity: 90%
- Maximum altitude: 10,000 ft. (3,048 m)

Size and weight

- Height: 11 in. (27.9 cm)
- Width: 13.5 in. (34.3 cm)
- Depth: 16 in. (40.6 cm)
- Weight: 27.6 lb. (12.5 kg)

Ordering Information


AppleColorRGBMonitor

Order No. A2M6014

With your order, you'll receive the following:

- AppleColorRGBMonitor
- Owner's guide
- Videocable
- Limited warranty statement

AppleColorRGBMonitorOverview

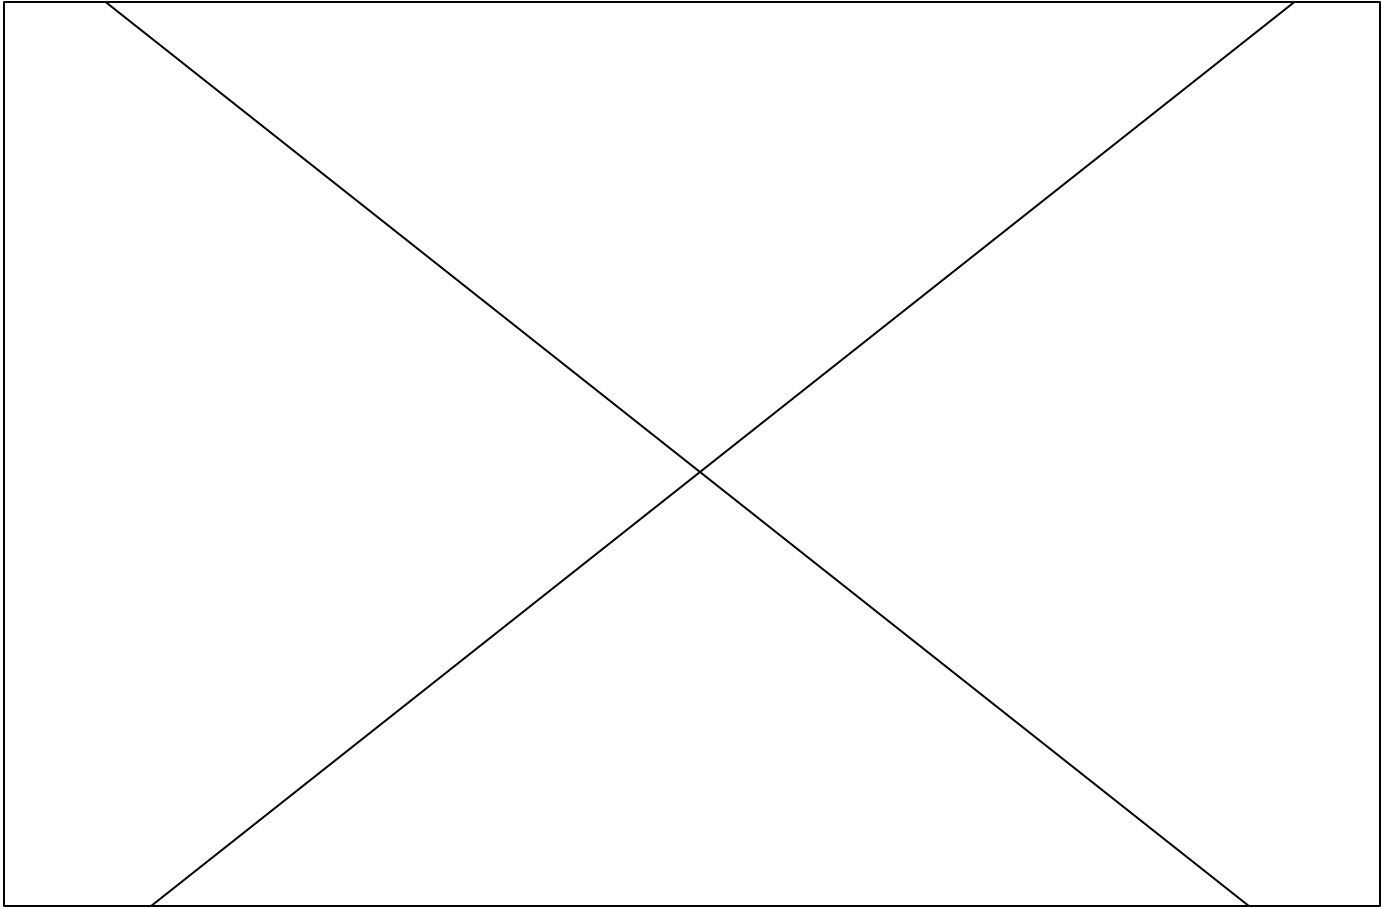

Overview

The AppleColor[®] RGB Monitor is the recommended color monitor for the Apple II[®]GS personal computer, because it takes full advantage of the computer's advanced graphics capabilities.

Working with the high-resolution graphics modes of the Apple II[®]GS, the AppleColor RGB Monitor brings you stunning graphics in up to 256 colors at a time from a palette of 4,096 colors. For text-intensive applications, it can also display crisp, clear 80-column text on its 12-inch screen, so you'll need just one monitor for all your Apple II[®]GS applications.

Features

- High-resolution 12-inch analog RGB color
- Color or monochrome 80-column text
- Direct connection to the computer

Benefits

- Displays any of the 4,096 colors generated by the Apple II[®]GS
- Provides higher resolution than composite (NTSC) color monitors, for sharp images across the full range of colors.
- Produces crisp text as well as graphics, so you don't need separate monitors to get the most from all your applications.
- Plugs directly into the RGB video output of the Apple II[®]GS; no adapters are required.