

**Floor Loading, "C" Path, 800 Series VRC**

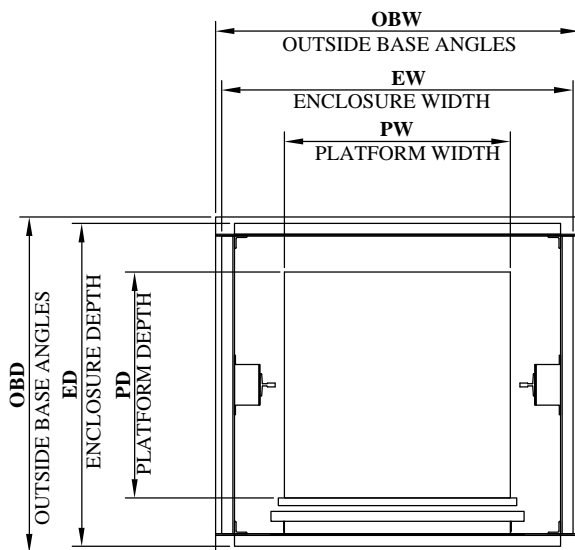
Model 870V: 500 lb. maximum capacity

Model 880V: 1000 lb. maximum capacity

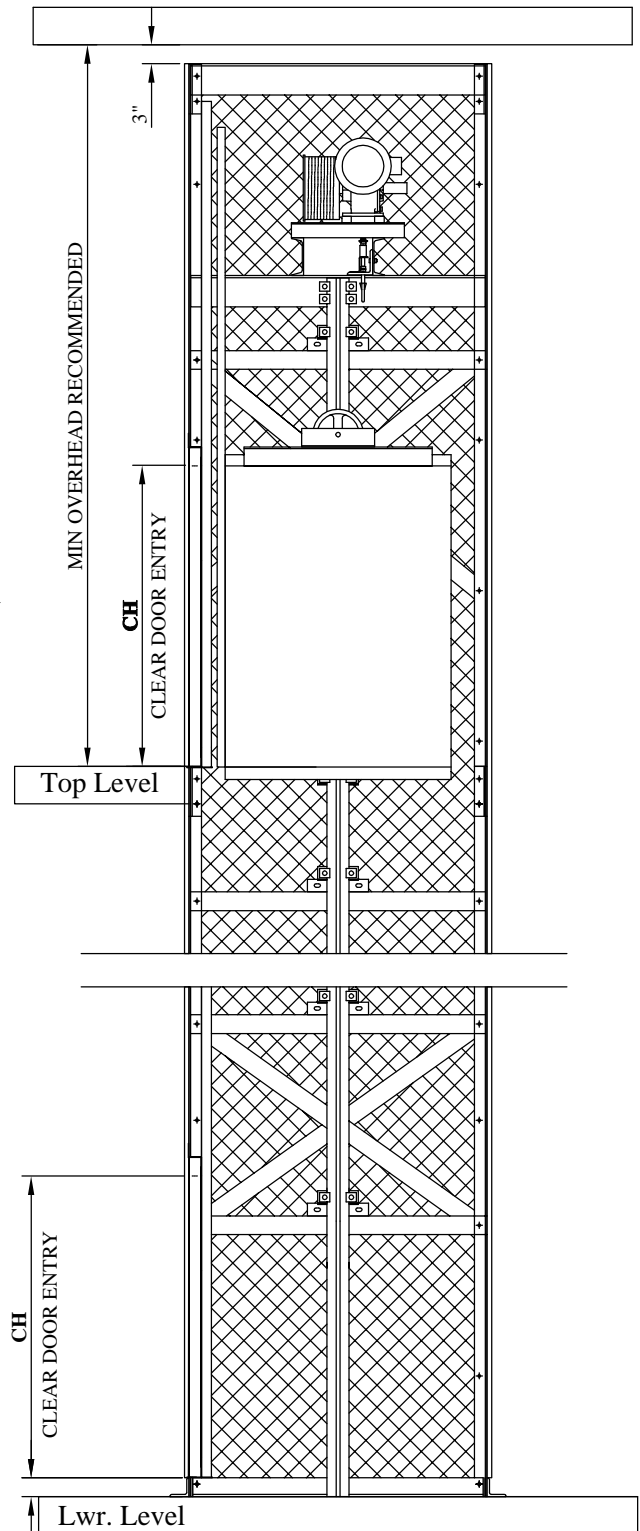
Model 890V: 2000 lb. maximum capacity

**NOTES:**

- 1) Lift supporting structure will be connected to the building, at the landing levels, for stabilization.
- 2) Overhead Requirements vary depending on the equipment furnished. Certain options or combinations of options can have a substantial impact on this requirement.
- 3) Minimum Loading height at the Lower Level can vary due to model or options chosen. Consult Factory for nominal height.
- 4) Loading height can be level with floor if a pit is provided.
- 5) A ramp may also be utilized in order to assist loading from the floor level.
- 6) If this equipment does not seem to fit your specific application, call the factory and we will assist you in finding options or suggesting design changes to fit your needs.

**"C" PATH PLAN VIEW**

LOAD HEIGHT SEE NOTE 3, 4, & 5

**ELEVATION VIEW**