

Above Floor Loading, "Z" Path, 800 Series VRC



Model 870V: 500 lb. maximum capacity

Model 880V: 1000 lb. maximum capacity


Model 890V: 2000 lb. maximum capacity

NOTES:

- 1) Lift supporting structure will be connected to the building, at the landing levels, for stabilization.
- 2) Overhead Requirements vary depending on the equipment furnished. Certain options or combinations of options can have a substantial impact on this requirement.
- 3) Minimum Loading height at the Lower Level can vary due to the model or options chosen. Consult Factory for nominal height.
- 4) With above floor loading applications it may be possible to locate the driving machine in a below location.
- 5) If this equipment does not seem to fit your specific application, call the factory and we will assist you in finding options or suggesting design changes to fit your needs.

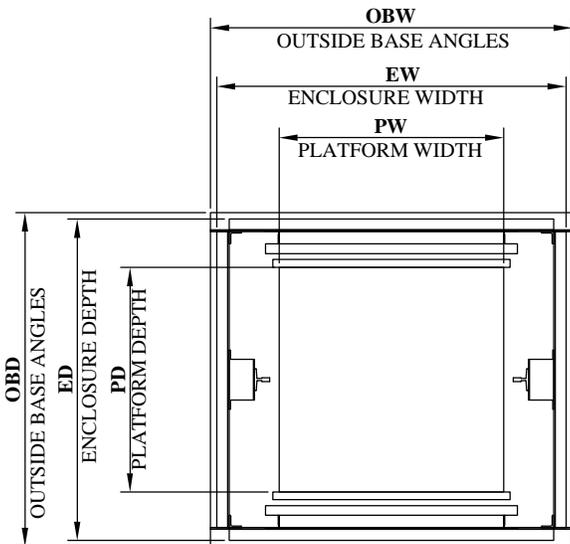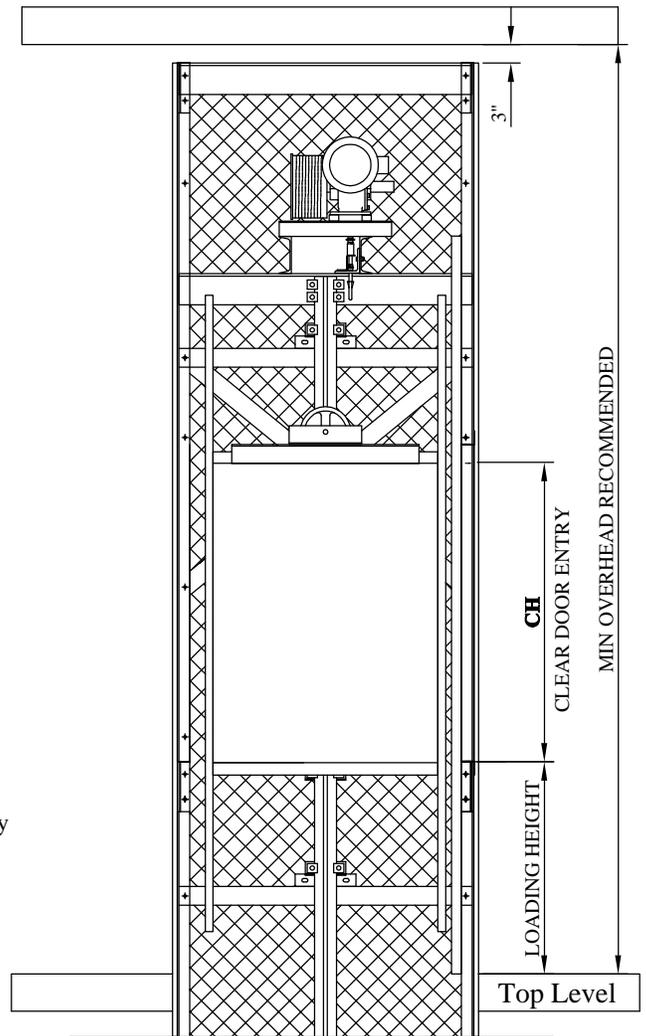

"Z" PATH PLAN VIEW

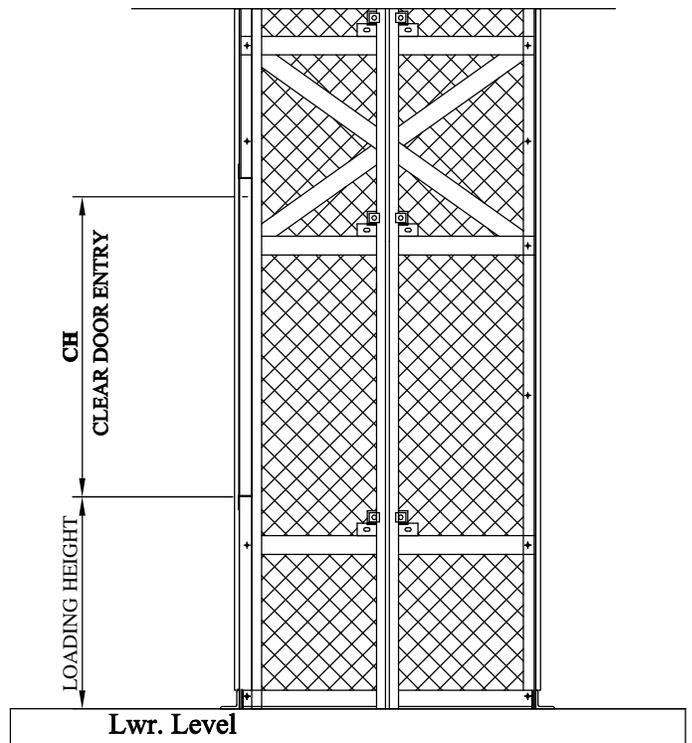

ELEVATION VIEW