

Floor Loading, "Z" Path, 800 Series VRC


Model 870V: 500 lb. maximum capacity

Model 880V: 1000 lb. maximum capacity

Model 890V: 2000 lb. maximum capacity


NOTES:

- 1) Lift supporting structure will be connected to the building, at the landing levels, for stabilization.
- 2) Overhead Requirements vary depending on the equipment furnished. Certain options or combinations of options can have a substantial impact on this requirement.
- 3) Minimum Loading height at the Lower Level can vary due to model or options chosen. Consult Factory for nominal height.
- 4) Loading height can be level with floor if a pit is provided.
- 5) A ramp may also be utilized in order to assist loading from the floor level.
- 6) If this equipment does not seem to fit your specific application, call the factory and we will assist you in finding options or suggesting design changes to fit your needs.

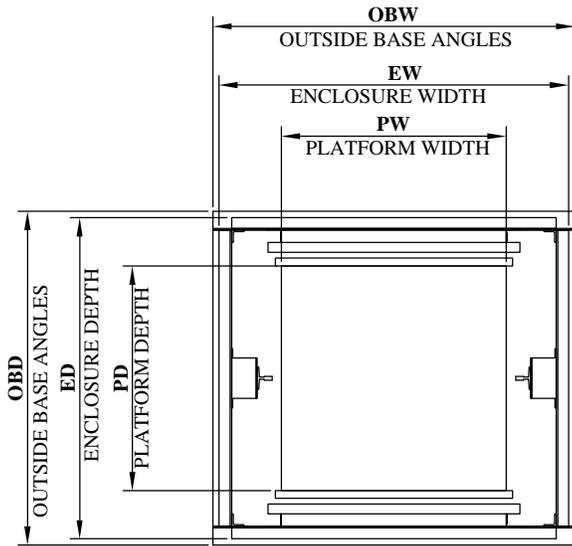

"Z" PATH PLAN VIEW

LOAD HEIGHT SEE NOTE 3, 4, & 5

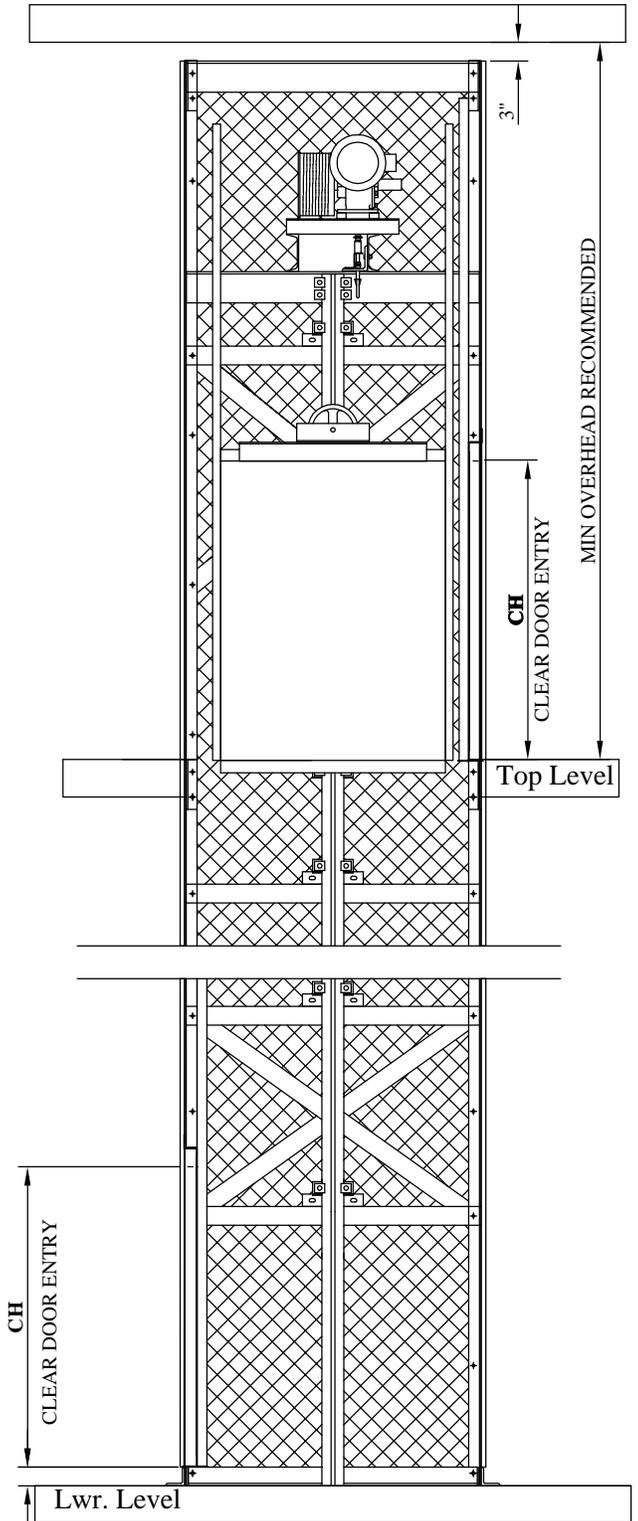

ELEVATION VIEW