

Network Working Group
INTERNET-DRAFT

S.E. Hardcastle-Kille
ISODE Consortium
November 1992
Expires: June 1993

Representing the O/R Address hierarchy in the Directory Information Tree

Status of this Memo

This document is an Internet Draft. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its Areas, and its Working Groups. Note that other groups may also distribute working documents as Internet Drafts.

Internet Drafts are draft documents valid for a maximum of six months. Internet Drafts may be updated, replaced, or obsoleted by other documents at any time. It is not appropriate to use Internet Drafts as reference material or to cite them other than as a "working draft" or "work in progress."

Please check the I-D abstract listing contained in each Internet Draft directory to learn the current status of this or any other Internet Draft.

Abstract

This document defines a representation of the O/R Address hierarchy in the Directory Information Tree [7, 1]. This is useful for a range of purposes, including:

- Support for MHS Routing [3].
- Support for X.400/RFC 822 address mappings [6, 4].

This draft document will be submitted to the RFC editor as a protocol standard. Distribution of this memo is unlimited. Please send comments to the author or to the discussion group <mhs-ds@mercury.udev.cdc.com>.

1 The O/R Address Hierarchy

An O/R Address hierarchy is mapped onto the directory by associating directory name components with O/R Address components. An example of this is given in Figure 1, the schema definition is given in Figure 2, and the required object classes and attributes defined in Figure 3.

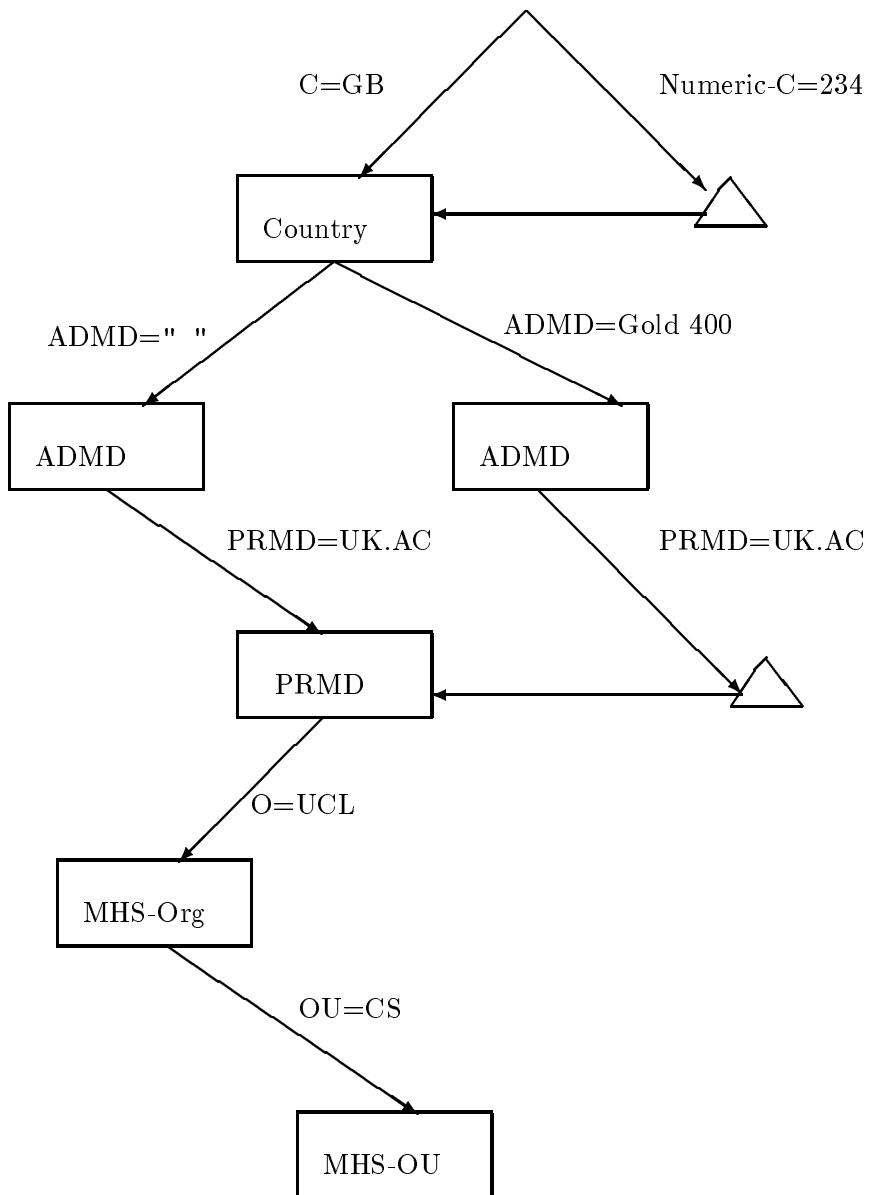


Figure 1: Example O/R Address Tree

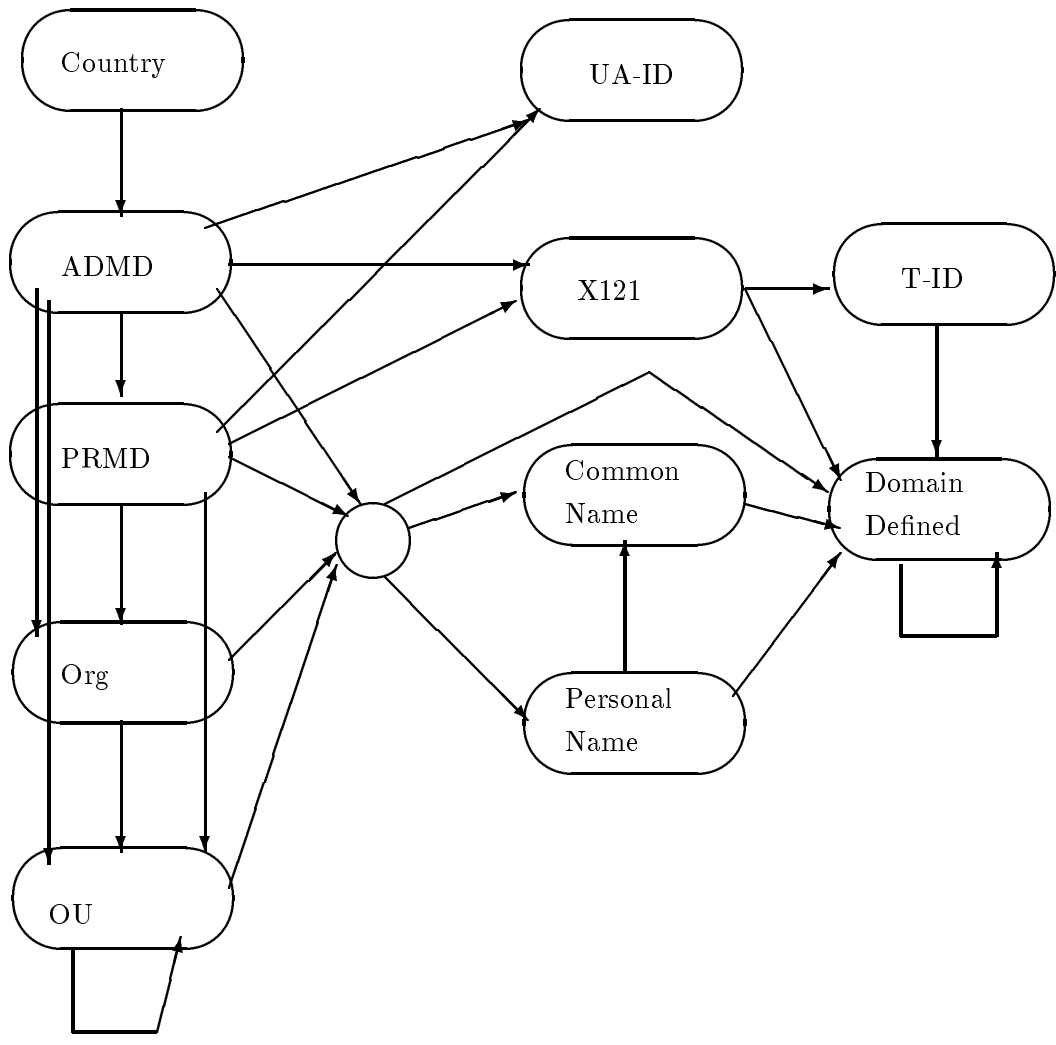


Figure 2: O/R Address Tree Schema

IMPORTS

ub-domain-name-length, ub-domain-name-length, ub-organization-name-length,
 ub-organizational-unit-name-length, ub-common-name-length,
 ub-x121-address-length, ub-domain-defined-attribute-type-length,
 ub-domain-defined-attribute-value-length, ub-terminal-id-length,
 ub-numeric-user-id-length

FROM MTSUpperBounds {joint-iso-ccitt mhs-motis(6) mts(3)
 modules(0) upper-bounds(3)};

10

mHSCountry **OBJECT-CLASS**

SUBCLASS OF country

MAY CONTAIN {

countryName, *-- one of these must be present*
 mHSNumericCountryName }

::= oc-mhs-country

mHSNumericCountryName **ATTRIBUTE**

WITH ATTRIBUTE-SYNTAX

NumericString (3..3)

20

SINGLE VALUE

::= at-mhs-numeric-country-name

aDMD **OBJECT-CLASS**

SUBCLASS OF organization

MUST CONTAIN {aDMDName }

::= oc-admd

aDMDName **ATTRIBUTE**

WITH ATTRIBUTE-SYNTAX

caseIgnoreStringSyntax (SIZE (1..ub-domain-name-length))

30

::= at-admd-name

pRMD **OBJECT-CLASS**

SUBCLASS OF top

MUST CONTAIN {pRMDName }

::= oc-prmd

pRMDName **ATTRIBUTE**

WITH ATTRIBUTE-SYNTAX

caseIgnoreStringSyntax (SIZE (1..ub-domain-name-length))

40

::= at-prmd-name

mHSOrganisation **OBJECT-CLASS**

SUBCLASS OF top

MUST CONTAIN {mHSOrganisationName }

::= oc-mhs-organisation

mHSOrganisationName **ATTRIBUTE**

SUBTYPE OF organisationName

50

WITH ATTRIBUTE-SYNTAX

caseIgnoreStringSyntax (SIZE (1..ub-organization-name-length))

::= at-mhs-organisation-name

mHSOrganisationalUnit **OBJECT-CLASS**

SUBCLASS OF top
MUST CONTAIN {mHSOrganisationalUnitName }
 ::= oc-mhs-organisational-unit 60

mHSOrganisationalUnitName **ATTRIBUTE**
SUBTYPE OF organizationalUnitName
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-organizational-unit-name-length))
 ::= at-mhs-organisation-name

mHSPerson **OBJECT-CLASS**
SUBCLASS OF top
MUST CONTAIN {personName}
 ::= oc-mhs-person 70

personName **ATTRIBUTE**
SUBTYPE OF commonName
 ::= at-mhs-person-name

mHSNamedObject **OBJECT-CLASS**
SUBCLASS OF top
MUST CONTAIN {mHSCommonName}
 ::= oc-mhs-named-object 80

mHSCommonName **ATTRIBUTE**
SUBTYPE OF commonName
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-common-name-length))
 ::= at-mhs-common-name

mHSX121 **OBJECT-CLASS**
SUBCLASS OF top
MUST CONTAIN {mHSX121Address}
 ::= oc-mhs-x121 90

mHSX121Address **ATTRIBUTE**
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-x121-address-length))
 ::= at-x121-address

mHSDomainDefinedAttribute **OBJECT-CLASS**
SUBCLASS OF top
MUST CONTAIN {
 mHSDomainDefineAttributeType,
 mHSDomainDefineAttributeValue}
 ::= oc-mhs-domain-defined-attribute 100

mHSDomainDefinedAttributeType **ATTRIBUTE**
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax
 (SIZE (1..ub-domain-defined-attribute-type-length))
SINGLE VALUE
 ::= at-mhs-domain-defined-attribute-type 110

mHSDomainDefinedAttributeValue **ATTRIBUTE**
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax

```

(SIZE (1..ub-domain-defined-attribute-value-length))
SINGLE VALUE
 ::= at-mhs-domain-defined-attribute-value

mHSTerminalID OBJECT-CLASS 120
 SUBCLASS OF top
 MUST CONTAIN {mHSTerminalIDName}
 ::= oc-mhs-terminal-id

mHSTerminalIDName ATTRIBUTE
 WITH ATTRIBUTE-SYNTAX
   caseIgnoreStringSyntax (SIZE (1..ub-terminal-id-length))
 ::= at-mhs-terminal-id-name

mHSNumericUserIdentifier OBJECT-CLASS 130
 SUBCLASS OF top
 MUST CONTAIN {mHSNumericIdentifierName}
 ::= oc-mhs-numeric-user-id

mHSNumericUserIdentifierName ATTRIBUTE
 WITH ATTRIBUTE-SYNTAX
   caseIgnoreStringSyntax (SIZE (1..ub-numeric-user-id-length))
 ::= at-mhs-numeric-user-id-name

```

140

Figure 3: O/R Address Hierarchy

Some choices of interest that are made in this hierarchy:

- The representation is defined so that it is straightforward to make a mechanical transformation in either direction. This requires that each node is named by an attribute whose type can determine the mapping.
- Where there are multiple domain defined attributes, the first in the sequence is the most significant.
- Physical Delivery (postal) addresses are not represented in this hierarchy. This is primarily because physical delivery can be handled by the Access Unit routing mechanisms defined in [3], and there is no need for this representation.
- Terminal and network forms of address are not handled, except for X.121 form, which is useful for addressing faxes.
- MHSCountry is defined as a subclass of Country, and so the same entry will be used for MHS Routing as for the rest of the DIT.

- The numeric country code will be an alias.
- ADMD will always be present in the hierarchy. This is true in the case of “_” and of “0”. This facilitates an easy mechanical transformation between the two forms of address.
- Each node is named by the relevant part of the O/R Address.
- Aliases may be used in other parts of the tree, in order to normalise alternate values. Where an alias is used, the value of the alias should be present as an alternate value in the node aliased to. Aliases may not be used for domain defined attributes.
- Domain Defined Attributes are named by a multi-valued RDN (Relative Distinguished Name), consisting of the type and value. This is done so that standard attribute syntaxes can be used.
- Where an O/R Address has a valid Printable String and T.61 form, both must be present, with one as an alias for the other. When both are present in the O/R Address, either may be used to construct the distinguished name.
- Personal name is normalised into a string, according to RFC 1327 [6]. For some forms of personal name, such as one which includes TeletextString, this will lead to a “/=” encoding. This use of a string attribute is more convenient than having structure by name components, and allows for mailboxes to be cleanly used for both RFC 822 and X.400 routing [2, 5, 3].

If this sharing is done, mailboxes must be specified using the printable string character set only. T.61 names should be restricted to X.400 only sites.

The relationship between X.400 O/R Addresses and the X.400 Entries (Attribute Type and Object Class) are given in Table 1. Where there are multiple Organisational Units or Domain Defined Attributes, each component is mapped onto a single X.500 entry.

2 Example Representation

The O/R Address:

```
I=S; S=Kille; OU=CS; O=UCL,
PRMD=UK.AC; ADMD=Gold 400; C=GB;
```

would be represented in the directory as:

```
CN=S.Kille, MHS-OU=CS, MHS-O=UCL,
PRMD=UK.AC, ADMD=Gold 400, C=GB
```


O/R Address	Object Class	Naming Attribute
C	mHSCountry	countryName or mHSNumericCountryName
ADMD	aDMD	aDMDName
PRMD	pRMD	pRMDName
O	mHSOrganisation	mHSOrganisationName
OU	mHSOrganisationalUnit	mHSOrganisationalUnitName
PN	mHSPerson	personName
CN	mHSNamedObject	mHSCommonName
X121	mHSX121	mHSX121Address
T-ID	mHSTerminalID	mHSTerminalIDName
UA-ID	mHSNumericUserIdentifier	mHSNumericUserIdentifierName
DDA	mHSDomainDefinedAttribute	mHSDomainDefinedAttributeType and mHSDomainDefinedAttributeValue

Table 1: O/R Address relationship to Directory Name

3 Mapping from O/R Address to Directory Name

The primary application of this mapping is to take an X.400 encoded O/R Address and to generate an equivalent directory name. This mapping is only used for selected types of O/R Address:

- Mnemonic form
- Numeric form
- Terminal form, where country is present and X121 addressing is used

Other forms of O/R address are handled by Access Unit mechanisms.

The O/R Address is treated as an ordered list, with the order as implied in Figure 2. For each O/R Address attribute, generate the equivalent directory naming attribute. In most cases, the mapping is mechanical. Printable String or Teletex encodings are chosen as appropriate. Where both forms are present in the O/R Address, the Teletex form only should be used to generate the distinguished name. There are two special cases:

1. A DDA generates a multi-valued RDN
2. The Personal Name is mapped to the attribute according to RFC 1327

In many cases, an O/R Address will be provided, and only the higher components of the address will be represented in the DIT. In this case, the "longest possible match" should be returned.

4 Underspecified O/R Addresses

X.400 requires that some underspecified O/R Addresses are handled in a given way. Where an underspecified O/R Address should be treated as if it were another O/R Address, an alias should be used. If the O/R Address should be rejected as ambiguous, an entry should be created in the DIT, and forced non-delivery specified for this reason.

5 Mapping from Directory Name to O/R Address

The reverse mapping is also needed in some cases. All of the naming attributes are unique, so the mapping is mechanically reversible.

References

- [1] The Directory — overview of concepts, models and services, December 1988. CCITT X.500 Series Recommendations.
- [2] D.H. Crocker. Standard of the format of ARPA internet text messages. Request for Comments 822, University of Delaware, August 1982.
- [3] S.E. Hardcastle-Kille. MHS use of the directory to support MHS routing, April 1992. Internet Draft.
- [4] S.E. Hardcastle-Kille. Use of the directory to support mapping between X.400 and RFC 822 addresses, April 1992. Internet Draft.
- [5] S.E. Hardcastle-Kille. Use of the directory to support routing for RFC 822 and related protocols, April 1992. Internet Draft.
- [6] S.E. Kille. Mapping between X.400(1988) / ISO 10021 and RFC 822. Request for Comments 1327, Department of Computer Science, University College London, May 1992.
- [7] CCITT recommendations X.400 / ISO 10021, April 1988. CCITT SG 5/VII / ISO/IEC JTC1, Message Handling: System and Service Overview.

6 Security Considerations

Security considerations are not discussed in this INTERNET-DRAFT .

7 Author's Address

Steve Hardcastle-Kille
ISODE Consortium
PO Box 505
London
SW11 1DX
England

Phone: +44-71-223-4062

E-Mail: S.Kille@ISODE.COM

DN: CN=Steve Hardcastle-Kille,
O=ISODE Consortium, C=GB

UFN: S. Hardcastle-Kille, ISODE Consortium, GB

A Object Identifier Assignment

```

tree OBJECT IDENTIFIER ::= {mhs-ds 2}

oc OBJECT IDENTIFIER ::= {tree 1}
at OBJECT IDENTIFIER ::= {tree 2}

oc-admd OBJECT IDENTIFIER ::= {oc 1}
oc-mhs-country OBJECT IDENTIFIER ::= {oc 2}
oc-mhs-domain-defined-attribute OBJECT IDENTIFIER ::= {oc 3}
oc-mhs-named-object OBJECT IDENTIFIER ::= {oc 4}
oc-mhs-organisation OBJECT IDENTIFIER ::= {oc 5}
oc-mhs-organisational-unit OBJECT IDENTIFIER ::= {oc 6}
oc-mhs-person OBJECT IDENTIFIER ::= {oc 7}
oc-mhs-x121 OBJECT IDENTIFIER ::= {oc 8}
oc-prmd OBJECT IDENTIFIER ::= {oc 9}
oc-mhs-terminal-id OBJECT IDENTIFIER ::= {oc 10}
oc-mhs-numeric-user-id OBJECT IDENTIFIER ::= {oc 11}

at-admd-name OBJECT IDENTIFIER ::= {at 1}
at-mhs-common-name OBJECT IDENTIFIER ::= {at 2}
at-mhs-domain-defined-attribute-type OBJECT IDENTIFIER ::= {at 3}
at-mhs-domain-defined-attribute-value OBJECT IDENTIFIER ::= {at 4}
at-mhs-numeric-country-name OBJECT IDENTIFIER ::= {at 5}
at-mhs-organisation-name OBJECT IDENTIFIER ::= {at 6}
at-mhs-organisation-name OBJECT IDENTIFIER ::= {at 7}
at-mhs-organisation-name OBJECT IDENTIFIER ::= {at 8}
at-mhs-person-name OBJECT IDENTIFIER ::= {at 9}
at-prmd-name OBJECT IDENTIFIER ::= {at 10}
at-x121-address OBJECT IDENTIFIER ::= {at 12}
at-mhs-terminal-id-name OBJECT IDENTIFIER ::= {at 13}
at-mhs-numeric-user-id-name OBJECT IDENTIFIER ::= {at 14}

```

Figure 4: Object Identifier Assignment
