

Network Working Group
INTERNET-DRAFT

S.E. Kille
ISODE Consortium
July 1993
Expires: January 1994

Representing the O/R Address hierarchy in the Directory Information Tree

Status of this Memo

This document is an Internet Draft. Internet Drafts are working documents of the Internet Engineering Task Force (IETF), its Areas, and its Working Groups. Note that other groups may also distribute working documents as Internet Drafts.

Internet Drafts are draft documents valid for a maximum of six months. Internet Drafts may be updated, replaced, or obsoleted by other documents at any time. It is not appropriate to use Internet Drafts as reference material or to cite them other than as a "working draft" or "work in progress."

Please check the I-D abstract listing contained in each Internet Draft directory to learn the current status of this or any other Internet Draft.

Abstract

This document defines a representation of the O/R Address hierarchy in the Directory Information Tree [6, 1]. This is useful for a range of purposes, including:

- Support for MHS Routing [4].
- Support for X.400/RFC 822 address mappings [2, 5].

This draft document will be submitted to the RFC editor as a protocol standard. Distribution of this memo is unlimited. Please send comments to the author or to the discussion group <mhs-ds@mercury.udev.cdc.com>.

Object Class	Mandatory
mHSCountry	M
aDMD	M
pRMD	O
mHSX121	O
mHSNumericUserIdentifier	O
mHSOrganization	O
mHSOrganizationalUnit	O
mHSPerson	O
mHSNamedObject	O
mHSTerminalID	O
mHSDomainDefinedAttribute	O

Table 1: Order of O/R Address Directory Components

1 The O/R Address Hierarchy

An O/R Address hierarchy is represented in the X.500 directory by associating directory name components with O/R Address components. An example of this is given in Figure 1. The object classes and attributes required to support this representation are defined in Figure 2. The schema, which defines the hierarchy in which these objects are represented in the directory information tree is specified in Table 1. A given object class defined in the table will always be higher in the DIT than an object class defined lower down the table. Valid combinations of O/R Address components are defined in X.400.

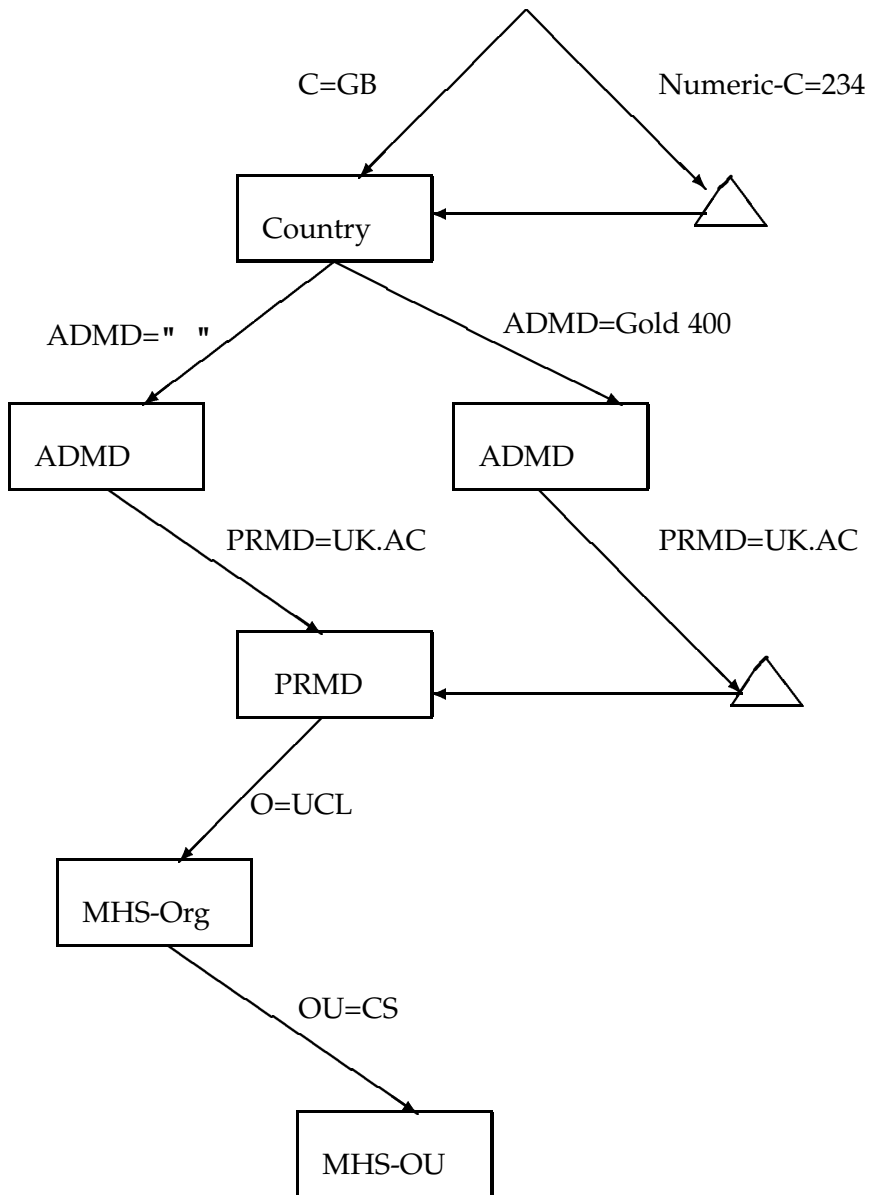


Figure 1: Example O/R Address Tree

IMPORTS

ub-domain-name-length, ub-domain-name-length, ub-organization-name-length,
 ub-organizational-unit-name-length, ub-common-name-length,
 ub-x121-address-length, ub-domain-defined-attribute-type-length,
 ub-domain-defined-attribute-value-length, ub-terminal-id-length,
 ub-numeric-user-id-length, ub-country-name-numeric-length,
 ub-surname-length, ub-given-name-length, ub-initials-length
 ub-generational-qualifier-length

FROM MTSUpperBounds {joint-iso-ccitt mhs-motis(6) mts(3) 10
 modules(0) upper-bounds(3)};

mHSCountry OBJECT-CLASS

SUBCLASS OF country
MAY CONTAIN {
 mHSNumericCountryName }
 ::= oc-mhs-country

mHSNumericCountryName ATTRIBUTE

WITH ATTRIBUTE-SYNTAX 20
 NumericString (SIZE (ub-numeric-country-name-numeric-length))
SINGLE VALUE
 ::= at-mhs-numeric-country-name

aDMD OBJECT-CLASS

SUBCLASS OF top
MUST CONTAIN {aDMDName }
 ::= oc-admd

aDMDName ATTRIBUTE

WITH ATTRIBUTE-SYNTAX 30
 caseIgnoreStringSyntax (SIZE (1..ub-domain-name-length))
 ::= at-admd-name

pRMD OBJECT-CLASS

SUBCLASS OF top
MUST CONTAIN {pRMDName }
 ::= oc-prmd

pRMDName ATTRIBUTE

WITH ATTRIBUTE-SYNTAX 40
 caseIgnoreStringSyntax (SIZE (1..ub-domain-name-length))
 ::= at-prmd-name

mHSOrganization OBJECT-CLASS

SUBCLASS OF top
MUST CONTAIN {mHSOrganizationName }
 ::= oc-mhs-organization

mHSOrganizationName ATTRIBUTE

SUBTYPE OF organizationName 50
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-organization-name-length))
 ::= at-mhs-organization-name

mHSOrganizationalUnit OBJECT-CLASS
SUBCLASS OF top
MUST CONTAIN {mHSOrganizationalUnitName }
 ::= oc-mhs-organizational-unit 60

mHSOrganizationalUnitName ATTRIBUTE
SUBTYPE OF organizationalUnitName
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-organizational-unit-name-length))
 ::= at-mhs-organizational-unit-name

mHSPerson OBJECT-CLASS
SUBCLASS OF top
MUST CONTAIN {mHSSurname} 70
MAY CONTAIN {mHSGivenName, mHSInitials, mHSGenerationalQualifier}
 ::= oc-mhs-person

mHSSurname ATTRIBUTE
SUBTYPE OF surname
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-surname-length))
 ::= at-mhs-surname

mHSGivenName ATTRIBUTE 80
SUBTYPE OF givenName
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-given-name-length))
 ::= at-mhs-given-name

mHSInitials ATTRIBUTE
SUBTYPE OF initials
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-initials-length))
 ::= at-mhs-initials 90

mHSGenerationalQualifier ATTRIBUTE
SUBTYPE OF generationQualifier
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-generational-qualifier-length))
 ::= at-mhs-generational-qualifier

mHSNamedObject OBJECT-CLASS
SUBCLASS OF top
MUST CONTAIN {mHSCommonName} 100
 ::= oc-mhs-named-object

mHSCommonName ATTRIBUTE
SUBTYPE OF commonName
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-common-name-length))
 ::= at-mhs-common-name

mHSX121 OBJECT-CLASS
SUBCLASS OF top 110
MUST CONTAIN {mHSX121Address}
 ::= oc-mhs-x121

mHSX121Address ATTRIBUTE
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-x121-address-length))
 ::= at-x121-address

mHSDomainDefinedAttribute OBJECT-CLASS 120
SUBCLASS OF top
MUST CONTAIN {
 mHSDomainDefineAttributeType,
 mHSDomainDefineAttributeValue}
 ::= oc-mhs-domain-defined-attribute

mHSDomainDefinedAttributeType ATTRIBUTE
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax
 (SIZE (1..ub-domain-defined-attribute-type-length))
SINGLE VALUE 130
 ::= at-mhs-domain-defined-attribute-type

mHSDomainDefinedAttributeValue ATTRIBUTE
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax
 (SIZE (1..ub-domain-defined-attribute-value-length))
SINGLE VALUE
 ::= at-mhs-domain-defined-attribute-value

140

mHSTerminalID OBJECT-CLASS
SUBCLASS OF top
MUST CONTAIN {mHSTerminalIDName}
 ::= oc-mhs-terminal-id

mHSTerminalIDName ATTRIBUTE
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-terminal-id-length))
 ::= at-mhs-terminal-id-name

150

mHSNumericUserIdentifier OBJECT-CLASS
SUBCLASS OF top
MUST CONTAIN {mHSNumericUserIdentifierName}
 ::= oc-mhs-numeric-user-id

mHSNumericUserIdentifierName ATTRIBUTE
WITH ATTRIBUTE-SYNTAX
 caseIgnoreStringSyntax (SIZE (1..ub-numeric-user-id-length))
 ::= at-mhs-numeric-user-id-name

160

 Figure 2: O/R Address Hierarchy

Some choices of interest that are made in this hierarchy:

- The representation is defined so that it is straightforward to make a mechanical transformation in either direction. This requires that each node is named by an attribute whose type can determine the mapping.
- Where there are multiple domain defined attributes, the first in the sequence is the most significant.
- Physical Delivery (postal) addresses are not represented in this hierarchy. This is primarily because physical delivery can be handled by the Access Unit routing mechanisms defined in [4], and there is no need for this representation.
- Terminal and network forms of address are not handled, except for X.121 form, which is useful for addressing faxes.
- MHSCountry is defined as a subclass of Country, and so the same entry will be used for MHS Routing as for the rest of the DIT.
- The numeric country code will be an alias.
- ADMD will always be present in the hierarchy. This is true in the case of " " and of "0". This facilitates an easy mechanical transformation between the two forms of address.
- Each node is named by the relevant part of the O/R Address.
- Aliases may be used in other parts of the tree, in order to normalise alternate values. Where an alias is used, the value of the alias should be present as an alternate value in the node aliased to. Aliases may not be used for domain defined attributes.
- Domain Defined Attributes are named by a multi-valued RDN (Relative Distinguished Name), consisting of the type and value. This is done so that standard attribute syntaxes can be used.
- Where an O/R Address has a valid Printable String and T.61 form, both must be present, with one as an alias for the other. When both are present in the O/R Address, either may be used to construct the distinguished name.
- Personal name is handled by use of the `mHSPerson` object class. Each of the components of the personal name will be present in the relative distinguished name, which will usually be multi-valued.

The relationship between X.400 O/R Addresses and the X.400 Entries (Attribute Type and Object Class) are given in Table 2. Where there are multiple Organizational Units or Domain Defined Attributes, each component is mapped onto a single X.500 entry.

O/R Address	Object Class	Naming Attribute
C	mHSCountry	countryName or mHSNumericCountryName
ADMD	aDMD	aDMDName
PRMD	pRMD	pRMDName
O	mHSOrganization	mHSOrganizationName
OU	mHSOrganizationalUnit	mHSOrganizationalUnitName
PN	mHSPerson	personName
CN	mHSNamedObject	mHSCommonName
X121	mHSX121	mHSX121Address
T-ID	mHSTerminalID	mHSTerminalIDName
UA-ID	mHSNumericUserIdentifier	mHSNumericUserIdentifierName
DDA	mHSDomainDefinedAttribute	mHSDomainDefinedAttributeType and mHSDomainDefinedAttributeValue

Table 2: O/R Address relationship to Directory Name

Note: When an X.121 address is used for addressing fax transmission, this may only be done relative to the PRMD. This is in line with the current X.400 standards position. This means that it is not possible to use this form of addressing for an organisational or departmental fax gateway service.

2 Notation

O/R Addresses are written in the RARE WG1 syntax ***REF.

Distinguished Names used the string representation of distinguished names defined in [3]. The keywords used for the attributes defined in this specification are given in Table 3.

3 Example Representation

The O/R Address:

```
I=S; S=Kille; OU=CS; O=UCL,
PRMD=UK.AC; ADMD=Gold 400; C=GB;
```

would be represented in the directory as:

```
MHS-I=S + MHS-S=Kille, MHS-OU=CS, MHS-O=UCL,
PRMD=UK.AC, ADMD=Gold 400, C=GB
```


Attribute	Keyword
mHSNumericCountryName	MHS-Numeric-Country
aDMDName	ADMD
pRMDName	PRMD
mHSOrganizationName	MHS-O
mHSOrganizationalUnitName	MHS-OU
mHSSurname	MHS-S
mHSGivenName	MHS-G
mHSInitials	MHS-I
mHSGenerationalQualifier	MHS-GQ
mHSCommonName	MHS-CN
mHSX121Address	MHS-X121
mHSDomainDefinedAttributeType	MHS-DDA-Type
mHSDomainDefinedAttributeValue	MHS-DDA-Value
mHSTerminalIDName	MHS-T-ID
mHSNumericUserIdentifierName	MHS-UA-ID

Table 3: Keywords for String DN Representation

4 Mapping from O/R Address to Directory Name

The primary application of this mapping is to take an X.400 encoded O/R Address and to generate an equivalent directory name. This mapping is only used for selected types of O/R Address:

- Mnemonic form
- Numeric form
- Terminal form, where country is present and X121 addressing is used

Other forms of O/R address are handled by Access Unit mechanisms.

The O/R Address is treated as an ordered list, with the order as defined in Table 1. For each O/R Address attribute, generate the equivalent directory naming attribute. In most cases, the mapping is mechanical. Printable String or Teletex encodings are chosen as appropriate. Where both forms are present in the O/R Address, the Teletex form only should be used to generate the distinguished name. There are two special cases:

1. A DDA generates a multi-valued RDN
2. The Personal Name is mapped to the attribute according to RFC 1327

In many cases, an O/R Address will be provided, and only the higher components of the address will be represented in the DIT. In this case, the "longest possible match" should be returned.

5 Mapping from Directory Name to O/R Address

The reverse mapping is also needed in some cases. All of the naming attributes are unique, so the mapping is mechanically reversible.

References

- [1] The Directory — overview of concepts, models and services, December 1988. CCITT X.500 Series Recommendations.
- [2] S.E. Kille. Mapping between X.400(1988) / ISO 10021 and RFC 822. Request for Comments 1327, Department of Computer Science, University College London, May 1992.
- [3] S.E. Kille. A string representation of distinguished name. Request for Comments in preparation, Department of Computer Science, University College London, January 1992.
- [4] S.E. Kille. MHS use of the directory to support MHS routing, July 1993. Internet Draft.
- [5] S.E. Kille. Use of the directory to support mapping between X.400 and RFC 822 addresses, July 1993. Internet Draft.
- [6] CCITT recommendations X.400 / ISO 10021, April 1988. CCITT SG 5/VII / ISO/IEC JTC1, Message Handling: System and Service Overview.

6 Security Considerations

Security considerations are not discussed in this INTERNET-DRAFT .

7 Author's Address

Steve Kille
ISODE Consortium
PO Box 505
London
SW11 1DX
England

Phone: +44-71-223-4062

E-Mail: S.Kille@ISODE.COM

DN: CN=Steve Kille,
O=ISODE Consortium, C=GB

UFN: S. Kille, ISODE Consortium, GB

A Object Identifier Assignment

mhs-ds **OBJECT IDENTIFIER** ::= {iso(1) org(3) dod(6) internet(1) private(4)
enterprises(1) isode-consortium (453) mhs-ds (7)}

tree **OBJECT IDENTIFIER** ::= {mhs-ds 2}

oc **OBJECT IDENTIFIER** ::= {tree 1}
at **OBJECT IDENTIFIER** ::= {tree 2}

oc-admd **OBJECT IDENTIFIER** ::= {oc 1} 10
oc-mhs-country **OBJECT IDENTIFIER** ::= {oc 2}
oc-mhs-domain-defined-attribute **OBJECT IDENTIFIER** ::= {oc 3}
oc-mhs-named-object **OBJECT IDENTIFIER** ::= {oc 4}
oc-mhs-organization **OBJECT IDENTIFIER** ::= {oc 5}
oc-mhs-organizational-unit **OBJECT IDENTIFIER** ::= {oc 6}
oc-mhs-person **OBJECT IDENTIFIER** ::= {oc 7}
oc-mhs-x121 **OBJECT IDENTIFIER** ::= {oc 8}
oc-prmd **OBJECT IDENTIFIER** ::= {oc 9}
oc-mhs-terminal-id **OBJECT IDENTIFIER** ::= {oc 10}
oc-mhs-numeric-user-id **OBJECT IDENTIFIER** ::= {oc 11} 20

at-admd-name **OBJECT IDENTIFIER** ::= {at 1}
at-mhs-common-name **OBJECT IDENTIFIER** ::= {at 2}
at-mhs-domain-defined-attribute-type **OBJECT IDENTIFIER** ::= {at 3}
at-mhs-domain-defined-attribute-value **OBJECT IDENTIFIER** ::= {at 4}
at-mhs-numeric-country-name **OBJECT IDENTIFIER** ::= {at 5}
at-mhs-organization-name **OBJECT IDENTIFIER** ::= {at 6}
at-mhs-organizational-unit-name **OBJECT IDENTIFIER** ::= {at 7}
at-prmd-name **OBJECT IDENTIFIER** ::= {at 10}
at-x121-address **OBJECT IDENTIFIER** ::= {at 12} 30
at-mhs-terminal-id-name **OBJECT IDENTIFIER** ::= {at 13}
at-mhs-numeric-user-id-name **OBJECT IDENTIFIER** ::= {at 14}
at-mhs-surname **OBJECT IDENTIFIER** ::= {at 15}
at-mhs-given-name **OBJECT IDENTIFIER** ::= {at 16}
at-mhs-initials **OBJECT IDENTIFIER** ::= {at 17}
at-mhs-generational-qualifier **OBJECT IDENTIFIER** ::= {at 18}

Figure 3: Object Identifier Assignment
