


ENGINE START


- 1 Engine start is part of the terminal count-down sequence. When this point in the count-down is reached, the ignition sequencer controls starting of all five engines.
 - 2 Checkout valve moves to engine return position.
 - 3 Electrical signal fires igniters (4 each engine).
 - a) Gas generator combustor and turbine exhaust igniters burn igniter links to trigger electrical signal to start solenoid of 4-way control valve.
 - b) Igniters burn approximately six seconds.
 - 4 Start solenoid of 4-way control valve directs GSE hydraulic pressure to main lox valves.
 - 5 Main lox valves allow lox to flow to thrust chamber and GSE hydraulic pressure to flow through sequence valve to open gas generator ball valve.
 - 6 Propellants, under tank pressure, flow into gas generator combustor.
 - 7 Propellants are ignited by flame of igniters.
 - 8 Combustion gas passes through turbopump, heat exchanger, exhaust manifold and nozzle extension.
 - 9 Fuel rich turbine combustion gas is ignited by flame from igniters.
 - a) Ignition of this gas prevents back-firing and burping.
 - b) This relatively cool gas (approximately 1,000°F) is the coolant for the nozzle extension.
 - 10 Combustion gas accelerates the turbopump, causing the pump discharge pressure to increase.
 - 11 As fuel pressure increases to approximately 375 psig, it ruptures the hypergol cartridge.
 - 12 The hypergolic fluid and fuel are forced into the thrust chamber where they mix with the lox to cause ignition.
- TRANSITION TO MAINSTAGE
- 13 Ignition causes the combustion zone pressure to increase.
 - 14 As pressure reaches 20 psig, the ignition monitor valve directs fluid pressure to the main fuel valves.
 - 15 Fluid pressure opens main fuel valves.
 - 16 Fuel enters thrust chamber. As pressure increases the transition to mainstage is accomplished.
 - 17 The thrust OK pressure switch (which senses fuel injection pressure) picks up at approximately 1060 psi and provides a THRUST OK signal to the IU.

ENGINE CUTOFF

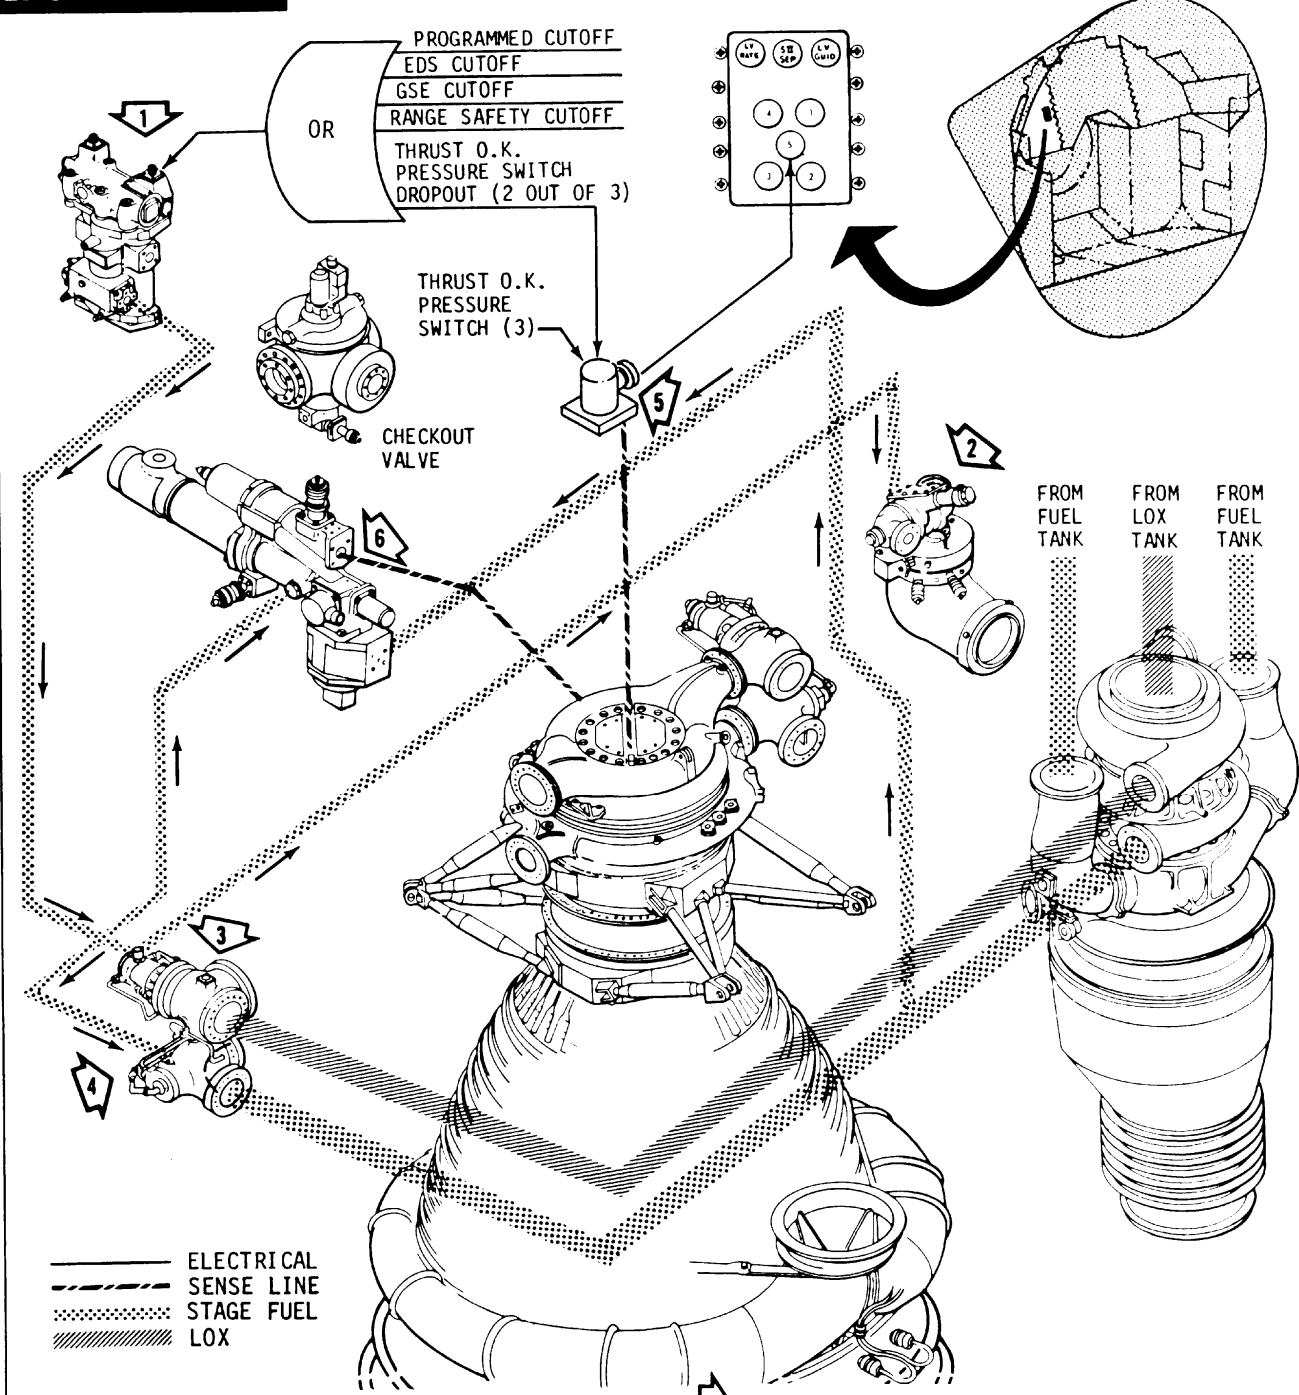


- 1 The 4-Way Control Valve Stop Solenoid is energized, which routes closing pressure to the following valves.
- 2 Gas Generator Ball Valve closes.
- 3 Main Lox Valves (2 ea) close.
- 4 Main Fuel Valves (2 ea) close.
- 5 The Thrust Chamber pressure decay causes the thrust OK pressure switch to drop out (3 ea).
- 6 Ignition Fuel Valve and Ignition Monitor Valve closed.


RETROROCKETS

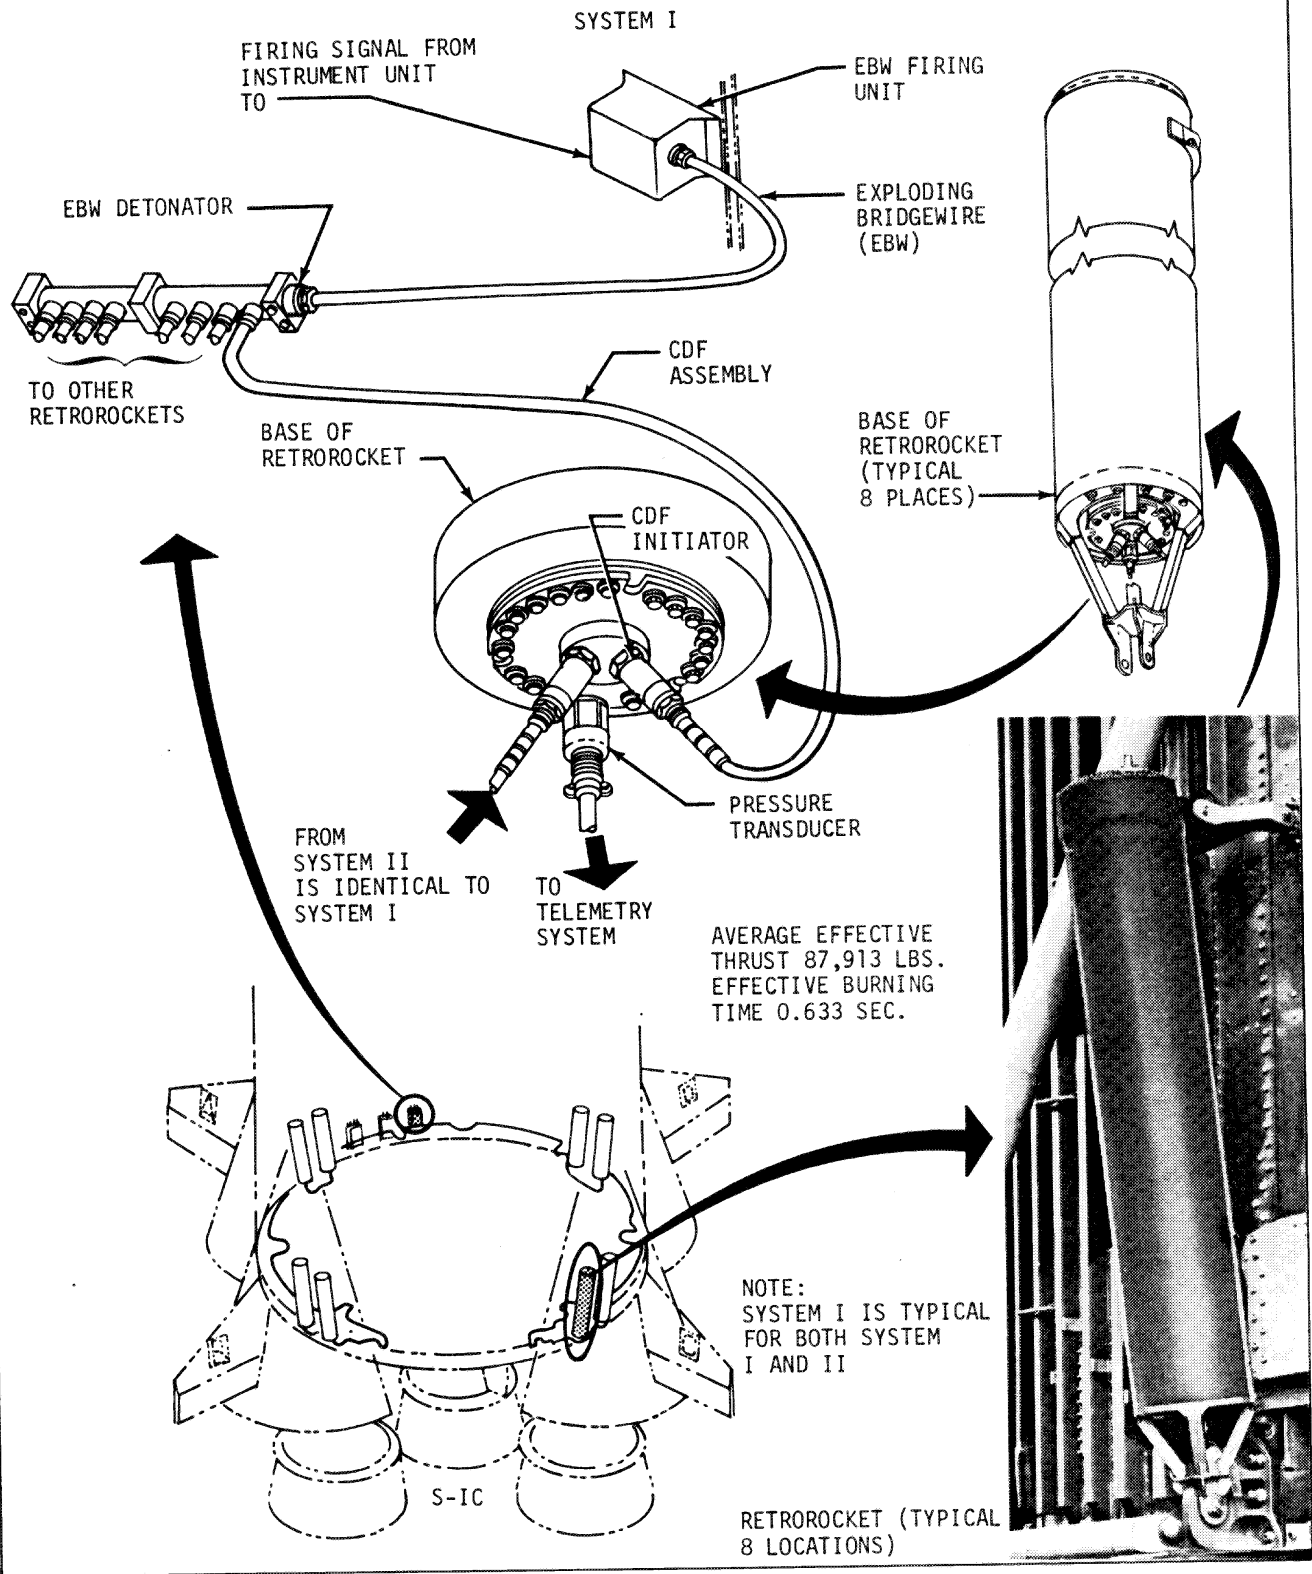

S-II STAGE STRUCTURE

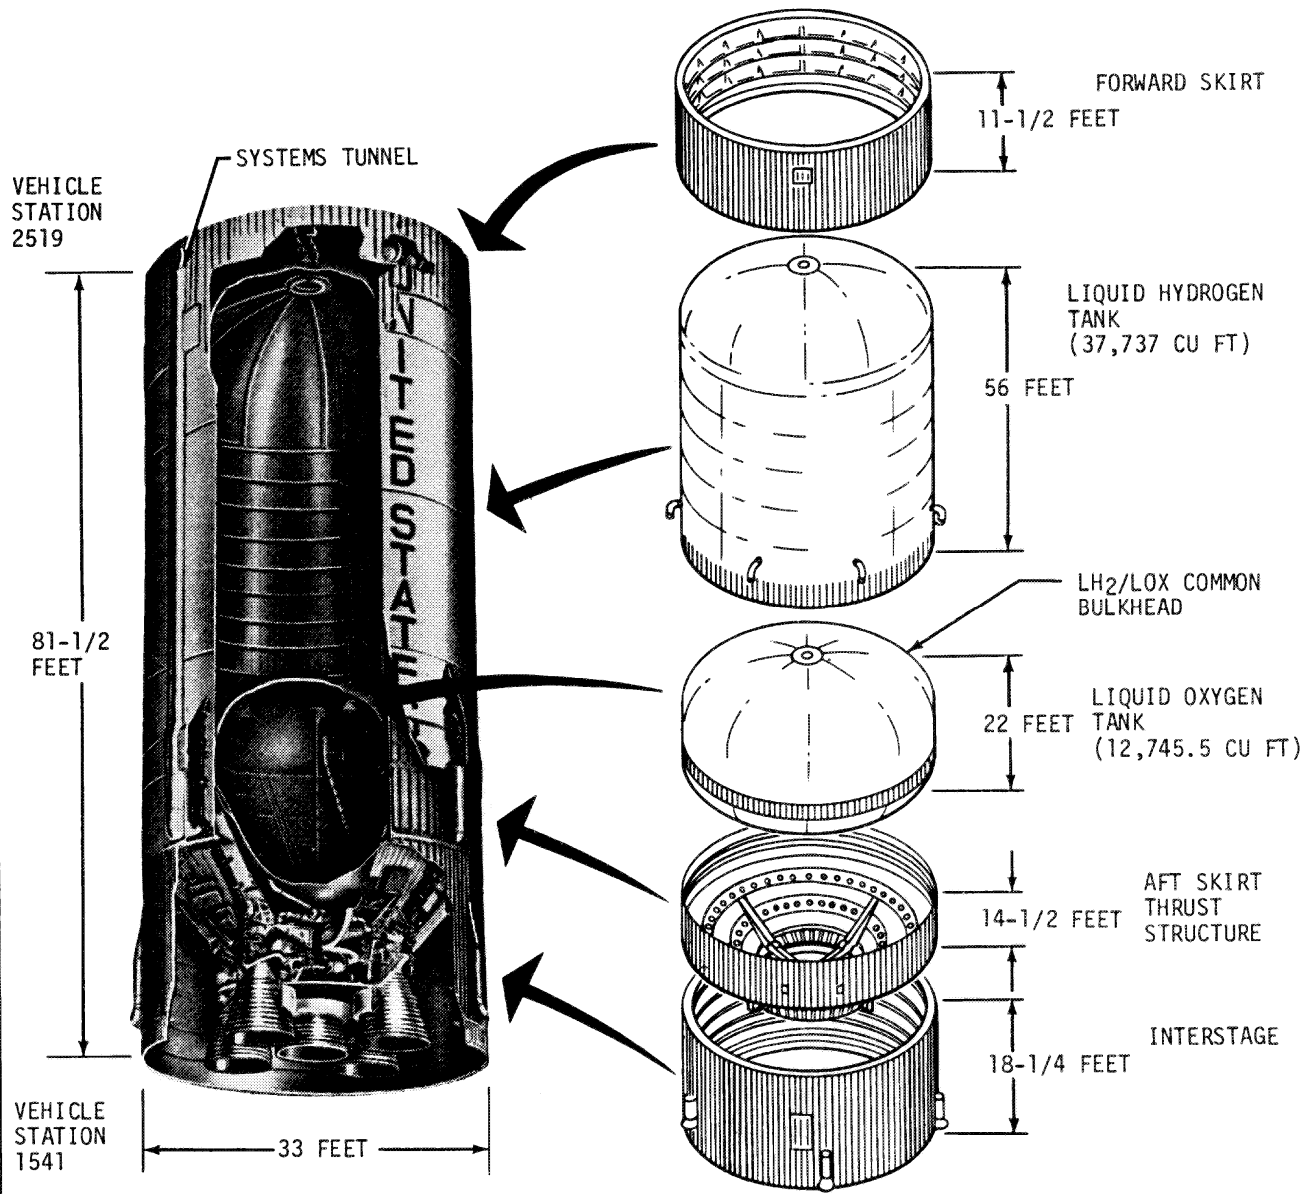


J-2 ROCKET ENGINE

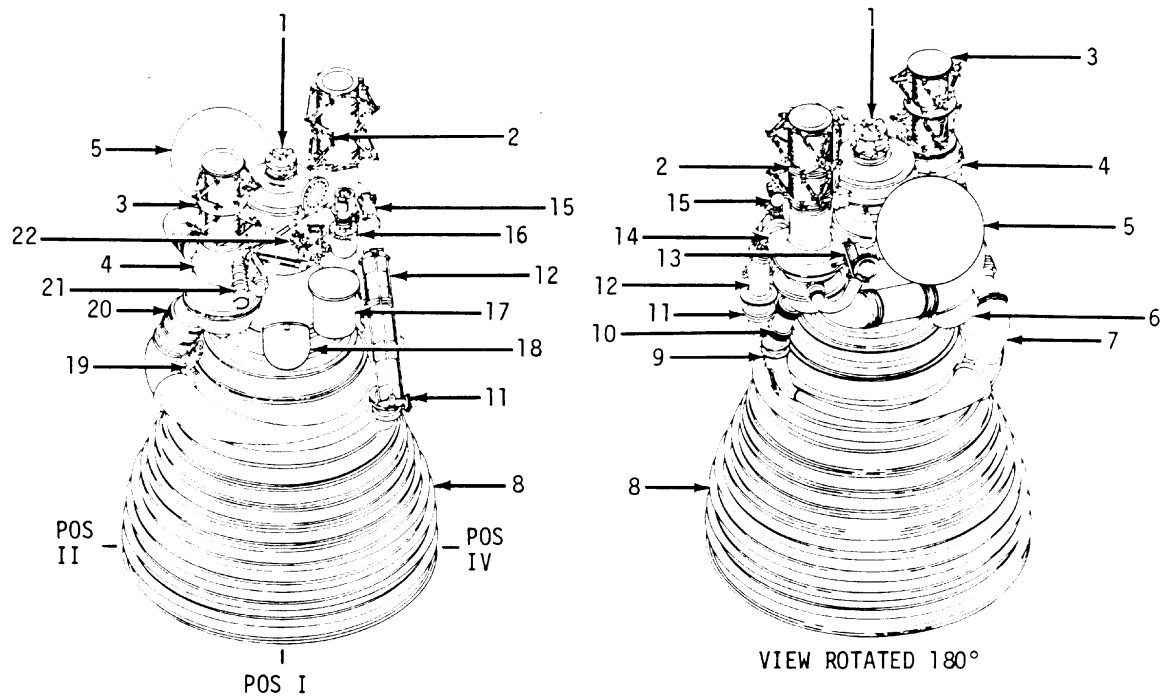

- | | | | |
|---|----------------------------------|-----------------------------------|----------------------------------|
| 1. GIMBAL | 7. EXHAUST MANIFOLD | 13. START TANK DISCHARGE VALVE | 19. ANTI-FLOOD CHECK VALVE |
| 2. FUEL INLET DUCT | 8. THRUST CHAMBER | 14. FUEL TURBOPUMP | 20. HEAT EXCHANGER |
| 3. OXIDIZER INLET DUCT | 9. OXIDIZER TURBINE BYPASS VALVE | 15. FUEL BLEED VALVE | 21. PROPELLANT UTILIZATION VALVE |
| 4. OXIDIZER TURBOPUMP | 10. TURBINE BYPASS DUCT | 16. GAS GENERATOR | 22. PNEUMATIC CONTROL PACKAGE |
| 5. START TANK | 11. MAIN FUEL VALVE | 17. ELECTRICAL CONTROL PACKAGE | |
| 6. AUXILIARY FLIGHT INSTRUMENTATION PACKAGE | 12. HIGH PRESSURE FUEL DUCT | 18. PRIMARY FLIGHT INSTR. PACKAGE | |

STAGE SEPARATION SYSTEMS

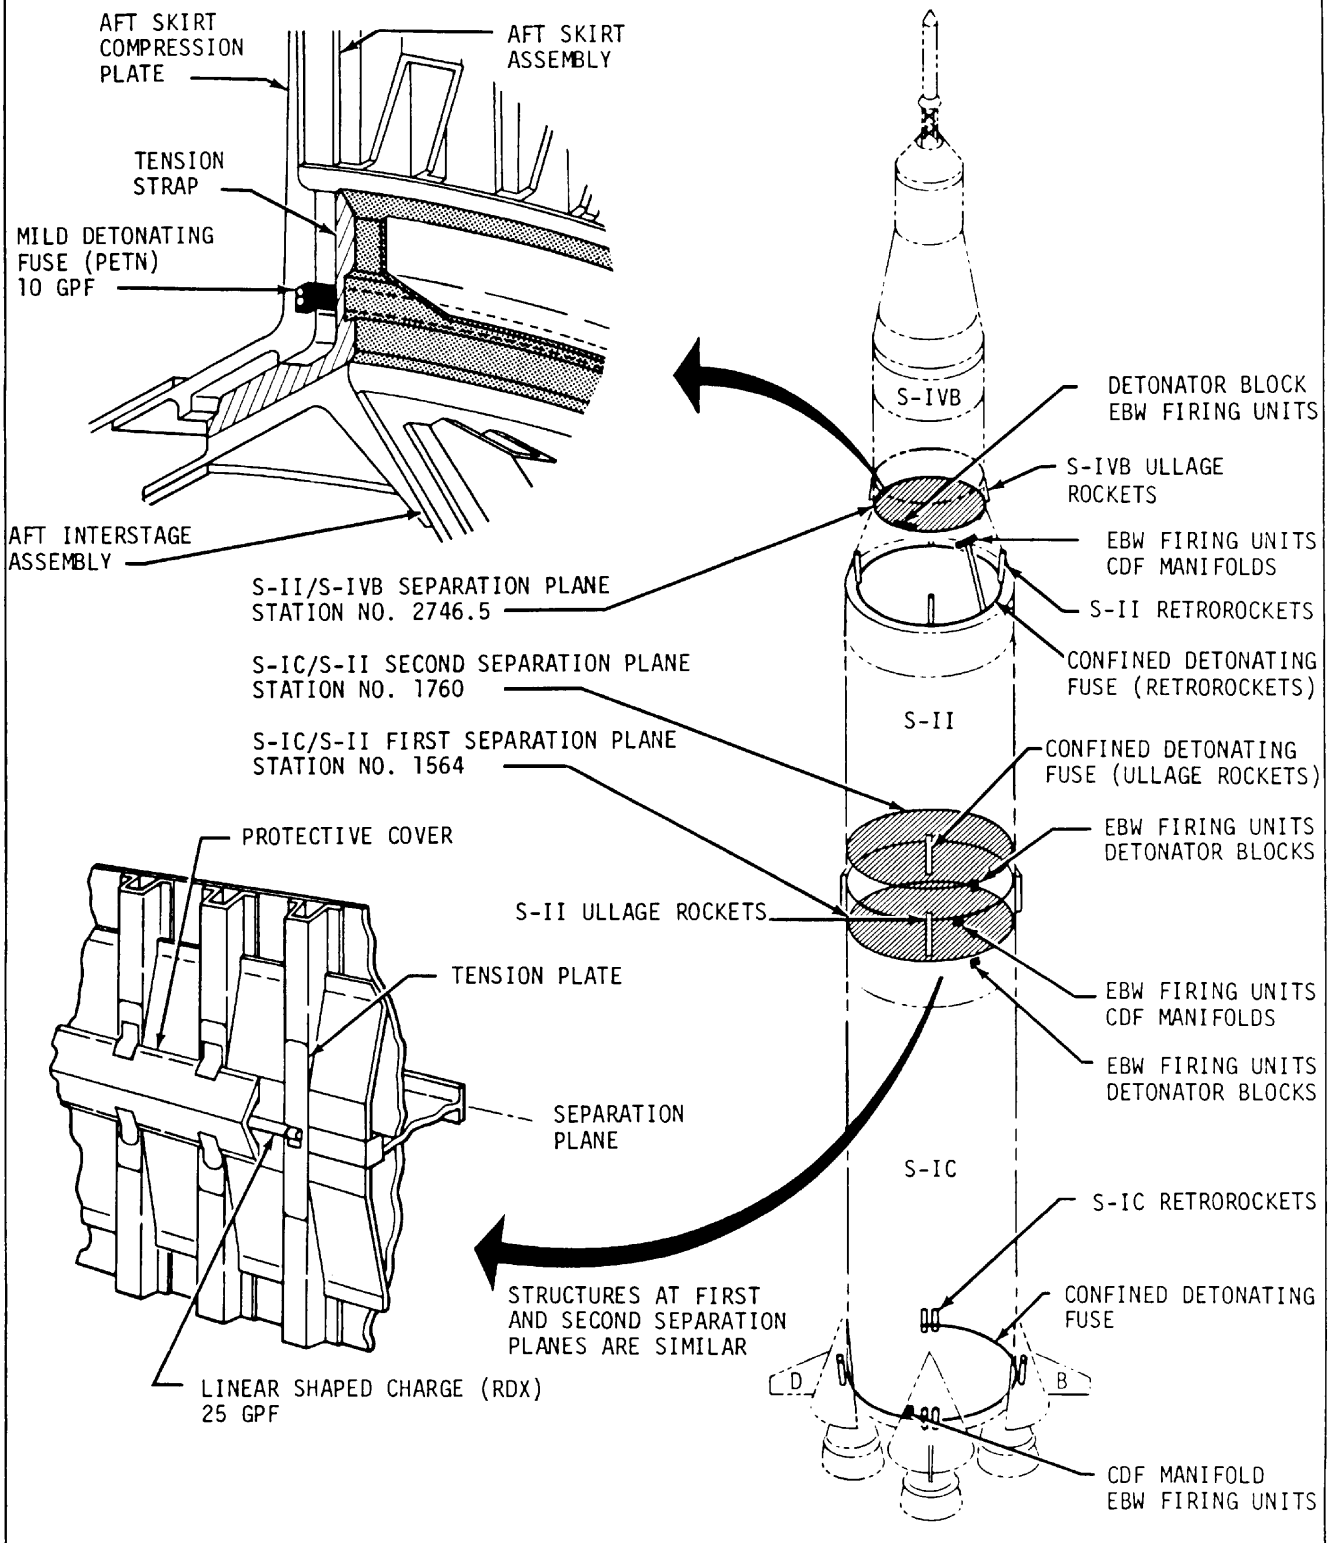

S-IC/S-II AND S-II/S-IVB SEPARATION

S-IC/S-II separation

1

EBW firing units enabled

A ground-latched interlock renders all the EBW firing units on the Saturn V inoperative while the vehicle is on the launch pad. The interlock is released with umbilical disconnect during liftoff, and the subsystem is reset to flight conditions.

2

S-IC/S-II separation ordnance arm

The ordnance-arm command is routed through the S-II switch selector to both the S-IC stage electrical circuitry to supply 28 vdc to the EBW units for first-plane separation and retrorocket ignition, and to the S-II stage electrical circuitry to supply 28 vdc to the EBW units for ullage rocket ignition and second-plane separation.

3

S-IC outboard engine cutoff followed by S-II ullage rocket ignition

4

First plane separation

Second plane separation is enabled by the removal of an electrical interlock during first plane separation.

5

Second plane separation

The second plane separation command is generated by the IU approximately thirty seconds after first plane separation.

This delay permits the transient vehicle motion, associated with first plane separation, to dampen out.

The separation command is routed to the S-II switch selector to trigger the ordnance train and ignite the LSC for second plane separation. The LSC detonates, severing the S-II interstage from the S-II stage. The combined effect of vehicle acceleration and the reaction caused by the J-2 engine exhaust plume impingement retards the interstage.

S-II/S-IVB separation

Physical separation is initiated by the IU at the end of the S-II boost phase following shutdown of the five J-2 engines. Separation requires the performance of the following major functions in the sequence described:

6

S-II/S-IVB separation ordnance arm

The ordnance-arm command is routed through the S-II switch selector to both the S-II and S-IVB stage electrical circuitry and carries 28 vdc to the EBW firing units for S-II/S-IVB separation and retrorocket ignition.

7

S-II/S-IVB separation

Four solid propellant S-II retrockets, (figure 5-22) are mounted at equal intervals on the periphery of the S-II/S-IVB interstage structure and are used to retard the S-II stage after separation.

Figure 5-20 (Sheet 1 of 2)

S-IC/S-II AND S-II/S-IVB SEPARATION





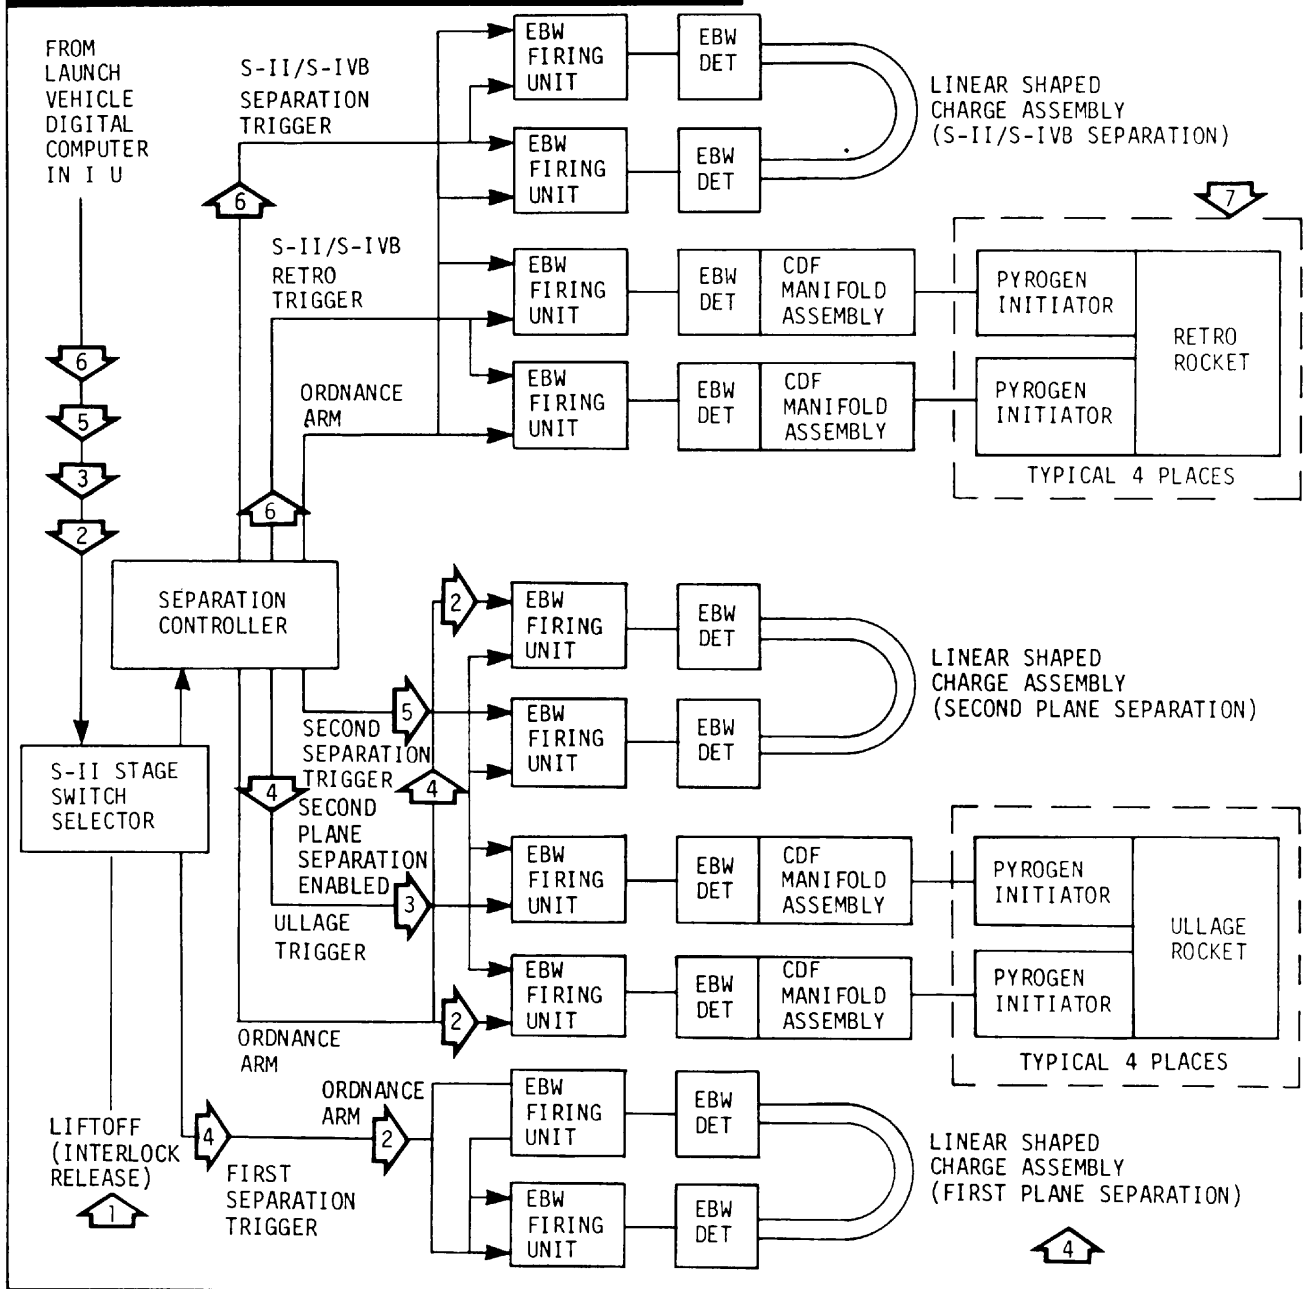


Figure 5-20 (Sheet 2 of 2)

S-II ULLAGE AND RETROROCKETS

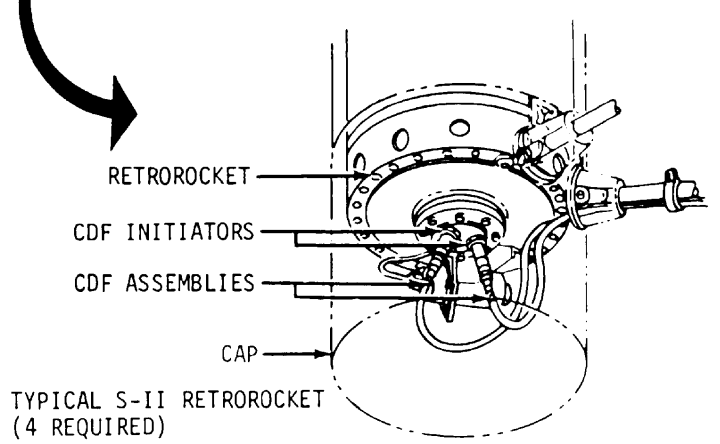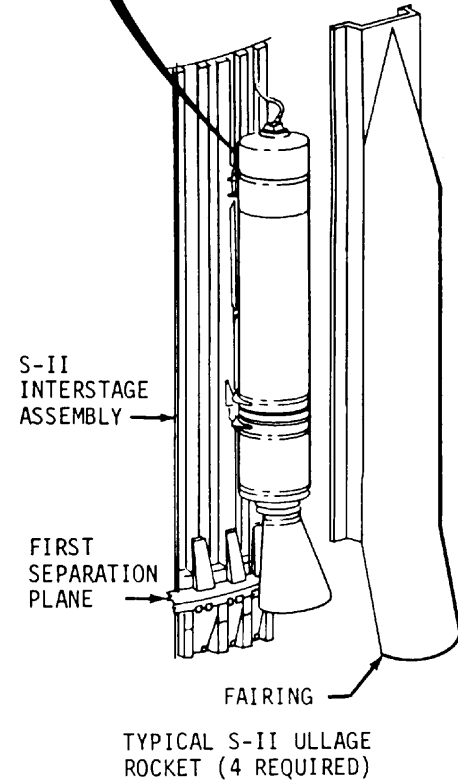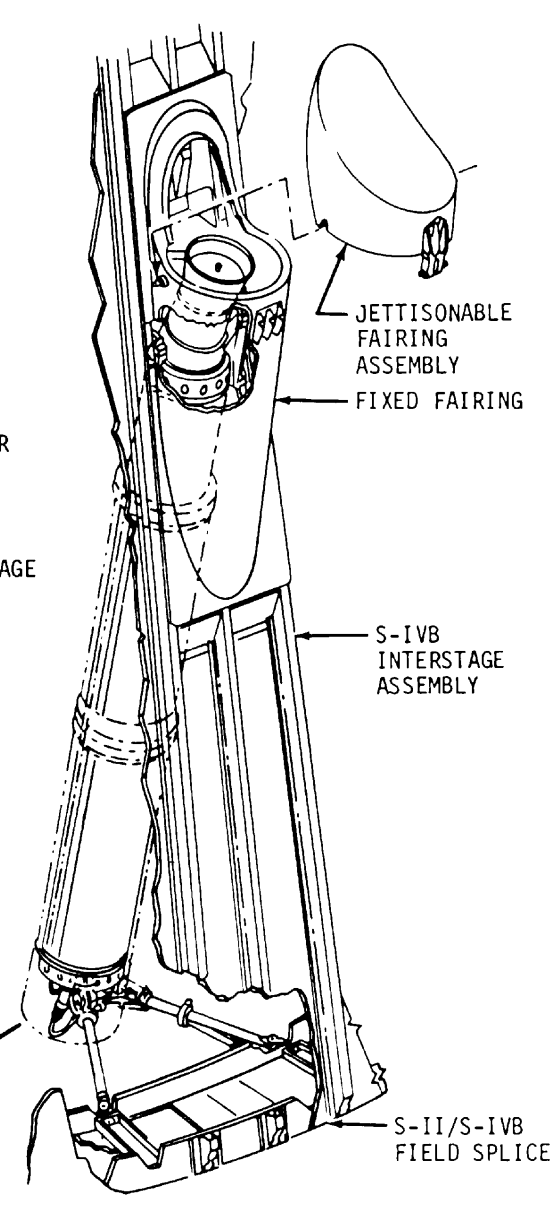

S-IVB STAGE STRUCTURE

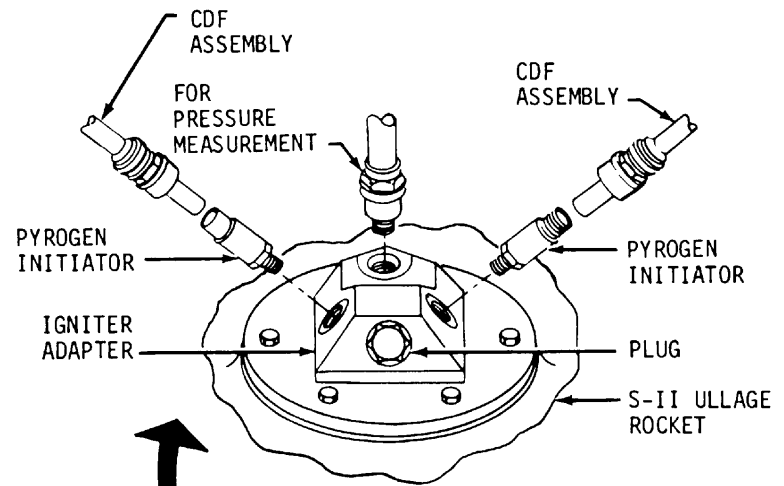