

TYPICAL PROPERTIES				
Meets or exceeds A137.1 ANSI standard				
C.O.F. ²		Abrasion Resistance	Absorption	BREAK STRENGTH
DRY	WET			
Standard				
> .50	> .50	Index of 35 or better	< 3%	250 Lbs. Min.
Slip Resistant*				
> .60	> .60	Index of 35 or better	< 3%	250 Lbs. Min.

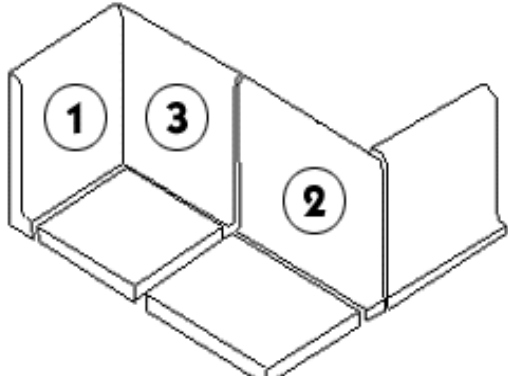
²These values may vary from lot to lot

- 1/2" thick

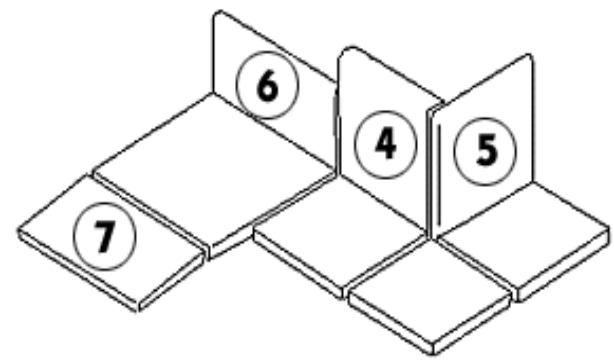
* Metro Quarry's X Series has a surface that provides enhanced slip-resistance for the life of the tile. The metallic additive is dispersed throughout the entire body of the tile. When properly maintained, the X-Series meets and exceeds all ADA recommendations.

Florida Tile Industries, Inc.

TRIM:

Description	Product #	Imperial
	1. Q3565	6" x 6"
	Q3585	6" x 7-5/8"
	Q3485	3-5/8" x 7-5/8"
	2. QL/R3565	6" x 6"
	QL/R3585	6" x 7-5/8"
	QL/R3485	3-5/8" x 7-5/8"
	QL/R1485	3-5/8" x 7-5/8"
	3. Q3565B	6" x 6"




Cove Base & Cove Base Corner

	4. Q1665	6" x 6"
	5. Q1665C	6" x 6"
	6. Q1485	3-5/8" x 7-5/8"
	7. Q8485	3-5/8" x 7-5/8"
	8. Q1485T	3-5/8" x 7-5/8"
	(Not Shown)	

Bullnose, Bullnose Corner, Stair Tread

9495.xls

& Transition Tile

AVAILABLE SIZES		
 8" x 8" (20 x 20 cm)	 6" x 6" (15 x 15 cm)	 4" x 8" (10 x 20 cm)

* Recommend 3/8" grout joint