

SPEC SHEET
PX01-5VNPT

*Interchangeable with
Model TH-1V*

\$854
Model Shown

PX01 SERIES
0-5 Vdc Output

0-2 to 7,500 psi
0-140 mbar to 0-500 bar

1 bar = 14.5 psi
1 kg/cm² = 14.22 psi
1 Atmosphere = 14.7 psi = 29.93 in-Hg = 760.2 mm-Hg = 1.014 bar

- Very High Accuracy
- 5-Point Calibration Provided
- Internal Shunt-Resistor for easy System Checks
- FM/CSA Intrinsically Safe - Standard
- All Stainless Steel Construction
- Hermetically Sealed Double Diaphragm Design for Harsh Environments
- Available in Gage, Absolute, Sealed Gage, PSI and Metric Ranges
- Cable or Connector Models
- Optional Pressure Ports to Fit Most Industrial Applications

For Sales and Service
In U.S.A. and Canada

1-800-872-3963SM
1-800-USA-DYNE

International Customers Dial
(614) 965-9340
24-Hour FAX (614) 965-9438


OMEGADYNESM FAX

OMEGADYNE's 24-Hour
On-Line Publishing Service

1-800-344-3963SM
1-800-DIG-DYNE

Document # 3649

OMEGADYNE, Inc.
149 Stelzer Court, Sunbury, OH 43074
<http://www.omegadyne.com>
e-mail: info@omegadyne.com



© COPYRIGHT 1996 OMEGADYNE, INC. ALL RIGHTS RESERVED.



**VERY HIGH
ACCURACY
AMPLIFIED
VOLTAGE
OUTPUT
PRESSURE
TRANSDUCER**
**1/4 NPT Pressure
Connection**

Model PX01C1-100G5T
Shown Smaller than Actual Size

➔ *Most Popular Models Highlighted* ◀

Prices Shown in U.S. Dollars

To Order: (Specify Model Number)			
Most Popular Models - 0-5 V Output / 1/4 NPT Connection / Connector Style			
Range (psi)	Model Number	Price	Compatible Meters
Absolute Pressure (All Ranges Available in Absolute Pressure)			
0-10	PX01C1-010A5T	\$854	INFP, INFCP, IDP
0-15	PX01C1-015A5T	854	INFP, INFCP, IDP
0-20	PX01C1-020A5T	854	INFP, INFCP, IDP
0-25	PX01C1-025A5T	854	INFP, INFCP, IDP
0-50	PX01C1-050A5T	854	INFP, INFCP, IDP
Gage Pressure (All Ranges Also Available in Sealed Gage Pressure)			
0-2	PX01C1-002G5T	924	INFP, INFCP, IDP
0-5	PX01C1-005G5T	924	INFP, INFCP, IDP
0-10	PX01C1-010G5T	924	INFP, INFCP, IDP
0-15	PX01C1-015G5T	924	INFP, INFCP, IDP
0-50	PX01C1-050G5T	854	INFP, INFCP, IDP
0-75	PX01C1-075G5T	854	INFP, INFCP, IDP
0-100	PX01C1-100G5T	854	INFP, INFCP, IDP
0-200	PX01C1-200G5T	854	INFP, INFCP, IDP
0-300	PX01C1-300G5T	854	INFP, INFCP, IDP
0-500	PX01C1-500G5T	854	INFP, INFCP, IDP
0-1000	PX01C1-1KG5T	854	INFP, INFCP, IDP
0-1500	PX01C1-1.5KG5T	854	INFP, INFCP, IDP
0-2000	PX01C1-2KG5T	854	INFP, INFCP, IDP
0-3000	PX01C1-3KG5T	854	INFP, INFCP, IDP
0-3500	PX01C1-3.5KG5T	854	INFP, INFCP, IDP
0-5000	PX01C1-5KG5T	854	INFP, INFCP, IDP
0-7500	PX01C1-7.5KG5T	854	INFP, INFCP, IDP

* 4 Digit meter counts in increments of 10.

Interchangeable with Model TH-1V

Metric Ranges Available - Consult Engineering

To order Absolute Pressure replace "G" in model number with "A" (no extra charge)

To order Gage units replace "G" in model number with "S" (no extra charge)

Ordering Examples: 1.) **PX01C1-500G5T** is a 500 psi gage model with 0-5 Vdc output, a 1/4 NPT male fitting, and a **PT1H-10-6P** Connector, **\$854**. 2.) **PX01C1-100A5T** is a 100 psi absolute pressure transducer with 0-5 Vdc output, a 1/4 NPT male fitting, and a **PT1H-10-6P** Connector, **\$854**. 3.) **PX01C1-200S5T** is a 200 psi sealed gage pressure transducer with a 0-5 Vdc output, 1/4 NPT male fitting, and a **PT1H-10-6P** Connector, **\$854**. To order Mating Connector (not included) specify **PT06F-10-6S**, **\$26.50**.

Printed On Recycled Paper



The OMEGADYNE PX01 series is a very high accuracy, amplified voltage output, industrial pressure transducer. The all stainless steel construction and hermetically sealed case makes it suitable for harsh industrial environments. It is a true high accuracy industrial device with FM/CSA Intrinsically Safe rating standard. A broad temperature compensated range of 60 to 160°F and excellent temperature compensation make this transducer very stable with fluctuating temperatures.

The PX01 is available in gage, absolute or sealed models as well as PSI or metric ranges. NPT and 7/16-20 O-ring seal fittings are available for industrial and Hydraulic applications.

SPECIFICATIONS: 0-5 Vdc Output

Electrical:

Excitation: 24 - 32 V ac/dc

Output: 0-5 Vdc ±10% adj.

Zero Balance: 0 V adj. ±10% FSO

Agency Approvals: FM/CSA
Intrinsically Safe IS/I.II.III/1/CDEFG - standard

Performance:

Accuracy Class: 0.05%

Linearity: ±0.05% FSO


Hysteresis: ±0.05% FSO

Repeatability: ±0.05% FSO


CUSTOM CONFIGURATIONS

SERIES	PRESSURE PORT	ELECTRICAL CONNECTION	RANGE (PSI)	UNITS	OUTPUT	OPTIONS
PX01	[1]	[2]	[3]	[4]	[5]	[6]
	Models < 10,000 psi		002*	S,G,A	V = mV/V Output	OL = Overload Stops
	C = 1/4-18 NPT-M +\$19		005*	S,G,A	Base Price	+\$45
	D = 1/4-18 NPT-F no charge		010	S,G,A	5T = 0 to 5 Vdc Output	OX = Cleaned for Oxygen use
	J = 7/16-20 UNF-M +\$19		015	S,G,A	+\$155 all ranges	+\$75 & 2 weeks
	K = 7/16-20 UNF-F no charge		020	S,G,A	5Z = Isolated 0 to 5 Vdc Output	
	Models ≥10,000 psi		025	S,G,A	+\$190 all ranges	
	S = 1/4 HP Tube Fitting no charge		050	S,G,A	10T= 0 to 10 Vdc Output	
			075	S,G,A	+\$155 all ranges	
	0 = 3 ft (0.9m) cable (std)		100	S,G,A	I = 4 to 20 mA Output	
	+\$2/ft over 3 ft		150	S,G,A	+\$175 all ranges	
	1 = PT1H-10-6P Connector or equal (no charge)		200	S,G,A		
	Mating Connector (not included)		250	S,G,A		
	PT06F-10-6S, \$26.50.		300	S,G,A		
	5 = Lightning protected Amplifier Box (no charge) (4-20 mA models only)		500	S,G,A		
			750	S,G,A		
			1K	S,G,A		
			1.5K	S,G,A		
			2K	S,G,A		
			3K	S,G,A		
			3.5K	S,G,A		
			5K	S,G,A		
			7.5K	S,G,A		
			10K†	S,G,A		
			20K†	S,G,A		
			30K†	S,G,A		

* 2 and 5 psi Ranges available only with amplified output
† 1/4 HP Tube Fitting

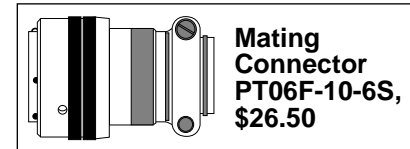

- To Order a Custom Configuration:**
1. Select a Pressure Port
 2. Select Electrical Connection
 3. Select a Pressure Range
 4. Select Pressure Units
 5. Select Output
 6. Select Options and Agency Approvals

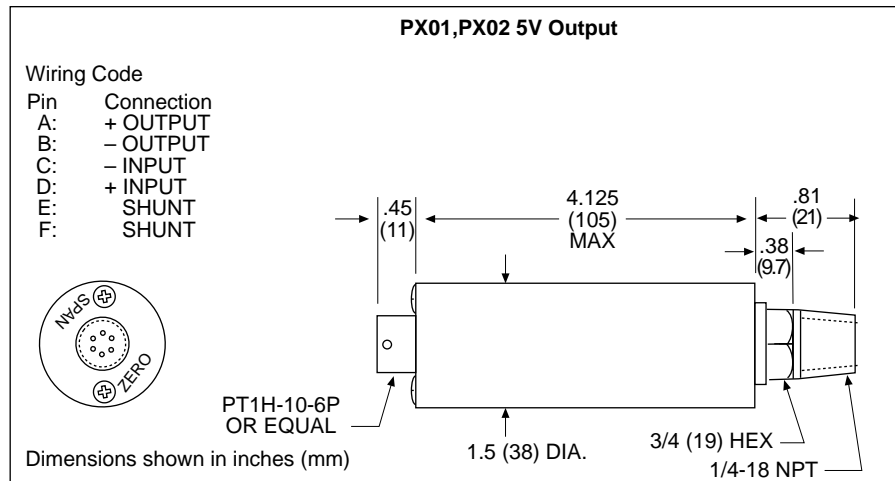

Sensing Element: 4 active-arm bridge, using thick film strain gages in a hermetically sealed "double diaphragm" chamber

Shunt Calibration Value: Specified on calibration sheet

Environmental:

Operational Temp Range:
-46 to 121°C (-50 to 250°F)

Compensated Temp Range:
16 to 71°C (60 to 160°F)

Thermal Effects: Span: 0.0015% FSO/°F
Zero: 0.001% FSO/°F

Pressure:

Ranges (psi):

2,5,10,15,20,25,50,75,100,150,200,250,300,500,750,1K,1.5K,2K,3K,3.5K,5K,7.5K

Proof Pressure:

150% of rated pressure

Burst Pressure:

300% of rated pressure

Mechanical:

Wetted Parts: 17-4PH SS

Pressure Port:

Ranges <10000 psi: 1/4-18 NPTM
Also Available: 7/16-20 UNF-2A M/F
Ranges 10000-30000 psi: 9/16-18, 1/4" HP tube

Electrical Connection: PT1H-10-6P or equal. Also available: 3 ft (0.9m) 6-conductor cable

Interchangeable with Model TH-1V

Metric Ranges Available – Consult Engineering

Ordering Examples: 1.) **PX01C1-100GI** is a 100 psi Gage Pressure transducer with a 1/4-18 NPT-Male fitting, a PT1H-10-6P Connector, and 4-20mA output, \$680+175+19 = **\$874**. Mating Connector (not included) order **PT06F-10-6S, \$26.50**.

2.) **PX01K0-1KS5Z** is a 1,000 Sealed Gage Pressure transducer with a 7/16-20 UNF-Female fitting, a 10 ft cable, and Isolated 0 to 5 Vdc output, \$680+190 = **\$870**.

3.) **PX01J1-015A5T** is a 15 psi Absolute Pressure transducer with a 7/16-20 UNF-Male fitting, PT1H-10-6P Connector, and 0 to 5 Vdc output, \$680+155+19 = **\$854**. Mating Connector (not included) order **PT06F-10-6S, \$26.50**.