




# EtherEZ

## ISA Ethernet Network Cards

### 10BASE-T, Thin Coax, and Combo Models

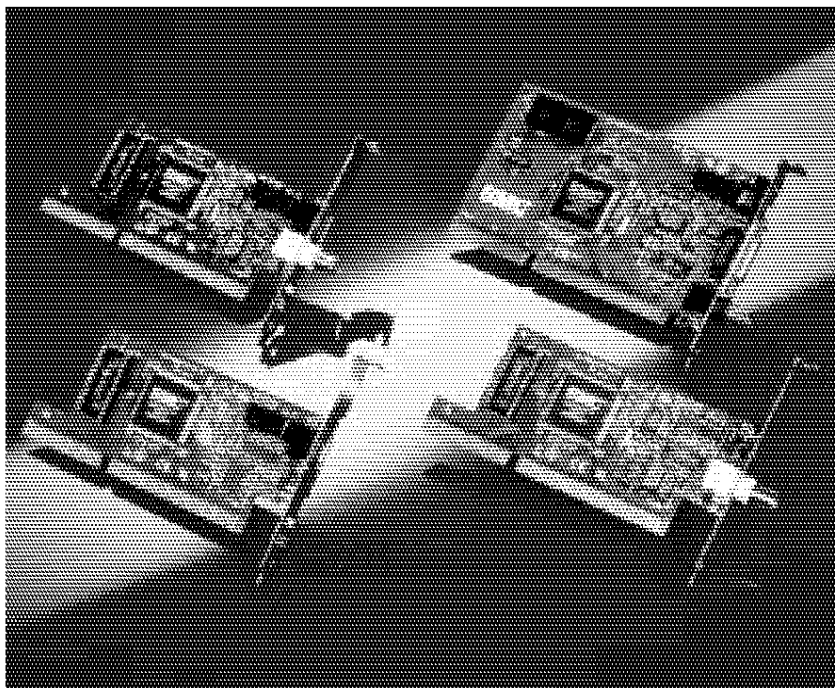

#### The Easy Way to Make Your Network Connections

For quick installation, superior performance and economical price, there's EtherEZ™, the *best* ISA Ethernet adapters we've ever made. According to XXCAL Test Laboratories, EtherEZ installs in less than thirty seconds, and its performance rivals that of any competitor!

These 16-bit adapters have been designed with such flexibility, they can be installed with equal ease in any ISA computer. They're fully auto-configurable in new Plug and Play (PnP) computers (simply install the adapter and power up), and can be configured in just a single step in older, non-PnP computers. They're also faster than any ISA card we've ever made, thanks to SimulTasking™ technology, SMC's unique pipelined data transfer technique.

EtherEZ's drivers are just as flexible and easy to use as the adapters themselves. The drivers are compatible with all previous generation SMC and Western Digital Ethernet adapters, so there's no need to keep track of which driver works with which SMC adapter. And, you can be sure that EtherEZ will work with your network, because it ships with the best driver selection in the industry and supports hundreds of networking environments, including Windows 95.

So, whether you've been using SMC's adapters for years or have never installed an adapter before, EtherEZ is the easy choice. Choose from four models: a 10BASE-T adapter with an RJ-45 connector for unshielded twisted-pair cabling; a 10BASE2 adapter with a BNC connector for thin coax cabling; a 2-port combo adapter with BNC and RJ-45 connectors; and a 3-port combo adapter with BNC, RJ-45 and AUI connectors.

#### Features/Benefits

##### Outstanding Performance

- ◆ SMC's unique SimulTasking pipelined data transfer technique for top performance
- ◆ Optimized network drivers

##### Easy Installation

- ◆ Installs in less than thirty seconds with a single-command utility
- ◆ EZStart™ utility simplifies driver installation
- ◆ Diagnostic LEDs easily visible on bracket
- ◆ On-board socket for optional Boot ROM

##### Compatible

- ◆ Plug and Play ISA specification v1.01a
- ◆ IEEE 802.3 and ISO/IEC 8802-3 standards
- ◆ Drivers support all existing EtherCard™ adapters, including Elite and Ultra

##### Easy Configuration

- ◆ Auto-configurable in PnP computers on power-up
- ◆ One-step configuration in non-PnP computers
- ◆ No shared memory space used when operating in I/O-mapped mode
- ◆ No jumpers to set
- ◆ Auto-media detect on combo models recognizes connector in use

##### Easy Desktop Management

- ◆ SMC's PC Agent/SNMP for desktop management from any SNMP-based Manager

##### Reliable

- ◆ Lifetime warranty
- ◆ FCC Class B certified
- ◆ CE marking

#### Support for Popular Network Operating Systems

- ◆ Novell NetWare: DOS and OS/2 Workstation and 386 (3.x/4.x) Server
- ◆ Microsoft: Windows for Workgroups, Windows NT and Windows 95
- ◆ Banyan VINES
- ◆ IBM LAN Server
- ◆ DEC Pathworks
- ◆ Artisoft LANtastic
- ◆ NDIS: DOS and OS/2
- ◆ UNIX: SCO, Novell UnixWare, Sunsoft ISC, Solaris x86, and many others
- ◆ Plus many other drivers available on SMC's Bulletin Board



## SMC Offices Worldwide

For information, call or fax:

◆ SMC—Headquarters

Hauppauge, NY  
Phones: (800) SMC-4-YOU  
(516) 435-6000  
Fax: (516) 273-1803

◆ SMC—Canada

Oakville, Ontario, CANADA  
Phone: (800) SMC-4-YOU

◆ SMC—France

St. Germain-En-Laye  
FRANCE  
Phone: 33 (1) 30.87.42.42  
Fax: 33 (1) 30.61.41.34

◆ SMC—Europe

Bracknell, Berkshire, UK  
Phone: 44 (0) 1344 418800  
Fax: 44 (0) 1344 418828

◆ SMC—Northern Europe

Bracknell, Berkshire, UK  
Phone: 44 (0) 1344 418820  
Fax: 44 (0) 1344 418826

◆ SMC GmbH—

Central Europe  
München, GERMANY  
Phone: 49 (0) 89 92861-0  
Fax: 49 (0) 89 92861-230

◆ SMC GmbH—

E. Europe/Middle East  
München, GERMANY  
Phone: 49 (0) 89 92861-142  
Fax: 49 (0) 89 9101934

◆ SMC—Australia

Sydney, AUSTRALIA  
Phone: 61.2.238.2206  
Fax: 61.2.238.2220  
Melbourne, AUSTRALIA  
Phone: 61.3.653.9461  
Fax: 61.3.653.9548

◆ SMC—South Africa

Sandton, Johannesburg  
SOUTH AFRICA  
Phone: 27 (0) 11 784-0414  
Fax: 27 (0) 11 784-0519

◆ SMC—Asia

SINGAPORE  
Phone: 65-320-8391  
Fax: 65-320-8359

◆ TMC—Japan


Tokyo, JAPAN  
Phone: 81 (3) 57212271  
Fax: 81 (3) 57212270

◆ SMC—EliteFax™

Fax-on-Demand System  
US/Canada: (800) SMC-8329  
Elsewhere: (516) 435-6107

### World Wide Web

<http://www.smc.com/>



# EtherEZ

## ISA Ethernet Network Cards

### 10BASE-T, Thin Coax, and Combo Models

### Specifications

#### Adapter Type

8416T (RJ-45 connector)  
8416B (BNC connector)  
8416BT (RJ-45 and BNC connectors)  
8416BTA (RJ-45, BNC and AUI connectors)

#### Network Interface

RJ-45 (UTP Cable; EIA/TIA Categories 3, 4, 5)  
BNC (Coax Cable, RG-58A/U or RG-58C/U)  
AUI (External Transceiver Drop)

#### Weight

8416T (2.2 oz./62 gm)  
8416B (2.5 oz./70 gm)  
8416BT (2.7 oz./76 gm)  
8416BTA (3.8 oz./108 gm)

#### Size (without bracket)

6.15 in. x 2.7 in. (15.6 cm x 6.9 cm)

#### Diagnostic LEDs

8416T (Network Activity, Link Integrity)  
8416B (Network Activity)  
8416BT (Network Activity, Link Integrity)  
8416BTA (Network Activity, Link Integrity)

#### Bus Interface

16-bit ISA

#### Interface to PC

I/O-mapped or memory-mapped

#### I/O Base Addresses

240 to 380 in increments of 20 (hex)

#### Interrupt Channels

2/9, 3, 5, 7, 10, 11

#### RAM

Buffer Size 8 KB  
Base Addresses  
C000 to EE00 in increments of 200 (hex)

#### Optional Boot ROM

Window Size 8 KB  
Base Addresses  
C000 to EE00 in increments of 200 (hex)  
Protocols  
NetWare, LAN Manager, IBM LAN Server,  
RPL, TCP/IP  
Type 27512 (200 ns access time)

#### Temperature

Operating 32° to 131° F (0° to 55° C)  
Storage -4° to 158° F (-20° to 70° C)

#### Humidity

Operating 10% to 90%  
Storage 5% to 95%

#### Operating Voltage

8416T, 8416B, 8416BT (+5 VDC ± 5%)  
8416BTA (+12 VDC ± 10%)

#### Operating Power

Typical (idle)  
8416T (0.60 W)  
8416B (2.20 W)  
8416BT and 8416BTA, 10BASE-T (2.10 W)  
8416BT and 8416BTA, 10BASE2 (2.20 W)  
8416BTA, AUI (2.25 W)  
Maximum (active)  
8416T (1.20 W)  
8416B (3.85 W)  
8416BT and 8416BTA, 10BASE-T (3.35 W)  
8416BT and 8416BTA, 10BASE2 (3.85 W)  
8416BTA, AUI (3.90 W)

#### Standards

IEEE 802.3 and ISO/IEC 8802-3 Ethernet  
ISA PnP spec v1.01a

#### Mean Time Between Failures (MTBF)

More than 400 years

#### Compliances

CE marking  
Safety  
UL 1950  
EN60950 (TUV)  
CSA 22.2 No. 950 (UL)  
Emissions  
FCC Class B  
CDOC Class B  
BMPT Vfg 243/1991  
EN55022 (CISPR 22) Class B  
VCCI Class 2


#### Warranty

Lifetime

Product	Order Number	Description
EtherEZ	SMC8416T*	Adapter with RJ-45 connector
	SMC8416B**	Adapter with BNC connector
	SMC8416BT*	Adapter with RJ-45 and BNC connectors
	SMC8416BTA*	Adapter with RJ-45, BNC and AUI connectors

\* Available in 5-, 20-, 50- and 100-packs.

\*\* Available in 5-, 20- and 50-packs.



SMC and Standard Microsystems are registered trademarks; and EliteFax, EtherCard, EtherEZ, EZStart and SimulTasking are trademarks of Standard Microsystems Corporation. Other product and company names are trademarks or registered trademarks of their respective holders.

© Copyright 1996 Standard Microsystems Corporation

4/97 ETH 8416