Twin View Setting Guide

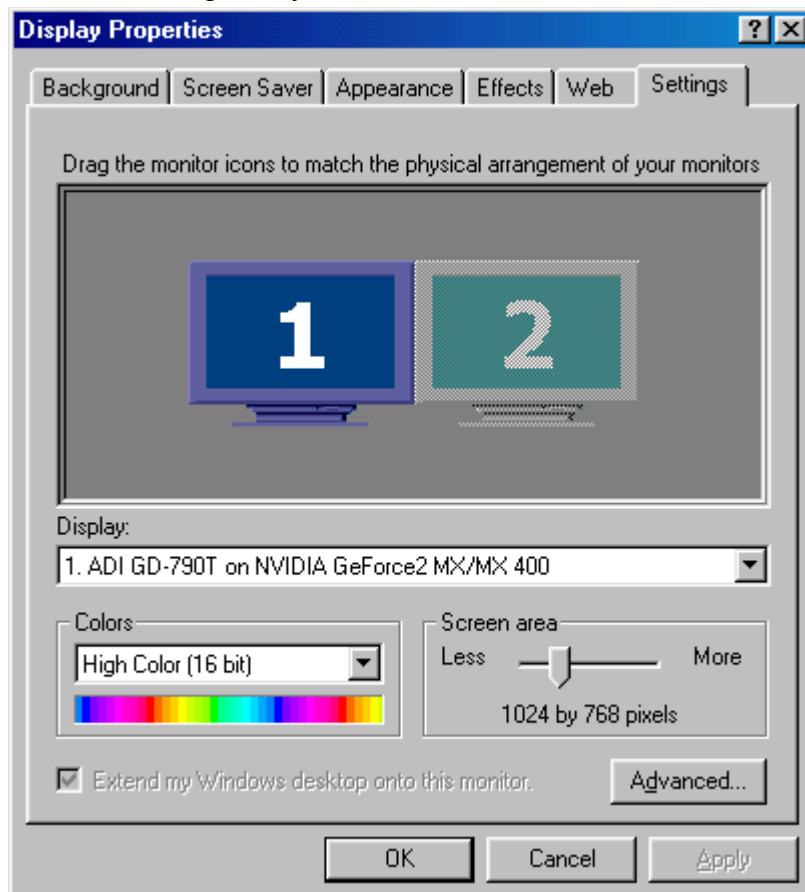## A. EQUIPMENT

1. System: Windows 98se
2. Model: SP6800/32M P38
3. BIOS: 3.11.00.18
4. Driver: V7.xx or later
5. Two monitor
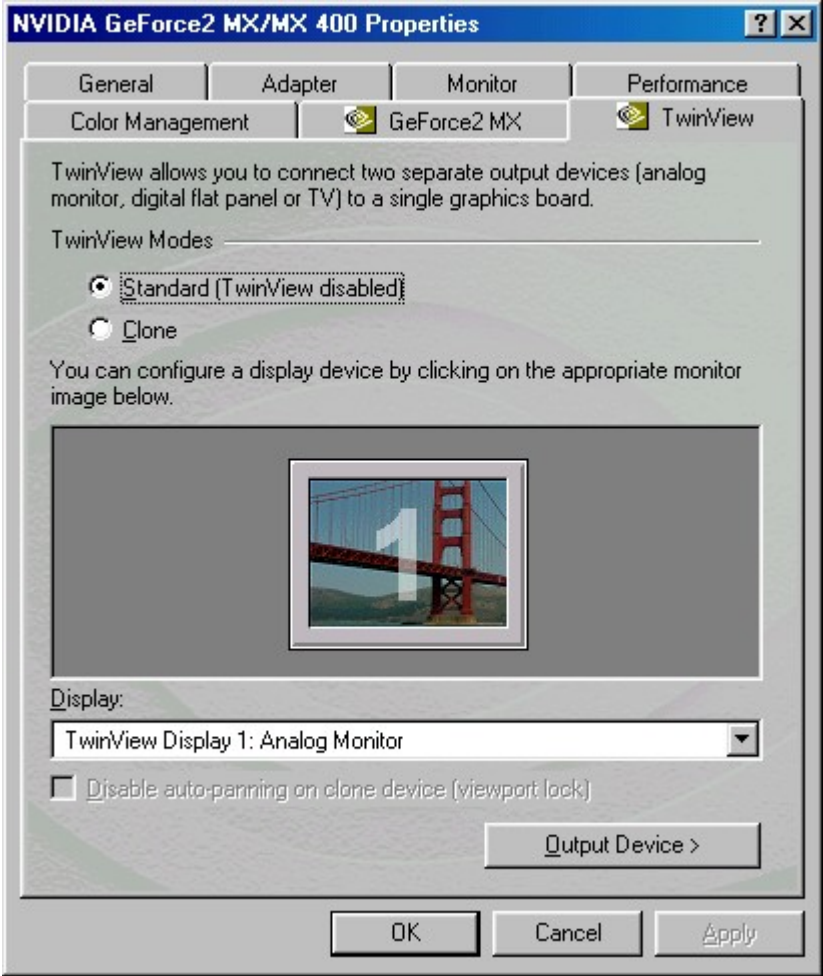
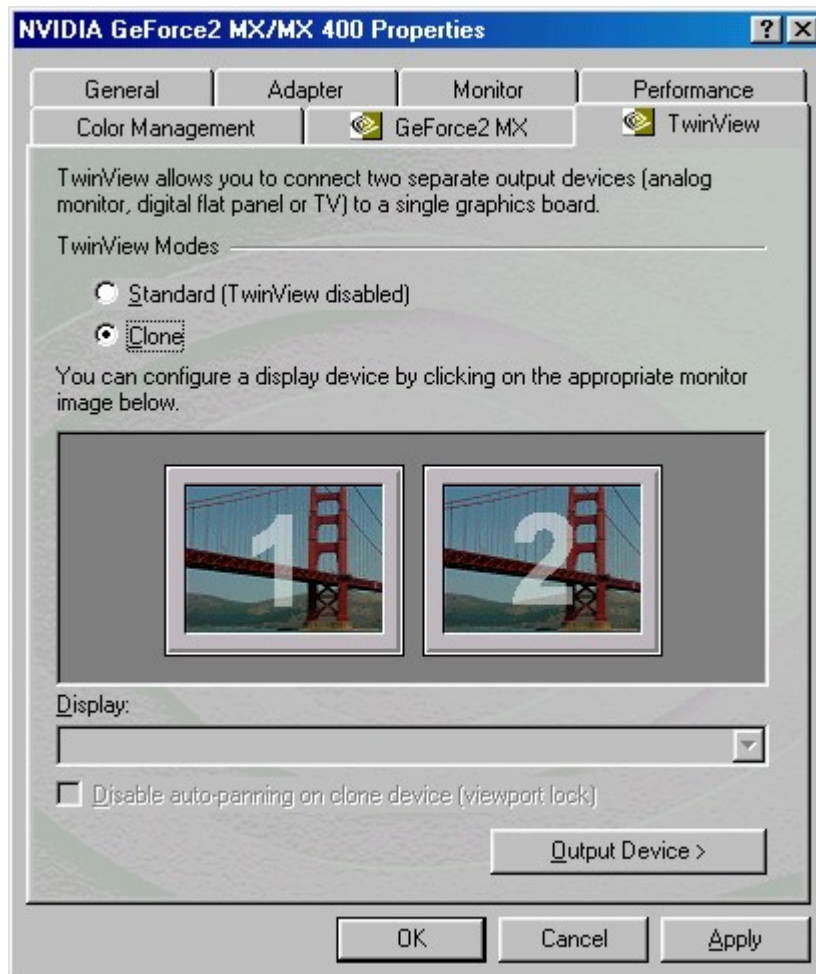## B. HOW TO USE TWINVIEW

1. CLONE MODE

    1.1 Right click mouse button on desktop, select **properties**.

    1.2 Select **settings**.

    1.3 Select primary monitor and click **advanced**.

    1.4 Select **TwinView**.

NVIDIA GeForce2 MX/MX 400 Properties

| General | Adapter | Monitor | Performance |

| Color Management | GeForce2 MX | TwinView |

TwinView allows you to connect two separate output devices (analog monitor, digital flat panel or TV) to a single graphics board.

TwinView Modes

◉ Standard (TwinView disabled)

○ Clone

You can configure a display device by clicking on the appropriate monitor image below.

Display:

TwinView Display 1: Analog Monitor

☐ Disable auto-panning on clone device (viewport lock)

Output Device >

OK   Cancel   Apply

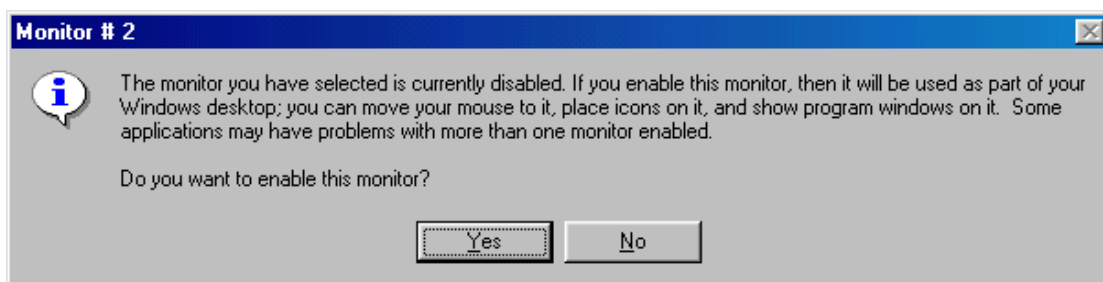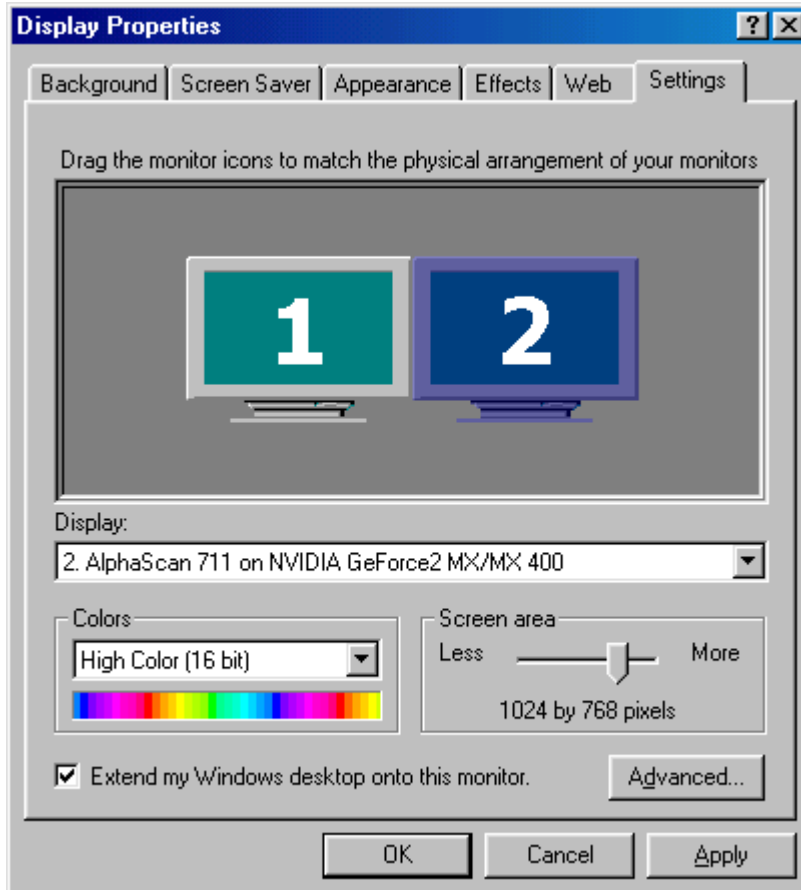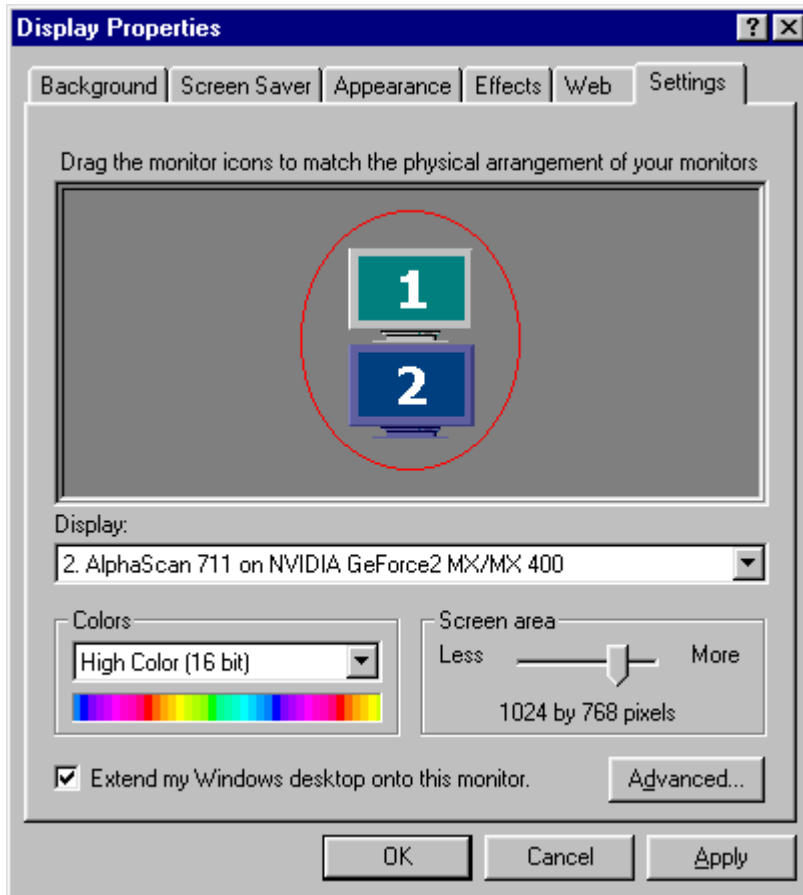1.5 Then select **Clone** and click **Apply**.

2. EXTENDED MODE

2.1 Right click mouse button on desktop, select **properties**.

2.2 Select **settings**.

2.3 Select second monitor and click **Yes**, then click **Apply**.

2.3-1 You can change your Extended Modes.

2.4 Click **Advanced**, then select **Output Device**.

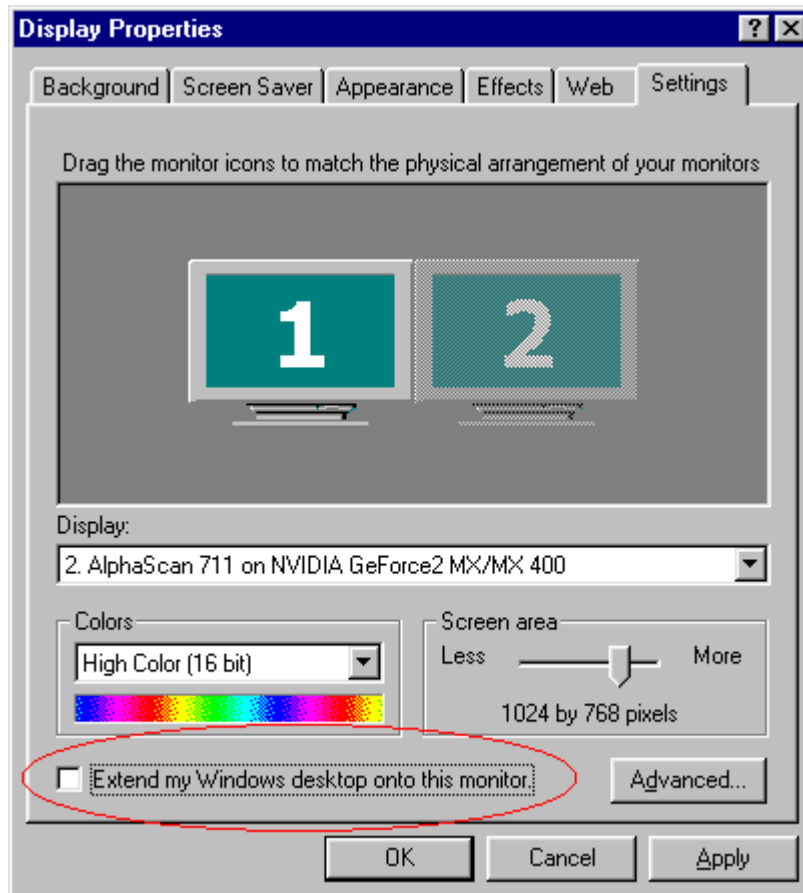If you connect to analog monitor or panel, you can select your output device.

2.5 How to disable Extended Mode

   2.5-1 Right click mouse button on desktop, select **properties**.

2.5-2 Select **settings**.

   2.5-3 Do not select " **Extend my Windows desktop onto this monitor**",
      then click **Apply**.

Trademark Acknowledgments

All brand names and trademarks are the property of their owners.