


T Series Electrical Testers

Now you can get more from a tester

New

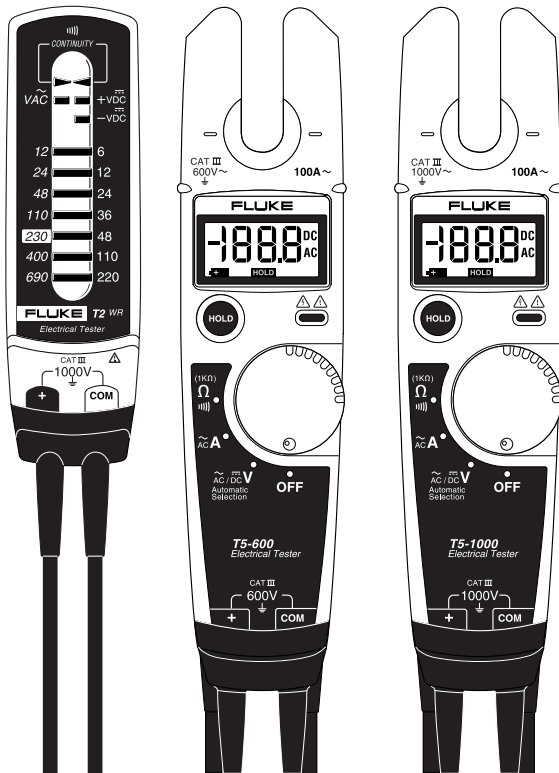

Fluke T5-600 and T5-1000 Voltage, Continuity/resistance and Current Testers

Fluke T5 electrical testers let you check voltage, continuity and current with one compact tool. With the T5, all you have to do is select volts, ohms, or current and the tester does the rest. Tough test leads stow neatly in the back of the tester, making it easy to tote the T5 in your tool pouch. The optional H5 holster keeps the test probes and leads ready to test, and lets you clip the T5 onto your belt. Open Jaw™ current lets you check current up to 100 amps - without breaking the circuit.

- Automatically measures Volts AC and Volts DC with precise digital resolution
- Displays resistance to 1000 ohms
- Easy and accurate Open Jaw™ current measurement
- Continuity beeper
- Compact design with neat probe storage
- Rugged enough to withstand a 3 meter (10-foot) drop
- Detachable Slim-Reach™ probe tips are customized for national electrical standards
- Test leads accept Fluke accessory test clips
- Available in 600 Volt and 1000 Volt models
- Can stay connected much longer than solenoid type testers
- Auto off mode to conserve battery life
- Optional holster attaches to a tool belt and neatly stows test leads

Fluke T2 Voltage and Continuity Tester

The Fluke T2 is a voltage and continuity tester that's designed to work long and hard. There are no settings - just probe the circuit and the T2 will show you whether you're looking at AC volts, DC volts, or an open circuit. You don't even have to turn it on or off! With seven different voltage indicators, it can clearly differentiate between key voltage levels.

- LEDs clearly indicate 7 AC and 7 DC nominal voltage levels
- Indicates DC voltages as low as 6 Volts
- DC polarity indicator
- Compact and rugged - fits in a tool pouch or overall pocket
- Automatically selects continuity beeper or voltage measurement
- Can stay connected much longer than solenoid type testers
- Rugged enough to withstand a 3 meter (10-foot) drop
- Protected to 1000 Volts for use in CAT III environments
- Automatically activates and shuts down to conserve battery power
- Heavy-duty test leads for long life

Safety Conformance

All inputs of the T2 are protected to IEC 1010-1 category III 1000V rating. All inputs of the T5-600 are protected to IEC 1010-1 CAT III 600V and the T5-1000 to IEC 1010-1 1000V CAT III rating.

LISTED



T2 Voltage Levels

World-Wide Version		US Version		Canada Version	
Vac	Vdc	Vac	Vdc	Vac	Vdc
12	6	24	6	24	6
24	12	120	12	120	12
48	24	208	24	208	24
110	36	240	36	240	36
230	48	277	48	347	48
400	110	480	110	480	110
690	220	600	220	600	220

Accessories and Ordering Information

Included Accessories

The T5-1000 and T5-600 come with 4 mm detachable probes and instruction sheet

The T2 comes with 4 mm probes and instruction sheet

Optional Accessories for T5-1000 & T5-600

H5 Custom Holster
AC85A Large Jaw Alligator Clips
AC20 Industrial Clips

Ordering Information

T5-1000 1000V Voltage, Continuity and Current Tester

T5-600 600V Voltage, Continuity and Current Tester

T2 Voltage, Continuity Tester

Fluke Corporation

P.O. Box 9090
Everett, WA USA 98206

Fluke Europe B.V.

P.O. Box 1186
5602 BD Eindhoven
The Netherlands

For more information call:

In the U.S.A. (800) 443-5853
or Fax (425) 356-5116

In Europe/M-East +31 (0)40 2 678 200
or Fax +31 (0)40 2 678 222

In Canada (905) 890-7600
or Fax (905) 890-6866

From other countries +1(425) 356-5500
or Fax +1(425) 356-5116

Web access: <http://www.fluke.com>

© 1997 Fluke Corporation. All rights reserved.
Printed in the Netherlands 12/97
C0168 EEN Rev A

Fluke. *Keeping your world up and running.*