

Scart

COLLABORATORS

	<i>TITLE :</i> Scart		
<i>ACTION</i>	<i>NAME</i>	<i>DATE</i>	<i>SIGNATURE</i>
WRITTEN BY		August 24, 2024	

REVISION HISTORY

NUMBER	DATE	DESCRIPTION	NAME

Contents

1 Scart	1
1.1 Amiga Scart Lead	1

Chapter 1

Scart

1.1 Amiga Scart Lead

Connecting Your Amiga To a TV Via Scart Leads

By PARASITE of LSD.

WHAT YOU NEED

1 Amiga 23 Pin Video connector (Goes in RGB VIDEO port)
 1 20 Pin SCART connector (goes in SCART TV)
 6 core cable (Length as required)
 Small screwdriver
 Soldering Iron
 Solder


HOW TO ASSEMBLE IT


Open the SCART and Amiga plugs
 Solder together the pins as shown below, via the cable
 Re-assemble the plugs
 And that's magic!

The correct connections on an Amiga to SCART lead should be as follows:


AMIGA	SCART
Pin 3 Analog red	Pin 15 red in
Pin 4 Analog green	Pin 11 green in
Pin 5 Analog blue	Pin 7 blue in
Pin 10 Composite	Sync Pin 20 Video sync in
Pin 16-20 Ground	Pin 17 Video ground

SCART CONNECTOR

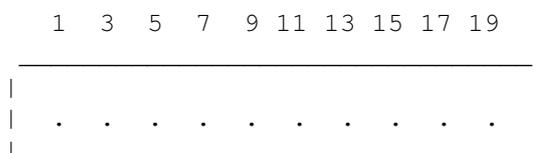

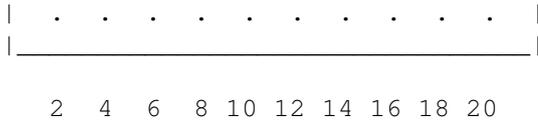

AMIGA CONNECTOR

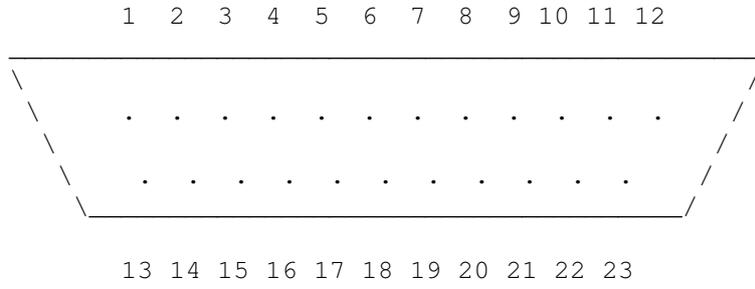

End.

Back To Main Menu

Back To Projects Menu