

EigerCom™

33.6 kbps v.34+ Cellular Ready

33.6 kbps v.34+ Standard

**33.6 kbps v.34+ Standard for Mac
Data/ Fax Modems**

The Market's Fastest PC Card Modem (15% faster than standard 28.8 modems)

The EigerCom 33.6 PC Card modem provides ultra high speed data rates up to 33.6 Kbps for data transmission over traditional phone lines. Access your home office e-mail, the internet, bulletin boards, and other on-line services with rapid speed. The EigerCom 33.6 PC Card modem will ensure fast screen displays and help reduce phone costs.

Performance

The EigerCom 33.6 PC Card fax/modems are the highest performing PC Card modems available today. The EigerCom 33.6 supports the brand new V34+ de facto standard. As with all PC Cards from Eiger Labs, the EigerCom 33.6 PC Card modems are simple to use, require no external power, feature innovative power management and support cellular communications.

Cellular Ready*

On the go? Your Eiger Labs modem is cellular ready*. The optional cellular cable will enable you to connect your cellular phone to the modem, and the communications is handled by the modem just as if you were connected to the wall jack.

Easy To Use Fax

Using the included fax software, sending and receiving faxes is as easy as printing. The software allows you to manage faxes just as you would files. You can store fax numbers, set re-send times, and much more.

Included Software

Every EigerCom 33.6 fax/modem includes fax and communications software. We also include the following on-line services:

EarthLink TotalAccess™ with
Netscape Navigator 2.0™, Prodigy™,
America OnLine™ and Compuserve™

Guaranteed Compatible

The EigerCom 33.6 fax/modem is 100% compatible with any notebook or desktop computer with a type II PC Card socket. This product comes with a customer satisfaction guarantee and a 5 year replacement warranty.

Free Technical Support

Here at Eiger Labs, we understand that users sometimes have problems installing or using products. It is with this in mind that we provide free technical support to all of our end-users.



* Available only with cellular models. Cellular cable must be purchased separately

EigerCom 33.6kbps PC Card Fax/Modem

Technical Specifications

Interface Standards

PCMCIA Type-II (5.0mm); PCMCIA 2.1; JEIDA 4.1, PC-CARD 95.

RJ-11C Two-wire dial-up

Operating System Compatibility

DOS, Windows, Windows 95, Windows NT, Apple System 7 (Apple SW bundles also available)

Fax Compatibility

CCITT V.17 - 14,400, 12,000, 7,200 (TCM)

CCITT V.29 - 9,600, 7,200 (QAM)

CCITT V.27ter - 4,800, 2,400 (DPSK)

CCITT V.21 Channel 2 - 300 (FSK)

Class 1 and Class 2

Data Transmissions (bps)

ITU-T V.34+ - 33,600 - 2,400

CCITT V.32bis - 14,400, 12,000, 7,200 (TCM)

CCITT V.32 - 9,600 (TCM), 9,600, 4,800 (QAM)

CCITT V.22bis - 2,400 (QAM), 1,200 (DPSK)

CCITT V.22 - 1,200, 600 (DPSK)

CCITT V.23 - 1,200, 600 (FSK)

CCITT V.21 - 300 (FSK)

Bell 212A - 1200 (DPSK), Bell 103 - 300 (FSK)

Cellular Compatibility

Connections available for most cellular phones with 336C version.

Error Correction Data Compression

MNP 2-4, V42, MNP 10 EC

MNP 5, V.42bis

DTE Speeds (max. bps) 115,200

Operating Modes

Auto dial/answer; auto feature negotiation

Full-duplex

Software controlled switching for COM1-COM4

Dial Type

Tone and Pulse

Test Modes

CCITT V.54

V.52 Pattern Recommendations

Analog loop, Digital loop, Remote Digital loop and pattern test

Command Set

Extended AT Commands

EIA Class 1, 2 (EIA 576)

Flow Control

XON/XOFF; CTS/RTS (Hardware & Software)

Electrical

0.81 W Operating Mode

-10 dBm Transmit Level

-43 dBm Receive Sensitivity

Features:


- Easy installation and no confusing switches to get you up and running in minutes
- Transmit data up to 115,200 bps with compression†
- Fax documents up to 14,400 bps
- "Hot Swap" - insert and remove PC Cards without shutting down the system
- Everything you need to get started immediately; nothing else to buy
- Fax directly from your Windows programs
- Background/broadcast fax send and receive
- MNP 5 and V.42bis compression and error correction increases accuracy and saves time and money
- Low-power consumption
- Free technical support
- 5-year Replacement Warranty

Packaging Specifications:

- Box weight: 1.75 lbs.
- Box Dimensions: 10.75" x 7.62" x 2.85"

Models Available:

- Model Number: EPX-3360PL
- Model Number: EPX-3360P
- Model Number: EPX-3360PM

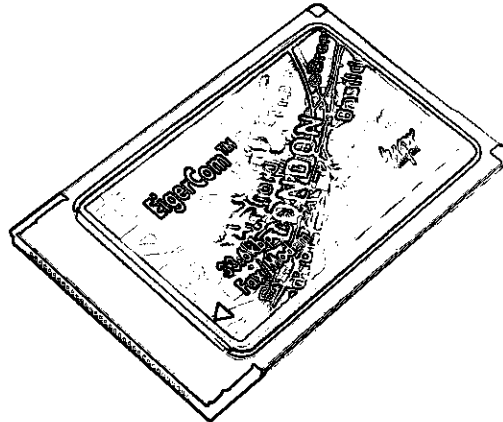

All specification subject to change without notice. All trademarks referenced are the service marks, trademarks, or registered trademarks of the respective manufacturers.

© 1995 Eiger Labs Inc.

Printed in U.S.A.

Eiger
LABS INC.

