

MENUWATCH Control, version 1.1

About the Author

Description

The "MenuWatch" custom control allows you to easily add a full-featured menu help status bar to your application. By placing this custom control directly on your main form, you can display help "snippets" in a help status bar at the bottom of the window as the user highlights menu items.

This control supports MDI windows, The MDI "WindowList" property, and it does not interfere with the normal activation of menu-related context-sensitive help.

File Name

MENUWATCH.VBX

Remarks

Distribution Note When you create and distribute applications that use the MENUWATCH control you should install the file MENUWATCH.VBX in the customer's Microsoft Windows \ SYSTEM subdirectory. The Visual Basic Setup Kit included with the Professional VB product provides tools to help you write setup programs that install you applications correctly.

All of the properties, events, and methods for this control are listed below. Properties and events that apply only to this control, or require special consideration when used with it, are underlined. They are documented in this help file. See the Visual Basic *Language Reference* or online Help for documentation of the remaining properties, events, and methods.

Properties

<u>Changed</u>	<u>NumPulldowns</u>
<u>NumOptions</u>	Name
Index	Parent
Tag	hWnd
Align	

Events

<u>Open</u>	<u>Select</u>
<u>Close</u>	

Methods

Refresh

Changed Property, MENUWATCH Control

Description

Returns -1 if the menu has been changed since the application started or the [Refresh](#) method was last invoked, 0 otherwise.

This property is read-only.

Usage

`[MenuHasChanged %=] [form.]MenuWatch.Changed`

Data Type

Integer

NumPulldowns Property, MENUWATCH Control

Description

Returns the number of pulldown menus currently associated with the application. For example, an application which provides only "File" and "Edit" menus has 2 pulldown menus. This property is read-only.

Usage

`[NumPulldowns %=] [form.]MenuWatch.NumPulldowns`

Data Type

Integer

NumOptions Property, MENUWATCH Control

Description

Returns the total number of options under the pulldown menu identified. For example, an application which provides only "File" and "Edit" menus has 2 pulldown menus, and if the "Edit" menu has only "Cut", "Copy", and "Paste" options, **NumOptions** with *PulldownID%* = 2 returns 3.

This property is read-only.

Usage

[*NumOptions %=*] [*form.*]MenuWatch.**NumOptions**(*PulldownID%*)

Data Type

Integer

Open Event, MENUWATCH Control

Description

Occurs when the user first begins to interact with the menu, but before a Select event occurs.

Syntax

Sub *MenuWatch_Open* ()

Remarks

This event is the best place to put code which initializes your menu help status bar and Refreshes the MenuWatch control (if necessary).

Select Event, MENUWATCH Control

Description

Occurs when the user highlights a menu option.

Syntax

Sub *MenuWatch_Select* (ItemID **As Integer**, fSeparator **As Integer**)


Remarks

The fSeparator parameter is -1 if the menu option is a separator and zero otherwise.

ItemID is 1 for the first option in your menu, 2 for the second, etc. ItemID is 0 for the Control menu itself, -1 for the first control menu option, -2 for the second control menu option, etc.

Note: if the currently selected menu item is not recognized by MenuWatch (probably because the menu has changed and the Refresh method has not been called), then ItemID is -32768. The value of fSeparator is accurate regardless of the value of ItemID.

The following picture illustrates how the ItemID parameter relates to your menu:

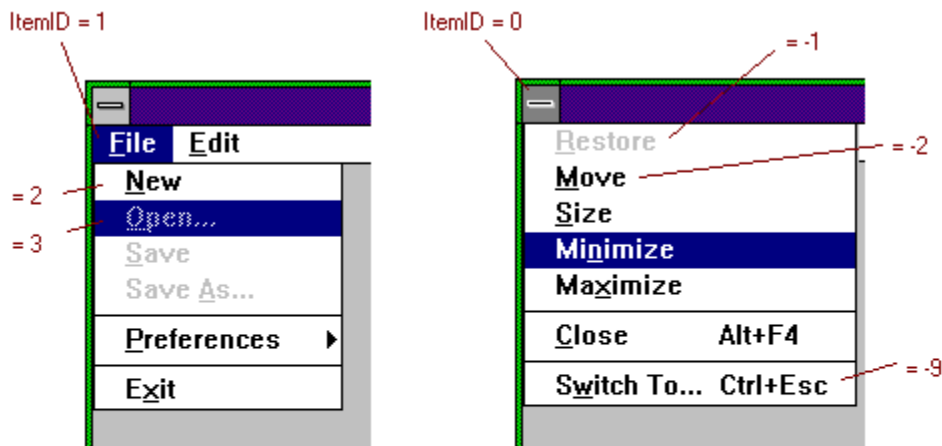

Close Event, MENUWATCH Control

Description

Occurs when the user stops interacting with the menu by closing it or selecting an option.

Syntax

Sub *MenuWatch_Close* ()

Remarks

This event is the best place to put code which de-initializes your menu help status bar.

Refresh Method, MENUWATCH Control

Description

Use this method to update the MenuWatch control when the menu changes. If this method is not invoked, any changes to the menu will not be reflected when a Select event occurs.

Syntax

MenuWatch.Refresh

Remarks

The Open event is a good place to invoke this method when necessary.

The "MenuWatch" custom control was developed by:

Steve Lathrop
19101 Willow Spring Drive
Germantown, MD 20874

CIS ID: 70540,370

Support for a registered copy of "MenuWatch" may be obtained via CompuServe e-mail to the ID above. Suggestions for improvements to "MenuWatch" and for the development of other custom controls is encouraged.

