



## Some Background Considerations


Defining a behavior for components in MindMap is equivalent to the process of programming an application in a conventional development environment such as C++, VisualBasic, PowerBuilder, etc. In MindMap, defining the behavior is accomplished by assigning one or more links to a component. A link is comprised of exactly one **incoming event** and one **outgoing message**. This pair is what we call a **link**. The process of defining such links in MindMap is referred to as linking components.

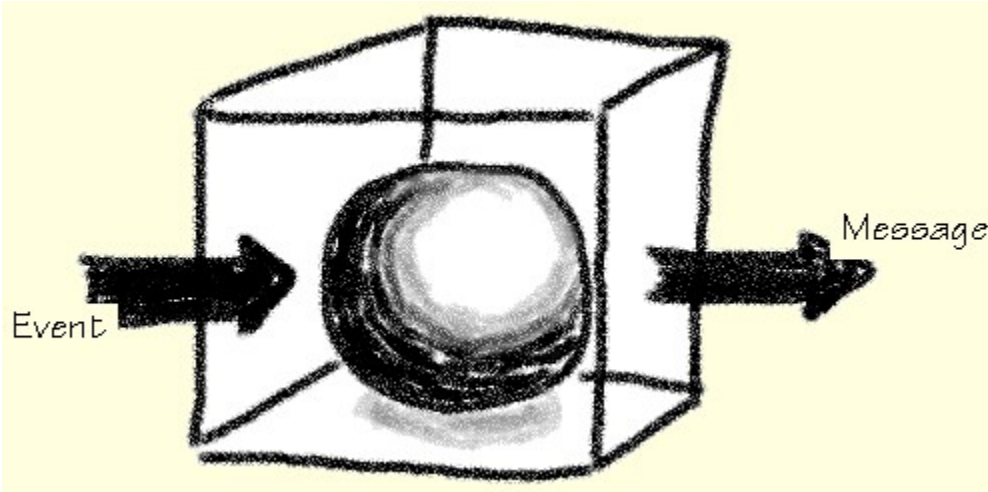

An event functions as a **trigger** for a component. When a trigger occurs, the component which has been associated with the trigger will receive control and do as it has been instructed in the message. It will generate the message. A message, in turn, will cause a specific reaction by the associated component or it will act as an event for a subsequent component.

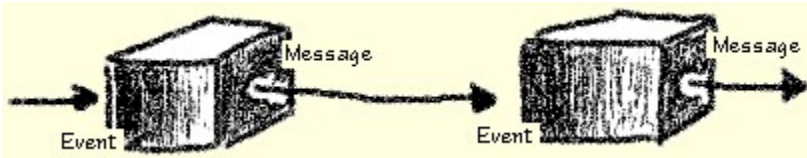


Thus, building an application can be viewed as constructing a network of components, sending and receiving both events and messages. In the above model, a component is receiving exactly one event and generating one message. In other words, it has exactly one link associated with it. If this were always the case, an application would be fairly limited. Therefore, MindMap allows multiple links to be assigned to a component.

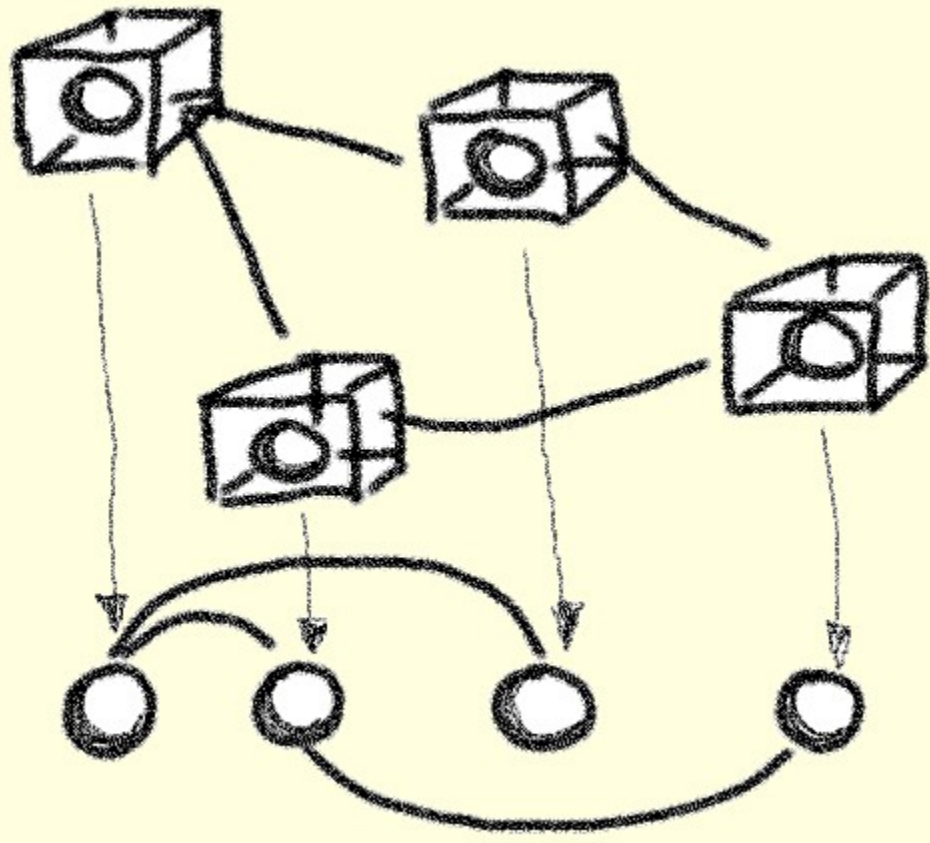

In a two-dimensional representation, the cubes represent the components and are displayed as a network, albeit in this case a very simplistic one. If the two-dimensional representation is collapsed into one dimension (*represented by the balls*), then an application can be viewed as a single list of components connected in a parent-child relationship.

This leads to a very important aspect of MindMap, which should be kept clearly in mind when constructing applications — the mechanism by which messages are passed in the system. Let us take this, and granted, a somewhat abstract representation, one level further. Consider the balls in the above representation to be pearls on a chain. In this little example, the application would consist of one string of pearls. Let's look at a somewhat more complex application.

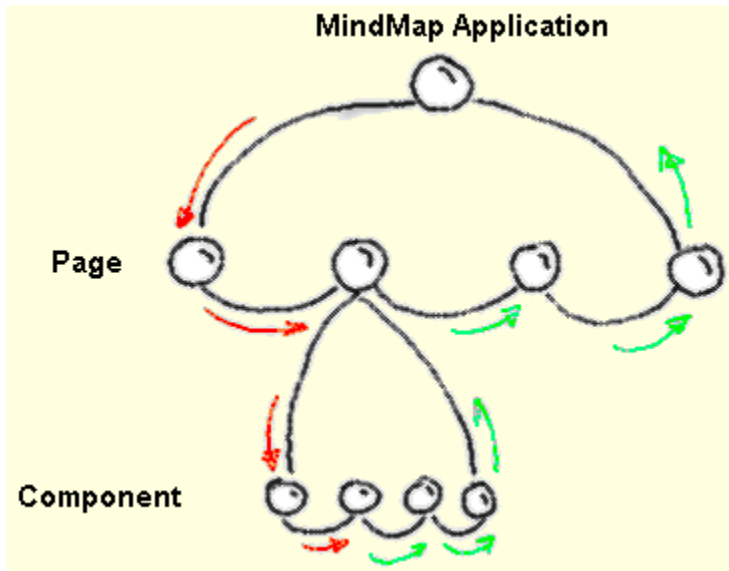

This is a necklace of necklaces — where multiple strings of pearls are interconnected. The top level of this picture represents the application itself. At this level, events are received from the operating system. When a user clicks on the mouse, the operating system intercepts the event and determines which programs are running at the time. It then determines which program is in foreground and should presumably be waiting for user interaction. Once this has been determined, the operating system forwards the event into the message handling facility of the program, in this case MindMap.

Next, MindMap — actually its **event-message handler** — grabs the event and forwards it to the first page. All pages are on the same string of pearls, meaning that they are logically at the same level. The event is passed into the necklace and the first page receives it. The page determines whether or not it is to act on it. In case it decides it doesn't want to deal with it, it passes the event on to the next page on the necklace. The process begins anew. Eventually either a page decides to process the event or it ends up back at the top of the chain, in which it is simply discarded.

If a page decides that it should deal with the event, it grabs the event, opens up its little necklace of components on the page and forwards the event into this chain. The process begins again. The first component on the page takes a look at the event and decides if it wants to act on it. If not, it passes the event on to the next in line. Either the event is squeezed back up to the page level without having been dealt with, or some component on the page has grabbed it and acted on it. In this case, the event will be flagged so that subsequent components will not deal with it. The flagged event is then passed through the component level of the chain, up to the page level, where it is then rushed back up to the application level.

The sequence for processing events is — graphically speaking — either left to right or right to left, depending on the particular type of event. Well, how does this relate to the components as viewed on the screen? Easy. The first page in a MindMap application is the leftmost page. The next created page will be 'next in line', or to the right of the previous page. Inserting a new page can be envisioned as cutting open the necklace, adding in a new pearl and knotting the chain back together again.

The same metaphor can be used for the components themselves. The first placed component is first-in-line. It is at the leftmost position on its segment of the necklace. The next created component is attached to the right of its predecessor.

This 'pearls-on-the-necklace' order can also be viewed differently; namely, in the sense of foreground and background. The first component placed on a page is in the background. The next component is in foreground, relative to the first, and so on. Thus, the last placed component is in foreground, relative to all other components on the page. If you now move a component into background (via the menu option [Edit | Background](#) or vice versa [Edit | Foreground](#)), what you are actually doing is rearranging the pearls on the necklace. You are, figuratively speaking, cutting open the necklace and inserting the component into a new position.

Applying this metaphor to groups, we get the following picture. When you create a group of components, what is really happening is that the component necklace segment is cut open, a new type of component is created and inserted (*being the non-visible group component*) and all components belonging to the group are strung onto the new segment, which dangles off

the component segment. A group of groups is, thus, a necklace of necklaces.

Keep in mind, that the order in which the components receive and process their messages, also corresponds to the order in which they are painted onto the screen - from background to foreground or from foreground to background

The direction of event passing actually depends on the type of event. Generally, all mouse-related events are passed from right to left (foreground to background) in order to make sure that events being in the foreground receive mouse clicks first, as one would expect. On the other hand, system related events like "Application started" or "F3 key pressed" are passed from left to right.

We strongly recommend that links acting on the same type of system related event (like "Application started" or "Page activated") are kept together on a single component. This makes it easiest to keep control over the sequence of operation.


## How to Define a Link

Before getting into the details of what each event and message actually does, let's look at how they are assigned to a component.


Select a component to which you want to assign a link. Next, either click on the menu option Properties | Links, press the F6 function key, or activate the attribute toolbox for the component. Let's assume you did the latter.



Now, click on the icon displaying an arrow leaving a little square and pointing towards a little circle. This will result in the following screen being displayed:

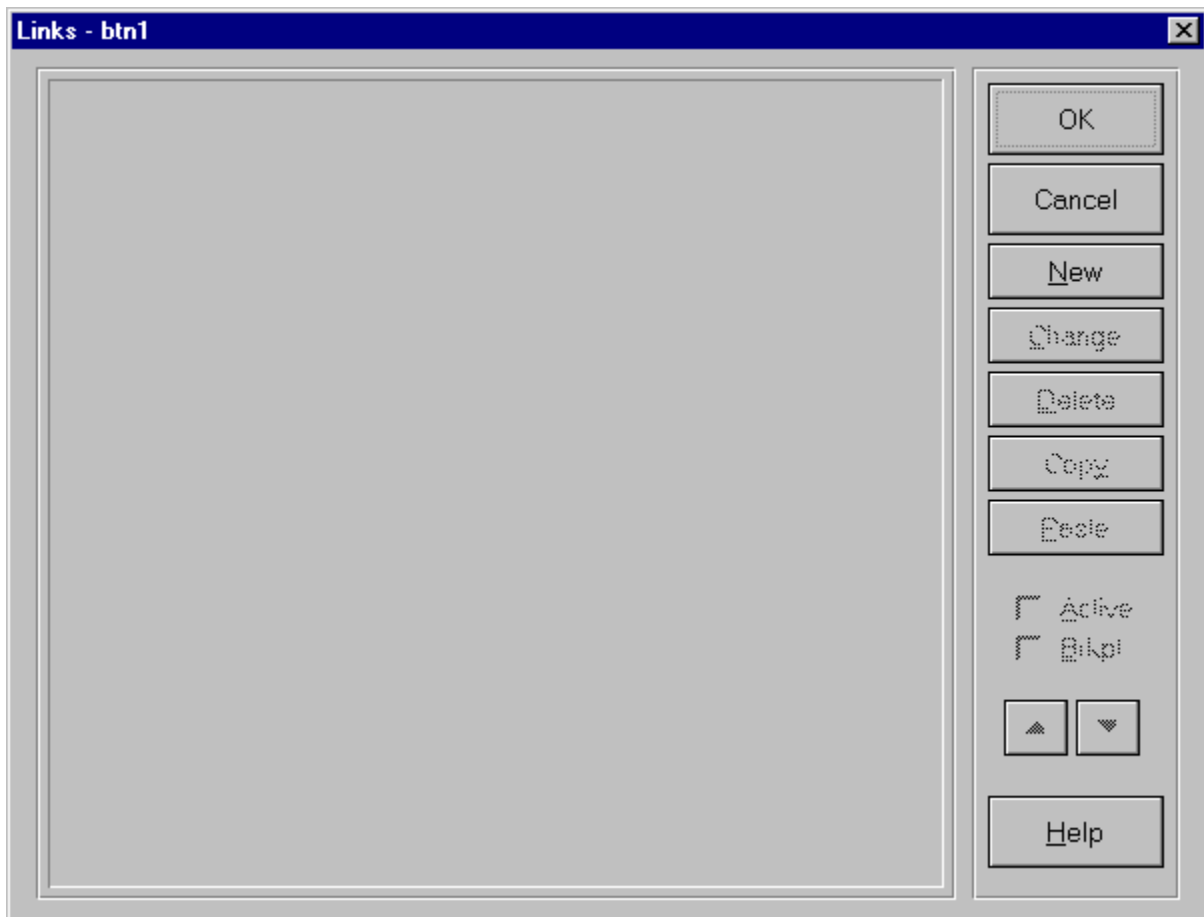


Since no links have been defined so far, the major portion of this dialog box is empty. In order to define a new link, click on the **New** button on the right side of the dialog box. This will open up the following dialog box:

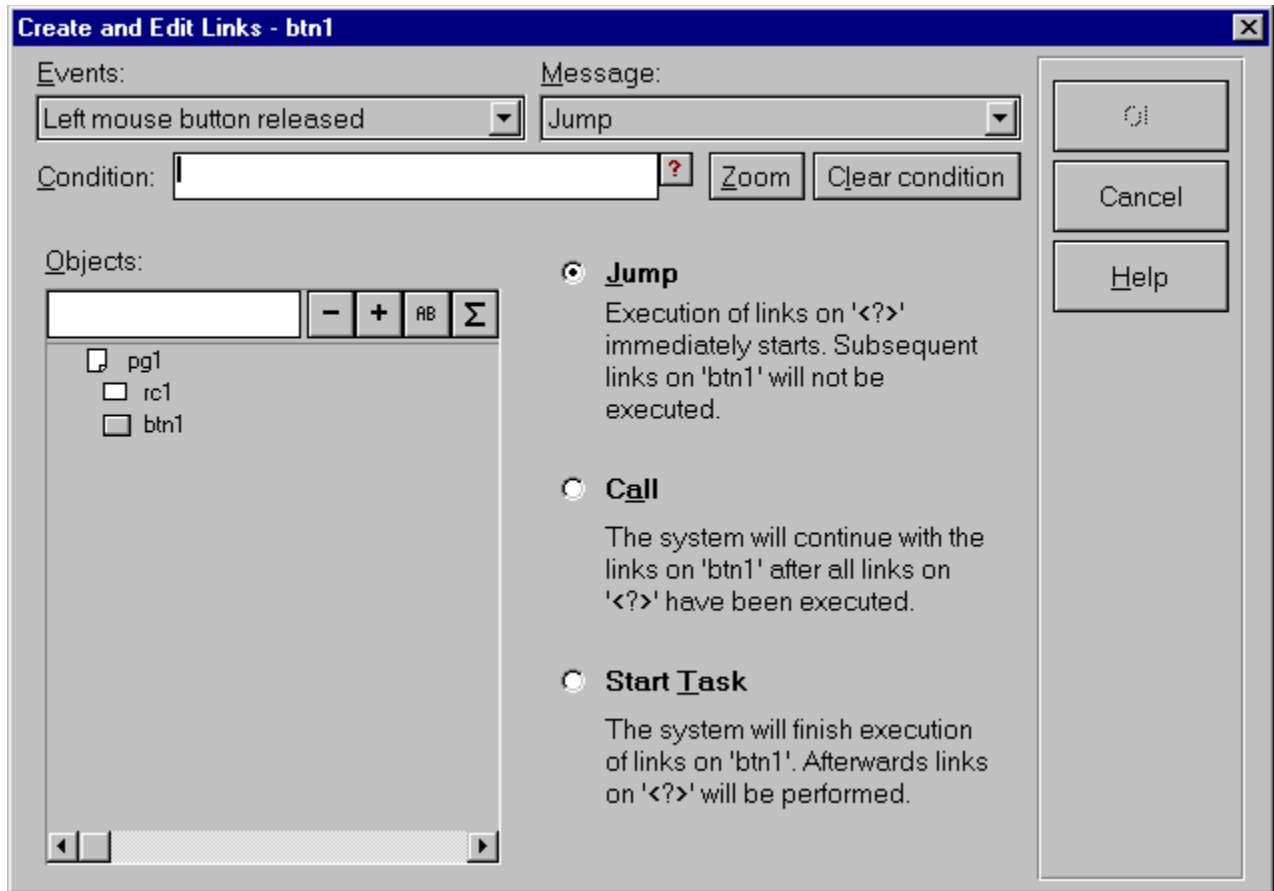


This is the control center. Here is where you actually define the behavior of a component. At the top left of this screen, you see the **Events** list. Next to it is the **Message** list. Underneath both lists is an area which deals with conditions. The rest of the screen is dedicated to whatever definitions are necessary, in conjunction with the selected event-message combination. Therefore, it will change its appearance depending on the selection made earlier.

To demonstrate the method by which a link is defined, drop down the Events list. Select one of the events, such as "*Left Mouse Button Released*". Next, drop down the Message list and select the message entitled Sound. This will result in the following screen:

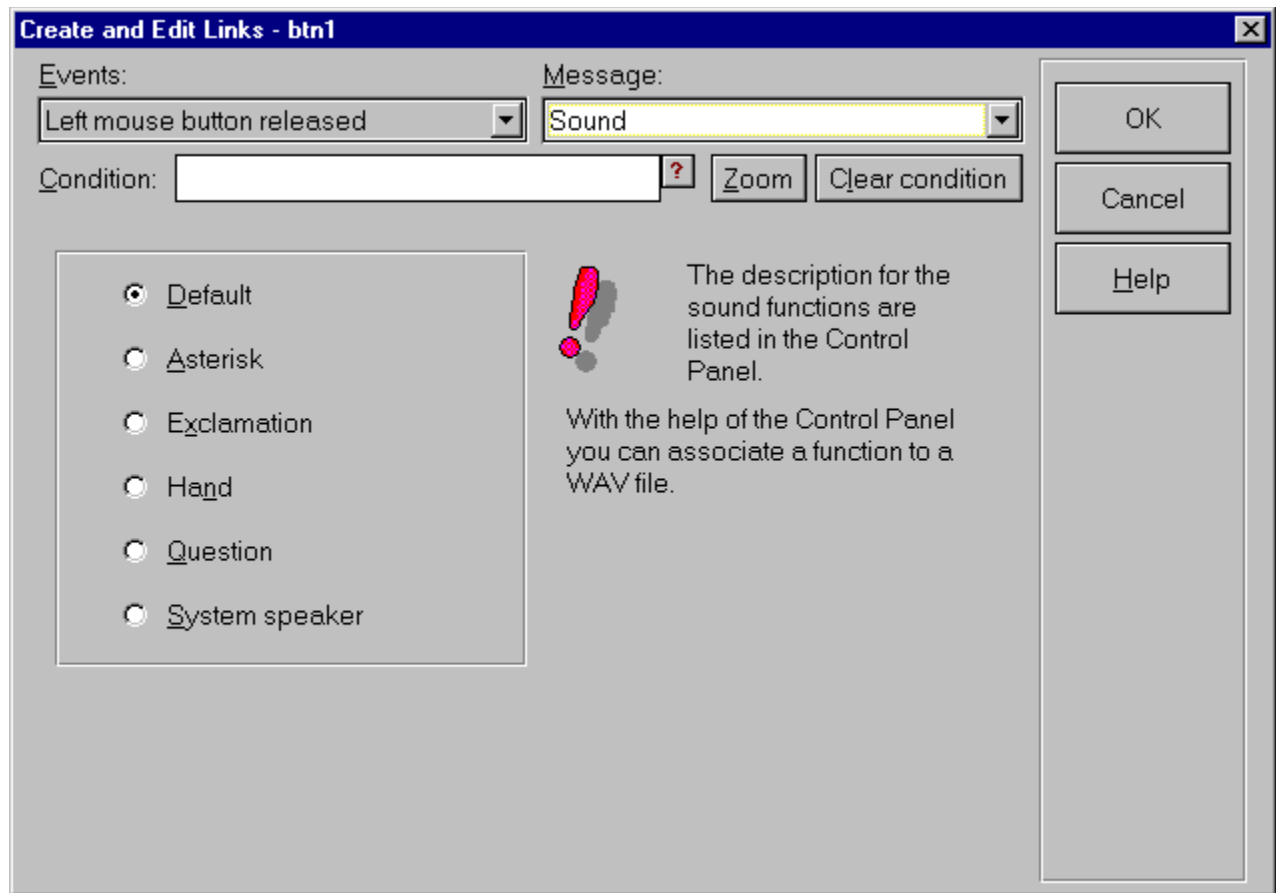

As you will notice, the bottom section of the dialog box has changed to reflect the selection of the Sound message. Click on any one of the options on the left side and accept the selection by clicking on the **OK** button on the right side of the screen. This will result in returning you to the initial link dialog box, only this one has now been updated to reflect the new link definition.

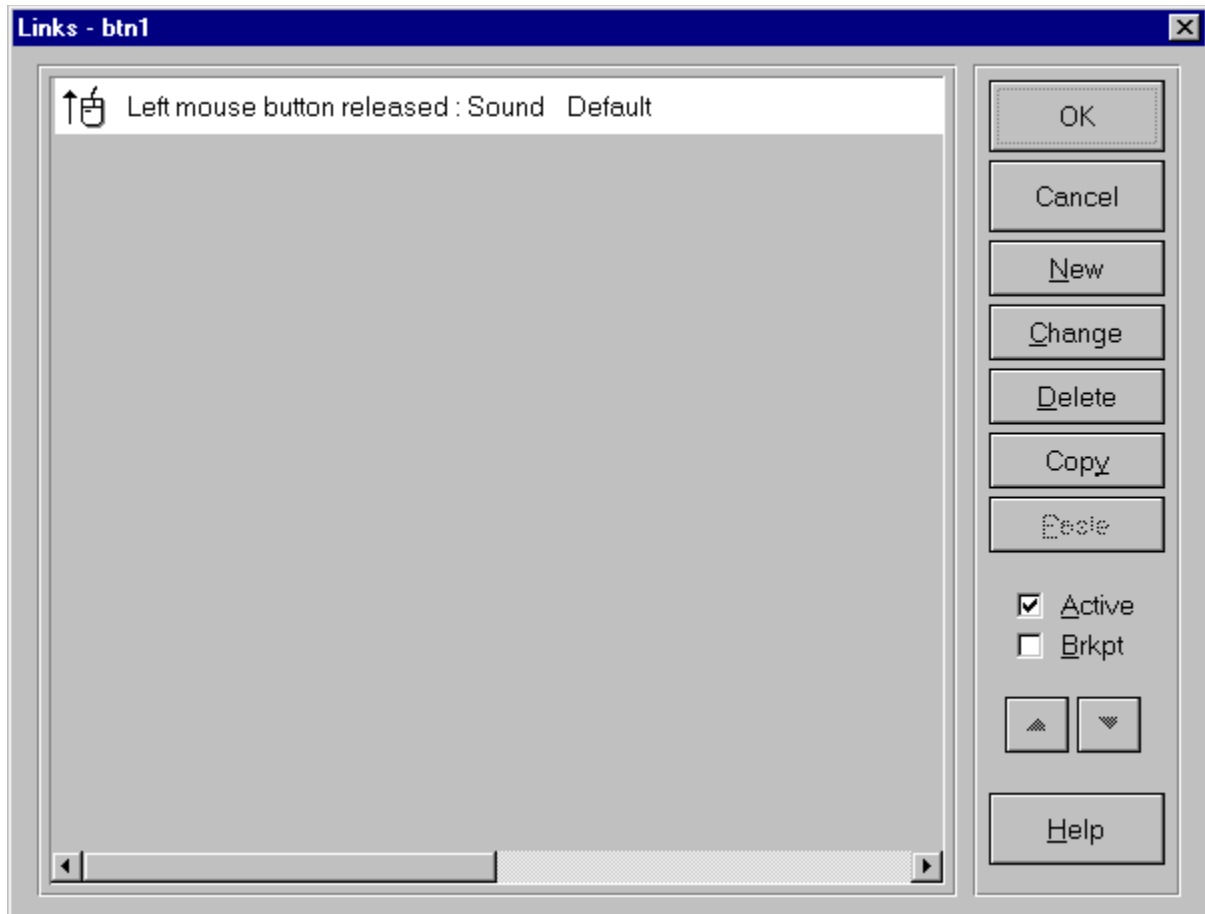


The dialog box now displays a link defined for the component btn1 (*see the caption bar on the dialog box*). The link can be read to say that:

“When the mouse has been moved on top of the component btn1, and the left mouse button has been clicked and subsequently released, the sound associated with the default setting will be produced.”

Next, create another link, this time associating a different sound with the same event. The screen should then look similar to this one:



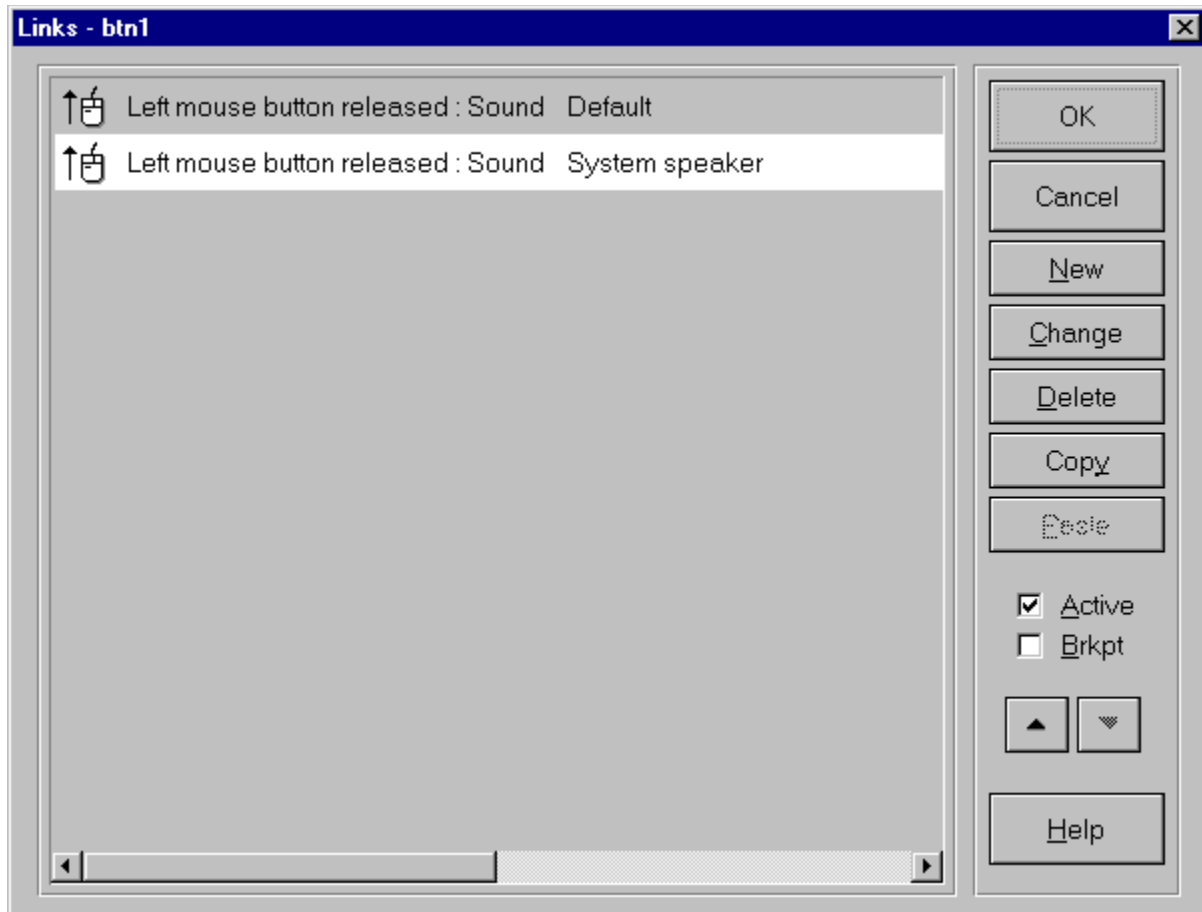

If you were to execute this little application, then the following actions would take place. Once you clicked on the push button named btn1, the sound associated with *Default* would be played (provided you have a sound card installed), immediately followed by the sound associated with *System speaker*. In other words, the processing sequence of links is top-to-bottom of the list for any given component. There is one aspect you should be aware of, though. Some events are generated sooner than other events, an example being 'Application started'. If you have assigned this event to any component in the application, then it will be executed, and thus the message associated with it will be performed, before the list of any component will be processed.

Relative to a component, the link list is processed from top to bottom. Relative to the application though (*which in some cases might override the apparent sequence associated with any given component*), certain events are generated without user interaction, and prior to any user interaction events. These will be processed first.

If you wish to rearrange the order of link processing, you can easily do so. In this simple case, let's assume you want to hear the sound associated with the *System speaker* entry before the *Default* sound is generated. In this case, select the second link (*Sound Speaker sound*). It will invert the background color. On the bottom right hand side of the dialog box, you can see two arrow heads, one pointing up, the other pointing down. Click on the one pointing up. This will cause the second link to be moved up, in front of the *Sound Default* link.

Another way of rearranging the links is by selecting the link you wish to move. Then, keeping the left mouse button pressed, drag it to the position you wish it to be moved to. The cursor will change its appearance



to display where it will accept placement of the link. This cursor will appear whenever the mouse has been positioned between two existing links, or at the top or the bottom of the list of links.

You can also delete, copy, and paste links within this screen, as well as between links screens.

If you wish to delete a link, select it and then click on the **Delete** button on the right side of the dialog box. If you want to delete multiple links, you can select them either individually by keeping the *CTRL* key pressed and clicking on the link, or by keeping the *SHIFT* key pressed and clicking on the links. Using the *CTRL* key approach permits you to select non-contiguous links. Using the *SHIFT* key method will select all links between the first and the last selection made using the mouse.

Using the **Copy** button on the right side of the dialog box, you can place the selected link(s) on the clipboard. You can employ the same selection methods just described for the delete function. Once selected, the links are placed on the clipboard as soon as you click on the **Copy** button. Copying links to the clipboard will overwrite any links placed there previously.








You can retrieve the links from the clipboard by clicking on the **Paste** button. The link(s) off the clipboard will be placed immediately above the links selected at the time. Thus if you already have to links on the screen and you insert the contents of the clipboard, then assuming the first of the two links is selected, the contents will be placed as the first links.












Another feature available is that of toggling a link active and inactive. Links are **active** by default. If you wish to temporarily turn one off (make it *inactive*), then simply select it and mark the check box on the lower right hand side of the dialog box. The selected link(s) will be grayed and will not be executed during run time.

## Common Events

All components have a common heritage in regards to the events they support. When a component developer builds a new component he/she is offered a set of generic events. It is then the decision of the developer to support all, or any sub-set, of these events. In addition, the developer can then register new events, that are specific to the component being developed.

The simpler components do not support their own events. They merely inherit their events from the generic list of events. Following is the set of generic events. In general, all – or at least a major portion of them – are supported by all components.

	Event	Description (When generated)
	Left mouse button clicked	When left mouse button is pressed and before it is released.
	Left mouse button released	When left mouse button has been released.  This ( <i>and right mouse button released</i> ) is the preferred event on which to trigger buttons.
	Left mouse button double clicked	When left mouse is clicked twice in rapid sequence.  <b>Note:</b> <i>Many users have difficulties performing this operation. This is in part due to the sensitivity settings for the mouse. When attempting to double click many users move the mouse a few pixels. This is often enough for Windows to interpret the action as two separate single mouse clicks. It is generally advised to avoid using this event, if at all possible.</i>
	Right mouse button clicked	When right mouse button is pressed and before it is released.
	Right mouse button released	When right mouse button has been released.  This ( <i>and left mouse button released</i> ) is the preferred event on which to trigger buttons.
	Right mouse button double clicked	When right mouse button is clicked twice in rapid sequence.  <b>Note:</b> <i>Many users have difficulties performing this operation. This is in part due to the sensitivity settings for the mouse. When attempting to double-click many users move the mouse a few pixels. This is often enough for Windows to interpret the action as a two separate single mouse clicks. It is generally advised to avoid using this event, if at all possible.</i>
	Activate Page	When control is passed to current page ( <i>jumped to or to component on page</i> ).  Use this event when you wish actions to be taken before anything else on the page, to

		which is being jumped, is to be executed.
	Deactivate Page	<p>When control is passed to another page.</p> <p>Use this event if you need to 'clean up' something, before turning control over to the next page.</p>
	Mouse movement	<p>Any movement of the mouse will generate this event. This event is sent to the component which the mouse is currently above.</p> <p>Use this event very cautiously, since it will be generated anytime the mouse is moved within the border of the selected component.</p>
	Mouse movement into object	<p>When the mouse cursor is moved into selected component.</p> <p>Use this event in conjunction with the changing of the appearance of the mouse cursor.</p>
	Mouse movement out of object	<p>When the mouse cursor leaves the selected component.</p> <p>Use this event in conjunction with the changing of the appearance of the mouse cursor.</p>
	Application started	When the application is started ( <i>put into run mode or executed as EXE file</i> ).
	Application terminated	<p>When the application is normally terminated (<i>put into edit mode or quit as EXE file</i>), this event will be generated.</p> <p>This event is often used to clean house (<i>i.e., set variables to some predefined value</i>) before leaving the application.</p>
	Goal of a jump	When the selected component has been jumped to ( <i>used in conjunction with sub routines/sub assemblies</i> ).
	Error in calculation	When an error in evaluating a formula is encountered. This event is sent to all components on the active page.
	Begin Drag&Drop	When a drag&drop operation using the mouse begins. This event is sent to the component initiating the drag&drop operation.
	End Drag&Drop	When a drag&drop operation using the mouse ends. This event is sent to the component that has initiated the drag&drop operation.
	F1-F12-Keys	When any function key is pressed in run mode for the selected component. This event is sent to all components on the currently active page.

**Note:**

*F4 toggles back into edit mode, if the file is running as an .MM file. When running an .MM file which has been converted to an .EXE file, this function key will not toggle between edit mode and run mode.*











Esc-Key

When the ESC key is pressed for the selected component.









## **Component Specific Events**

The following list contains those events which are available if, and only if, the associated component has been installed. These events are specific to the particular component. They will only be visible in the list of events for a component of the same type.

## Buttons






	Event	Description (When generated)
	Button pressed	When a command button has been pressed and before it is released.
	Button released	When a command button has been released.
	Row up/left	When Up arrow has been clicked on a selected scroll bar component.
	Page up/left	When area on selected scroll bar between elevator and the Up arrow has been pressed
	Row down/right	When Down arrow has been clicked on a selected scroll bar component
	Page down/right	When area on selected scroll bar between elevator and Down arrow has been clicked
	Move	Only when the elevator bar on the scroll bar is moved up and down ( <i>or left and right on a horizontal scroll bar</i> ), will this event be generated.
	Scroll change	The event is generated when either the elevator bar is moved, one of the arrows has been clicked on, or the area between the elevator bar and an arrow has been clicked.

## Data Tables












	Event	Description (When generated)
	Receive focus	Whenever the cursor is placed inside a cell of the data table, this event will be generated. This event is only generated when the data table itself receives focus. Use the event "Cursor changed" if you want to determine each single click into a cell of the data table.
	Lose focus	Whenever the data table itself or a cell inside the data table loses focus, this event will be generated.
	Cursor changed	Anytime the cursor is moved to another cell within the data table, this event is generated.
	Double-click	Whenever a cell in the data table receives a double click, this event is generated.
	Abort edit mode	This event is sent when the cell edit mode is canceled with the <i>ESC</i> key.
	Begin edit mode	The normal procedure to begin the edit mode in the cell of a data table is to press the <i>CTRL+E</i> key. This will generate the event. If the cursor is placed inside a cell of the data table and the user begins to enter in characters, the event will also be generated.
	Cell changed	Whenever the content of a cell has been changed, this event will be generated. Keying in the same characters as are already in the cell, will not generate this event.
	Order changed	If the attribute, which permits the user to rearrange the rows at run time, has been set, then the event will be generated whenever a row has actually been rearranged. The process for rearranging rows is to select a row, keeping the left mouse button pressed, moving it to another row and letting go of the left mouse button. The row can only be 'dropped' when the cursor changes its appearance, signaling a valid position.



Input Fields

	Event	Description (When generated)
	Enter	If the cursor is inside the input field ( <i>input field has focus</i> ) and the user presses the <i>ENTER</i> key, this event is generated. If the input field is set to display multiple lines, then <i>ENTER</i> will cause carriage/line feed and the cursor will be placed into the first column of the next row.
	Keyboard input	If the cursor is inside the input field ( <i>input field has focus</i> ) and the user begins to type in characters this event is generated.
	Receive focus	Whenever the cursor is placed inside the input field, this event is generated.
	Lose focus	If the input field had focus and the cursor was used to click somewhere other than inside the input field, this event is generated.
	Cursor changed	If the cursor is inside the input field ( <i>input field has focus</i> ) and the user moves the cursor ( <i>caret</i> ) to another position by clicking on the arrow keys on the keyboard, this event will be generated. Moving the position of the caret by means of the mouse will not generate this event.

## MCI

	Event	Description (When generated)
	Mode changed	This event is generated, if the mode of the multimedia component changes (e.g. <i>playing</i> , <i>seeking</i> , <i>stopped</i> , ...).
	Device not ready	This event is generated, if the device is in a state in which playing a multimedia file is not possible, as is the case when a CD was ejected from a CD drive.
	Stopped	This event is generated, when the device ends playing a multimedia sequence, regardless of whether the device stops through user interaction or if the end of the media is reached. Prior to sending this event, the <b>Mode changed</b> event will be sent.
	Playing	This event is generated, when the device starts playing a multimedia sequence. The event is sent after the <b>Mode changed</b> event has been generated.
	Recording	This event is generated, when the device starts recording a multimedia sequence. The event is sent after the <b>Mode changed</b> event has been generated.
	Seeking	This event is generated, when the device moves to a new position of a multimedia sequence. The event is sent after the <b>Mode changed</b> event has been generated.
	Paused	This event is generated, when the device is in pause mode. The event is sent after the <b>Mode changed</b> event generated.
	Device is open	This event is generated, when a multimedia sequence is ready to be launched after loading. Prior to sending this event, the <b>Mode changed</b> event will be sent.
	Position changed	This event is generated continuously once every second to indicate the progress of playing a multimedia file. Use the <code>mciGetPosition</code> or <code>mciGetPositionString</code> functions to retrieve the current position. (see <a href="#">Parser</a> )
	Size changed	This event is generated, when the MCI interface changes the size of the display window.
	Media changed	This event is generated, when a new media ( <i>such as a CD</i> ) is loaded.



## Error

This event is generated, when the MCI interface detects an error. The formula value of the MCI component contains the appropriate error string.


## VBX

If you register a VBX, then it will usually augment the list of events by itself. Since these events are specific to the component, there is no way to document, here, which events will be registered. As is the case with all other component specific events, the events registered by the VBX will be appended to the list. Some of the otherwise available events might be excluded from the list, since the VBX paradigm does not support them (*such as drag & drop*) between non-VBX components.

You should refer to the documentation accompanying the VBX in order to determine which events are/will be available.






## Encapsulation (Client / Server)

An encapsulation component will always register at least one event. In addition to this event, the developer of the encapsulation component (*subassembly*) will be responsible for exposing other facilities. These facilities, otherwise referred to as the sub-assembly's API (*Application Programming Interface*), will appear in the event list, as defined by the component developer.

	Event	Description (When generated)
	Server has closed	This event is generated when the server has terminated normally. The client connected to this server will receive this event and can process it.



## Database

The following events are generated by any installed database.

	Event	Description (When generated)
	Record loaded	When a query is sent to a database, and a record has been returned to MindMap, an event of this type is generated. Also, if the database cursor has been moved to a new position, by means of the First record, Previous Record, Next record, Last record or Go to record commands.
	Refresh data fields	
	Delete failed	When the MindMap application attempts to delete a record in the database and the operation has failed, this event is generated. A possible cause for this failure might be that the database is write-protected.
	Insert failed	When the MindMap application attempts to insert a record in the database and the operation has failed, this event is generated. A possible cause for this failure might be that the database is write-protected
	Update failed	When the MindMap application attempts to update a record in the database and the operation has failed, this event is generated. A possible cause for this failure might be that the database is write-protected

## Input/Output

The following events are generated, independent of the type of data stored on the clipboard.

	Event	Description (When generated)
	New data in clipboard	Whenever something is copied to the clipboard, this event is generated. This event can be used to signal to the application that a copy has been successful.
	Clipboard empty	Whenever another application has changed or has cleared the contents of the clipboard.

## Menu



### Event

"Menu"

### Description (When generated)

When a menu component is placed on the screen and a text has been assigned to a field, then this text will appear as the event option in the event list. The text string itself has no meaning. It merely functions as a placeholder representing the nth menu entry.

#### **Note:**

*The only events a menu component has, are those entered into the component itself, by the developer.*



## Common Messages


The following list contains all the messages which are available in the standard environment. This means that even if you have not installed additional components, these messages will be available to you. Each additional component can choose to register its own messages. In this case, they are added to this list. The description of the component specific messages are dealt with on a component-by-component basis at the end of this list.

Whenever you select a message from the list on the right side of the dialog box, the lower section of the dialog box will change to reflect the selection. The actual contents of the link dialog box after having selected a message is, thus, a function of the selected message.

## Jump



Once you select the jump message, the dialog box will take on the following appearance.

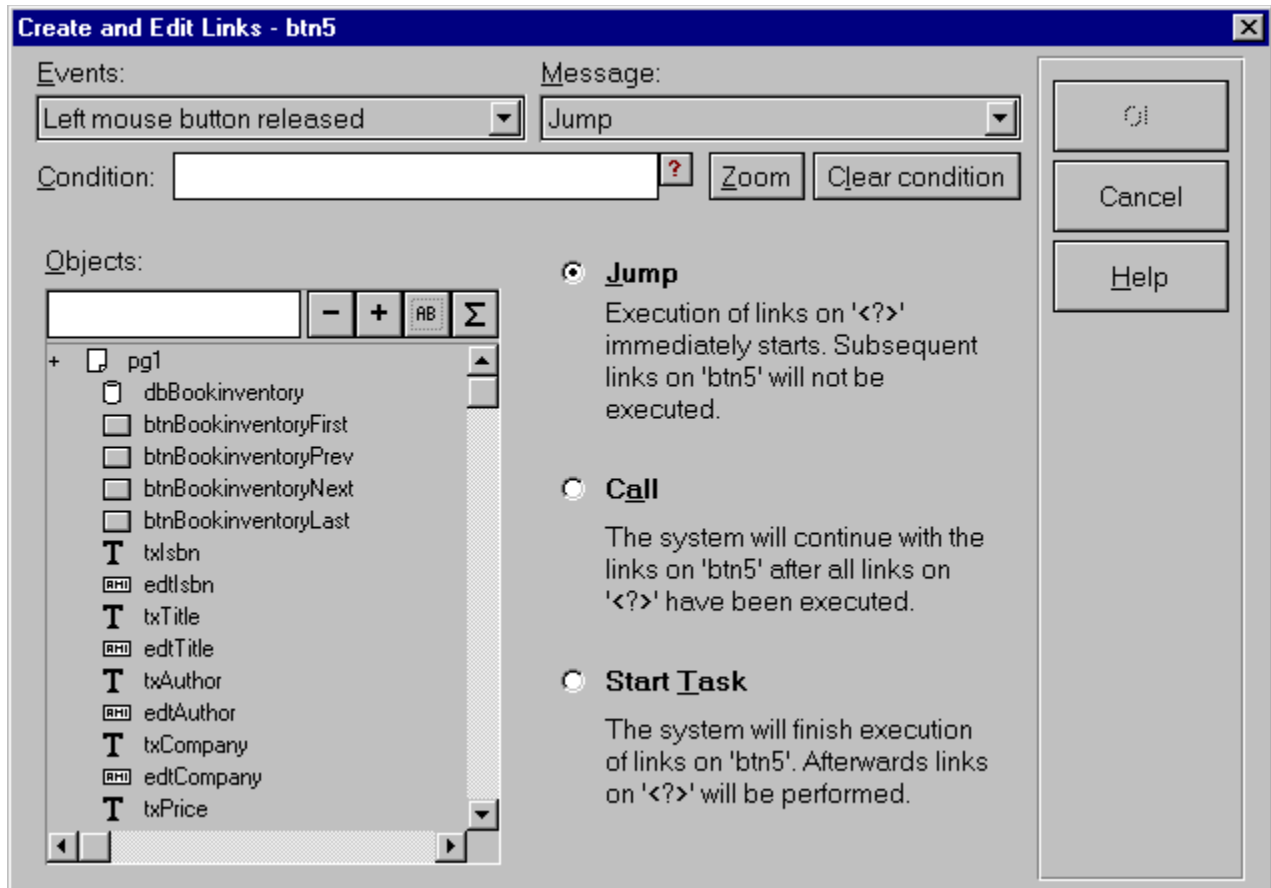

This message is used in a number of different ways. Its most common use is to transfer control from one page to another. By no means is this its most important use, though. The fact is that a jump message transfers control to whatever it jumps to, making it suitable for a number of different situations, such as:

- reassigning focus
- beginning a 'subroutine'
- a dummy operation to execute parser statements

In order to actually jump to another component (*which includes a page*), merely select the component in the list which opens once you select this message. You can jump to any component, although the reaction due to the jump might differ.

If you jump to a **page** (*not a component on the page*), the jumped to page will display itself. If you have set any effects on the page, these will take affect. All components on the page will receive a message to paint themselves and to evaluate any parser statement associated with them. The paint sequence corresponds to the order in which they were created, or more precisely the order in which they have been layered (*foreground / background*). They will be painted from background to foreground. The component farthest in background, capable of receiving focus, will receive it.

If you jump to a **component on a different page**, then the page will be displayed, the components will be painted in the order as described above, and any parser statements will be evaluated. The difference is that the default focus assignment is overridden by the component jump. If the component the jump is directed to is capable of receiving a focus, it and not the component farthest in background, will receive focus.

Special consideration must be given if the component that receives the jump has been set to be **invisible**. In this case the

page will not be displayed. Let's look at an example. If you have placed a rectangle on page two, along with a number of other components and you jump from page one to the invisible rectangle, then all links associated with the rectangle ("*Goal of a Jump*"), as well as the associated parser statements will be executed. You can use this feature to launch activities without letting the normal effects of a jump become visible.

If you jump to a **component on the same page**, more or less the same process takes place. The page is not redrawn though, unless some other link is executed that invokes a repaint. Again, if you jump to an invisible component, the jump and all links associated with the jumped to component will be executed. If the component could receive focus, but has been set to be invisible, then it will not accept the focus and focus will remain where it originally was (*again, assuming that no link is activated that otherwise changes focus*).

A jump message is also used to **initiate a subroutine**. This is done by dropping a placeholder component (*most commonly a rectangle is used*) on the desktop. Next, all desired links are placed on the rectangle. The event they trigger on though is "*Goal of a jump*". When the rectangle is jumped to, then it is actually receiving a "Goal of a Jump" event. Lets view this process in more detail:

Sending Component	Receiving Component	Description
Left Mouse Button Released Call to...		<i>The component transfers control to the receiving component.</i>
	Left Mouse Button Released Change Attributes Color to Green	<i>This link is not executed, since the control has been received not via user interaction on the component, but via transfer from another component.</i>
	Goal of a Jump Sound	<i>This link is processed, since control has been received through the jump message/event. The sound message is executed.</i>
'Next link'		<i>Control is back at the initial component.</i>


It must be noted, that the behavior of the sending component during the period in which the receiving component is processing its links, can be influenced by the setting of the switches on the right of the dialog box.

MindMap also supports **computed jumps**. When you select a component in the component list, MindMap will use the component as an absolute place to jump to. There might be situations in an application you are building, in which you would like to jump to a page or component which is determined at run time. To enable a computed (*or parsed*) jump, you must point the jump to a component which contains the destination. In this case the jump doesn't actually jump to the specified component, it uses the contents of the component as a pointer to the 'real' destination.

Let's use a little example to clarify this feature. Place an input field on Page1 of the application. Place a command button next to it. Now create a second and a third page. Go back to the first page and place a link on the command button which reads:

#### **Left Mouse Button Release Jump to EDT1**

At the top of the section displaying the component list in the link dialog box, you can see a row of buttons.

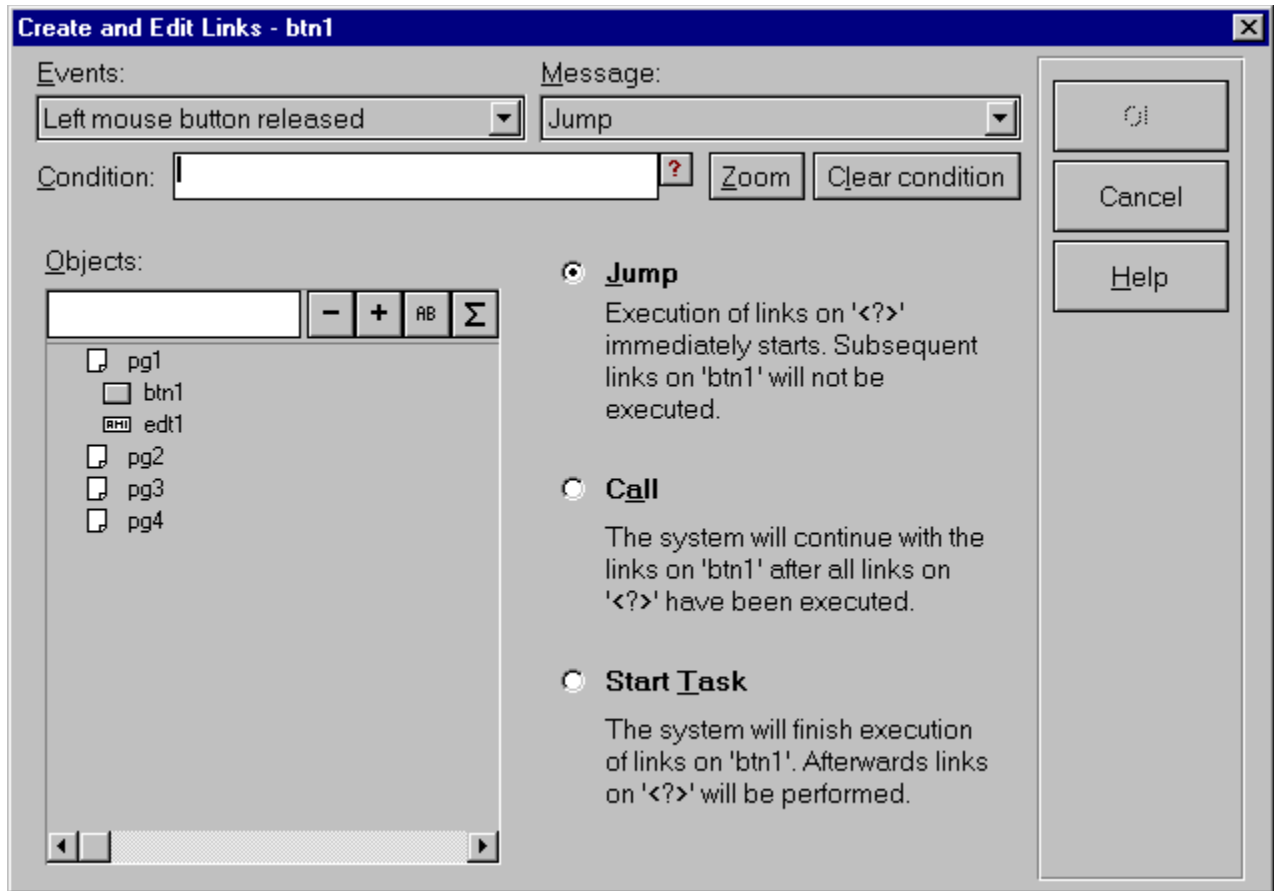

Next to the plus ('+') and the minus signs ('-') you will see two additional buttons. The button labeled 'AB' toggles the component list to display in alphabetical order. The button with the capital sigma ('Σ') is the one we need in this context. If you selected the input field labeled EDT1, this name should appear in the area to the left of the four buttons. If you now click on the -button, the list of components will be grayed and the component's name listed in the field will be ungrayed. The -button will remain pressed. If you now leave the dialog box (by clicking the OK button) and return to the list of defined links, you will notice that the component's name has been placed in square brackets ('[]'). This symbolizes that the component, in this case EDT1, is not being used as a jump target, but as a supplier of the pointer.

## Assign value



Once you have selected this message, the dialog box will change to reflect the options associated with this message:

This is the method by which a specific value can be assigned to another component. If you employ the parser, then you can assign a statement to a component, which will be evaluated when the component is instructed to do so. The general conceptual syntax for the Assign value statement is

### **component x statement**

with component x being the component selected in the upper section of the dialog box. (*Please note that only those components that are capable of having a value assigned to them are displayed in the list.*) The statement belongs in the area beneath the list of components. The statement itself must adhere to a certain syntax. (*The valid syntax of statements is described extensively in conjunction with the [parser](#).*)

A statement may include:

- constants or values
- operators
- references to other components
- functions

Thus, a valid statement might be:

**$\text{sqrt}(\text{component x}) * (10 * \pi)$**

or

### **substr(component y,2,3)**

The first statement would assign the result of the mathematical operation on the component-x as described in the statement. The second statement would assign the result of the string operation to the appropriate component.

Please note that you do not include any assignment or equality operators such as '=' or '<' in the statement. By selecting the component in the list, you are already making the assignment and you must merely supply the rest of the 'equation'.

The component to which you assign the value, does not necessarily have to be able to deal with the assigned value. You can use a component as a storage location for values. Often, rectangles are used as temporary storage locations for values, much as they are used for subroutines.

Let's look at a little example of this concept.


Place a command button, an input field and a rectangle, on the desktop. Select the command button and put the following link on it:

*Left Mouse Button Release - Assign Value 23 to RCT1.*

Next, define the following link on the same command button:

*Left Mouse Button Release - Assign Value RCT1 to EDT1.*

Note that this assumes the rectangle has been given the name RCT1 and the input field has been set to EDT1.

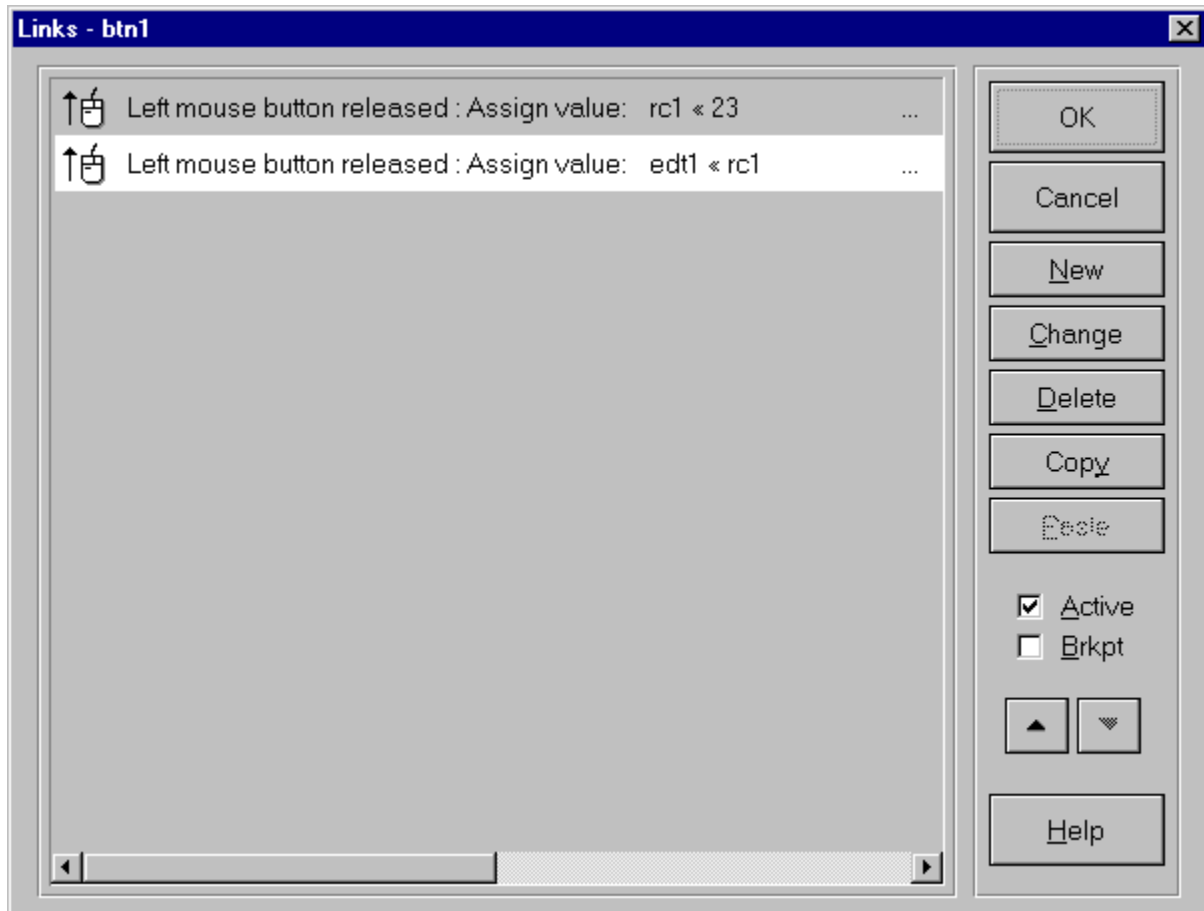

The first link assigns the value to the rectangle and, even though the rectangle can't deal with the assignment in the conventional manner, it does store it. The second link takes the value of the rectangle and displays it, since the edit field knows how to deal with values.


Please note that this little example would not function properly, if you were to reverse the order of the two links. The links are processed by MindMap in a top-to-bottom order.

## Drag&Drop



First, let's look at the concept. Dragging & dropping implies taking something from one component and passing it on to another component. The component which is providing the data does not get involved in the manner in which the receiving component deals with the data. Sender and receiver are completely independent of one another.

Once you select the Drag & Drop message, the dialog box will change its appearance. On the lower left-hand side of the dialog box, a list of components capable of supplying data via drag & drop are displayed. Immediately to the right, you will see a list of components in the application which have the ability to react to drag & drop data.

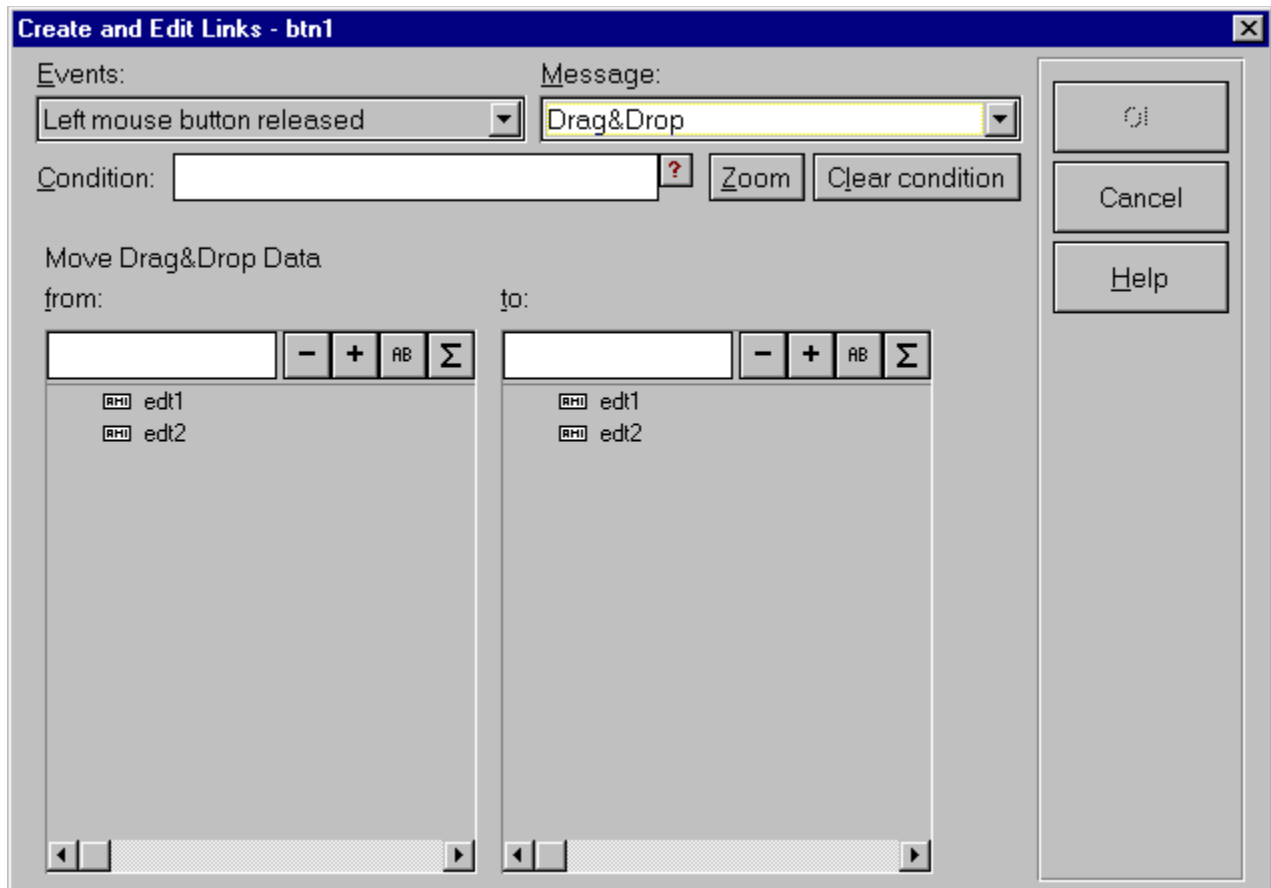

Let's use a simple example to explain how this message works. Place a button and two input fields on page 1. Select the command button and place a link on it. Use Left Mouse Button Released as the event and select the Drag & Drop message. The two list boxes will only contain components capable of sending or receiving data via this message. Therefore, the button you have placed on the screen will not appear. Select edt1 as the component from which the data is requested and select edt2 as the receiving component. Put MindMap in run mode and type some data into the input field edt1. Now, click on the command button and the data should be copied from edt1 to edt2.

Let's take this one step further. Return to edit mode and click on the icon representing the import of graphic files. Select BMP as the format and search your system for a .BMP file. Generally, your Windows directory will contain such files. While you're at it, try to remember a second file name (*or better yet, take a note of it*). Accept the selection and place the bitmap on the desktop. Next, select the bitmap and set its attribute to drag & drop enable. (*This is the icon with the little hand dropping the ball.*) You should still have a command button and an input field placed on the desktop. If not, place one of each on the page. Select the command button and place a link on it. As an event, use the omnipresent Left Mouse Button Released, and, as the message, use Drag & Drop. Now select the input field as the originating data source and select the bitmap as the receiving component. Accept the link, go back to the desktop and put MindMap into run mode. Your screen should look something like this:



Select the input field and key in the name of the file you either memorized or have written down. Please make sure that you type in the complete path for the file. When you click on the command button, a drag & drop operation will be performed. Strangely enough though, the existing bitmap will be replaced by the bitmap contained in the file you have specified in the input field.

What has happened? The bitmap has received a file name as data via the drag & drop message. It has then attempted to display the file name, which it can't. It then attempted to locate a file by that name (*and hopefully succeeded*), has opened the file, read it, and displayed the contents in place of the existing bitmap. The existing bitmap has taken on the roll of a placeholder.

Reverse the order of sending and receiving in the above example - drag & drop the bitmap to the input field (*remember to set the attribute of the input field to enable incoming data via drag & drop*). Go into run mode and execute the link. Interestingly enough, what will happen is that the bitmap will display its file name in the input field. What has happened now, is that the bitmap started out by sending the actual bitmap to the edit field. It responded by informing the sender, that it could not deal with this form of data, only with alphanumeric information. The bitmap component then sent it a file name. This the input field could deal with and immediately displayed it.

Try the same procedure with a list box. Place a list box on the desktop, along with a button and a bitmap. Set the drag & drop attribute of the list box to receive data. Instruct the button to perform a link, whereby it is to send data via drag & drop from the bitmap to the list box. Put MindMap into run mode and execute the link. As presumably expected, the list box displays the file name associated with the bitmap. Now go back into edit mode and set the specific attributes of the list box to 'Show Bitmaps' (*bottom left hand corner of the specific attributes dialog box*). Now get back into run mode and execute the link. Well, the list box now displays the bitmap you sent it. If you execute the link multiple times, the list box will display multiple instances of the bitmap.

The point of the story is that each component reacts differently to incoming data via the drag & drop message.

The drag & drop message also supports the **computed drag & drop** feature. When specifying the sending component, click on the -button after selecting the component. Keep in mind though, that the supplying component must be capable of containing a pointer (*i.e. a graphical primitive cannot be used here*). Then select the destination. When the link is executed, it will go to the specified component, pick up the pointer, and go and get the contents of the component the pointer is pointing



to. The contents will then be forwarded to the receiving component.

The same procedure can be used the other way around. The receiving component can contain a pointer to the component which is really supposed to receive the data. This way you can pick up data from a component and send it right back to itself.

Here is a break-down of how the components react to incoming data via drag & drop:

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Input field	Input field	<i>The input field will overwrite its contents and display the contents of the sending input field.</i>
	List box	<i>The list box will append the contents of the input field to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i>
	Collapsed list box	<i>If the input field contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i>  <i>If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred to the collapsed list box.</i>
	Combo box	<i>The combo box behaves in the same manner the list box does.</i>
	Drop down	<i>The drop down behaves in the same manner the list box does.</i>
	Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though, unless you drop down the list.</i>
	Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
	Data table	<i>The contents of the input field will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i>  <i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the</i>

*incoming data will be placed in the first row of the specified column.*

Input/output:  
Clipboard

*If the clipboard attribute has been set to accept text, then the result of the drag & drop operation will be that the contents of the input field will be placed on the clipboard and made available as text to other applications.*

*If the attribute has been set to any of the graphic formats, then the clipboard will still accept the text and make it available to other applications as a text.*

*If the input field has been given a specific format, such as a date or time format, the clipboard will interpret the data as a string and make it available as a string.*

Input/output:  
File system

*If you drag the contents of an input field to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag & drop an input field to the I/O component, the component will open the file, write the contents to the file, and subsequently close the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The contents of the input field will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the contents of the input field to the specified file.*

Menu

*- no reaction -*

Text

*- no reaction -*

Output page

*- no reaction -*

MCI

*When the contents of an input field is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the input field contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons

*- no reaction -*

Graphical  
primitives

- no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
List box	Input field	<p><i>The input field will overwrite its contents and display the selected row of the sending list box. Only the selected row in the list box will be sent.</i></p> <p><i>If the list box has been set to show bitmaps, then dragging &amp; dropping the selected row to input field will result in the input field displaying the file name of the bitmap.</i></p>
	List box	<p><i>The list box will append the contents of the sending list box to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i></p> <p><i>If the list box has been set to show bitmaps, then dragging &amp; dropping the selected row of the sending list box will result in the receiving list box displaying the file name of the bitmap.</i></p>
	Collapsed list box	<p><i>If the sending list box contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i></p> <p><i>If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred to the collapsed list box.</i></p> <p><i>If the list box has been set to show bitmaps, then dragging &amp; dropping the selected row collapsed list box will result in the collapsed list box displaying the file name of the bitmap.</i></p>
	Combo box	<p><i>The combo box behaves in the same manner the list box does.</i></p> <p><i>If the list box has been set to show bitmaps, then dragging &amp; dropping the contents to combo box will result in the combo box displaying the file name of the bitmap.</i></p>
	Drop down	<p><i>The drop down behaves in the same manner the list box does.</i></p>

	<p><i>If the list box has been set to show bitmaps, then dragging &amp; dropping the contents to drop down will result in the drop down displaying the file name of the bitmap.</i></p>
Drop down list	<p><i>The drop down list behaves in the same manner the list box does. It will not show the new entries though, unless you drop down the list.</i></p> <p><i>If the list box has been set to show bitmaps, then dragging &amp; dropping the selected row to a drop down list will result in the drop down displaying the file name of the bitmap.</i></p>
Bitmap, CGM, etc.	<p><i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i></p> <p><i>If the list box has been set to show bitmaps, then sending the selected row to a bitmap, CGM, etc., will result in the selected bitmap in the list box to be displayed instead of the placeholder.</i></p>
Data table	<p><i>The contents of the list box will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i></p> <p><i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i></p>
Input/output: Clipboard	<p><i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the selected row of the list box will be placed on the clipboard and made available as text to other applications.</i></p> <p><i>If the attribute has been set to any of the graphic formats, then the clipboard will still accept the text and make it available to other applications as a text.</i></p>
Input/output: File system	<p><i>If you drag the selected row of a list box onto a file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop a selected row of the list box to the I/O</i></p>

*component, the component will open the file, write the contents to the file, and subsequently close the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The selected row of the list box will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the selected row of the list box to the specified file.*

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
*When the selected row of a list box is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the list box contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons - no reaction -

Graphical primitives - no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Collapsed list box	Input field	<p><i>The input field will overwrite its contents and display the contents of the sending collapsed list box.</i></p> <p><i>If you have selected a row which is indented, then the indentation characters ('\') will not be sent to the receiving component.</i></p>
	List box	<p><i>The list box will append the selected row of the collapsed list box to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i></p> <p><i>If you have selected a row which is indented, then the indentation characters ('\') will not be sent to the receiving component.</i></p>

Collapsed list box	<i>If the collapsed list box contains indented rows, the dragging &amp; dropping them to another collapsed list box will strip the preceding indentators ('\') and the resulting collapsed list box will not display the rows indented.</i>
Combo box	<i>The combo box behaves in the same manner the list box does.</i>
Drop down	<i>The drop down behaves in the same manner the list box does.</i>
Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.</i>
Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
Data table	<p><i>The selected row of the collapsed list box will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i></p> <p><i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i></p>
Input/output: Clipboard	<p><i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the selected row of the collapsed list box will be placed on to the clipboard and made available as text to other applications.</i></p> <p><i>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</i></p>
Input/output: File system	<i>If you drag the selected row of a collapsed list box to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop a selected row to the I/O component, the component will open the file, write the contents to the file, and subsequently close</i>

*the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The selected row of the collapsed list box will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the selected row of the collapsed list box to the specified file.*

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
*When the selected row of an collapsed list box is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the received data contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons - no reaction -

Graphical primitives - no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Combo box	Input field	<i>The input field will overwrite its contents and display the selected row of the sending combo box.</i>
	List box	<i>The list box will append the selected row of the combo box to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i>
	Collapsed list box	<i>If the selected row of the combo box contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i>  <i>If characters precede the backslash(s), these will be ignored and only the characters</i>

*following the backslash(s) will be transferred to the collapsed list box.*

Combo box	<i>The combo box behaves in the same manner the list box does.</i>
Drop down	<i>The drop down behaves in the same manner the list box does.</i>
Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.</i>
Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
Data table	<p><i>The contents of the combo box will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i></p> <p><i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i></p>
Input/output: Clipboard	<p><i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the selected row of the combo box will be placed on to the clipboard and made available as text to other applications.</i></p> <p><i>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</i></p> <p><i>If the combo box has been given a specific format, such as a date or time format, the clipboard will interpret the data as a string and make it available as a string.</i></p>
Input/output: File system	<i>If you drag the contents of an combo box to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop an combo box to the I/O component, the component will open the file, write the contents to the file, and subsequently close</i>



*the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The selected row of the combo box will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the selected row of the combo box to the specified file.*

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
*When the selected row of the combo box is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the selected row of the combo box contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons - no reaction -

Graphical  
primitives - no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Drop down	Input field	<i>The input field will overwrite its contents and display the selected row of the sending drop down.</i>
	List box	<i>The list box will append the selected row of the drop down to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i>
	Collapsed list box	<i>If the selected row of the drop down contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i>  <i>If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred</i>

*to the collapsed list box.*

Combo box	<i>The combo box behaves in the same manner the list box does.</i>
Drop down	<i>The drop down behaves in the same manner the list box does.</i>
Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.</i>
Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
Data table	<i>The contents of the drop down will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i>  <i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i>
Input/output: Clipboard	<i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the selected row of the drop down will be placed on to the clipboard and made available as text to other applications.</i>  <i>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</i>
Input/output: File system	<i>If you drag the selected row of an drop down to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop a selected row of a drop down to the I/O component, the component will open the file, write the contents to the file, and subsequently close the file.</i>  <i>If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing</i>

*file, a warning message will be displayed, otherwise the file will simply be overwritten. The selected row of the drop down will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the selected row of the drop down to the specified file.*

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
*When the selected row of a drop down is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the selected row of the drop down contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons - no reaction -

Graphical primitives - no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Drop down list	Input field	The input field will overwrite its contents and display the selected row of the sending drop down list.
	List box	The list box will append the selected row of the drop down list to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.
	Collapsed list box	If the drop down list contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.  If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred to the collapsed list box.
	Combo box	The combo box behaves in the same manner the list box does.

Drop down	The drop down behaves in the same manner the list box does.
Drop down list	The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.
Bitmap, CGM, etc.	The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.
Data table	<p>The contents of the drop down list will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</p> <p>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</p>
Input/output: Clipboard	<p>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the selected row of the drop down list will be placed on to the clipboard and made available as text to other applications.</p> <p>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</p>
Input/output: File system	<p>If you drag the selected row of an drop down list to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop the selected row of a drop down list to the I/O component, the component will open the file, write the contents to the file, and subsequently close the file.</p> <p>If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The selected row of the drop down list will not be appended to the existing file. If you have checked the option 'Append to file',</p>

then subsequent executions of the link will append the selected row of the drop down list to the specified file.

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
When the selected row of a drop down list is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the selected row of the drop down list contains a valid file name, then the MCI component will retrieve the file, open, and load it.

Buttons - no reaction -

Graphical primitives - no reaction -

Sending component	Receiving component	Description
Bitmap, CGM, etc.  <i>(referred to in the following simply as bitmap)</i>	Input field	<i>The input field will overwrite its contents and display the file name of the graphic element that is being sent.</i>
	List box	<i>The list box will append the file name to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i>  <i>If the list box has been set to show bitmaps, then it will display a shrunk version of the bitmap, if the source is a bitmap. Vector cannot be displayed in the list box.</i>
	Collapsed list box	<i>If the bitmap contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i>  <i>If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred</i>

*to the collapsed list box.*

Combo box	<i>The combo box behaves in the same manner the list box does.</i>
Drop down	<i>The drop down behaves in the same manner the list box does.</i>
Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.</i>
Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
Data table	<i>The contents of the input field will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i>  <i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i>
Input/output: Clipboard	<i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the contents of the input field will be placed on to the clipboard and made available as text to other applications.</i>  <i>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</i>  <i>If the input field has been given a specific format, such as a date or time format, the clipboard will interpret the data as a string and make it available as a string.</i>
Input/output: File system	<i>If you drag the contents of an input field to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop an input field to the I/O component, the component will open the file, write the contents to the file, and subsequently close</i>

*the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The contents of the input field will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the contents of the input field to the specified file.*

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
*When the contents of an input field is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the input field contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons - no reaction -

Graphical  
primitives - no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Data table	Input field	<i>The input field will overwrite its contents and display the contents of the sending input field.</i>
	List box	<i>The list box will append the contents of the input field to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i>
	Collapsed list box	<i>If the input field contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i>  <i>If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred</i>

*to the collapsed list box.*

Combo box	<i>The combo box behaves in the same manner the list box does.</i>
Drop down	<i>The drop down behaves in the same manner the list box does.</i>
Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.</i>
Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
Data table	<i>The contents of the input field will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i>  <i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i>
Input/output: Clipboard	<i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the contents of the input field will be placed on to the clipboard and made available as text to other applications.</i>  <i>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</i>  <i>If the input field has been given a specific format, such as a date or time format, the clipboard will interpret the data as a string and make it available as a string.</i>
Input/output: File system	<i>If you drag the contents of an input field to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop an input field to the I/O component, the component will open the file, write the contents to the file, and subsequently close</i>



*the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The contents of the input field will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the contents of the input field to the specified file.*

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
*When the contents of an input field is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the input field contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons - no reaction -

Graphical  
primitives - no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Input/output: Clipboard	Input field	<i>The input field will overwrite its contents and display the contents of the sending input field.</i>
	List box	<i>The list box will append the contents of the input field to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i>
	Collapsed list box	<i>If the input field contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i>  <i>If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred</i>

*to the collapsed list box.*

Combo box	<i>The combo box behaves in the same manner the list box does.</i>
Drop down	<i>The drop down behaves in the same manner the list box does.</i>
Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.</i>
Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
Data table	<i>The contents of the input field will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i>  <i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i>
Input/output: Clipboard	<i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the contents of the input field will be placed on to the clipboard and made available as text to other applications.</i>  <i>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</i>  <i>If the input field has been given a specific format, such as a date or time format, the clipboard will interpret the data as a string and make it available as a string.</i>
Input/output: File system	<i>If you drag the contents of an input field to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop an input field to the I/O component, the component will open the file, write the contents to the file, and subsequently close</i>

*the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The contents of the input field will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the contents of the input field to the specified file.*

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
*When the contents of an input field is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the input field contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons - no reaction -

Graphical primitives - no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Input/output: File system	Input field	<i>The input field will overwrite its contents and display the contents of the sending input field.</i>
	List box	<i>The list box will append the contents of the input field to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i>
	Collapsed list box	<i>If the input field contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i>  <i>If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred</i>

*to the collapsed list box.*

Combo box	<i>The combo box behaves in the same manner the list box does.</i>
Drop down	<i>The drop down behaves in the same manner the list box does.</i>
Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.</i>
Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
Data table	<i>The contents of the input field will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i>  <i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i>
Input/output: Clipboard	<i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the contents of the input field will be placed on to the clipboard and made available as text to other applications.</i>  <i>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</i>  <i>If the input field has been given a specific format, such as a date or time format, the clipboard will interpret the data as a string and make it available as a string.</i>
Input/output: File system	<i>If you drag the contents of an input field to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop an input field to the I/O component, the component will open the file, write the contents to the file, and subsequently close</i>

*the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The contents of the input field will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the contents of the input field to the specified file.*

Menu - no reaction -

Text - no reaction -

Output page - no reaction -

MCI  
*When the contents of an input field is sent to an MCI component via drag & drop, the receiving component attempts to interpret it as a command. If the input field contains a valid file name, then the MCI component will retrieve the file, open, and load it.*

Buttons - no reaction -

Graphical primitives - no reaction -

<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Input/output: Printer	Input field	<i>The input field will overwrite its contents and display the contents of the sending input field.</i>
	List box	<i>The list box will append the contents of the input field to the bottom of its list. This is true even if you have highlighted a row in the receiving list box - the incoming data will always be appended.</i>
	Collapsed list box	<p><i>If the input field contains backslashes ('\') starting in the first column, these will be interpreted as indentators. One backslash will indent the string one level. Two backslashes equals two levels, etc.</i></p> <p><i>If characters precede the backslash(s), these will be ignored and only the characters following the backslash(s) will be transferred</i></p>

*to the collapsed list box.*

Combo box	<i>The combo box behaves in the same manner the list box does.</i>
Drop down	<i>The drop down behaves in the same manner the list box does.</i>
Drop down list	<i>The drop down list behaves in the same manner the list box does. It will not show the new entries though unless you drop down the list.</i>
Bitmap, CGM, etc.	<i>The graphic components will attempt to interpret the incoming data as a file name. If they succeed, they will attempt to open the file and display its contents. If the file type (i.e. .BMP) does not correspond to the placeholders file type (i.e. CGM), the receiving component will display the file contents in its own format.</i>
Data table	<i>The contents of the input field will be placed in the first column, first row of the data table. Subsequent drag &amp; drops will overwrite the contents of that cell.</i>  <i>If you specify a certain column in the drag &amp; drop attribute of the data table, then the incoming data will be placed in the first row of the specified column.</i>
Input/output: Clipboard	<i>If the clipboard attribute has been set to accept text, then the result of the drag &amp; drop operation will be that the contents of the input field will be placed on to the clipboard and made available as text to other applications.</i>  <i>If the attribute has been set to any of the graphic format, then the clipboard will still accept the text and make it available to other applications as a text.</i>  <i>If the input field has been given a specific format, such as a date or time format, the clipboard will interpret the data as a string and make it available as a string.</i>
Input/output: File system	<i>If you drag the contents of an input field to file system I/O component, nothing will happen. If you specify a file name in the attribute of the component and drag &amp; drop an input field to the I/O component, the component will open the file, write the contents to the file, and subsequently close</i>

*the file.*

*If you execute the same link again, the process will be repeated. If you have set the switch in the attribute dialog box to warn you prior to attempting to overwrite the existing file, a warning message will be displayed, otherwise the file will simply be overwritten. The contents of the input field will not be appended to the existing file. If you have checked the option 'Append to file', then subsequent executions of the link will append the contents of the input field to the specified file.*

Menu	- no reaction -
Text	- no reaction -
Output page	- no reaction -
MCI	<i>When the contents of an input field is sent to an MCI component via drag &amp; drop, the receiving component attempts to interpret it as a command. If the input field contains a valid file name, then the MCI component will retrieve the file, open, and load it.</i>
Buttons	- no reaction -
Graphical primitives	- no reaction -


<b>Sending component</b>	<b>Receiving component</b>	<b>Description</b>
Menu		<i>You cannot drag &amp; drop the contents of the menu component to other components.</i>
Text		<i>You cannot drag &amp; drop the contents of the text component to other components.</i>
Output page		<i>You cannot drag &amp; drop the contents of the output page component to other components.</i>
MCI		<i>You cannot drag &amp; drop the contents of the MCI component to other components.</i>
Buttons		<i>You cannot drag &amp; drop the contents of the buttons component to other components.</i>
Graphical primitives		<i>You cannot drag &amp; drop the contents of the graphical primitives component to other components.</i>

## Change attributes



During the course of an application, it often becomes necessary to change one or many attributes of a component. You might wish to change the color of a graphical primitive to reflect a change in a certain status, or you might want to gray the text on a button and simultaneously switch it to be inactive.

To achieve this, you merely have to define the event which will trigger the change, select the component you want to perform the attribute change on, the attribute to be changed, and the new value it is to take on.

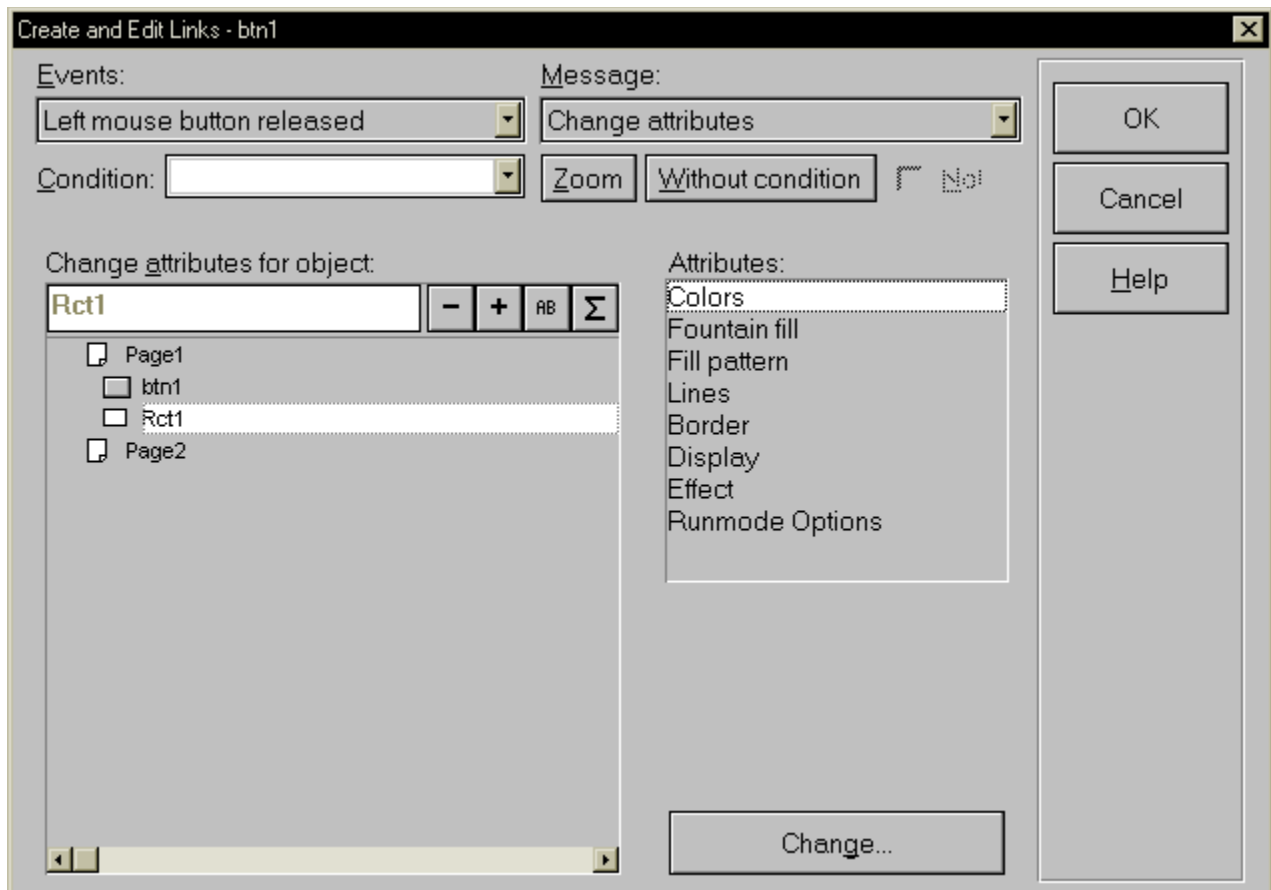

All attributes that can be changed in edit mode, can also be changed in run mode. Obviously, this will always be at the discretion of the application developer, but, nonetheless, all attributes can be changed.

If a component registers its own attributes, these are accessible via the entry *Object* in the attribute list.


Let us use two examples to demonstrate how this message is used.

First, we will simply toggle the color of rectangle.

1. Place a command button and a rectangle.
2. Access the link facility on the command button.
3. The event should be Left Mouse Button Released
4. The message should be Change Attributes
5. Select the rectangle in the list
6. Double-click on the Colors attribute and select red
7. Acknowledge the link




8. Create a new link using the Right Mouse Button Released as the event
9. Proceed as described above, but select a different color this time.
10. Acknowledge the input and return back to the MindMap screen.
11. Put the application into run mode and toggle the color.
12. Now, let us create a somewhat more complex link, using the Change Attribute message.
13. The goal is to turn a command button inactive, conditional on the contents of an input field.

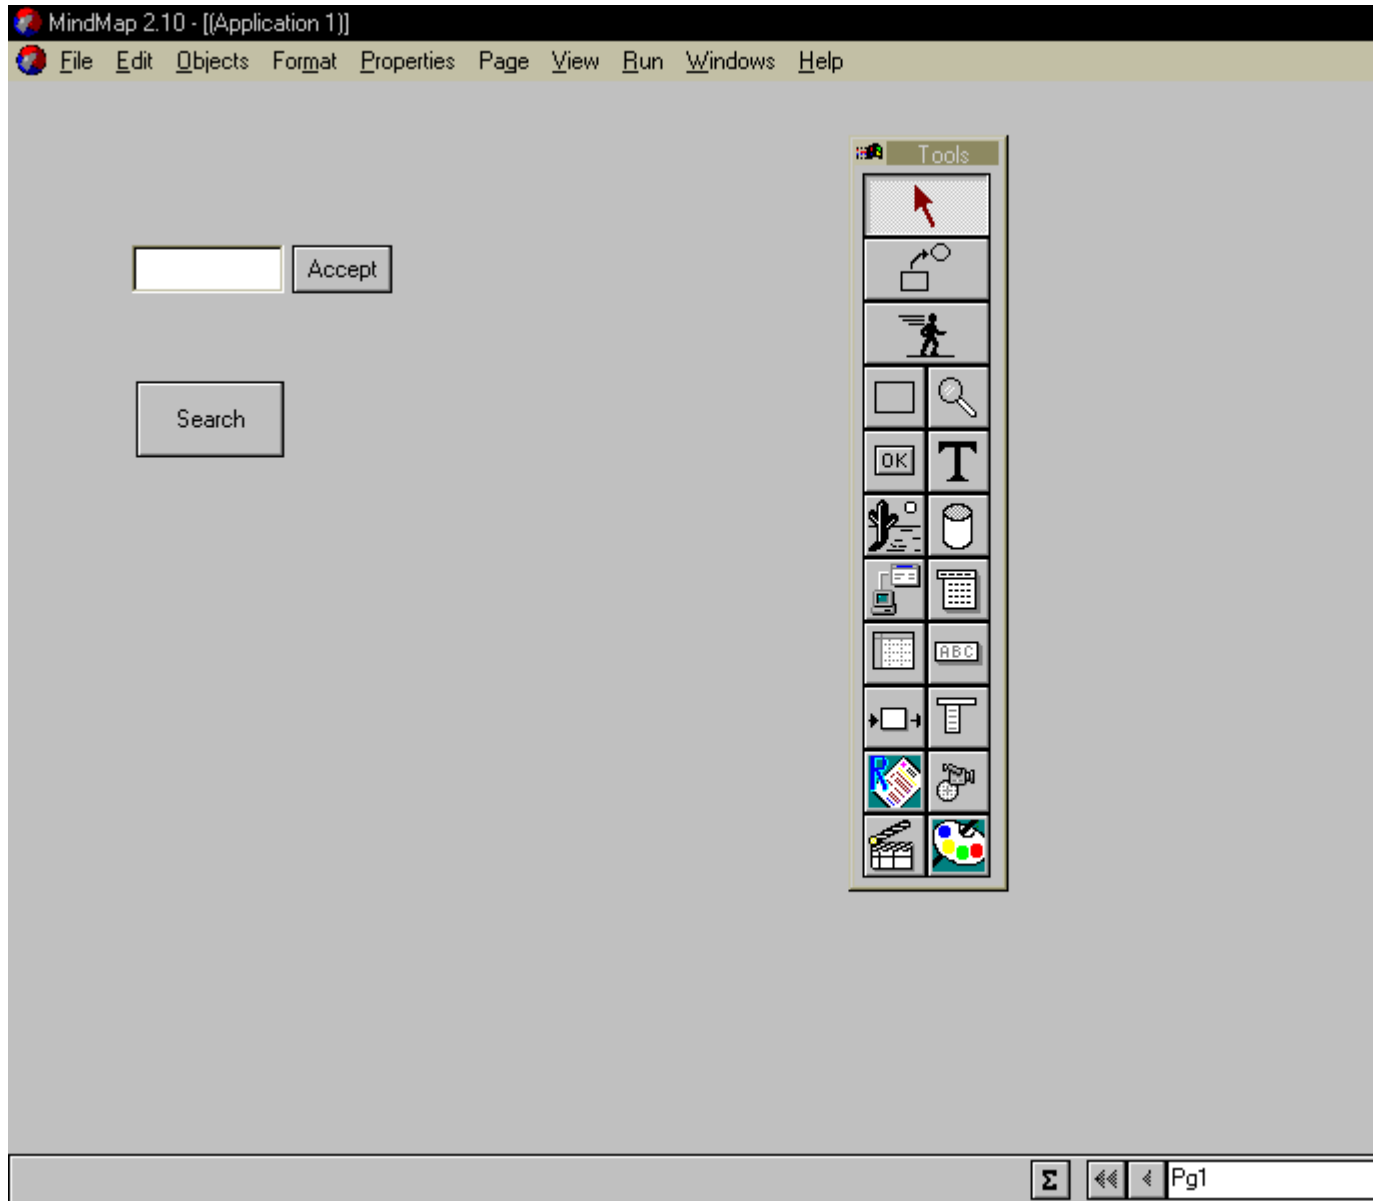

1. Place two command buttons and an input field
2. Label one command button with OK, label the other one with Search
3. Name the first button, btnOK, the second one btnSearch
4. Set the format of the input field to be Number

5. Access the links on btnOK
6. As the event use Left Mouse Button Released
7. As the message select Change Attributes
8. Now select btnSearch and its Object attribute
9. Check the check box labeled inactive
10. Select the Conditional field just beneath the Event list and enter edt1=1
11. Acknowledge the link
12. Create a new link with the inactive check box unchecked and enter as a condition, edt1=2
13. Your links should look like these:

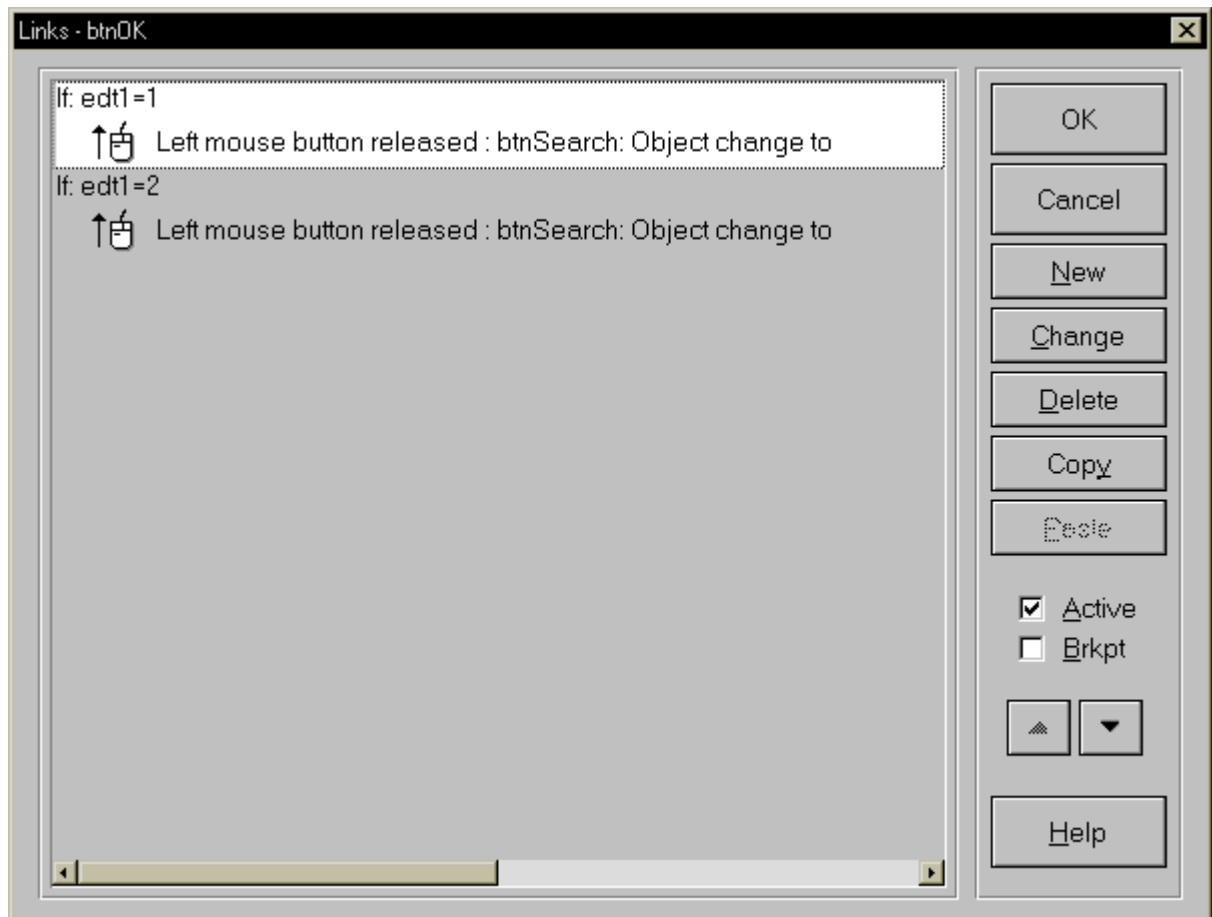


Put this little application into run mode and enter a 1 into the input field. Once you have released the left mouse button on the OK button, the Search button should become inactive. Entering a 2 into the input field, and subsequently releasing the left mouse button on the OK button, will switch it back to the active mode.

## Change cursor



This message is used when you want to notify the user of some, possibly non-obvious, condition in your application. Examples might be that you want to:


- cue the user as to the existence of a hot spot
- signal that a special operation is taking place (printing, drag&drop, etc.)

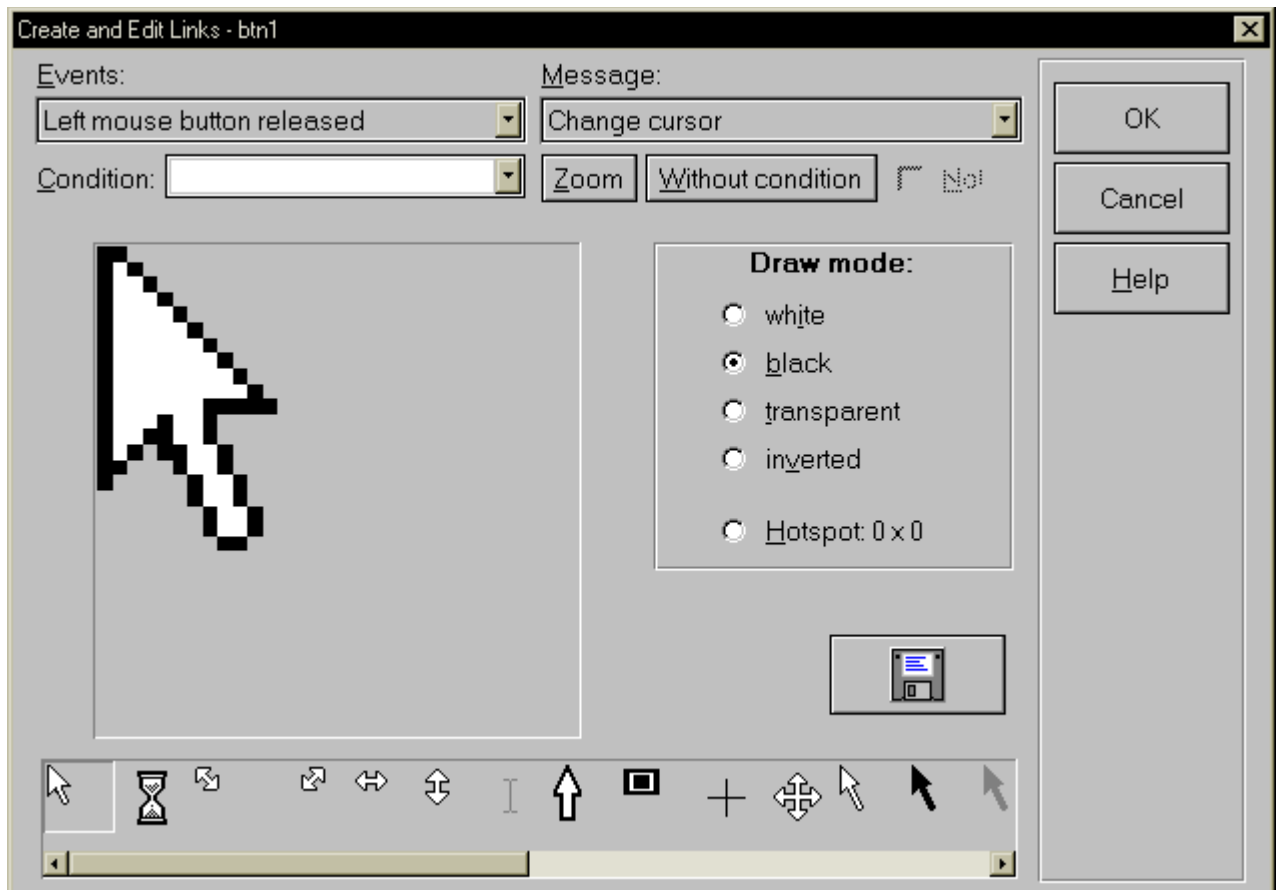

We will assume you want to change the cursor to indicate the location of a hot spot on a bitmap.

1. Place a bitmap on the screen
2. Select a circle (graphical primitive) and place it on top of some significant area of the bitmap
3. Select transparent as the fill color
4. Select transparent as the line color
5. Access the link facility on the circle
6. Select Mouse Movement into Object as the event
7. Select Change Cursor as the message
8. Choose one of the cursors offered in the scrollable list

9. Acknowledge the link
10. Create a new link with Mouse Movement out of Object as the event and the same message
11. Now, pick a different cursor from the list  
Acknowledge this link, also
12. Your two links should look something like these:

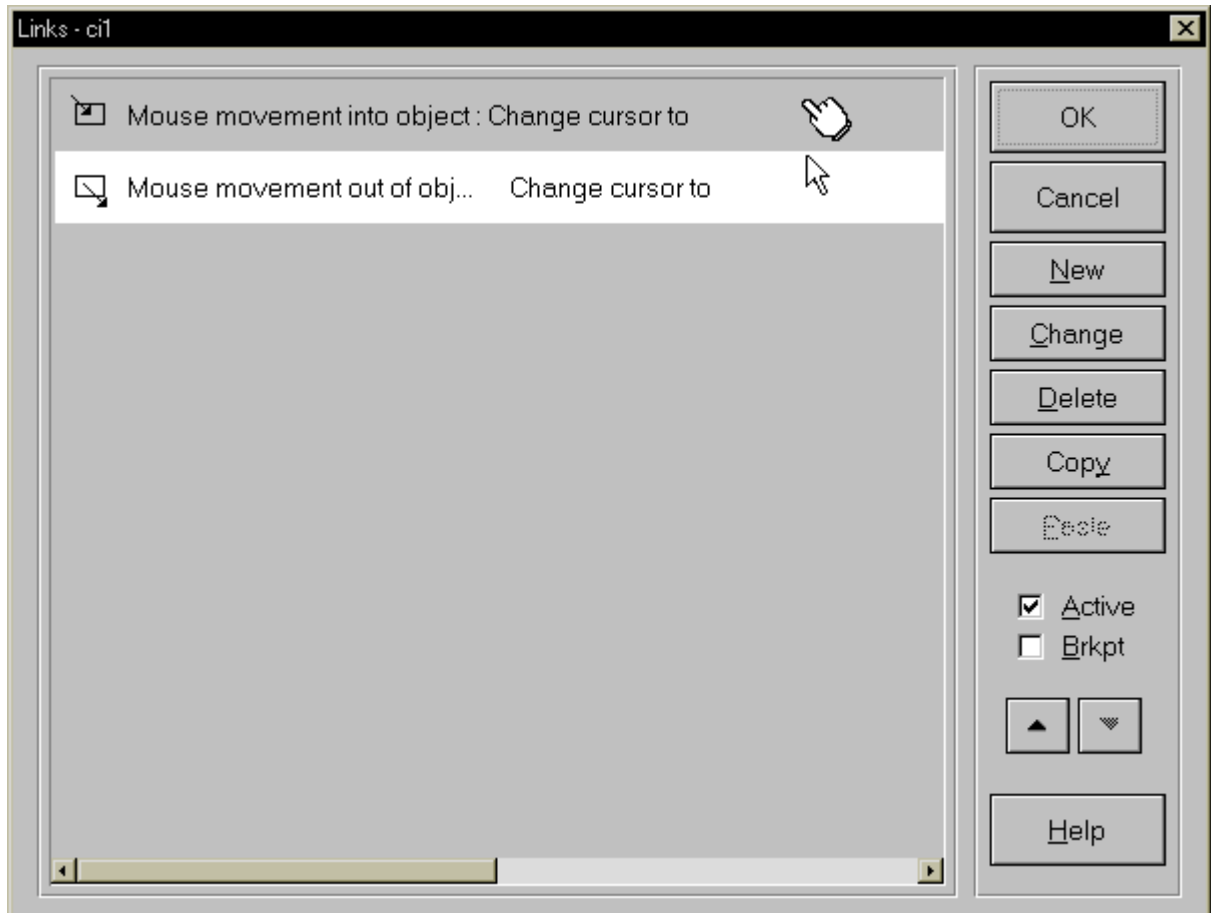


Keep in mind that you must always change the appearance of the cursor back to its initial state, dependent on some valid event, even if you jump to another page.

## Sound

99

This message is used to give the user some simple form of audible feedback, depending on some action. It will function on all Windows systems which have a loudspeaker. You should not confuse this message with the multimedia message MCI command and Multimedia. This message is the least common denominator on all Windows systems. Therefore, it is actually only capable of generating simple sounds, such as beeps.

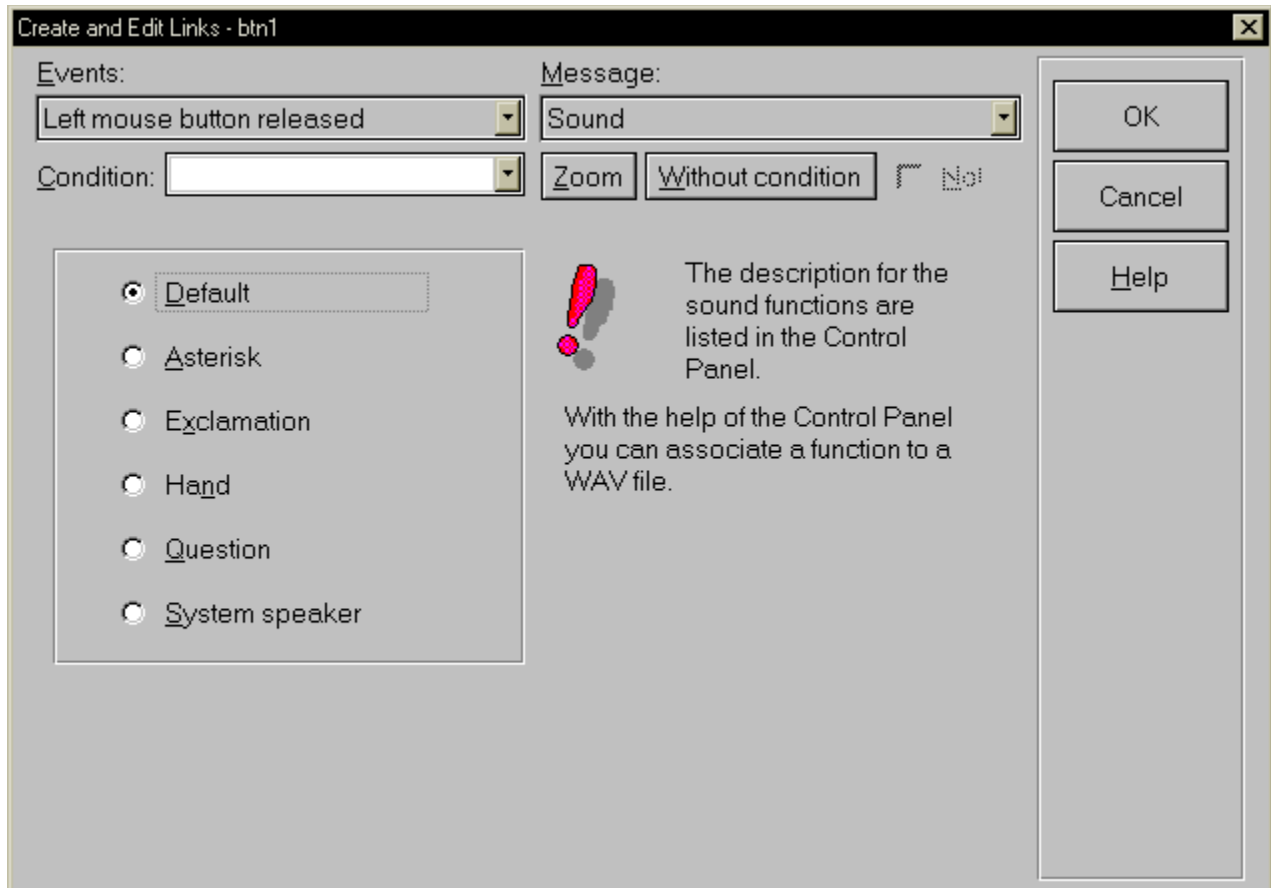

This message picks up the valid settings on your system that have been assigned in the Windows Control Panel. Please note that your setting does not necessarily match those on other systems. Please keep this in mind when planning to deploy your applications to other systems.

Building a link based on this message is extremely straight forward.

1. Place a component and access its links
2. Select an event and pick the Sound message
3. Click on one of the aforementioned sound options in the selection list
4. Acknowledge the link and put the little application into run mode
5. Generate the event and you should hear the sound

## Time-out



This message does exactly as the name implies — it times out for a specified period. During this period, all links on the component which starts the time-out are not processed. Any other links on other components, which may become active during the time-out, will be processed.

Create and Edit Links - btn1

Events: Left mouse button released

Message: Timeout

Condition: [ ]

Zoom Without condition Not

Time (in milliseconds): 1000 ?

The calculated timeout value must not exceed 65000 ms.

The system continues to evaluate further links for this object after the specified time has expired.

During this time the system is still running. Links on other objects may be performed.

OK

Cancel

Help

The time specified in the input field is defined in milliseconds (*1 sec. = 1000 msec*). This field is also evaluated by the parser at run time, so that a statement can be input, instead of a constant. Thus, the actual time-out period can be kept variable.

## Move



This message allows certain components to be moved at run time.

### Note:

The movement is limited to the page on which the component has been placed. Moving it outside the coordinate space of the page, will make it inaccessible for the user. Returning it into the visible area requires the execution of an additional Move message.

All components can be moved during run time, although in some cases, it is hard to conceive of a reason to do so.

Create and Edit Links - btn1

Events: Left mouse button released Message: Move

Condition: [ ] Zoom Without condition No!

Object: Rct1

- Page1
- btn1
- Rct1
- Page2

move to:

X: 220 ?

Y: 120 ?

☒ same size

Width: 60 ?

Height: 50 ?

Update

Delay: 0 ? ms

OK Cancel Help

Again, let us build a simple example.

1. Place a command button and a rectangle
2. Access the link feature on the command button
3. As an event use Left Mouse Button Released, as a message use Move
4. Select the rectangle from the list of components below the event list
5. Click on the Update button on the right side of the dialog box (This should cause the x- and y-coordinates of the rectangle to appear in the corresponding fields.)
6. Retain the displayed Width and Height and enter a Delay of 1000 msec
7. Acknowledge the entries and return to the MindMap screen

8. While still in edit mode, move the rectangle to a different location on the screen. Put the little sample application into run mode and click on the command button. With the delay of a second, the rectangle should return to the position at which it was prior to you moving it manually.
9. The Update button picks up the x- and y-coordinates, as well as the size of the selected component. Obviously, you can enter any other (*valid*) value. By default, the size of the selected component is retained.
10. Since all 5 fields are parsed at run time, you can also enter a computed statement.
11. When the component is moved with a delay, then a frame the size of the component is drawn and it is moved with the specified delay to the designated screen position. It is not possible to move the component as it is seen in its static form.



## Program execution




This message is used to launch other executable files (or programs) from within MindMap. Keep in mind that launching an application in Windows implies that another process is started. This means that control will immediately return to MindMap - links following the program execution will immediately be executed.

Let's try a little example. To launch the MS Windows calculator from within MindMap, perform the following steps:

1. Place a command button
2. Access the link feature on the command button
3. Use Left Mouse Button released as the event and Program Execution as the message
4. Click on the Browse button and navigate the file list until you find the calculator (under normal conditions, it will be located in your Windows directory)
5. Acknowledge the link and return to the MindMap screen
6. Place the little application into run mode and click on the command button. MindMap will pass control to Windows, which in turn will locate the Windows calculator and launch it. If you minimize the calculator, return to the little application and click on the command button again, another instance of the calculator will be launched. To avoid launching multiple instances, you must terminate the application you have started, before you attempt to launch it again.
7. Both fields in the dialog box are parsed, meaning you can also enter any valid statement. This is especially useful if you wish to launch the application in conjunction with a specific file. If you wish to launch a word processor, together with a document the user selected from a list, then you simply use the string concatenation feature to add the selected file to the

program name.

- Let's construct another little example. We want the user to pick the word processor application from one list of files and the document they want to work on from the second list. Clicking on the command button should launch the application and pass the document file, via the command line interface.

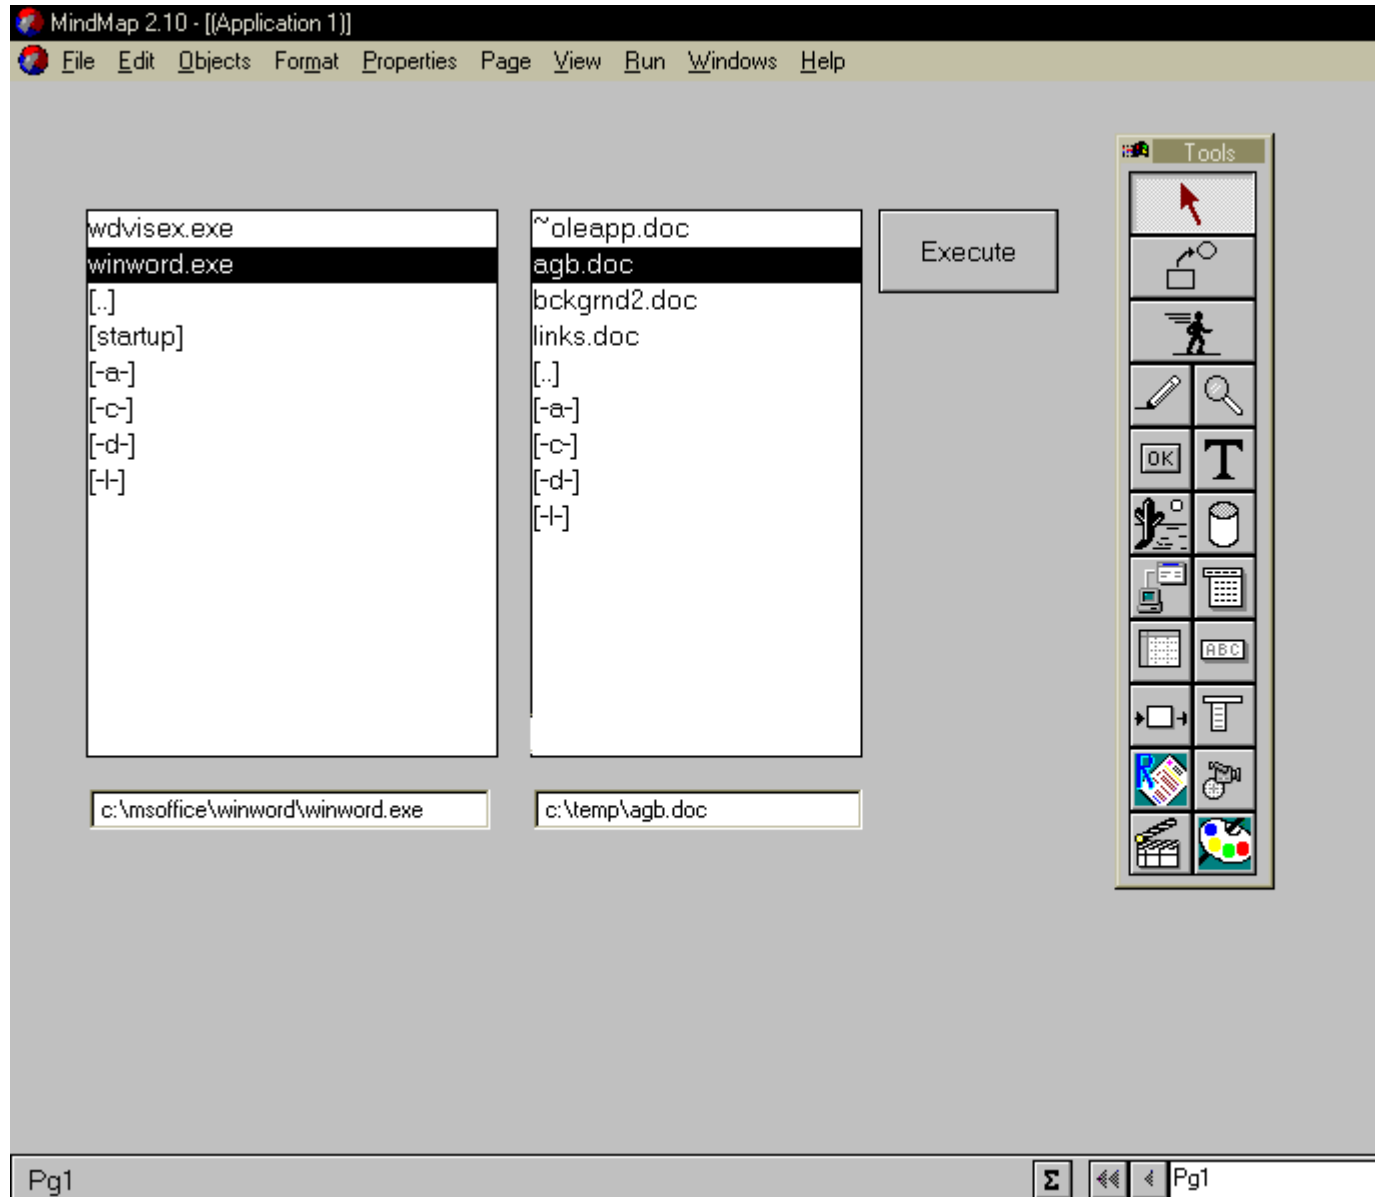

Here are the necessary steps:

- Place two list boxes. Name one ProgramFiles and the other DocFiles. Set the component specific attribute of both list boxes to display files with full path display.
- Place an input field beneath each list box. Name the one beneath the ProgramFiles list box ProgramFileName. Name the other one DocFileName. (In a real application both input fields would be set to be invisible at run time.)
- Place a command button and label it with a caption, such as Execute

4. Select the list box ProgramFiles and access the link facility. As an event, use Application Started. As the message, use Combo-/List box. Here, select the option, Directory, and enter the string "C:\\\*.EXE", including the quotation marks. This will only display files with the extension .EXE.
5. Place another link on the list box. Use Double-click as the event and Drag & Drop as the message. Drag & Drop the contents of this list box to the input field ProgramFileName. (This will assure that the full path is used.)
6. Do the same for the other list box, with the exception that the string you should enter is "C:\\\*.DOC". This will display only those files with the extension .DOC.
7. Also place a link to drag & drop the contents of DocFiles to the input field named DocFileName.
8. Select the command button and access its link facility. Use Left Mouse Button Released as the event and Program Execution as the message.
9. Enter into the field labeled Program name... the following string  
ProgramFileName + " " + DocFileName  
The quotations marks enclose a blank which is concatenated between the program name and the doc file, since this is the convention by which files are specified in the command line (an old MS-DOS convention).
10. Return to the MindMap screen and place this little application into run mode. The left list box should fill itself with the top-level directories and the drives defined on your system. Navigate the structure until you find the program you wish to use. Every time you double-click on an entry in the list box, it will appear in the input field beneath the list box.
11. Navigate the right list box until you have located the document file you wish to work on. Here, again, every double-click will pass the selection from the list box to the input field.
12. Once you have located the program file and the document file, click on the command button.
13. In some cases, it is necessary to load an application, but to keep it minimized. To accomplish this, mark the check box labeled:
14. Run minimized
15. If you launch an application using this switch, then the application will not appear in foreground, but it will be running.

## System command



MindMap offers a set of commands which affect itself.

**Maximize:** This option allows you to let the user expand the application to full screen.

**Minimize:** Conversely this option allows you to let the user minimize the application (iconize). If you have used the feature which allows you to define your own application icons, this will be displayed, once the application has been minimized.

**Restore:** Causes a MindMap application, that has been minimized, to restore itself to its initial size and position.

**Terminate Application:** Executing this message will terminate the MindMap application and return control to the Windows environment. If the application you are executing is not running as an EXE file, then this message will function as a toggle back into the edit mode of MindMap.

Create and Edit Links - btn1

Events: Left mouse button released Message: System command

Condition: Zoom Without condition Not

Menu command:

- maximize
- minimize
- restore
- Terminate Application

OK Cancel Help

## MCI Command



Windows offers a large set of multimedia extensions which can control audio/visual devices like sound boards, CD players, Video Disc players as well as the Video for Windows system.

All of these devices are controlled through a common interface. The basic approach to this multimedia control interface (MCI) is a command language. Windows itself defines only a minimum set of commands. Various types of multimedia devices may introduce new commands to this syntax to cover their special features.


MindMap offers a convenient interface to this multimedia command language. The benefit of this approach is that low level calls to the device interface are possible. The disadvantage is that you will have to concentrate on the various options of a particular device by reading through the device's documentation.

The link dialog contains a generic set of predefined instructions you can chose from to build your MCI commands.

Please note at this point that a device is always identified by its type name. Valid type names may be

MCI Type	Description
waveaudio	Windows sound through a built-in sound board.
avivideo	Video for Windows if running under Windows 95 or if it has been properly installed as a Windows extension
cdaudio	a CD-ROM drive as an audio CD-Player

Once an MCI device has been opened, it is referenced through an alias name in any further commands that apply to the open device. This device name is arbitrary. However, you should select a suitable name to make it easier to associate a particular statement with the type of device it is applied to.

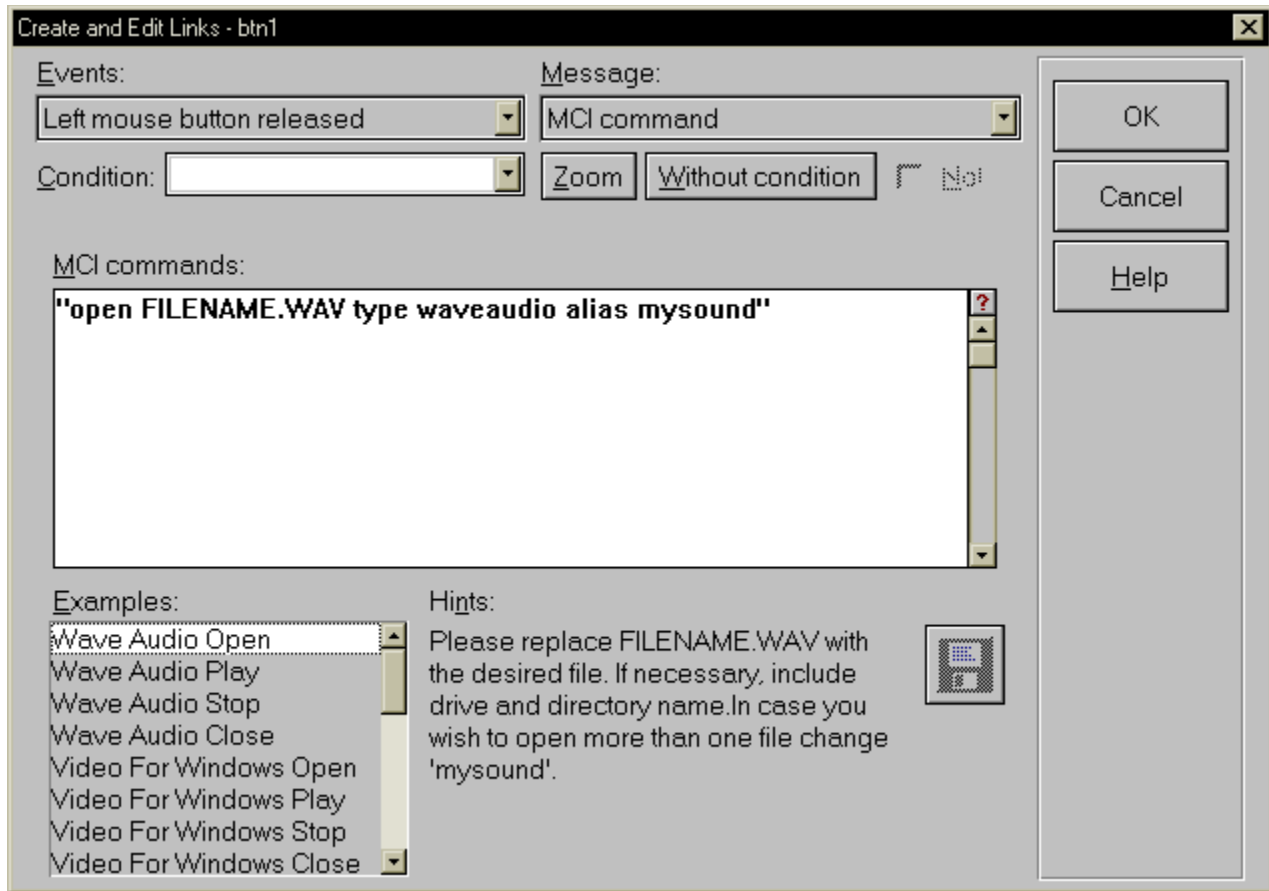

If the device deals with files (Video for Windows and Wave but not CD Audio), then the desired file name has to be included.

If you pick various open commands from the pick list at the bottom of the link dialog, you will find a FILENAME with the most common extension for this type of media. By pressing the button with the disk symbol, you may select an appropriate file from a standard file dialog box.




Since all MCI commands are parsed, you may freely construct your own MCI command strings from the contents of other MindMap components, e.g. input fields or list boxes.

The following example will open and play a Windows wave file. Execution of subsequent links will pause, until the file has been played.

```
"open C:\\WINDOWS\\TADA.WAV type waveaudio alias mysound"
"play mysound from start wait"
"close mysound"
```

If you omit the word WAIT, MindMap will play the file and continue to execute subsequent links. In this case make sure that the sequence of commands is split across different events. Playing the sound file would immediately stop, if the MCI command "close mysound" would be executed immediately after the command "play mysound from start".

Try to put the following sequence of MCI commands on a button, given that the wave file exists.

-  Application started : MCI command"open TADA.WAV type waveaudio alias mysound"||
-  Left mouse button released : MCI command"play mysound from 0"||
-  Application terminated : MCI command"close mysound"||

## Message Box



This message allows you to post a message box with various alternative buttons. This feature is generally used to inform the user of a certain condition, to offer options regarding the general flow of the application, or to post an error message.

Place a button on the MindMap screen and access its links. As an event, use Left Mouse Button Released and select the Message box as the message. The following dialog box will be presented:

The first entry you can make relates to the title or caption of the message box you wish to display. MindMap has put a placeholder into the field called Title. Please enter the desired caption into this field and make sure that you enclose the string in double quotation marks. Since this field is parsed, not enclosing a string in quotation marks will have the parser attempt to interpret the string as the name of a component which contains the desired string. The corollary is that you can also enter a component name containing the string you wish to use as a title.

The next field is used to enter the actual body of the message text you wish to display. Again, this field is parsed. Thus, if you wish to enter a string which is to be displayed, then enclose it in double quotation marks. If, on the other hand, you wish to place a pointer (another component name) into this field, then do not enclose it in quotation marks. Please note that MindMap will automatically attempt to format the string, should it not fit into the boundaries of the message box. If you wish to force a new line (carriage return/line feed), then enter an ENTER or a CTRL+ENTER. In this case, the link will display a double vertical line, which depicts the position of the new line.

At the bottom of the dialog box you will find three fields which correspond to a maximum of three buttons you can display on the message box at run time. Enter the labels in the corresponding fields.

To the immediate right of each of the label fields, you will find a field titled *Goto*. This is where you can enter the location the button should jump to. You can either manually enter the component name to which you want to divert control, or you can

click on the button labeled *Object*. This will pop up the list of all components.

Let's construct a little example.

This example will display a message box with a caption and a body, along with two buttons pointing to other components.

1. Place a command button, an input field, and a rectangle. Label the button
2. Now access the link facility of the button, using Left Mouse Button released as the event and Message Box as the message
3. Enter in a caption and a body for the message box
4. Keep the OK label and point it at the rectangle (rct1)
5. Also retain the Cancel label and point it at the edit field
6. Acknowledge the dialog and return to the desktop

Create and Edit Links - btn1

Events: Left mouse button released Message: Message Box

Condition: [ ] ? Zoom Clear condition

Title: "Little Message Box Sample" ?

Text: "This will actually do nothing..." ?

Buttons	Go to	Object
1 "Ok" ?	[ ] Rct1	Object
2 "Cancel" ?	[RHI] edt1	Object
3 [ ] ?	[ ]	Object

OK Cancel Help

Now let's deal with the components you are pointing to:

1. Select the rectangle and access its links
2. As the event select Goal of a Jump and as its message generate a Sound
3. Acknowledge and return to the desktop

Start your application. As soon as you click on the command button, the message box should appear. If you click on the OK button, the message box should disappear and you should hear a sound. Click on the command button again, this time click on the Cancel button. Again, the message box will disappear, but the focus will now be in the input field.



## Data Tables



Since data tables are a standard MindMap component, this message will appear, even if you haven't placed a data table in the application. You will not be able to execute a data table message though, until you have placed one in the application.

Once a data table is available, three classes of commands can be accessed. These are:


- Row operations
- Column operations
- Miscellaneous

As the labels suggest, the commands are either oriented at the row, the column or the table in general.

### Note:

*All row and column operations assume integer numbers. The data table message will automatically convert/round strings, floating point, etc., values to integers. Also note that row/column numbers start with 1.*

Let's begin by looking at the row commands:

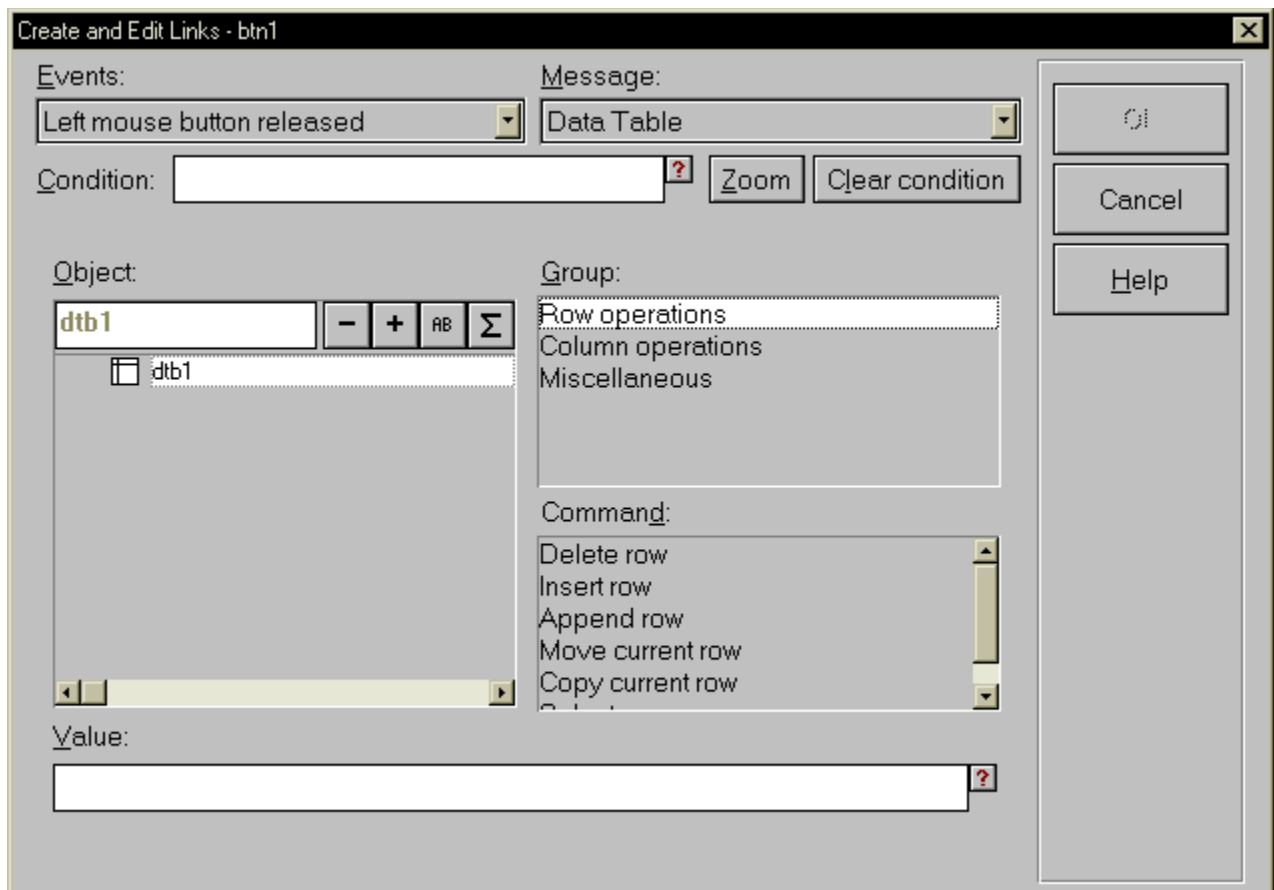

This group allows for six different commands:

Command	Description
Delete row	This command will delete the row specified in the <i>Value</i> section of the

dialog box. Since this field is parsed, you may either enter an integer or a component containing an integer. MindMap always attempts to resolve a string entry as a component name (reference), before interpreting it as a literal. Therefore, you can cascade the pointer in the *Value* field; i.e., a component name, which contains a component name, etc.

If the data table contains only one row, it cannot be deleted.

**Insert row** This command will insert a new row immediately above the currently selected row. All rows - starting with and including the currently selected row - will be incremented by 1.

The contents of the newly inserted row will be empty.

The focus of the data table will remain with the previously selected row.

This command will override the setting of maximum rows in the component specific attribute.

**Append row** This command will append a new row to the bottom of the data table.

The contents of the newly inserted row will be empty.

The focus will remain in the selected row.

This command will override the setting of maximum rows in the component specific attribute.

**Move current row** This command will move the selected row to the new row specified in the *Value* field at the bottom of the dialog box. The moved row will be inserted into the new position. The old row from where the row was copied will be deleted.

Since this field is parsed, you may either enter an integer or a component containing an integer. MindMap always attempts to resolve a string entry as a component name (reference), before interpreting it as a literal. Therefore, you can cascade the pointer in the *Value* field; i.e., a component name, which contains a component name, etc.

If you do not specify a row number, the selected row will be deleted.

**Copy current row** This command will copy the selected row to the new row specified in the *Value* field at the bottom of the dialog box. The copy of the row will be placed in a newly inserted row.

Since this field is parsed, you may either enter an integer or a component containing an integer. MindMap always attempts to resolve a string entry as a component name (reference), before interpreting it as a literal. Therefore you can cascade the pointer in the *Value* field, i.e. a component name, which contains a component name, etc..

**Select row** This command will select a row specified in the *Value* field at the bottom of the dialog box. Since this field is parsed, you may either enter an integer or a component containing an integer. MindMap always attempts to resolve a string entry as a component name (reference), before interpreting it as a literal. Therefore you can

cascade the pointer in the *Value* field, i.e. a component name, which contains a component name, etc.

If you specify a row number less than 1 or greater than the largest existing row number, nothing will happen. Any previously selected row will remain selected.

Now, let us review the column commands:

The screenshot shows a dialog box titled "Create and Edit Links - btn1". It contains several sections for configuring a link. The "Events" section has a dropdown menu set to "Left mouse button released". The "Message" section has a dropdown menu set to "Data Table". The "Condition" section has an empty text field with a red question mark icon, and buttons for "Zoom" and "Clear condition". The "Object" section has a text field containing "dtb1", a list box with "dtb1", and buttons for minus, plus, AB, and sum. The "Group" section has a list box with "Row operations", "Column operations" (selected), and "Miscellaneous". The "Command" section has a list box with "Delete column", "Insert column", "Append column", and "Select column". The "Value" section has an empty text field with a red question mark icon. On the right side, there are buttons for "OK", "Cancel", and "Help".

This group allows for four commands:

**Note:**

*All column operations require that the switch 'Large Data' be deactivated in the component specific attributes of the corresponding data table.*

Command	Description
---------	-------------

Delete column	This command will delete the column specified in the <i>Value</i> section of the dialog box. Since this field is parsed, you may either enter an integer or a component containing an integer. MindMap always attempts to resolve a string entry as a component name (reference), before interpreting it as a literal. Therefore, you can cascade the pointer in the <i>Value</i> field; i.e., a component name, which contains a component name, etc.
---------------	--

If the data table contains only one column, it will be deleted. The consequence, though, is that the complete data table will also be deleted.

**Insert column** This command will insert a column specified in the *Value* section of the dialog box. Since this field is parsed, you may either enter an integer or a component containing an integer. MindMap always attempts to resolve an string entry as a component name (reference), before interpreting it as a literal. Therefore, you can cascade the pointer in the *Value* field; i.e., a component name, which contains a component name, etc.

The insertion will increment the column number of all columns greater than the column being inserted by 1. The column attributes of the inserted column will be picked up from the settings in the component specific attributes of the data table.

Any column selections prior to the insertion will remain selected.

**Append column** This command will append a new column to the right of the data table.

The contents of the newly inserted column will be empty.

The focus will remain in the selected row and column.

This command will override the setting of maximum columns in the component specific attribute.

**Select column** This command will select the column specified in the *Value* section of the dialog box. Since this field is parsed, you may either enter an integer or a component containing an integer. MindMap always attempts to resolve an string entry as a component name (reference), before interpreting it as a literal. Therefore, you can cascade the pointer in the *Value* field; i.e., a component name, which contains a component name, etc.

MindMap will not highlight the currently selected column.

Now, we will look at the last group:

Create and Edit Links - btn1

Events: Left mouse button released

Message: Data Table

Condition:  ? Zoom Clear condition

Object: dtb1 - + AB Σ

☐ dtb1

Group: Row operations  
Column operations  
Miscellaneous

Command: Delete all rows

Value:  ?

OK  
Cancel  
Help

This group contains one command, which deletes all rows. Column operations are still possible, such as insertion and deletion, but no rows exist. The display of the data table will only retain the column headings and the previous size.

## Combo- / List boxes



This message is listed in the collection of standard messages, but it will only display its options if a combo-/list box has been placed in the application and selected in the left hand side of the dialog box. The available options are:

The field labeled Formula at the bottom of the dialog box is parsed at run time. It will accept either literals enclosed in double quotation marks or standard parser statements.

Option	Description
Add string	<p>This option will add the string referenced in the field at the bottom of the dialog box to the combo-/list box selected at the left hand side of the dialog box.</p> <p>If the parser statement evaluates to multiple lines, e.g. by inserting crlf strings or by fetching the contents of a multi line input field, multiple insert operations will be performed.</p>
Add string unique	<p>This option will add the string referenced in the field at the bottom of the dialog box to the combo-/list box selected at the left hand side of the dialog box, only if the string is not already contained in the combo-/list box.</p> <p>If the parser statement evaluates to multiple lines, e.g. by inserting</p>

crlf strings or by fetching the contents of a multi line input field, multiple insert operations will be performed if the lines are distinct.

**Delete string** This option will delete an occurrence of the string which matches the string referenced in bottom of the dialog box. Regardless of the current position in the combo-/list box, the list will be scanned from the top of the list.

The comparison is case insensitive.

**Find string** This option will find the first occurrence of the string which matches the string referenced in the bottom of the dialog box. Regardless of the current position in the combo-/list box, the list will be scanned from the top of the list.

The comparison is case insensitive.

**Select entry** This option will select the row in the combo-/ list box which is specified in the bottom of the dialog box. The option expects a number denoting a row number.

Row numbers are 1-based, meaning that the first row is number 1. Attempting to select a row number 0, will result in no row being selected. Attempting to select a row number greater than the number of existing rows will leave the last selected row still selected.

**Clear selection** This option will remove the highlight of any selected row. If multiple selection has been defined for this component and multiple rows have been selected, then this operation will remove all selections.

**Delete entry** This option will delete the row in the combo-/ list box which is specified in the bottom of the dialog box. The option expects a number denoting a row number.

Row numbers are 1-based, meaning that the first row is number 1. Attempting to delete a non-existing row number will cause no row to be deleted.

**Delete all entries** This option will delete all entries in the specified component, regardless of any selections.

**Directory** This option will fill the specified combo-/list box with the contents of the directory referenced in the bottom of the dialog box.

The valid syntax for the specification is:

`"x:\*.*"`

where x: is a valid drive; and \*.\* are wildcards for file names. You may also specify any other valid file name portion, such as \*.BMP or XYZ\*.\*.

The entry must be enclosed in double quotation marks. Directory delimiters must always be two backslashes.

The field is parsed so that a component name or a valid parser statement can be substituted for a path specification in the form of a literal.

If the component specific attributes of the component were not set to allow the display of files, this message will automatically set the attribute, although it will only display file names (not drives and/or paths). In order for drives and/or paths to be displayed, the corresponding attribute settings must have been made.


If you have selected Collapsed List box, then this operation will have no effect.



## MCI in General



If you have multimedia capabilities installed on your system, then the MCI component will register a set of its own messages.

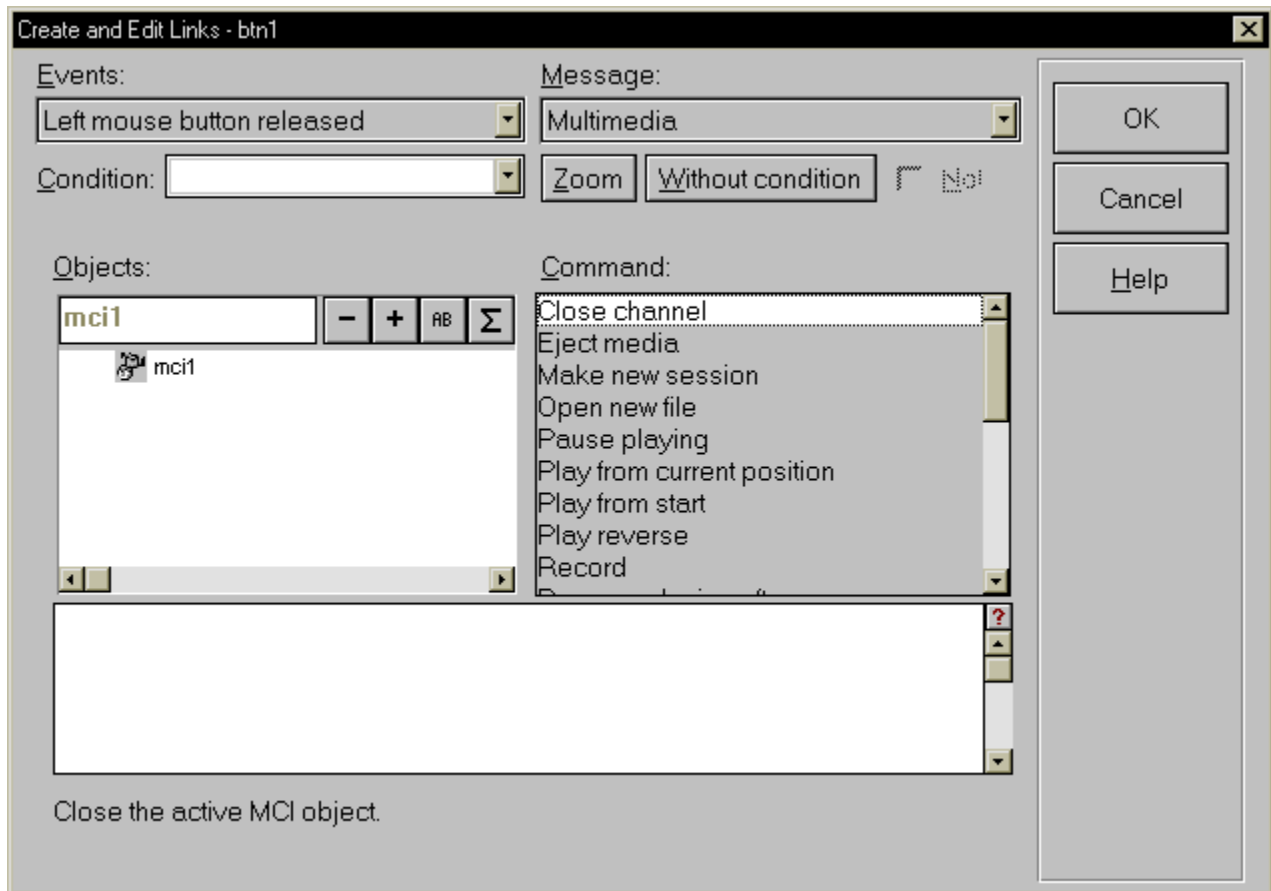

Open File	Open a media file. This command is applicable only to media that is associated to a file, e.g. Video For Windows or wave audio.  If the value input field at the bottom of the dialog contains or evaluates to a valid file name, then this file is opened. Otherwise a file open dialog box appears, which allows you to select a file. The system automatically loads a media driver that is suitable for the given file extension.
Close Channel	Closes a previously open media. You should use this command only if you control a device's behavior by means of special media commands. Usually, a device is automatically closed when its page becomes deactivated.
Play	Plays a previously opened media from the current position or from start, if it has not been played before. If the value input field contains a numeric value, playing starts from the given position. The units of this value depends on the type of media and its configuration (see the

commands Use Frame Mode and Use Time Mode).

Play from Start	Plays a previously opened media from start.
Play Reverse	Play the media backwards, if applicable to the particular media. Note that Video For Windows files usually accomplish reverse playing showing single frames (step mode).
Stop	Stops playing the media. Playing resumes either through the Play or the Resume command.
Pause	Pauses playing of the media. The function is similar to the Stop command. However, if hardware media is directed by the media driver, this command differs from the stop command in that it sets the device in "stand by" mode. For instance, a video disc player will keep the video heads running, while the Stop command will shut down the player.
Eject Media	Ejects the media, if applicable. Generally, CD audio drives and video disc players can eject the media.
Make New Session	<p>This command creates a new media session. It is applicable only to media that has the ability to record. The value input field contains the name of the media device (e.g. "waveaudio").</p> <p>Note that Video For Windows movies generally cannot be recorded through the MCI interface.</p>
Save File	Saves a previously recorded media stream to a disk file. The value input field contains a valid file name. Make sure that the extension of this file is suitable for the current media type. If this field is empty, a file save dialog box appears.
Use Frame Mode	Sets the media to use Frame Mode. (e.g. applicable for Video For Windows to return or set positioning information using video frames).
Use Time Mode	Sets the media to use Time Mode. (e.g. applicable for devices to return or set positioning information using the elapsed time from start).
Resume	Resumes playing of the device after a previous Pause command.
Seek To	Sets the position of the currently open media to the numerical value given in the input field at the bottom of the dialog. The units depend on the particular configuration of the device. (see the commands Use Frame Mode and Use Time Mode).
Send String	Can be used to send command strings to the media device (which must have been opened through either the Open File or the Make New Session command). This message allows full control over the device. Please refer to the documentation of the media specific driver.
Set Volume To	Sets the output volume to the level defined by the numeric value in the input field at the bottom of the dialog. Default volume is 1000 (= 100%). A value of 500 means half volume.
Set Speed To	Sets the playing speed to the level defined by the numeric value in the input field at the bottom of the dialog. Default speed is 1000 (=

100%). A value of 500 means half speed.

Set Repeat Mode	A value of 1 in the value input field indicates that the media has to be played repeatedly. 0 disables repeat mode.
Single Step	This command moves the current position of the media by a certain step relative to the current position. A value of 1 in the value input field means 1 step forward, -3 means three steps backwards.

## Output Page



This component is the entity generally used to print information. Therefore, the specific messages it can deal with all relate in some manner to its printing.


Since an output page is more or less another form of a MindMap page, components can be placed on it in the same manner as they are on MindMap pages.

Since this component is a standard component, the entry in the message list will appear, regardless of the placement of such a component in the application. The messages for the output page component are only available though, if an output page component has been placed in the application.

There are two groups of commands available for an output page component:

- Page
- Draw mode

We will first explore the Page group:

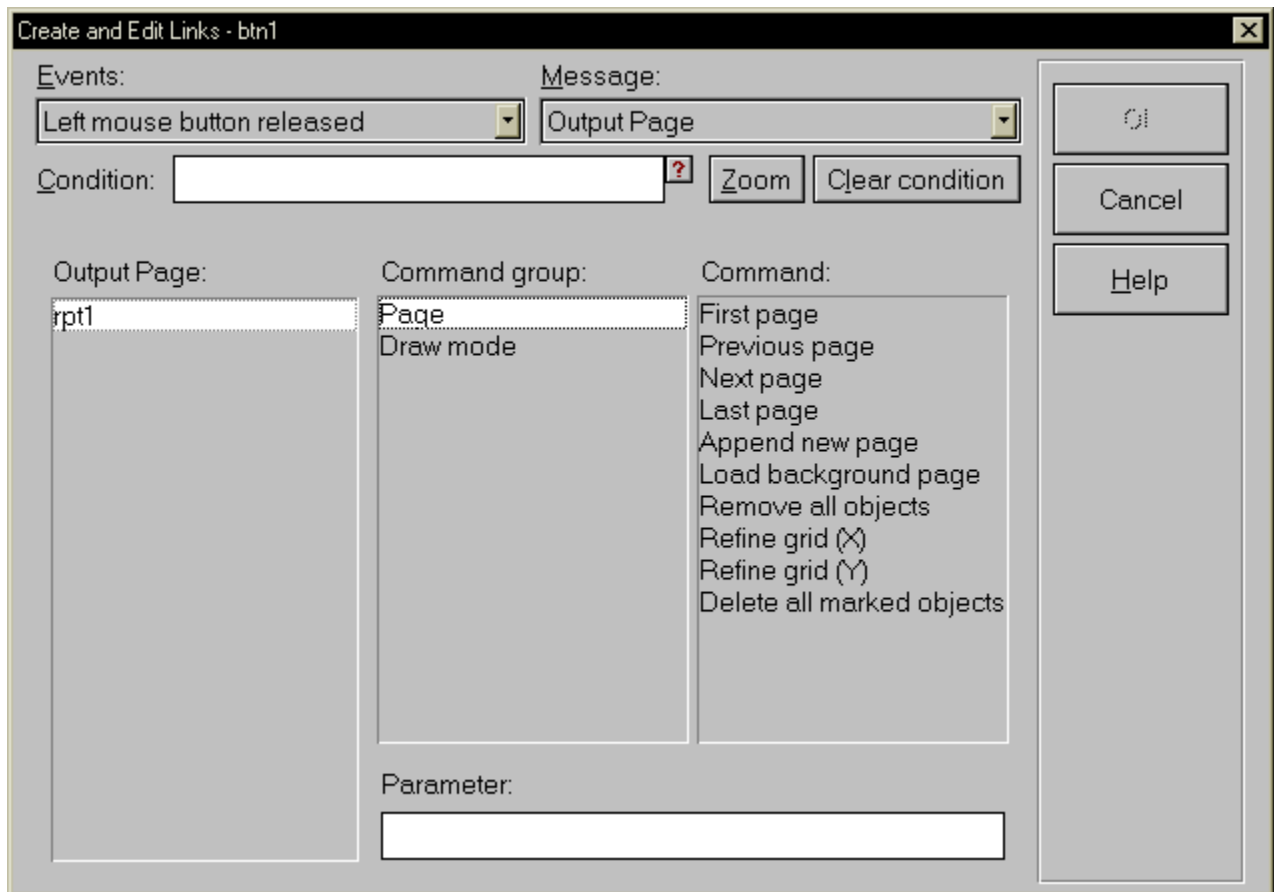


This group contains ten different commands:

Command	Description
First page	If the output page component has more than one page, this command will position to the first page and display it. If only one page exists, this

command will do nothing.

Previous page	If the output page component contains more than one page and it has not been positioned to the first page, then this command will position it to the previous page.
Next page	If the output page component contains more than one page and it has not been positioned to the last page, then this command will position it to the next page.
Last page	This command will position to the last page. If only one page exists, then this command will do nothing.
Append new page	This command will add a new page to the right of the last page and position to it.

Next let's investigate the Draw mode group of commands:

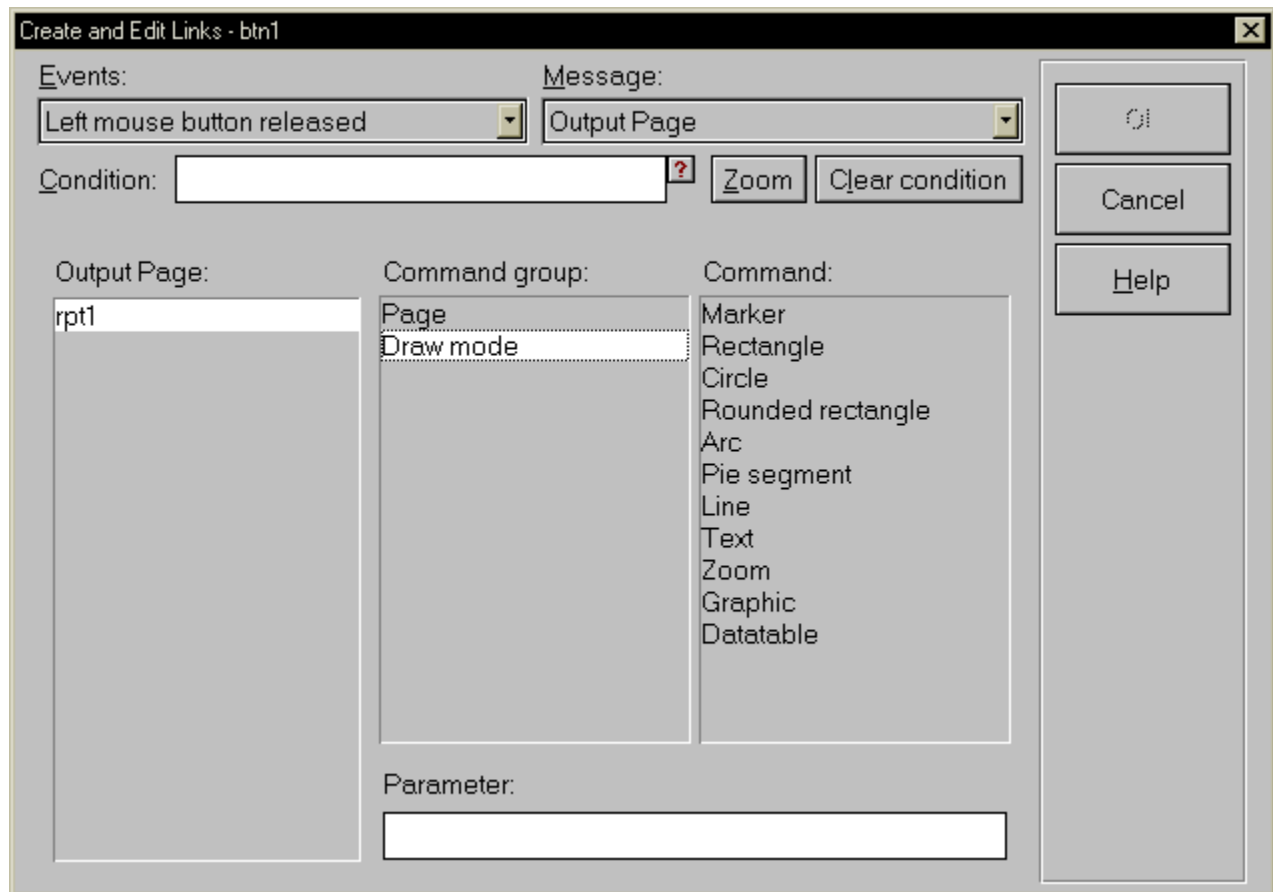

Here we have a total of eleven commands:

Command	Description
Marker	This command will allow the user to select components on the output page component. It is equivalent to the arrow on the toolbar when MindMap is in edit mode.

Rectangle	This command allows the user to draw a rectangle on the output page component at run time. The cursor remains in this draw mode, until a different function is selected. The standard procedure for accessing a component's attributes are also valid in run mode.
Circle	This command allows the user to draw a circle on the output page component at run time. The standard procedure for accessing a component's attributes are also valid in run mode.
Rounded rectangle	This command allows the user to draw a rounded rectangle on the output page component at run time. The cursor remains in this draw mode, until a different function is selected. The standard procedure for accessing a component's attributes are also valid in run mode.
Arc	This command allows the user to draw an arc on the output page component at run time. The cursor remains in this draw mode, until a different function is selected. The standard procedure for accessing a component's attributes are also valid in run mode.
Pie segment	This command allows the user to draw a pie segment on the output page component at run time. The cursor remains in this draw mode, until a different function is selected. The standard procedure for accessing a component's attributes are also valid in run mode.
Line	This command allows the user to draw a line on the output page component at run time. The cursor remains in this draw mode, until a different function is selected. The standard procedure for accessing a component's attributes are also valid in run mode.
Zoom	This command displays the zoom toolbar, containing <i>zoom in</i> , <i>zoom out</i> and <i>1:1</i> . The user can perform the zoom operations on the currently displayed output page component at run time.

## VBX in General



This message is available, if you have included a VBX via the [File | Preferences](#) menu. Only if the VBX has been placed in the application, will the actual messages be available, though.

The specific messages a VBX component is capable of dealing with is a function of the component itself. Each VBX has its own messages, so that you will have to consult the documentation accompanying the VBX.

The layout for the VBX message is consistent, independent of the selected VBX component. What differs are the actual commands, which are integral to the VBX component itself.

Create and Edit Links - btn1

Events: Left mouse button released

Message: VBX

Condition: [Empty field] ? Zoom Clear condition

Objects: vb1 [Minus] [Plus] [AB] [Sum]

Command: Autosize, BackColor, DragIcon, DragMode, Enabled, ForeColor, Height, InnerBottom, InnerLeft

Text: [Empty text area]

OK, Cancel, Help

The field labeled Text accepts the parameters associated with the selected command. Thus it is also dependent on the VBX itself.

## Encapsulation (Client / Server) in General



This icon represents the messages associated with the encapsulation component relating to the server instance. It will only be available, if your application includes a server instance.

Once you select this message, MindMap will locate the server and display the server's default message and its API.

The default message which is available for all server instances is:

<<<Close the Server>>>

This message instructs the application (subassembly) containing the server instance, to terminate normally.

In addition to this default message, the server instance has those messages available that the builder of the instance defined for it. These are the statements (API) that were defined in the process of constructing the server subassembly. Their function is dependent on whatever the designer intends them to do.




This icon represents the messages associated with the encapsulation component relating to the client instance. It will only be available, if your application includes a client instance.

Once you select the message from the list of available messages, MindMap will locate all client instances in your application and display them in the list. When you select one of these client instances, MindMap will locate the physical instance of the corresponding server (*encapsulation*) instance, open it, and query it for its API. If the associated server instance is not located on the same computer, MindMap will attempt to establish a physical connection to the computer on which the server component resides. It will then logically connect to the component and interrogate its interface. In this case, it might take some time to establish the connection, depending on the connection method (modem, ISDN, network, etc.). MindMap will display a progress bar during the process.

The result of this process is then displayed in the right hand section of the dialog box.



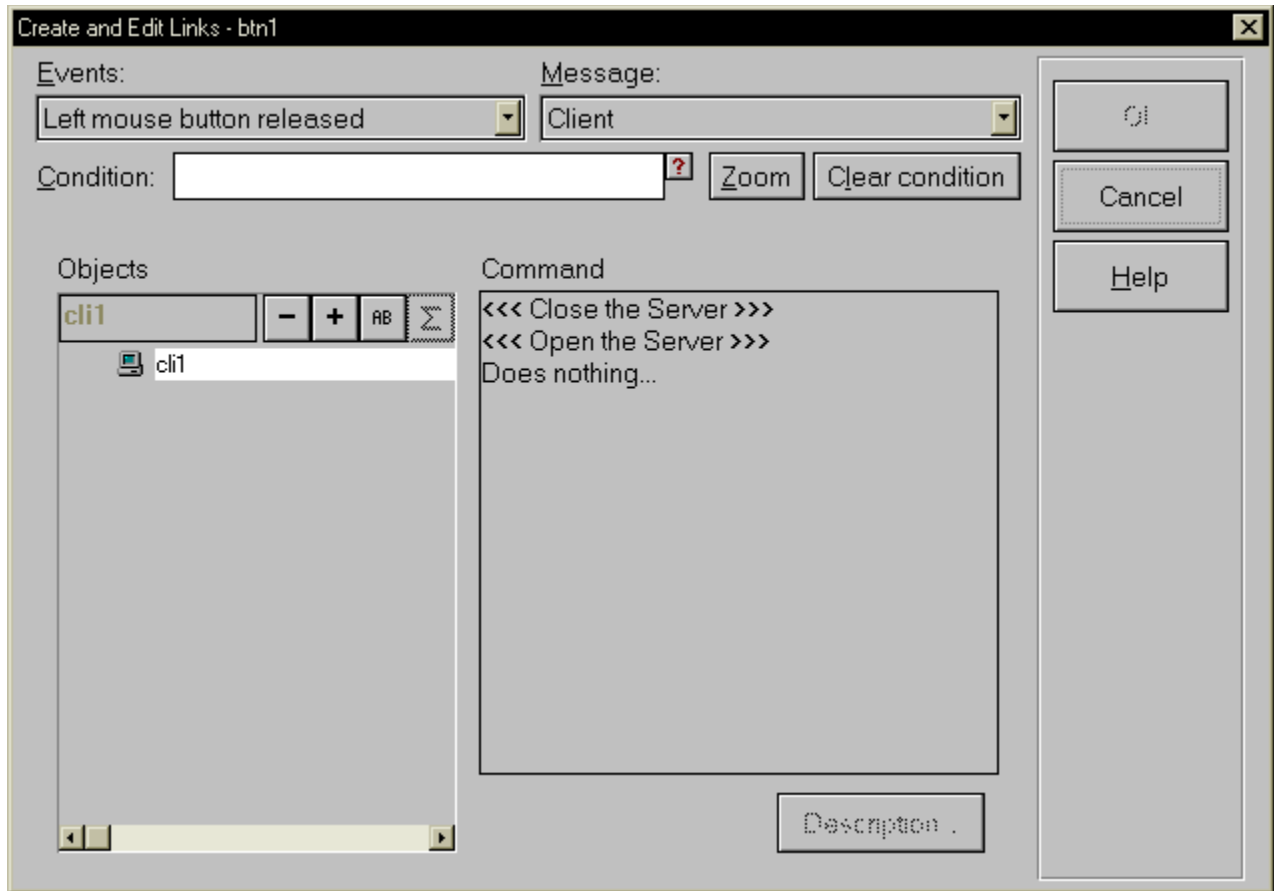

The <<<Close the Server>>> message sends this command to the server instance, which causes it to close down. This message is automatically generated whenever the client component, which is connected to the server instance, is terminated normally. It is still suggested that you generate this message in a controlled manner from within your client application.

The <<<Open the Server>>> message must be sent to the server instance, before it will accept any other messages. Without receiving this message, the server instance will remain dormant.

Following these two default messages, are whatever other messages the constructor of the server application intended to expose to the outside world.

## Database in General



This message entry is visible even if a database component has not been placed in the current application. The actual message options are only available if a database has been placed.

In the case of the ODBC driver, the set of commands are identical, independent of the actual underlying database. In those cases in which the database is not a SQL compliant database, the ODBC driver emulates the actions of a true SQL database.

The database message contains five groups of commands. These are

- Database
- Cursor position
- Record
- Search
- SQL Exec

Each one of these groups has a set of commands. The majority of the commands necessary to interact with a database have been summarized into high-level commands, making the input of SQL superfluous. These commands can usually be augmented by the inclusion of parameters specific to the command. In addition to these high-level commands, MindMap also offers the opportunity of explicitly entering SQL commands, thereby permitting complete control of the database.

Please note that it is beyond the scope of this manual to describe SQL (*Structured Query Language*) in detail. Despite a standardized group of commands and syntax, many database vendors have created specific extensions for their own databases. Again, it is beyond the scope of this manual to cover all of these variations. Please refer to vendor-specific manuals for more details.

We will begin by describing the first group:

Create and Edit Links - btn1

Events: Left mouse button released

Message: Database

Condition:  ? Zoom Clear condition

Database: dbADDRESS - + AB Σ

☐ dbADDRESS

Command group: Database  
Cursor position  
Record  
Search

Command: Open Database  
Close Database  
Commit  
Rollback

Value:  ?

OK  
Cancel  
Help

Command	Description
Open Database	This command will open the selected database. If the driver accepts any additional options, these can be entered in the field at the bottom of the dialog box labeled <i>Value</i> .
Close Database	This command will close the selected database.
Commit	The default setting for a database is auto commit. If this attribute has been deselected, then the process of committing a database operation can be controlled manually. This command will have the database commit the operations. Please note that the particular ODBC database driver must support commit/rollback for this function to be available.
Rollback	The default setting for a database is auto commit. If this attribute has been deselected, then the process of rolling back a database operation can be controlled manually. This command will have the database rollback all non-committed operations.

The second group of commands deals with the positioning of a cursor in the database. By definition, the database cursor can be moved to any record in the selected table. Operations such as deletion of records, insertion of records, etc., are then performed at the cursor position.

**Create and Edit Links - btn1**

**Events:** Left mouse button released

**Message:** Database

**Condition:** ? Zoom Clear condition

**Database:** dbADDRESS - + AB Σ

dbADDRESS

**Command group:** Database Cursor position Record Search

**Command:** First record Previous record Next record Last record Go to record

**Value:** ?

OK Cancel Help

This group contains five commands. These are:

Command	Description
First record	This command will position the cursor to the first record in the table. Record numbers are 1-based, so that the first record is number 1.
Previous record	This command will decrement the record counter by 1 and position the cursor at that point, if it is larger than 1. Otherwise, the cursor will remain at the first record.
Next record	This command will increment the record number by one and position the cursor at that point, unless the cursor is at the last record in the table, in which case nothing will happen.
Last record	This command will position the cursor to the last record in the table and set the record number to the last record.
Goto record	This operation will position the cursor to the record specified in the field labeled <i>Value</i> . The Value field will accept either an integer, or a component name which either contains an integer or another component name. The field is parsed at runtime.

Database record numbers are 1-based.

The third group of commands deals with write operations to the database. These are:

Command	Description
---------	-------------

Update	This command updates an existing record and writes the contents of the components to the corresponding fields in the database table. The record to which the components are written is determined by the cursor position. The record at which the cursor is pointing at the time the operation is committed, is the record to which the data is written. Which components are written into their corresponding database fields depends on the particular assignment settings.
--------	---

No additional parameter (*Value*) is necessary.

Insert	This operation writes the contents of the components to the corresponding fields in the database. In doing so, this operation creates a new record in the database. Since relational databases are not kept in any specific order, the insertion occurs at the position of the cursor at the time the operation is committed. Which components are written into their corresponding database fields depends on the particular assignment settings.
--------	--

No additional parameter (*Value*) is necessary.

Delete	This operation deletes the record the cursor is pointing at, when the
--------	---

operation is committed.

Please be aware of the fact that deleting a row from a table may result in serious implications for the database.

Consider two tables containing customer information and employee information. An employee who is responsible for a particular customer may be identified in the customer table only by his ID. If you delete the employee, you will leave the corresponding ID in customers without reference to the employee table. This is a violation of referential integrity.

If not defined by the underlying database system, MindMap does not take special care about the referential integrity of the database and therefore will delete the selected record.

The fourth group of commands deals with queries to the database. These are:

The screenshot shows a dialog box titled "Create and Edit Links - btn1". It contains several input fields and buttons. The "Events" section has a dropdown menu showing "Left mouse button released". The "Message" section has a dropdown menu showing "Database". The "Condition" section has a text input field, a "?" icon, and buttons for "Zoom" and "Clear condition". The "Database" section has a text input field containing "dbADDRESS", a list box below it also containing "dbADDRESS", and buttons for minus, plus, AB, and a summation symbol. The "Command group" section has a list box containing "Record", "Search", and "SQL Exec". The "Command" section has a text input field containing "Clear display fields", "Search for fields", and "Select all records". The "Value" section has a large text input field and a "?" icon. On the right side, there are three buttons: "OK", "Cancel", and "Help".

Command	Description
Clear display fields	All input fields on any MindMap page associated with the selected database will be cleared. This means that their contents will be set to whatever has been previously specified in the corresponding default settings for each input field (Preset). Commonly, a null string has been set, so that the input fields will be blanked.

**Search for fields** The default setting for an input field associated with a database is that it will be included in the query. Executing this command will construct a SQL SELECT statement which includes all fields that are set to be query fields. To exclude fields from participating in the query (being included in the SELECT statement), change the assignments in the connection between the input fields and the database table.

The exact structure for the SELECT statement is also determined by the search attribute of the corresponding input fields.

**Select all records** This command will generate a SELECT \* FROM table, resulting in a query which selects all records in the database. If dealing with a large database, be careful in executing this command, due to the possibility of an extremely large number of records being returned.

The last group of commands allows you to expand the existing high-level database commands by means of explicitly generating SQL statements. For those users who wish to generate their own SQL statements, this is the location to do so. The commands included in this group are:

**Create and Edit Links - btn1**

**Events:** Left mouse button released

**Message:** Database

**Condition:** [Empty field] ? Zoom Clear condition

**Database:** dbADDRESS [Buttons: -, +, AB, Σ]

dbADDRESS

**Command group:** Record, Search, SQL Exec

**Command:** SQL Select, SQL Command, SQL Command with Refresh

**Value:** [Empty field] ?

OK, Cancel, Help

Command	Description
SQL SELECT	This command expects the WHERE, GROUP BY and/or HAVING clause of a SQL statement in the value editor at the bottom of this dialog.

MindMap will automatically prefix the given SQL part with the clause

SELECT <connected fields> FROM<table name>

Typically the given clause could be "WHERE name like 'Smi%'"

SQL  
COMMAND

This message lets you enter and execute any type of SQL statement supported by the database. Use this command to typically issue commands which do not return a result set.

SQL  
COMMAND  
with refresh

This message lets you enter and execute any type of SQL statement supported by the database. You should use this command to execute SQL commands which return result sets.

Always make sure that the returned result set matches the assignment of MindMap components as defined by the database component. Retrieving data from the result set to undefined or invalid components may give unpredictable results.



## Input/Output in General




There are two different entities to/from which this command can be applied. These are:

- File System
- Printer

Interaction with the **file system** implies that you either wish to read from or write to a file. Therefore, the appropriate messages are:

- Open
- Close

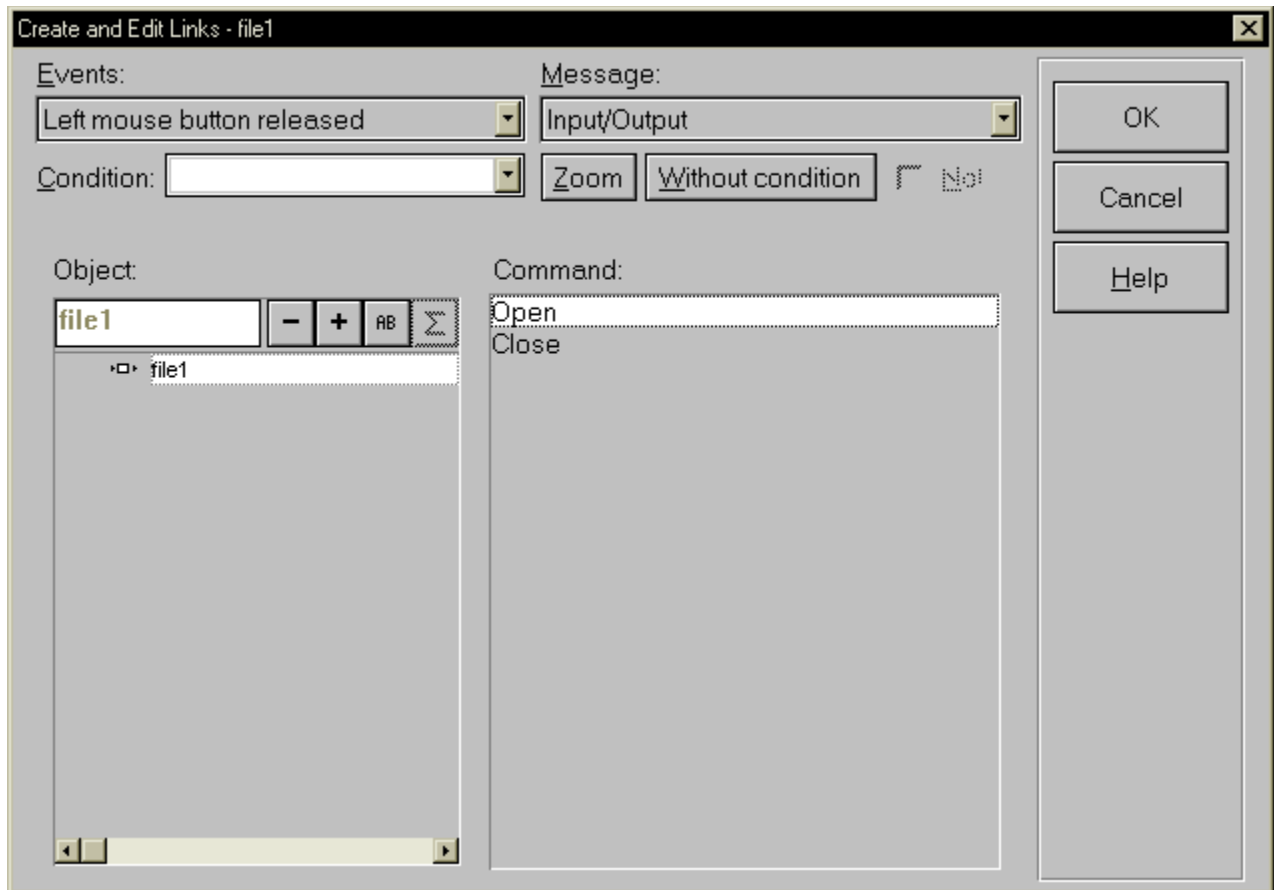

Select the Input/Output component from the list on the left side of the dialog box. Then select the message, depending on whether you are reading or writing a file. If you wish to read from a file, then drag & drop the contents of this component to a component which can deal with the type of data you are reading (*i.e.*, *input field for alphanumeric data*, *a bitmap for incoming or outgoing graphic data*, etc.). Refer to the attributes of the component to set such things as file name, prompt user for file name, etc.

*Note that printing in a network environment, will generate a new print job, whenever a printer is opened and closed. It is more common to put multiple print operations into a single job. Use these two commands to open and close the print job accordingly.*

These two commands cause the file or printer being opened and closed through a link message. Usually, a drag&drop

operation, that acts on either the printer or a file, will automatically open and then close the appropriate channel. Issuing multiple drag&drop commands after another, will cause unwanted open and close actions on the printer or file. Therefore, it is more convenient to open the appropriate channel first and close it when no longer needed.

## Drag&Drop in General

MindMap's mechanism of drag&drop is commonly used to move information from one component to another. While the Assign Value command is designed to evaluate formulas and store the result into a components formula attribute, drag&drop can be thought of a mechanism which moves larger amounts of information, and especially types of information that cannot be calculated with, such as bitmaps.

Please also keep in mind that the drag&drop facility is used in conjunction with MindMap's encapsulation feature (Client/Server), which makes it possible to move information between components that reside on two different computers.

Drag&drop is accomplished using only a few rules. A component is either capable of

- sending data,
- receiving data or

both.

Information from a component can be offered in three different ways

ASCII	Text information, sometimes limited in size according to a component's limitations. Text can include multiple lines, separated by the carriage return-line feed sequence or multiple columns within the same line can be separated by the tab character.
BITMAP	Graphical information, usually device independent, i.e. rendering of an image occurs in the most suitable way with respect to the computer's graphic adapter.
METAFILE	Also graphical, but vector-oriented, data.

All three data types are internally stored in the same format as used for the Windows clipboard.

Obviously, each component renders its information as a suitable type. Some components can even supply their data in multiple formats: A graphic component, for instance, can supply its contents as an image (either BITMAP or METAFILE), or it can send the bitmap's file name, if requested by another component.

During the drag&drop exchange, both components negotiate a data type which both can support. Thinking of a drag&drop operation being established between graphic component and an input field, the graphic component will first offer its data as an image. Since an input field cannot deal with bitmaps, this offer will be refused, which in turn causes the graphic component to send the bitmap's initial file name to the input field. If this negotiation also fails, nothing will be transferred, both components appear to be incompatible.

Not every component is capable of sending and/or receiving drag&drop information. The following list contains all components that participate in the drag&drop negotiation. Also, the data types that can be supplied or accepted are listed.

Component	Sends	Accepts
Graphic component	Bitmap or Metafile,	Bitmap or Metafile.
	Filename, if known, as text. The graphic component does not know about a file name if the image has been copied from the clipboard.	Valid file name, i.e. complete directory, file name and extension information. According to the extension, the graphic component will choose a graphic input filter to load the image.
Input field	Text, limited by 32KB.	Text.
	If the component is a multi	Large text data will be truncated

	<p>line input field, the lines will be separated by the carriage return-line feed sequence.</p> <p>Data classes other than string will be converted into strings before they are transferred.</p>	<p>to the limitation of the input field.</p> <p>Should the input field be formatted to a class other than string, the information is expected to be a string and will be translated appropriately.</p>
List box	<p>Text:</p> <p>Depending on the settings in the component's drag&amp;drop settings, either the highlighted row(s) or all rows are sent. Rows are separated by the carriage return-line feed sequence.</p> <p>Graphic (Bitmap only):</p> <p>If the list box is set to Show Bitmaps, the currently selected bitmap will be sent.</p>	<p>Text:</p> <p>The received text is appended to the end of the list. If this text contains multiple lines, multiple rows will be created.</p> <p>Graphic (Bitmap only):</p> <p>If the list box is set to Show Bitmaps, a valid file name is expected. The list box will attempt to load the graphic file and stretch it to the width of the list box (keeping the ratio constant).</p>
Data table	<p>Text:</p> <p>Multiple cells in the same row will be separated by the tab character. Multiple lines will be separated by the carriage return-line feed sequence. If a specific column has been selected in the drag&amp;drop option dialog, only the contents of this column will be sent, separated by crlf.</p> <p>The data table component either sends its entire content or only the highlighted rows, depending on the settings in the drag&amp;drop configuration dialog.</p>	<p>Text:</p> <p>To be copied to multiple cells of the data table, incoming text data is expected to contain multiple rows, separated by crlf and/or columns, separated by the tab character.</p> <p>If multi column text information is received into a data table having selected a specific column in the drag&amp;drop dialog will result in the data copied into subsequent columns beginning with the specified column.</p> <p>New rows will automatically be created if necessary.</p>
Input/Output - clipboard	<p>The component will send either text, bitmap or metafile data, depending on the current contents of the clipboard. If the clipboard is empty, nothing is sent.</p>	<p>The component will accept all types of information and copy it to the clipboard, making it available for other programs.</p>

Input/Output - file	The component will send either text, bitmap or metafile data, depending on the contents of the selected file. If the file format cannot be determined, its contents will be sent as text.	<p>The component will accept all types of information and create a file or append to an existing file if text data was received.</p> <p>Make sure that a file extension suitable for the type of data has been specified.</p> <p>If bitmap information has been received, the component will always create a device independent bitmap file (*.DIB or *.BMP).</p>
Input/Output - printer	The component cannot send any information.	<p>Text:</p> <p>Text data will be printed on the specified printer using the printer's default font. The output is limited by a single page, regardless of the amount of data being received.</p> <p>Graphic:</p> <p>The printer will print the graphic. The size of the output can be modified using the component specific dialog.</p>
Output page	The output page will send a rendering of the components on its page.	The component will either accept text or graphic and will create an appropriate component on its output page.
MCI component	The component cannot send any information.	Valid file name, i.e. complete directory, file name and extension information. According to the extension, the MCI component will attempt to open the media device. (same functionality as Open File link command.

starting with 1

