


# Class `java.lang.IllegalThreadStateException`

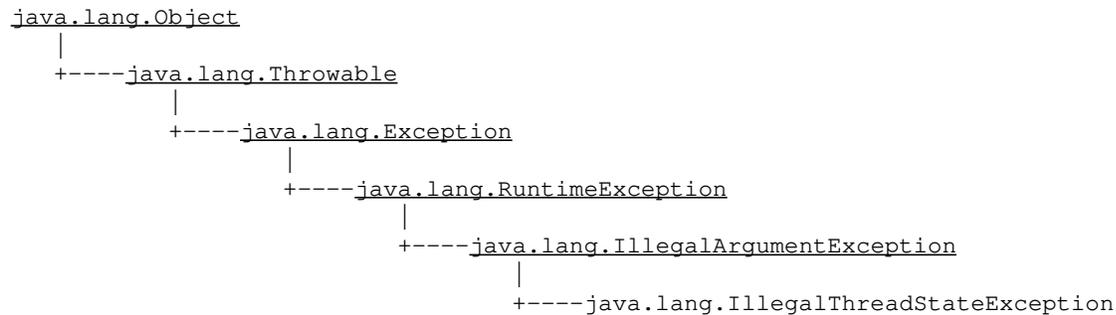

```
public class IllegalThreadStateException
extends IllegalArgumentException
```

Exception indicating that a thread is not in the proper state for the requested operation.

**See Also:**

[suspend](#), [resume](#)

**Version:**

1.11, 08/11/95

---

## Constructor Index

- o [IllegalThreadStateException\(\)](#)  
Constructs an `IllegalThreadStateException` with no detail message.
- o [IllegalThreadStateException\(String\)](#)  
Constructs an `IllegalThreadStateException` with the specified detail message.

## Constructors

- o **IllegalThreadStateException**

```
public IllegalThreadStateException()
```

Constructs an `IllegalThreadStateException` with no detail message. A detail message is a `String` that describes this particular exception.

## o **IllegalThreadStateException**

```
public IllegalThreadStateException(String s)
```

Constructs an `IllegalThreadStateException` with the specified detail message. A detail message is a `String` that describes this particular exception.

**Parameters:**

s – the detail message

---

[All Packages](#)   [This Package](#)   [Previous](#)   [Next](#)