


# Class `sun.tools.debug.RemoteInt`

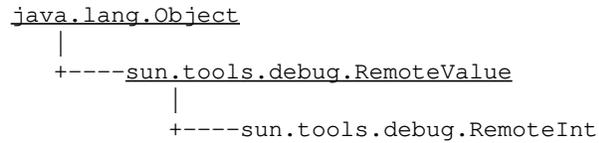

```
public class RemoteInt
extends RemoteValue
```

The `RemoteInt` class extends `RemoteValue` for ints.

**See Also:**  
[RemoteValue](#), [RemoteDebugger](#)

**Author:**  
Thomas Ball

---

## Constructor Index

o [RemoteInt\(int\)](#)

## Method Index

- o [get\(\)](#)  
Return the int's value.
- o [toString\(\)](#)  
Return the int's value as a string.
- o [typeName\(\)](#)  
Print this `RemoteValue`'s type ("int").

## Constructors

o [RemoteInt](#)

```
public RemoteInt(int i)
```

# Methods

## o **get**

```
public int get()
```

Return the int's value.

## o **typeName**

```
public String typeName()
```

Print this RemoteValue's type ("int").

**Overrides:**

typeName in class RemoteValue

## o **toString**

```
public String toString()
```

Return the int's value as a string.

**Overrides:**

toString in class Object

---

[All Packages](#)

[This Package](#)

[Previous](#)

[Next](#)