# Tcl and Tk:
# A Programming System
# for X11 User Interfaces

John Ousterhout

Computer Science Division
Department of EECS

University of California at Berkeley

# Overview

**What I've built:**

- Tcl: embeddable command language.
- Tk: X11 toolkit and widgets based on Tcl.

**The principle:** single interpretive language controls all aspects of all interactive applications.

- Function of application.
- Interface of application.
- Composing pieces of application.
- Communication between applications.

**Results:**

- Raise the level of X programming (simpler, 5-10x faster application development).
- Greater power (more things programmable, program applications to work together).

# Outline

1. **The Tcl language.**
2. **The Tk toolkit.**
3. **Tk applications.**
4. **Composing applications: hypertools.**
5. **Status and conclusions.**

# Tcl: Tool Command Language

**Problem:**

- Interactive programs need command languages.
- Traditionally redone for each application.
- Result: weak, quirky.
- Emacs and csh nice, but can’t reuse.

**Solution: Tcl**

- Command language = embeddable C library.
- Powerful features: procedures, variables, lists, expressions, loops, etc.
- Extensible by applications.

# Language Philosophy

**Classes of language:**

- Large application implementation (structure, performance important). } C
- Scripting, extensions. } Tcl
- Interactive commands (structure bad, performance not critical). } Tcl

**One language can’t meet all three needs?**

**Tcl goals:**

- Simple syntax (for humans).
- Programmable.
- Easy to interpret.
- Simple interface to C procedures.

# Tcl Syntax

**Basic syntax like shells:**

- Words separated by spaces:

```
cmd arg arg arg ...
```

- Commands separated by newlines, semi-colons.
- Commands return string results.

**Simple substitution rules:**

- Variables:

```
set a $b
```

- Command results:

```
set a [expr $b+2]
```

- Complex arguments:

```
if $a<0 {
  puts stdout "a is negative"
}
```

# More on the Tcl Language

**Rich set of built-in commands:**

- Variables, associative arrays, lists.
- Arithmetic expressions.
- Conditionals, looping.
- Procedures.
- Access to UNIX files, commands.

**Only datatype is strings:**

- Easy access from C.
- Programs and data interchangeable.

# Factorial Procedure

```
proc fac x {
    if $x==1 {return 1}
    expr $x*[fac [expr $x-1]]
}
```

`fac 4` **returns** `24`

# Embedding Tcl in Applications

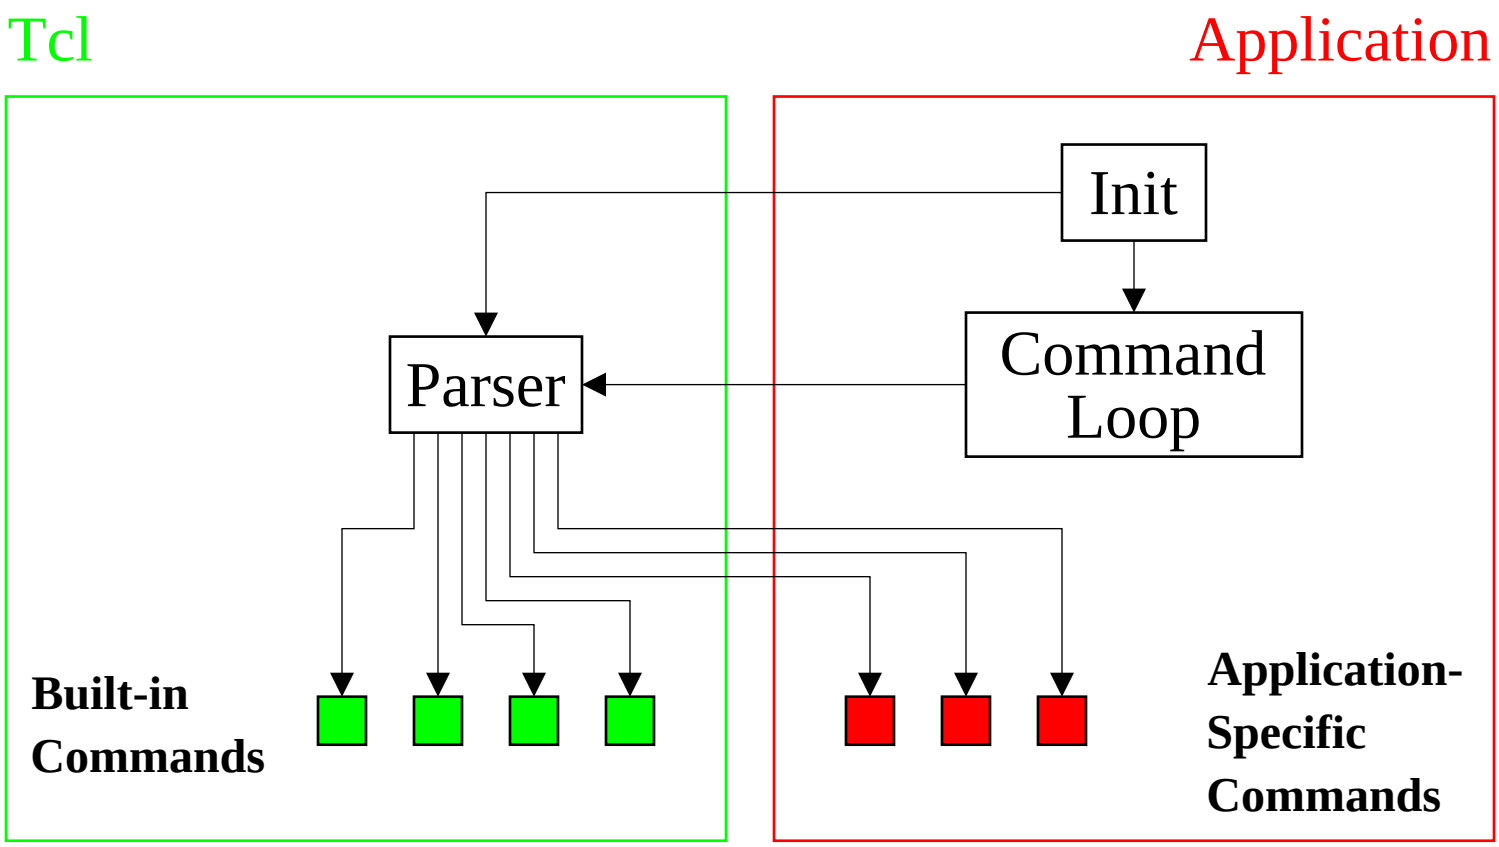


- Application generates Tcl scripts.
- Tcl parses, substitutes, passes argc/argv to command procedures.
- Application extends built-in command set.

# The Tk Toolkit

**The problem:**

- Too hard to build applications with nice user interfaces.

**The wrong solution:**

- C++, object-oriented toolkits.
- Only small improvement (10-20%?): must still program at a low level.

**The right solution:**

- Raise the level of programming.
- Create interfaces by writing Tcl scripts.

# Creating Interfaces with Tk

**Widgets/windows have path names:**

```
.dlg.quit
```

**Create widget with command named after class:**

```
button .dlg.quit -text Quit \
   -foreground red -command exit
```

**Tell geometry manager where to display widget:**

```
place .dlg.quit -x 0 -y 0
pack .dlg.quit -side bottom
```

# Other Tk Features

**Manipulate widgets with widget commands:**

```
.dlg.quit flash
.dlg.quit configure -relief sunken
```

**Use Tcl for interconnection:**

- Buttons, menu entries invoke Tcl commands.
- Scrollbars and listboxes communicate with Tcl.
- Can define new event bindings in Tcl.
- Selection, focus accessible via Tcl.

**Tk also provides C interfaces:**

- Create new widget classes.
- Create new geometry managers.

# What's a Tk-based application?

1. **The Tcl interpreter.**

2. **The Tk toolkit.**

3. **Application-specific C code:**
   - New object types.
   - New widgets.

   } Tcl commands

4. **Tcl scripts:**
   - Build user interface.
   - Compose application primitives into useful functions.

# The Simplest Tk Application: Wish

**No C code except command-line reader.**

**Can build many applications as `wish` scripts:**

- Hello, world:

```
label .hello -text "Hello, world"
pack .hello
```

- Simple directory browser:
  30 lines.

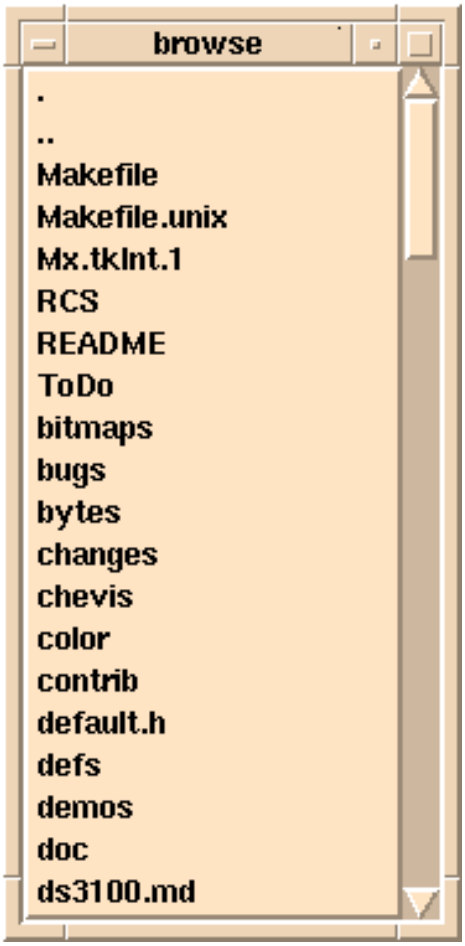

# Browser Wish Script

```
listbox .list -yscroll ".scroll set" \
    -relief raised -geometry 20x20
pack .list -side left
scrollbar .scroll -command ".list yview"
pack .scroll -side right -fill y
if {$argc > 0} {
    set dir [lindex $argv 0]
} else {
    set dir "."
}
foreach i [exec ls -a $dir] {
    .list insert end $i
}
bind .list <Double-Button-1> {
    browse $dir [selection get]
}
bind .list <Control-c> {destroy .}
focus .list
proc browse {dir file} {
    global env
    if {$dir != "."} {set file $dir/$file}
    if [file isdirectory $file] {
        exec browse $file &
    } else {
        if [file isfile $file] {
            exec xedit $file &
        } else {
            puts stdout "can't browse $file"
        }
    }
}
```

# Perspecta Presents!

**Commercial presentation package:**

- Presentation = sequence of slides.
- Text, graphics, images.
- Backgrounds, slides, notes.
- Postscript output, on-line slide shows.

**Implemented using Tcl and Tk:**

- 29000 lines of new C code.
- 1 new widget for displaying slides.
- ~30 other Tcl commands for manipulating presentations.
- 11000 lines of Tcl scripts.

# Uses of Tcl in Perspecta Presents!

1. **Powertext: text created by Tcl script, not typed by user.**
   - Slide numbers.
   - Bullet numbers.
   - Update values from database?
2. **File format = Tcl script. To load, just execute file.**
3. **Selection exchanged as Tcl script (selectively copy backgrounds, looks, etc.)**
4. **Undo/redo:**
   - Undo/redo script pairs saved in log file.
   - Infinite-level undo/redo.
   - Recovery after crashes.
5. **Slide shows, etc. etc.**

# Composing Applications

**The problem:**

- Only communication between applications is via selection.
- Result: monolithic applications.

**The solution: `send` command**

- `send appName command`
- Implemented using X11 properties.
- Any Tk application can invoke anything in any other Tk application: interface or actions.
- Result: powerful communication.

# Composing Applications, cont'd

**Examples:**

- Debugger sends command to editor: highlight line of execution.
- User-interface editor sends commands to modify interface of live application.
- Multi-media: send `record`, `play` commands to audio and video applications.
- Spreadsheets: cell sends commands to database to fetch current value.

**Revolutionary results:**

- Build complex systems as collections of specialized but reusable hypertools.
- Easy to create active objects: embedded Tcl commands. Hypertext, hypermedia easy.

# Status

**Tcl:**

- 20000 lines C code.
- First released January 1990.

**Tk:**

- Intrinsics: 21500 lines C code.
- Motif-like widgets: 34000 lines C code.

| | | |
|---|---|---|
| Buttons | Labels | Scales |
| Canvases | Listboxes | Scrollbars |
| Entries | Menus | Texts |
| Frames | Messages | |

- First released March 1991.

**User community:**

- 5000-10000 (as of January 1993).

# Conclusions

**Power from programming:**

- High-level programming for power, flexibility.
- Extensibility.
- One language for many things.

**Power from composition:**

- Widgets within an application.
- Send between applications.

**Tcl + Tk = shell of 1990's?**

**Wanted: application developers.**