

Contents

FAXmaker - an overview

[Introduction](#)

[Requirements](#)

[The FAXmaker system](#)

[How does FAXmaker for Intranet work?](#)

[How do users indicate the fax number?](#)

[Preparing for the installation of FAXmaker for Intranet](#)

Installation

[Introduction](#)

[Running the installation procedure](#)

[Steps to complete installation](#)

[Installation of the OCR routing module](#)

User Settings

[Introduction](#)

[User settings](#)

The Fax Server

[Introduction](#)

[Registration](#)

[Configuring the Fax Server](#)

[RTF converter setup](#)

[General options](#)

[Configuring the document converter](#)

[US date format in fax header](#)

[The FAX Server Monitor](#)

[Running the fax server](#)

Installing the Client software

[Introduction](#)

[Installing Windows 3.1 or 3.11 clients](#)

[Installing Windows 95 clients](#)

[Installing Windows NT 3.51 clients](#)

Installing the Windows NT 4.0 clients

Using an unsupported POP3 client

Advanced Use

Introduction

Fax server error messages

Call accounting

Internet site <http://www.gfifax.com>

Designing CoverPages & Templates

Introduction

Designing a coverpage or template

Supported merge-fields

Sending and Receiving Faxes

Benefits of sending faxes with FAXmaker

Sending a Fax from an Application

Sending a fax from an e-mail package

Specifying recipient name and company

Specifying additional recipients for the fax

FAX Options

Creating a Fax Attachment

Receiving a Fax

Remote administration

Introduction

FAX admin

Coverpage administration options

Template administration options

Attachment administration options

Setting the default fax resolution

Setting the FAX header

Setting multiple options at a time

Retrieving the defaults

The Viewer

Introduction

Viewing Faxes

Scale to Grey

Fax annotation

Troubleshooting

Server software problems

FAQ on <http://www.gfifax.com>

How to request for support

Introduction

Congratulations on purchasing FAXmaker. FAXmaker for Intranet will save your company time and money by offering you advanced network fax technology. With FAXmaker, sending a fax is as easy as printing a document.

FAXmaker for Intranet is designed to integrate seamlessly with any SMTP/POP3 based mail server. Therefore this manual assumes that an SMTP/POP3 server is already up and running, and that you have a working knowledge of SMTP/POP3 and TCP/IP.

Requirements

FAXmaker for Intranet requires the following;

- A standard SMTP/POP3 based mail server, installed and running.
- A Windows NT or 95 machine with at least 16 MB memory and a 100 Mhz 486. The machine does not need to be dedicated to FAXmaker. You can run the FAXmaker server alongside the mail server on the same Windows 95 or NT machine. FAXmaker requires very little resources or processing time.
- E-mail client software capable of handling "aliases". To send a fax conveniently, the user will need to store the fax number as an alias. This is explained in more detail later on. Most standard e-mail software including Eudora Lite, Eudora Pro, Netscape, Microsoft Internet mail and Microsoft Exchange support this.
- One or more class 2 compatible fax modems, preferably quality modems. FAXmaker uses standard CLASS 2 fax modems. Although technically speaking you can use any class 2 modem, the reliability (how long you can leave the modem unattended), connect rate (average bps speed at which your faxes will be sent) and connect success percentage (The amount of fax machines the fax modem will not connect to) will depend almost entirely on the quality of modem you use. We recommend using a quality fax modem such as Zyxel or Multitech. They may cost a little more, but they are well worth the extra money.

| Why class 2 and not class 1? Class 2 is actually a more advanced protocol, which offloads a lot of the processing time to the modem. This allows your fax server to use less processor time and to be less sensitive to machine load.

| Although FAXmaker includes a driver for US Robotics, GFI FAX & VOICE do not recommend the use of US Robotics modems.

The FAXmaker system

The FAXmaker installation consists of a Fax server program running as a gateway, and the client software running on the users' workstations. The client software consists only of a fax printer driver and a viewer, which enables all E-mail users to send a fax by printing to the FAXmaker driver. Using the viewer, users can view or print incoming faxes.

The system is depicted in the following figure:



Figure 1 FAXmaker fax gateway running on the mail server.

Figure 1 shows the FAXmaker fax server/gateway running on the mail server machine. If the mail server is running on Windows NT, there is no need to use a separate machine for the fax server. However, FAXmaker is compatible with any SMTP/POP3 server, so if your server is running on a UNIX system, FAXmaker can still be used, but will need to be installed on a separate Windows NT/95 machine.

How does FAXmaker for Intranet work?

FAXmaker acts as a fax gateway to all users on the network. By setting up a "fax mailbox", FAXmaker can communicate with all e-mail users via this fax mailbox. The fax mailbox is nothing else than a standard mailbox/POP account dedicated to the fax server. To send faxes, users direct their faxes as e-mail to the fax mailbox. Likewise, the fax server routes inbound faxes or feedback to the e-mail users, using the fax mailbox.




Figure 2 How the fax mailbox interacts with the users

As depicted above, user 1, 2 and 3 can send faxes by sending a fax to the fax mailbox. FAXmaker will regularly check the fax mailbox, convert any pending jobs to fax and send them out. An incoming fax will be sent to the appropriate user via the fax mailbox.

How do users indicate the fax number?

There are two ways to indicate fax numbers:

1. Type in the fax number in the 'To' field of the e-mail message, followed by the e-mail address of the fax mailbox in between brackets: <fax@your domain name>. For example:

661072 <fax@gfifax.com> this will send a fax to 661072

This method of addressing is the easiest to setup and requires no configuration changes on the mail server. Most Internet mail software (including Netscape 2.0, 3.0, Communicator, Eudora Lite & Pro) support this feature including the Outlook/Exchange/Windows Messaging client of Windows 95/NT and Microsoft Internet mail.

2. Type in the fax number as the first part of the e-mail address of the fax server mailbox in between brackets as follows: <661072@your domain name>. For example:

661072@gfifax.com - this will send a fax to 661072

| This method of addressing requires the mail server to support what is called wildcard aliases, or the automatic routing of mails with an invalid e-mail address to a certain mailbox. Rather than returning and error to the user, the mail server must forward the mail to the fax mailbox.

Preparing for the installation of FAXmaker for Intranet

Before continuing installation of FAXmaker for Intranet, ensure that you have understood how it works and that the requirements mentioned at the beginning of this chapter are met. Furthermore, you will need to create an account/mailbox, which the fax server will use. Please consult the manual of your own e-mail software to find out how to do this.

You are advised to call the mailbox 'Fax'. This makes the function of that particular mailbox clear to the users.

Introduction

This chapter describes the installation of the FAXmaker software on to the fax server. It will help you choose the installation options available, but will not discuss the user's configuration options, which are explained in the chapter 'User Settings'.

Prior to running the installation procedure, you are advised to read the chapter 'FAXmaker - an overview'.

Running the installation procedure

1. Insert the FAXmaker CD ROM in your CD ROM drive. Remember that you must run the installation program from the computer with the fax modem(s) attached.
2. Run 'setup.exe' from the File Manager/Explorer or choose 'Run' from the 'File' menu in Program Manager and type in <a:\setup.exe>.
3. The setup procedure will now start, and you will be prompted by the installation routine which language you wish to use. Select the right language and click 'Next' to continue.
4. Setup will now request you to close any open programs. When you have done so, click 'Next' to continue.
5. Setup will now prompt you for your company name, fax number and registration number. The registration number is indicated on the disk envelope. If you are evaluating the product, do not enter a registration number. FAXmaker will allow you to setup a maximum of two users.
6. Setup will now ask you where you want the FAXmaker fax server files to be installed. FAXmaker will need approximately 10 megabytes of free hard disc space. In addition to this you must reserve approximately 30 Megabytes for temporary fax files. Click 'Next' to continue.
7. Setup will now prompt you where to copy the client setup programs. The users must run the client setup programs from their PC (See chapter 'Installing the Client Software'). The setup program installs the fax printer driver and fax viewer on the user's PC. Since the users must run the installation, it is best to choose a location, which is accessible to all users. Click 'Next' to continue.
8. Setup will now ask you for a mail server name, scan time in seconds (interval that the FAXmaker Intranet MTA checks the mailbox for outgoing faxes). Additionally, setup needs to know the fax-mailbox name and password that you have created for the FAXmaker Intranet MTA.
9. Setup will ask you whether your mail server supports APOP. Most mail servers do. If you are not sure, select no.
10. The setup program will now copy all program files to the selected destination.
11. - **Windows NT users only** - FAXmaker setup will now ask you for a FAX service name. There is no need to change the service name, however in certain cases when you are re-installing FAXmaker, you might need to change the name in order not to conflict with the previous FAXmaker service names. Click 'Next' to continue.
| To de-install a service, you must delete all references to it from the registry and re-boot. Click OK to continue.
12. - **Windows NT users only** - FAXmaker setup will now ask you for a service name for the Intranet MTA (Message transfer agent). There is no need to change the service name, however in certain cases when you are re-installing FAXmaker, you might need to change the name in order not to conflict with the previous FAXmaker service names. Click 'Next' to continue.
| To de-install a service, you must delete all references to it from the registry and re-boot. Click OK to continue.
13. - **Windows NT users only** - Setup will remind you that after rebooting your PC, you need to install the FAXmaker printer driver as described in the readme or in the Chapter 'Installing the client software'.

14. Setup will now finish the installation by creating a FAXmaker program group. This program group includes a number of applets (small applications) which you need to run to complete the installation of FAXmaker for Intranet.

15. Setup is now ready copying the files and modifying the registry. To complete the installation and start the operation of FAXmaker for Intranet, you must follow the steps outlined in the dialog.

Steps to complete installation

Step 1: Reboot your PC

Step 2: Install the FAXmaker Printer driver

Step 3: Configure the FAX server

Step 4: Create user accounts

Step 5: Start the FAXmaker Intranet MTA

Step 6: Start the FAX server program

Step 1: Reboot your PC

Reboot your PC. This is necessary for the printer driver to be installed.

Step 2: Install the FAXmaker Printer driver

If you are running Windows NT 3.51 or 4.0, you need to install the printer driver as described in the readme, or in the Chapter 'Installing the client software' of this manual.

Step 3: Configure the FAX server

Configure the fax server. You need to setup at least one port (modem or fax board) to start the fax server. This is done using the Fax server configuration applet, located in the FAXmaker program group. The first time you start it, it will scan your PC for installed modems. You must have at least one class 2 modem installed. You can cancel the autodetect process at any time by clicking Cancel. After FAXmaker detects a class 2 modem, it will automatically configure the port for you with default settings. Accept these for now and close the Fax server configuration applet. For more information on the fax server configuration applet, consult the Chapter 'Fax server' in this manual.

Step 4: Create user accounts

The fourth step is to create a number of user accounts that will be allowed to send and receive faxes. This is done in the user configuration applet located in the FAXmaker program group. To add users, click on 'Add', and enter their name and e-mail address. FAXmaker will automatically create a user account with default settings. A dialog with the user name and the default settings will appear. Click 'OK' to confirm creation of the user account. After creating a few accounts, click 'Close' to close the applet. For more information on the applet and the possible user settings, please consult the chapter 'User settings'.

Step 5: Start the FAXmaker Intranet MTA

You can now start the FAXmaker Intranet MTA (Message Transfer Agent). This program will check the fax mailbox for outgoing and incoming faxes messages and distribute them to the fax server or the users respectively. You can start this program from the FAXmaker program group. If you have Windows NT, you can also start this program as a service from the services applet in the control panel.

| If you want to run the FAXmaker Intranet MTA as a service, you must enter an account that has rights to log on as a service. This is done by highlighting the FAXmaker Intranet MTA service and clicking 'Startup'. Here you can enter a log in name.

| To have the FAXmaker Fax service and FAXmaker Intranet MTA start up automatically, change the Start-up type setting to 'Automatic'.

Step 6: Start the FAX server program

Start the FAXmaker fax server. This program handles the sending and receiving of faxes on one or more ports. You can start this program from the FAXmaker program group. If you have Windows NT, you can also start this program as a service from the services applet in the control panel.

You can monitor the fax server using the FAXmaker monitor, which displays port activity and modem status.

If you want to run the FAXmaker Fax server as a service, you must enter an account that has rights to log on as a service. This is done by highlighting the FAXmaker Fax server service and clicking 'Start-up'.

Installation of the OCR routing module

THIS SECTION IS ONLY APPLICABLE TO FAXMAKER USERS WHO HAVE PURCHASED THE OCR MODULE.

FAXmaker users can opt to purchase an OCR module, that can automatically route incoming faxes to the right recipient, and will allow you to convert a fax to text format. With this module, the fax server will scan the incoming fax for a recipient name, and if it finds a recipient's name, FAXmaker will automatically route that fax to the recipient's mailbox.

The module includes 1 OCR support disk, as well as a revised serial number.

To install the module, run a:\setup.exe from the file run command in the Program manager menu.

Follow the instructions explained during the installation.

You will now be able to setup OCR routing per user from the User setup utility, by going to the "OCR tab" in the routing setup.

Introduction

All E-mail users who wish to be able to send and receive faxes must be added in the user configuration utility.

The user configuration is done from the user configuration utility, which can be started from the FAXmaker program group.

User settings

To add users and configure their settings;

1. Click 'Add user'. You will be asked to enter the user name as well as his/her e-mail account. Be sure to enter this email account carefully. It will be used to validate whether the user is a valid user on the FAXmaker system. In addition it will be used to send the success, failure and error reports
2. Click 'OK'. The user will be created, and the user settings dialog will appear automatically.

More:

[General Options](#)

[Send Options](#)

[Receive Options](#)

[Routing](#)

[Call blocking](#)

[User info](#)

[Coverpages & Templates](#)

[Mail server settings](#)

General Options

Remote administration - This option will allow the user to change coverpage, fax header and send resolution by sending mail to the faxadmin (See the chapter 'Remote administration' for more information).

Send Options

Normal resolution/High resolution - Select the default resolution to send faxes in. Users can override this by specifying a different resolution in the body of the message. (See fax options in the "Sending and receiving faxes" chapter).

Personal FAX header - activating this option will include the sender's name on top of the FAX. This will allow recipients of the FAX to identify the sender.

Receive Options

Include fax files with notification - When a fax is transmitted, a user can choose to receive the converted fax file for backup/confirmation purposes.

Receive incoming faxes - This option specifies that this user must receive all incoming faxes, so that she/he can route faxes to the right users.

Include/Exclude routed faxes - When receiving all incoming faxes in one mailbox, this option allows you to specify whether to include or exclude faxes for which a recipient already has been found, using available routing methods.

Routing

FAXmaker can automatically route an incoming fax to the right person. There are a number of ways to achieve this: CSID routing, DTMF/DID routing and OCR routing.

CSID routing - this method relies on the FAX ID which each FAX machine/FAX card displays when sending a FAX. Since it rarely changes, it can be used to identify the sender and thus the corresponding recipient.



Routing a fax using the FAX ID (CSID)

You can setup CSID routing by adding CSIDs (FAX IDs) to a user's CSID list. FAXmaker will then route incoming faxes with that particular CSID to that user.

Automatic Updating of the user's CSID list.

Activating the option 'Store CSIDs of all outgoing faxes in list' will automatically update the user's CSID list. Each time a user sends a fax, the CSID of the recipient(s) will be stored in the CSID list. This technique relies on the fact that if a user sends a fax to a particular fax machine, he is likely to be the recipient of the answer to the fax. If you enable this option, each time the user sends a fax, the CSID of the receiving fax is stored in the user's CSID database.

DTMF routing - DTMF (Dual Tone Multi Frequency) tones are the tones generated by a telephone handset, and can be used to identify a recipient. The DTMF number can be appended after the regular fax number. The system works in the following way: the caller dials the fax number and waits until the call is answered. The fax card will now transmit a tone, after which the caller must enter the DTMF routing number. The FAXmaker server will recognise the DTMF number and use it to identify the recipient of the fax.

DTMF routing can work well, if you explain your callers how to use it. This can be done on the FAX coverage of outgoing faxes. DTMF routing can also be used behind a PBX which supports DID. In this case you can use excess DID lines from the PBX to route the FAX to an extension.



Routing a fax using DTMF/DID routing

DID routing (Direct Inward Dial) - DID routing is generally considered the most reliable form of automatic inbound routing, because it relies on information provided by the telephone exchange, not on information provided by the caller. DID requires you to purchase 'virtual phone numbers' from your telecom company, which you can assign to users or departments. The virtual phone number (DID number) will be passed to FAXmaker so that FAXmaker knows to whom the fax should be routed. A DID number is passed using either a PBX with DID capability, or a fax card with DID as a DID device. These

devices must pass the DID number to FAXmaker as a series of DTMF tones. The system is completely transparent to the caller and does not require any effort on his part.

To setup both DID and DTMF routing, go to the DID/DTMF tab in the routing dialog. Fill in an appropriate routing code for the user. Remember that actual activation of DID or DTMF routing is done in the FAX server. The administrator only stores the users' routing code. The same routing code can be used for both DID or DTMF routing.

OCR routing - OPTIONAL MODULE - Another easy way to route faxes automatically is using OCR. This system will OCR the first page of a fax, and consequently search the fax for a recipient name. If it finds one, it will route it to the recipients mailbox. This option requires the optional OCR module.



Routing a fax using OCR

To setup OCR routing, click the OCR setup button in the Routing tab. This dialog has two tabs:

1. Greeting - meaning that the FAX server will search for a greeting such as Dear, Mr., Ms., etc., before the actual user name. This means that the FAX server will only attempt to recognise a user name after it has recognised a greeting word. You can add and remove greetings by clicking the add and remove buttons. You can enter a matching ratio, or confidence level in the edit box. This allows you to specify the confidence FAXmaker must have before it will actually recognise it as a greeting. Using this option you can tune the system to your specific needs. For normal use, a low setting is required, since greetings are short, and a lower matching ratio allows for OCR mistakes, and for 'spelling mistakes'.
2. User keywords - here you can enter keywords per user, which FAXmaker will search for to identify the recipient of a FAX. If, for example, an individual Mr. Johnson, is also known as John, this keyword may be entered also, as well as Mr. Johnson. In addition, if Mr. Johnson is responsible for international sales, one might add international sales as a keyword too. A matching ratio can be entered to tune the system.

Call blocking

Call blocking allows you to exercise control over the fax numbers that the users can send to. To enable this option, activate the 'Disallow numbers to dial out' radio box at the bottom of the dialog. You can now add numbers to the list, which may not be dialled by the user. FAXmaker will check the list before each fax transmission, and not send any faxes starting with numbers listed in the call-blocking list. This means that if you want to disallow certain users making international fax transmissions, you only need to insert the international dial out number (for example 00, 09 or 011). Alternatively you can block specific fax-numbers.

User info

The user info properties.

This tab allows you to enter additional information regarding the user. This information is used for filling in coverpage/templates with the sender's information.

The fields in the dialog correspond with the following coverpage/template fields.

User properties	Merge field
Company	<S_Company>
Department	<S_Department>
Fax	<S_Fax>
Voice	<S_Phone>

Coverpages & Templates

A number of coverpages and templates can be used for sending faxes. The administrator can do this from the Coverpage and Template properties dialog. Users can also change coverpage and templates from the client (see chapters 'Sending and receiving faxes' and 'Remote Administration').

Difference between a coverpage and a template

A coverpage is inserted in front of a fax, whereas a template is the format or lay-out of the actual fax message. This means that by designing a template with a letter head and fields, you could eliminate the use of a coverpage (see also chapter 'Designing CoverPages & Templates').

Whether you use a template or coverpage or both is up to you to decide.

Adding templates or coverpages

FAXmaker ships with a number of sample templates and coverpages. By default, FAXmaker will use the file template.rtf (located in the Faxmaker-coverpage subdirectory) as a template for all users.

By modifying template.rtf you can avoid configuring a template file for each user.

To add a custom coverpage or template:

1. Design your coverpage/template in your word processor and save it as an RTF (Rich Text format) file (i.e. with extension '.rtf'). For more information on designing a coverpage/template, turn to the chapter 'Designing Coverpages & Templates'.
2. Click 'Add' and select the RTF file you created.
3. If you wish to set this RTF file as the default, click 'Set Default'.

Mail server settings

The user setup utility also contains a dialog, which allows you to change the mail server settings, which you entered during installation. In this dialog you can change the mail server name, the poll time (i.e. how frequently the fax server must check the fax mailbox) and the e-mail account and password of the fax server.

Introduction

The Fax server program is the core of FAXmaker. It is fully multi - tasking and will handle sending and receiving of faxes simultaneously. The Fax Server can run as an application or as a service. Setup of the Fax server is performed from the FAXmaker Fax server configuration applet.

Registration

Before you setup the fax server, enter your registration number in the register dialog. This registration number will also allow you to upgrade to more users or add additional modules. To read more about the upgrade options of FAXmaker, please visit our web site at <http://www.gfifax.com>.

To enter the registration number;

1. Click on 'Register '.
2. Enter your company name & registration number Click 'OK' to continue.

| If you are evaluating FAXmaker for Intranet, leave this field empty and test FAXmaker with a maximum of two-users.

| Please take some time to register your product using the WWW form on our site:
<http://www.gfifax.com/pages/regfrm.htm>. This will also allow you to request support.

Configuring the Fax Server

Before you start the Fax Server, you must configure the 'Ports' that you will be using in the Fax server. A port is a COM port with a modem attached or a fax line on a fax/ISDN board. To configure a port:

1. Start up the Fax server configuration applet.

The first time you start it, it will automatically scan your PC for an available port. You can cancel this process by clicking 'Cancel'.

If you have cancelled the scanning of ports earlier, or have installed an additional modem or board, you can select 'Add' to create an extra port. You will be able to choose from a list of fax devices.

2. You can specify the port settings by double-clicking on a port or selecting a port and clicking 'Properties'.

3. A tabbed dialog will appear, which allows you to specify modem, fax, printing, routing and archive options for that port. If you have OCR installed, an OCR tab will also appear.

More:

[Modem Properties](#)

[Fax Setup](#)

[Routing](#)

[Autoprint incoming faxes](#)

[Archive](#)

Modem Properties

This tab allows you to configure your modem.

Modem control

Modem type - Select your modem from the drop down list box.

Initialisation string - Although the initialisation string does usually not need to be changed, you can edit the string in this field.

Line options

Tone dialling - Activate this check box if you can use tone dialling. If you deactivate it, the Fax server will use pulse dialling.

Wait for dial tone - If you activate this option, the fax server will only send the fax if the modem detects a dial tone.

| Some export modems do not recognise the dial tone, so you must first test whether your modem recognises a dial tone. If it does not, deactivate this option.

Check for busy tone - Activate this option if you want the modem to check for a busy tone.

Speaker mode - Select whether you want the speaker to be 'Always Off', or 'On until connected' or 'Always On'.

Speaker volume - Select the appropriate volume.

Fax Setup

General options

Maximum Speed - Select the send & receive speed according to your modem's capabilities. Remember that not all modems are able to negotiate "down" well, so choose 9600 if in doubt.

Local ID- Enter the fax ID. The recipient will see this as the identification code of the fax.

Send options

Send outgoing faxes - This radio box allows you to determine whether this port/modem should send faxes. This is useful when you want to use one port or modem for receiving faxes only.

Dial prefix - If your lines are located behind a PBX, you can specify a dial prefix here.

Number of retries - Sets the number of times FAXmaker will try to send a fax.

Retry delay - This option allows you to set a delay between retries in seconds.

Fax header - The fax header is a word or company name, which will appear on top of each fax.

Receive options

Answer incoming calls - For the fax server to be able to receive faxes, this option must be checked. Specify after how many rings you want FAXmaker to answer in the 'Rings until answer field'.

Attach OCR document - If you have the OCR module installed, you can select this option to have the OCR text output attached to the incoming fax.

Incoming call detection - By default the fax server will answer all incoming calls as fax only. However, if you have installed the voice mail or fax on demand module (optional module), you can have the fax server detect between fax/voice or voice only calls.

Routing

Inbound routing of faxes is set up in the Administrator, however you must activate the various routing methods in the server in the 'Routing properties' tab. Activate a routing method by clicking on the appropriate radio box.

| Do not enable DTMF routing unless you have a compatible voice modem correctly setup. Compatible voice modems are Zyxel or modems that have a Rockwell voice chipset. You must also select the corresponding driver in Modem properties as either Voice modem (Rockwell) or Zyxel. If you enable DTMF routing without having a voice modem, the fax server will generate an error whilst receiving.

DTMF options

Generate beep - you can have the Fax server generate a beep when it picks up the line. This will alert the caller or PBX to enter the DTMF string.

Number of digits - Length of DTMF string/number that caller or PBX must generate.

Autoprint incoming faxes

The printing options dialog allows you to configure automatic printing per port. That is, you can select either the same or different printers to service the printing requests from various ports. Both incoming and outgoing faxes can be printed automatically. Printing of outgoing faxes is configured in the general setup because it is not port specific.

| Because a fax is an image, printing a fax can take some time. The auto-print feature requires a faster PC, and printing must be set to low priority in the print manager if the printer is connected to the fax server directly.

Archive

This tab allows you to specify the archive options. Archiving allows you to create a backup of all incoming and outgoing faxes.

If you have the OCR module installed, FAXmaker will store the OCR text output in the same directory, using the same file name as the corresponding fax file, but using extension *.txt instead of *.fax.

Archive incoming - Archives all incoming faxes in a directory of your choice.

Archive outgoing - Archives all outgoing faxes in a directory of your choice.

RTF converter setup

The RTF converter converts e-mail messages to fax, using a customisable RTF file as a template. The converter options are changed from the FAX server configuration applet.

To change RTF conversion options:

1. Click the RTF setup button at the bottom of the list of ports.
2. A dialog appears which allows you to specify the margins that you wish to use. It is important to take these margins into account when designing your cover page.
3. The default page size cannot be changed. The list box has been included to indicate that you must set the page size of your RTF template to 8 1/2 by 11 inches. (Standard US size) This will in no way effect your fax transmissions.

General options

The general setup contains general options, which are not specific to a port. To change general options;

1. Click the general button at the bottom of the list of ports.
2. A dialog appears which allows you to specify general options;

More:

[Autoprint outgoing faxes](#)

[Scan directory for text files](#)

Autoprint outgoing faxes

Autoprint outgoing faxes - This option automatically prints all faxes that are sent successfully. You can select a printer on which all faxes from the list box will be automatically printed.

Print report if successful - FAXmaker can print a transmission report after successfully sending a fax. In addition a miniature of up to 4 pages of the fax can be included on the report.

Scan directory for text files

This option allows you to send faxes programmatically, by posting a correctly formatted text file in the 'scan directory'. In this way you can integrate FAXmaker with a Web server, and allow a custom CGI script to send a fax automatically.

To send out a text file automatically:

1. Create a text file with your message text in it.
2. Add a line, starting with a double colon ::, specifying the recipients name (optional) and company and the fax number. For example:

::Mr Johnson, GFI, 661072

3. You can add additional send options by adding a second line, preceded by a double colon, specifying valid send options as described in the 'Sending and Receiving Faxes' chapter.

If the fax is transmitted successfully, the extension of the fax file name will be changed to *.suc. If the fax has failed, the extension will be changed to *.err. This allows you to give feedback to the user of your program.

Text files are formatted using an rtf file as a template. This way you can add your company logo etc. to the text file. The rtf file is called txtmpl.rtf and is located in the coverpage directory.

Configuring the document converter

FAXmaker is able to convert attachments such as word files to fax format, using its document converter interface.

Note: As new applications and GFI adjusts FAXmaker to be compatible with these applications, the information below may or may not be outdated by the time you ready it. Please check our FAXmaker for Intranet support FAQ for the latest information;

<http://www.gfifax.com/pages/inttsfaq.htm>

More:

[Requirements of the document converter](#)

[Adding additional formats](#)

Requirements of the document converter

- FAXmaker for Intranet must be running on Windows NT 4 or 95.
- An application that supports that format, for example in the case of word files, Microsoft Word, must be installed and running on the server.
- The application must install a print shortcut - in other words, the application must support automatic printing from the explorer. The application must not pop up a print to dialog, which requires user intervention. To check whether your application supports 'automatic printing', start up explorer and right click a file in the applications file format. A print command must be available. Activate it and check whether further user intervention is required simply by printing it to file.
- The FAXmaker printer driver must be set as the default printer on the NT server, and connected to the GFIFAX: port.
- The FAX server must be run as a desktop application, i.e. not as a service. This is required because a service can not interact with an application. To do this, run the FAXmaker fax server with the -desktop option from the console.

Adding additional formats

To add additional formats, you must edit the fgwmserv.ini file, which is located in the Windows NT directory. Under the heading 'Allowed Extensions', add the file extension and the short - cutname, usually, Print, that FAXmaker must use.

[Allowed extensions]

DOC=Print

If you do not have a Print shortcut installed, you can create it yourself if you think the application supports it, but you have to contact the company, which made the application and ask if it is possible.

US date format in fax header

The FAXmaker fax header is as default set to the European date format.

To make the FAX header appear in US date format;


Open the fgwmserv.ini file (located in the Windows NT directory) with notepad, and search for;

UsaDateFormat=0/1

This settings should be changed for each COM port.

The FAX Server Monitor

The Fax server monitor allows you to monitor the status of the fax server. The top pane shows the activity on each of the ports, and the bottom pane displays a detailed error log.

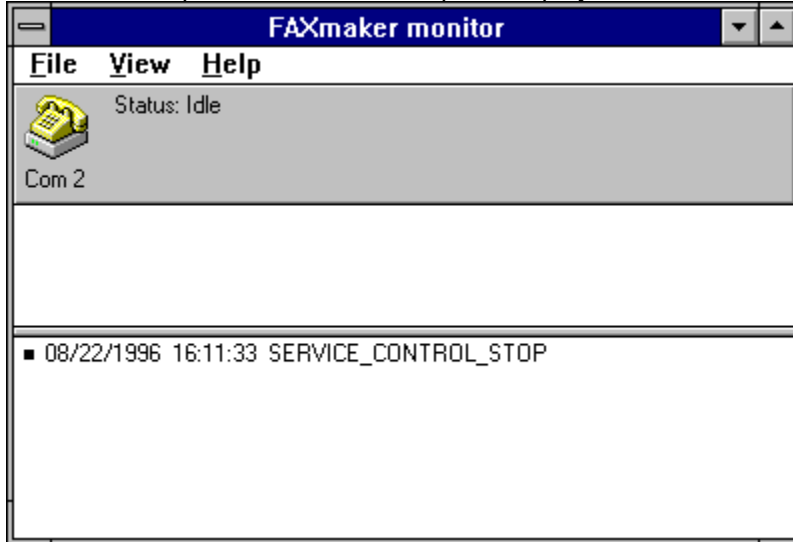

The Fax server monitor can be started from another PC as well, however the error log will not be listed.

More:

[Aborting a fax](#)

Aborting a fax

To abort a fax, select the appropriate port and choose 'Abort' from the port menu.

Running the fax server

The FAXmaker fax server can be run as an application from the FAXmaker program group or as a service from the services applet.

The FAXmaker fax server can also be run from the console/command prompt by specifying `< -desktop >`. For example;

`fgwmserv -desktop`

This will start the FAXmaker fax server as an application and allow you to quickly start and stop the fax server.

Introduction

After installing the Fax server, you can already send faxes by typing the message in the e-mail program. However if users wish to send faxes directly from their Windows applications, or wish to view their incoming faxes using the FAXmaker viewer, they must run a setup program from their machine first. This installation procedure is described below.

The setup program installs the printer driver and the viewer on the user's machine.

Installing Windows 3.1 or 3.11 clients

1. Run <setup.exe>, located in the install\win 3.1 directory located under the install directory, by using the 'Run' command from the 'File' menu in Program Manager. The exact location of the client setup programs was determined by the administrator during initial FAXmaker setup. (If in doubt, contact your administrator to find out from where to install the FAXmaker client).
2. Follow the installation instructions displayed in the installation dialogs. Setup will copy a number of files to the directory Faxmaker, located under your Windows directory.
3. Setup will ask what POP3 client you are going to use. All the most popular ones are listed. If your POP3 client is not listed, contact your administrator.
4. Reboot your machine after completing the installation.

Installing Windows 95 clients

1. Run <setup.exe> located in installwin95 directory by using the 'Run' command from the 'File' menu in Program Manager.
2. Follow the installation instructions displayed in the installation dialogs. Setup will copy a number of files to the directory Faxmaker, located under your Windows directory.
3. Setup will ask what POP3 client you are going to use. All the most popular ones are listed. If your POP3 client is not listed, contact your administrator.
4. Reboot your machine after completing the installation.

Installing Windows NT 3.51 clients

1. Run <setup.exe> located in the \install\winNT35 directory by using the 'Run' command from the 'File' menu in Program Manager.
2. Follow the installation instructions displayed in the installation dialogs. Setup will copy a number of files to the directory Faxmaker, located under your Windows directory.
3. Setup will ask what POP3 client you are going to use. All the most popular ones are listed. If your POP3 client is not listed, contact your administrator.
4. Reboot your machine after completing the installation.

More:

[Installing the Windows NT 3.51 fax printer driver](#)

Installing the Windows NT 3.51 fax printer driver

After running the FAXmaker Windows NT Install program, you must install the fax printer driver from the Print Manager.

To create a printer, you must be logged on as a member of the Administrators, Server Operators, Print Operators, or Power Users group.

1. Start the Print Manager from the Control Panel or Main group.
2. From the Printer menu, choose 'Create Printer'.
3. In the Printer Name box, type **FAXmaker**.
4. Install the FAXmaker printer driver: in the 'Printer Properties' dialog box, select 'Other' in the Driver box.
5. In the 'Install Driver' dialog box, specify the drive and path where the install\winnt directory is located, for example:
d:\apps\install\winnt35 and choose the 'OK' button.
6. In the Select Driver dialog box, select the FAXmaker driver. Then choose the 'OK' button.
7. FAXmaker will now install the driver.
8. In the Driver box, select the FAXmaker printer driver 'FAXmaker'.
9. In the 'Print To' box, select 'GFIFAX'. (This port should have been automatically added after you rebooted the system).
10. In the 'Create Printer' dialog box, choose the 'OK' button.
11. This completes a basic printer installation. Once a driver is installed, Print Manager automatically displays a dialog box allowing you to set up the features of your printer. There is no need to change any of these options.

! Remember that under NT the client must be active before printing to the FAXmaker printer driver. Otherwise the send fax windows will not pop-up automatically.

Installing the Windows NT 4.0 clients

1. Run <setup.exe> located in the \install\winNT40 directory by using the 'Run' command from the 'File' menu in Program Manager.
2. Follow the installation instructions displayed in the installation dialogs. Setup will copy a number of files to the directory Faxmaker, located under your Windows directory.
3. Setup will ask what POP3 client you are going to use. All the most popular ones are listed. If your POP3 client is not listed, contact your administrator.
4. Reboot your machine after completing the installation.

More:

[Installing the Windows NT 4.0 fax printer driver](#)

Installing the Windows NT 4.0 fax printer driver

After running the FAXmaker Windows NT Install program, you must install the fax printer driver from the Print Manager.

To create a printer, you must be logged on as a member of the Administrators, Server Operators, Print Operators, or Power Users group.

Go to the 'Add printer' wizard located in the printers folder in the control panel.

| You may need your Windows NT 4 install disks at hand.

1. Start 'Add Printer'
2. Select 'My Computer'
3. Select 'Next'
4. Select 'GFIFAX' from available ports list. This port will only appear after running the client installation and rebooting your machine after installation.
5. Select 'Next'.
6. The printer selection dialog will appear. Select 'Have Disk'
7. Enter the path to the FAXmaker NT driver directory; namely **\\faxmaker\client\program\winnt4**.
8. Choose 'OK'
9. Verify FAXmaker printer driver appears in Printer dialog.
10. Choose 'Next'.
11. The 'Add Printer' wizard will prompt you to insert the Windows NT 4 CD-ROM. However, if you have an English installation, you can simply delete i386 from the path that is prompted' and use the files supplied by the FAXmaker install.

Click 'OK' to continue.

12. You may choose to use FAXmaker as your default printer driver.
13. Click 'Next'.
14. Choose 'Not shared'.
15. Click 'Next'.
16. Do not print a test page.
17. Choose 'Finish'.

| Remember that for the e-mail client to automatically pop up after printing to the FAXmaker printer driver, the FAXmaker icon must be loaded before.

Using an unsupported POP3 client

If your POP3 client is not listed during setup, you can still use it with FAXmaker. However, you will need to edit an initialisation file located on the user's workstation.

To setup up FAXmaker with an unsupported POP3 client;

Run the FAXmaker client setup and select custom.

After finishing setup, open the fmclient.ini file located in the windows directory of the client PC.

Under the entry 'Path:', add a line as follows;

Parameters={Parameters}

In {Parameters}, you must specify the command line option which allows FAXmaker to attach the fax file to a new message. The attachment must be specified as %1 in the INI file.

For example;

Your POP3 client is called POP3.exe. By launching POP3.exe with the option /a, POP3.exe will automatically load and create a new message, with the file name specified in the command line as an attachment.

Application=Custom

Path=C:\Windows\pop3.exe

Parameters= /a %1

Introduction

The chapter on advanced use is meant for users of FAXmaker who wish to tune their FAXmaker installation and get to know all its features.

Fax server error messages

2000: Error 2000 means: look in Windows NT Event Log for a description. You can also see the description in the FAXmaker Monitor application.

For a more extensive listing of the errors in FAXmaker, please check our Website;

<http://www.gfifax.com/pages/errlist.htm>

More:

[RTF2FAX Errors](#)

RTF2FAX Errors

- 1600 Open File Failed
- 1601 File not found
- 1602 Read file failed
- 1603 Conversion failed
- 1604 Fax recovery/conversion failed
- 1605 already initialised (should never happen!)
- 1606 Initialisation failed
- 1607 Coverpage does not exist
- 1608 The specified Rich text file is not valid
- 1609 An Unknown error occurred

SMTP

- 4608 : An error occurred, but it was not one of the other types described in this table.
- 4609 : A logical protocol error occurred between the client and the SMTP server.
- 4610 : Error while reading on I/O
- 4611 : Error while writing on I/O
- 4612 : The Domain Name Server (DNS) cannot resolve the host name, most likely because the specified server name was not valid, or the DNS was down.
- 4613 :An error occurred while connecting to the server, most likely because
 - 1) there was no SMTP server running on the host,
 - 2) the host is down or,
 - 3) the host was too busy to handle new connections.
- 4614 : Communication error on sending.
- 4615 : Communication error on receiving.
- 4616 : SMTP server busy. An SMTP request is already in progress.
- 4617 : The connection was aborted
- 4618 : A command (other than login) was issued while not logged.
- 4619 : A command was issued at a time when there was no relevance to the protocol.
- 4620 : The connection was aborted. Further communication is not possible, and a new login must be issued to reconnect.

Call accounting

Call costing can easily be done using Excel or Access. FAXmaker logs all incoming and outgoing faxes in the following two files: Sendlog.txt and rcvlog.txt. The files are located in the main FAXmaker directory. Using the information in those files, a detailed report can be made.

More:

[Send log file](#)

[Receive log file](#)

[MS Access application to analyse log file](#)

Send log file

The following information is stored for each outgoing fax;

Date,Time,SenderEmail,SenderName,BillingCode,RemotId,RecipientName,RecipientCompany,RecipientNumber,CallDuration,PagesTransferred,Result,Info,Port,FilesInArchiveDir.

For example:

```
"22/12/96","22:18:16","nick@gfitest","nick","", "88888888","nick","gfi","nick_gfi_23  
<fax@gfitest>","00:30","1","SUCCESS","Fax has been sent successfully","COM2", ""
```

Receive log file

The following information is stored for each incoming fax:

Date,Time,RemoteID,CallDuration,PagesReceived,Result,Info,Port,FileInArchiveDir,RoutedTo.

For example;

```
"21/12/96","20:14:03","88888888","00:39","1","SUCCESS","Fax  
received","COM2","","nick@gfitest,alexm@gfitest,bart@gfitest"
```

MS Access application to analyse log file

Registered users will be able to download from the Internet a Microsoft Access application that analyse the send and receive logs. They are scheduled to be available by the end of September 1997. Please check our web site for availability. The macros will only be available to registered users.

Internet site <http://www.gfifax.com>

Tips for using FAXmaker and further information regarding technical support can be found on our web site:

<http://www.gfifax.com>.

The web site will always have the most up to date listing of tips and support questions.

Introduction

FAXmaker allows you to customise your templates and coverpages.

A coverpage is inserted in front of a fax, and a template is the format or layout of the actual fax message. This means that by designing a template with a letterhead and fields, you could eliminate the use of a coverpage. All FAXmaker users can use both.

You can design your cover page or template to include your company logo, sender and recipient fields, message fields and any bitmap images. You could also use or customise the existing templates included in FAXmaker.

The administrator, but also the users themselves can store coverpages and templates, and set them either as defaults or use them for a particular fax. For more information see the chapter 'Remote administration', and 'Sending and Receiving Faxes'.

Designing a coverage page or template

FAXmaker uses a standard rich text format file as a template to create cover pages.

The rich text format (RTF) is a standard amongst word processors and is supported by virtually any word processor, including MS Word and Wordpad (included in Windows 95). This means that you can create your template in your favourite word processor, and just include the merge fields such as the recipient name, company and message text by inserting a field where you wish to have the actual names/information inserted. For example, to have a field recipient name filled in, include a text <R_Name> in the coverage template.

For example a very simple coverage page with recipient name and company could be created as follows;

To: <R_Name>
Company: <R_Company>

Supposing you want to send a fax to Pete Johnson at York computers, the fax would be sent out as follows:

To: **Pete Johnson**
Company: **York Computers**

The merge fields in the RTF file are replaced by the recipient information and then the coverage page is converted to fax format.

The easiest way to design a cover page is to adjust one of the samples included with FAXmaker in the coverage directory. To do this simply open up one of the coverage pages in your word processor, for example Wordpad, and move around, add or delete merge-fields and/or text as you wish.

After you have finished designing your cover page, save the template as an RTF file and assign it to a user. If you wish to make a default template for the entire company, modify the file template.rtf in the Faxmaker\coverpge directory. If you wish to make a default coverage page for the entire company, modify the file coverpge.rtf in the Faxmaker\coverpge directory.

TIP: Use Wordpad or MS Word to design your coverpages/templates. FAXmaker uses conversion technology used by these applications also, and therefore it will give you "what you see is what you get" (WYSIWYG).

The rtfv32 utility lets you quickly convert your coverage page/template and preview the result of your artistic efforts.

TIP: use the rtfv32.exe program located in the FAXmaker directory to preview your template/coverage page as a fax file.

Supported merge-fields

The following merge-fields may be used in the RTF file.

More:

[Sender fields:](#)

[Recipient fields](#)

[General fields](#)

[Tips on designing a cover page](#)

Sender fields:

These fields are replaced by the sender information, typed in the e-mail message box:

Address Fields	Merge code
Last name	<S_Last_name>
First name	<S_First_name>
Name	<S_Name>
Company	<S_Company>
Department	<S_Department>
E-mail	<S_E-mail>
Fax	<S_Fax>
Voice	<S_Voice>

Recipient fields

These fields are replaced by the recipient information typed in the e-mail message box:

Address Fields	Merge code
Company	<R_Company>
Name	<R_Name>
Fax	<R_Fax>

General fields

These fields are replaced by general information:

Message text: <message>

This field inserts the text of the coverpage as entered in the e-mail message. Be sure to leave enough space in the RTF file.

Current time: <time>

Current date: <date>

These fields insert the date and time of the fax. Please note that the date and time of the server machine will be used.

Subject: <subject>

This field inserts the subject line of the message

Tips on designing a cover page

When designing your cover page in RTF format, please take note of the following:

| To preview your coverpage as a fax, use the rtf2fax program located in the FAXmaker directory.

| Remember that RTF does not support tables and/or headers/footers.

| Remember that merge fields are replaced by the actual field values. Therefore, if you do not leave sufficient space, long names can mix up your formatting.

Example of a coverpage with merge- fields

Benefits of sending faxes with FAXmaker

FAXmaker allows users to send and receive faxes directly from their PC, without having to print the document first, walk to the fax machine, type in the fax number and reschedule at a later stage if the number is busy.

Instead, FAXmaker uses a Fax server computer, located on your network, which is assigned all Fax related jobs, and also allows you to send and receive faxes at the same time!

More:

[The benefits](#)

[Ways to send a fax](#)

The benefits

- You no longer need to print out a document prior to faxing it.
- FAXmaker will automatically retry fax numbers if they are busy.
- Your faxes are more legible and of a better quality, since they are sent directly from your PC, using high-resolution techniques.
- Incoming faxes can be automatically routed to you as soon as they are received.
- Only you can view your outgoing and incoming faxes.
- You can easily send faxes to groups of people.

Ways to send a fax

There are two ways to send a fax with FAXmaker:

1. Create or open a document in any Windows application and print it on the 'FAXmaker printer'. This automatically activates your e-mail application from which you can send the fax.

OR:

2. Type in the text in your e-mail package, and send it from there.


Sending a Fax from an Application

Sending a fax from a Windows application is a simple process. You can make a document in your word processor or any Windows application, and then fax it using FAXmaker's printer driver. If you can print the document in Windows, you will be able to fax it with FAXmaker.

To fax from a Windows application, follow the following steps:

| As administrator you could try it out by faxing your registration form to GFI FAX & VOICE.

1. Start Write/Wordpad.
2. Enter some text or open an existing document.
3. Choose the FAXmaker printer driver as your current printer. (The FAXmaker printer driver is a mechanism, which stores your document as a fax file.)
 - a. From Wordpad's 'File' menu, choose 'Printer Setup'. Select the FAXmaker printer driver and choose 'OK'.
4. Print your letter:
 - a. From Wordpad's 'File' menu, choose 'Print'. In the 'Print' dialog box, click on 'OK'.
 - b. Immediately after the printer driver has printed your document, the E-mail package starts.
5. Click on the 'To' field in your send message dialog.

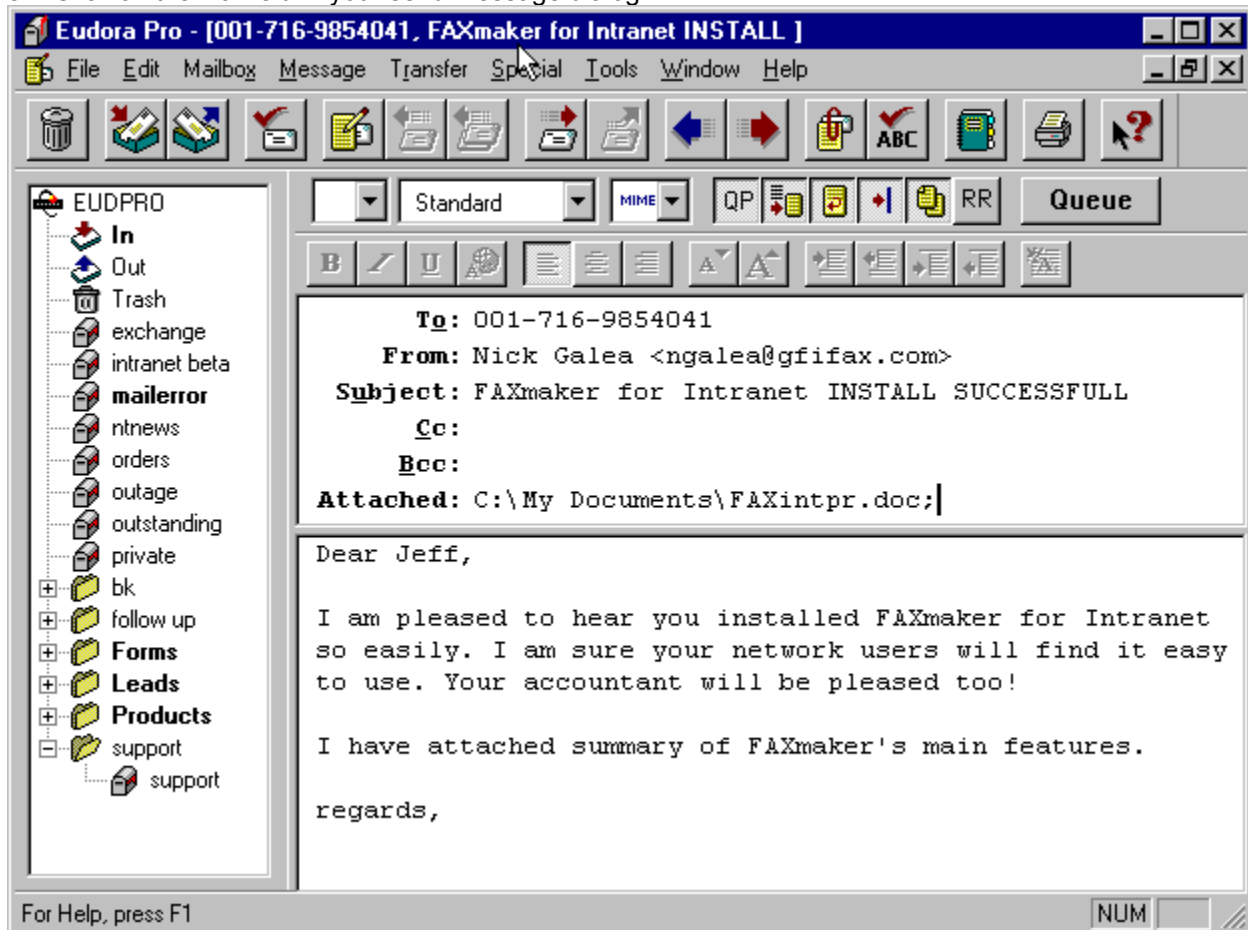

6. Enter the fax number followed by the e-mail address of your fax server in between brackets: <fax@your domain name>. For example:


011,356661072 <fax@gfitest> (The last part depends on which name the administrator used for the fax server mailbox)

If you wish to store this fax number for future use, give it a 'Nickname'. In Eudora this is achieved using the Make Nickname function, or by pressing the [Ctrl+K] key combination.

| To have the coverpage fill in the recipient name and company, you need to specify them in the address as follows:

support.gfi.011,356661072 <fax@gfitest.com>

The dot (.) separates the name, company and number field, whereas the underscore (_) indicates a space.

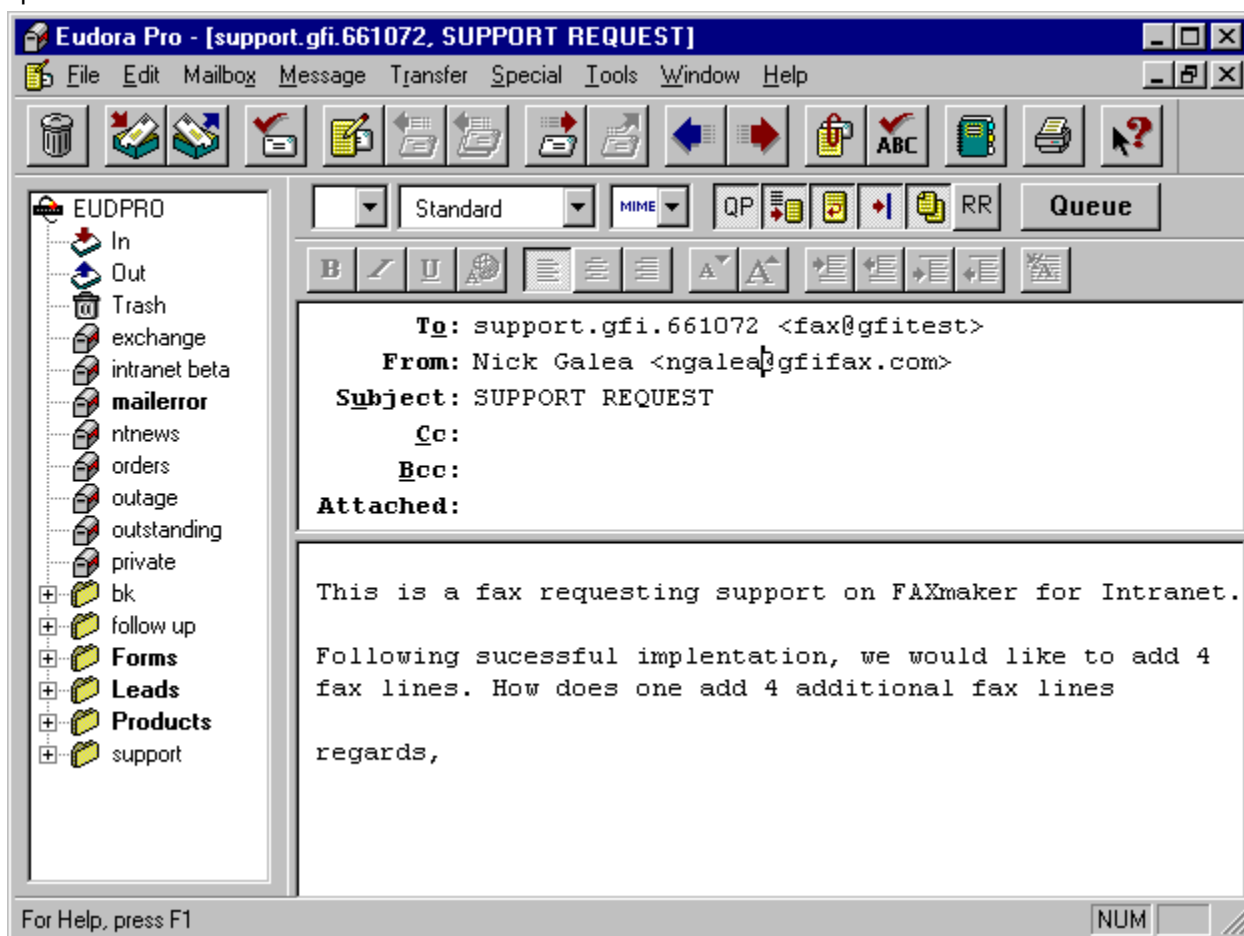

7. You can attach files to your message using the attach file function.

| When attaching files other than FAXmaker fax files, make sure that all fonts and objects that you included in your document are also available to the server. Please contact your administrator for this.


8. When you are ready, click on the 'Send' button. FAXmaker will send the fax, and it will notify you on the status of the fax.

Sending a fax from an e-mail package

To send a fax from an e-mail package, follow the following steps:

As administrator you could try it out by faxing your registration form as an attachment in the e-mail message to GFI FAX & VOICE.

1. Click on the 'To' field in your send message dialog.

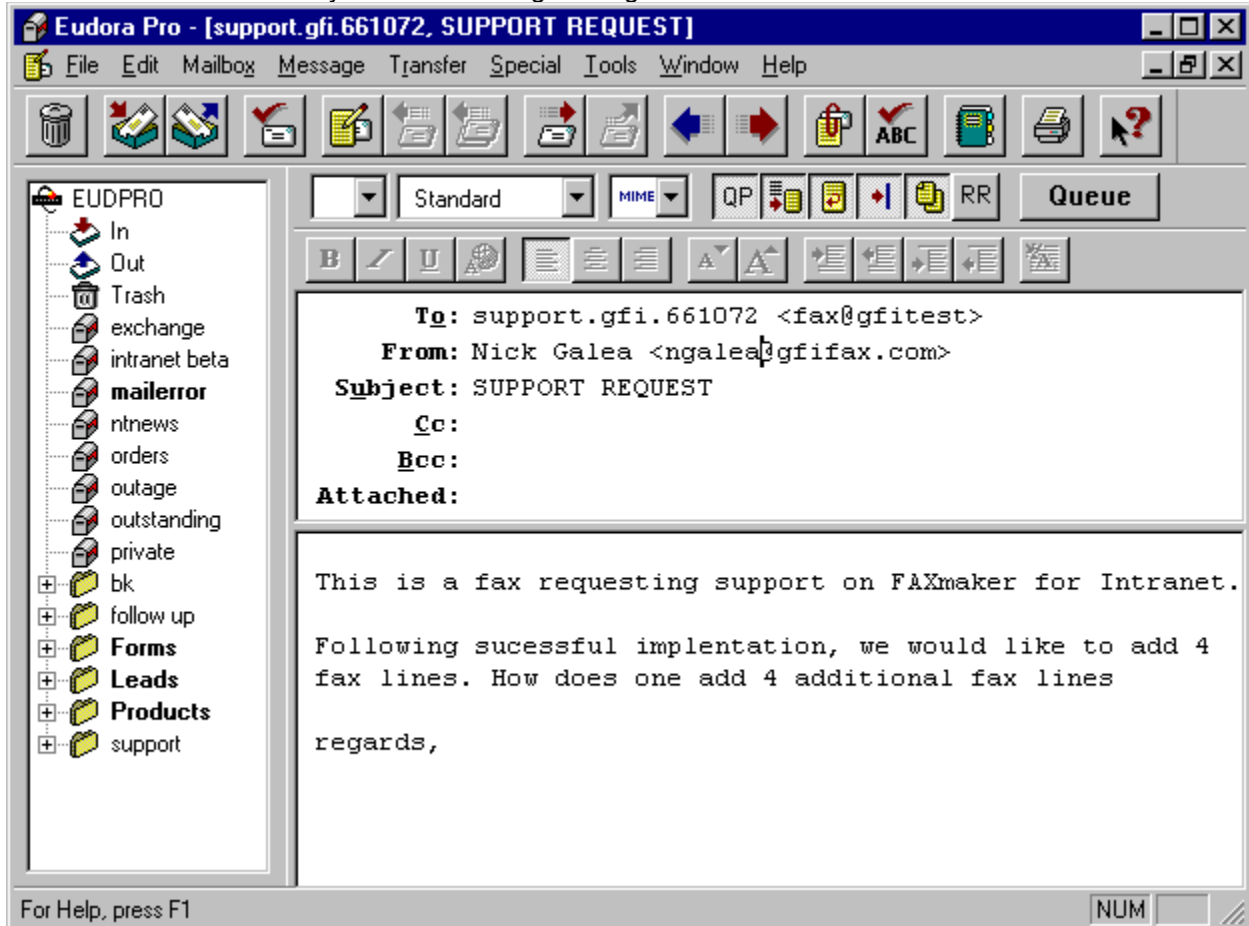

2. Enter the fax number followed by the e-mail address of your fax server in between brackets: <fax@your domain name>. For example:

011,356661072 <fax@gfittest> (The last part depends on which name the administrator used for the fax server mailbox)

If you wish to store this fax number for future use, give it a 'Nickname'. In Eudora this is achieved using the Make Nickname function, or by pressing the [Ctrl+K] key combination.

To have the coverage fill in the recipient name and company, you need to specify them in the address as follows:

support.gfi.011,356661072 <fax@gfittest>

The dot (.) separates the name, company and number field, whereas the underscore (_) indicates a space.

3. You can attach files to your message using the 'Attach file' function.

| When attaching files other than FAXmaker fax files, make sure that all fonts and objects that you included in your document are also available to the server.

4. When you are ready, click on the 'Send' button. FAXmaker will send the fax, and it will notify you on the status of the fax.

Specifying recipient name and company

As mentioned above, if you want the name and company of the recipient of the fax to appear in the coverage page, you need to indicate this to FAXmaker. For reasons of compatibility, the recipient name and number has to be filled in the e-mail address itself.

To indicate the recipient name and company, indicate the name, company and fax number separated by commas, followed by the address of the fax mailbox:

support.gfi.011,356661072 <fax@gfitest>

The dot (.) separates the name, company and number field, whereas the underscore (_) indicates a space.

The recipient name comes first, followed by the optional company field and then the fax number. If the name or company includes spaces, you need to use the underscore character:

support.gfi_fax_&_voice.011356661072 <fax@gfitest>

| Since you can use a nickname for the e-mail address, the inconvenience is limited to the first time you create an e-mail address. In Eudora this is achieved using the 'Make Nickname' function, or by pressing the [Ctrl+K] key combination.

Specifying additional recipients for the fax

You can specify multiple recipients using your e-mail package, but a list of additional recipients can also be added using an extra options line in the body of the message.

To add an additional recipient, simply type a double colon :: followed by name (optional), company (optional) and number, separated by commas at the top of the body of the e-mail message. For example;

::Registration, GFI FAX & VOICE, 00,356661072

You can add a whole series of recipients in this manner.

FAX Options

If you want to send a particular fax using settings, which differ from the default settings set by either your administrator or yourself, you can do this by using the Fax options described in this paragraph. If you want to change your own Fax default settings, please turn to the next chapter 'Remote Administration'.

When sending a fax you can enter send options such as high or normal resolution, schedule time, cover page to be used etc. The options mentioned below should be typed in at the top of the body of the e-mail message, preceded by a double colon <::>. Please note that the recipients of the fax will not be able to see these specifications in the received text.

| You only need to specify fax options in this way, if the defaults, which you or your administrator have set, need to be overridden.

The following options can be used:

More:

[To specify a cover page](#)

[To specify high or low resolution](#)

[To specify a template](#)

[To schedule a fax](#)

[To specify a billing code](#)

[To attach a file to your fax](#)

[Skip Queue](#)

[Multiple options](#)

To specify a cover page

::C=cover page name

For example: **::C=cover1**

'Cover page name' stands for the name of your cover page. If you do not want to send a coverpage, but by default a coverpage is added, you can override this option temporarily by specifying 'none' instead of a cover page name. This will cause FAXmaker not to add a coverpage.

| Remember that the cover page must be stored on the server first, as explained in the chapter 'Remote Administration'.

To specify high or low resolution

::'H' or 'N'

For example: ::H

'H' stands for high resolution (200 * 200 dpi) and 'N' for normal resolution (200 * 100 dpi).

To specify a template

::T=template name

For example: ::**T=template2**

'Template name' stands for the name of the template.

| Remember that the template must be stored on the server first, as explained in the chapter 'Remote Administration'.

To schedule a fax

::nn:mm

For example: **::23:15**

'nn' equals hours and 'mm' equals minutes. If you want to send a fax at a scheduled date or time, this option can be used.

To specify a billing code

::Bnnnn

For example: ::**B5**

'nnn' can be replaced by any number. This number will be added in the log file and can then be used to apportion costs.

To attach a file to your fax

::A=name

For example: ::**A=brochure**

'Name' stands for the name of a fax attachment. Multiple attachments can be added to the fax.

! Remember that the fax attachment must be stored previously on the server, as explained in the chapter 'Remote Administration'.

Skip Queue

::S

For example: ::**S**


'S' stands for skip queue. This option is handy when you have submitted a large fax mailing and you wish to send out this fax immediately.

Multiple options

When you are using multiple options in a message, you must type them on the same line, separated by a comma.

For example;

:: c=cover1, 23:15, B5

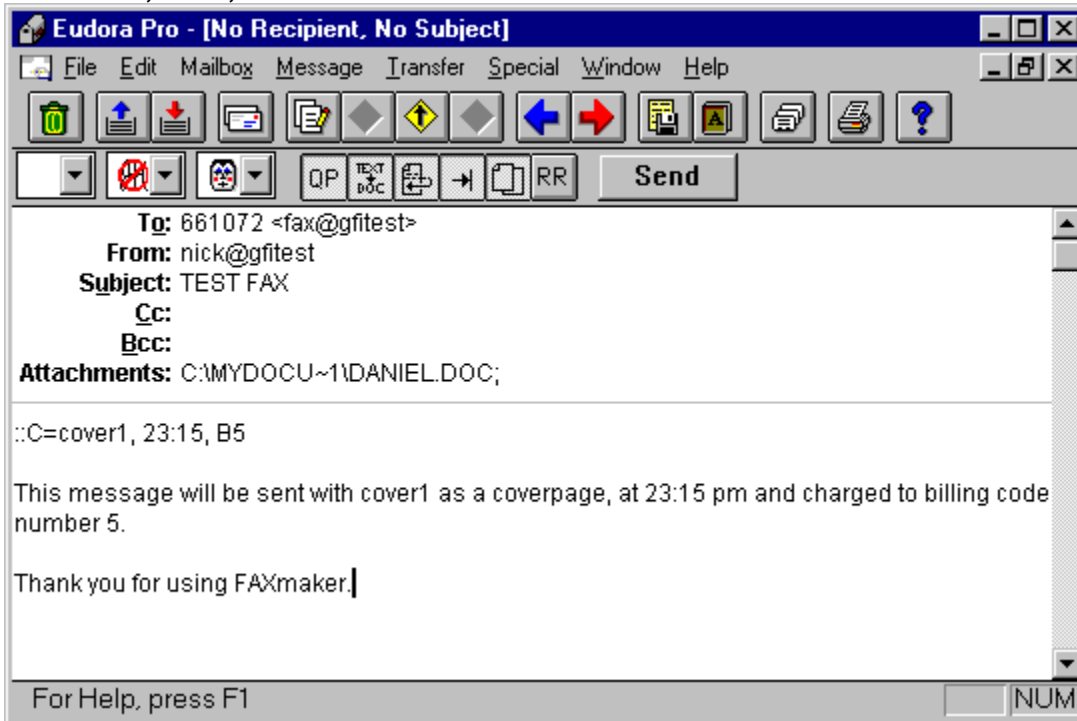

Send a fax using multiple options

This example sends a fax with 'cover1' as a cover page, scheduled for 23:15 hours, and will be charged to billing code 5.

| Remember that prior to using fax options, you must ensure that you have actually stored the attachments, templates and coverpages that you are using.

| FAXmaker is insensitive to case. This means that it does not matter whether you type your text in capitals or not.

Creating a Fax Attachment

Attachments can be useful when certain information is frequently faxed, such as product brochures. As these can be graphics intensive, it makes sense to convert them only once to fax format and store them as fax attachments on your computer. If you want to store an attachment on your Fax server so that other users can also send it out, see the next chapter 'Remote Administration'.

To create a fax attachment on your own computer:

1. Start the application in which the document is saved.
 - a. From the application menu, choose 'Print Setup'
 - b. Select the FAXmaker printer driver and click 'OK'. The e-mail package will pop up.
 - c. Double-click on the attachment. The viewer will convert and load the fax.
 - d. To save the fax as an attachment, simply use the 'Save As' function in the viewer.
 - e. You can either choose to send this attachment immediately, or cancel the send fax process and return to the application.

TIP: You can also use the remote administration feature to create an attachment:

1. Print your document to the FAXmaker printer driver
2. Specify FAXadmin as the recipient: **faxadmin<fax@your domain name>**.
3. Specify the name of the attachment in the subject field of the mail message, using the following command:


A=Attachment name

For example: **A=brochure**

4. Send the message. You will receive a notification that your fax has been stored. The notification will include the ready converted fax file!

Receiving a Fax

Incoming faxes are logged in your mailbox. The message will read 'FAX from', followed by the FAX ID (CSID). To view the fax, double-click on the message, and then double-click on the attachment. The FAXmaker viewer will load and display your fax.

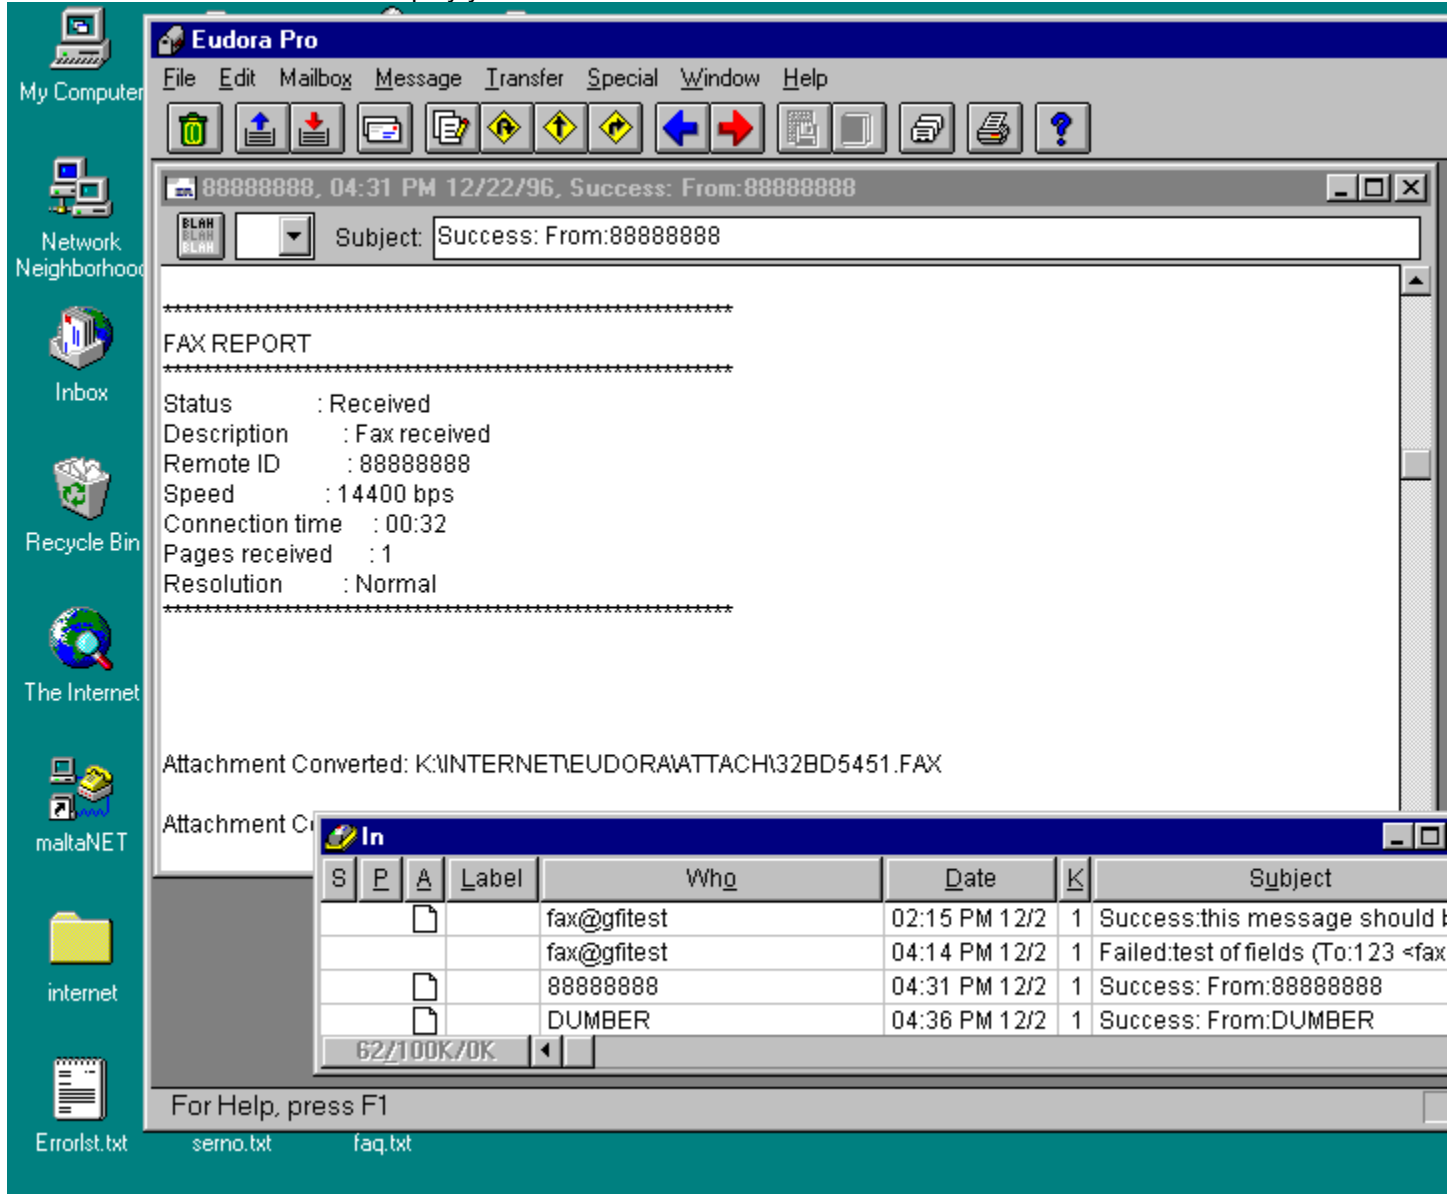

Eudora with a received fax message. The mail message shows the fax report, and the inbox shows the sender's fax ID

Introduction

FAXmaker has a set of options or defaults, which specify how a fax must be sent. These options include which coverpage to use, template, fax attachments if any, and even the resolution at which the faxes must be sent.

The options can be changed by the administrator (from the User Configuration utility on the Fax server, see chapter 'User settings'), but also by the users themselves. In this chapter it is explained how a user can change his or her defaults. Sending a message to the fax administrator can do this. The process is called 'Remote administration'.

| If you just want to change the options for sending one particular fax, please turn to the chapter 'Sending and Receiving Faxes'. You may also choose not to change the options at all and use the default settings your administrator has chosen

FAX admin

Remote administration is done by sending messages to the 'Fax administrator'. Sending a message to the Fax administrator is exactly the same as sending a fax. However instead of entering a fax number in the 'To' field, you enter 'faxadmin'.

For example: **faxadmin<fax@gfitest>**

It is convenient to create a nickname for the fax administrator, e.g. faxadmin (to create a nickname see Chapter 'Sending and Receiving Faxes').

This way the FAXmaker server will know that this message concerns an administration option.

Coverpage administration options

FAXmaker allows users to add multiple coverpages, which can be used interchangeably, and to set a particular coverpage as default.

Before a coverpage can be used, the coverpage file (RTF format) must be stored on the server and must be given a name.

To store a coverpage:

To: **faxadmin <fax@your domain name>**


Subject: **C=coverpage name {,default} { ,delete }**

Attachment: **attach your coverpage**

Do not add multiple attachments. To insert an attachment in your e-mail package, use the 'Attach file' command from the message menu.

If you wish this cover page to be the default coverpage, add ', default' in the subject line.

If you wish to delete this coverpage file and name, add ', delete' in the subject line and do not attach a file.

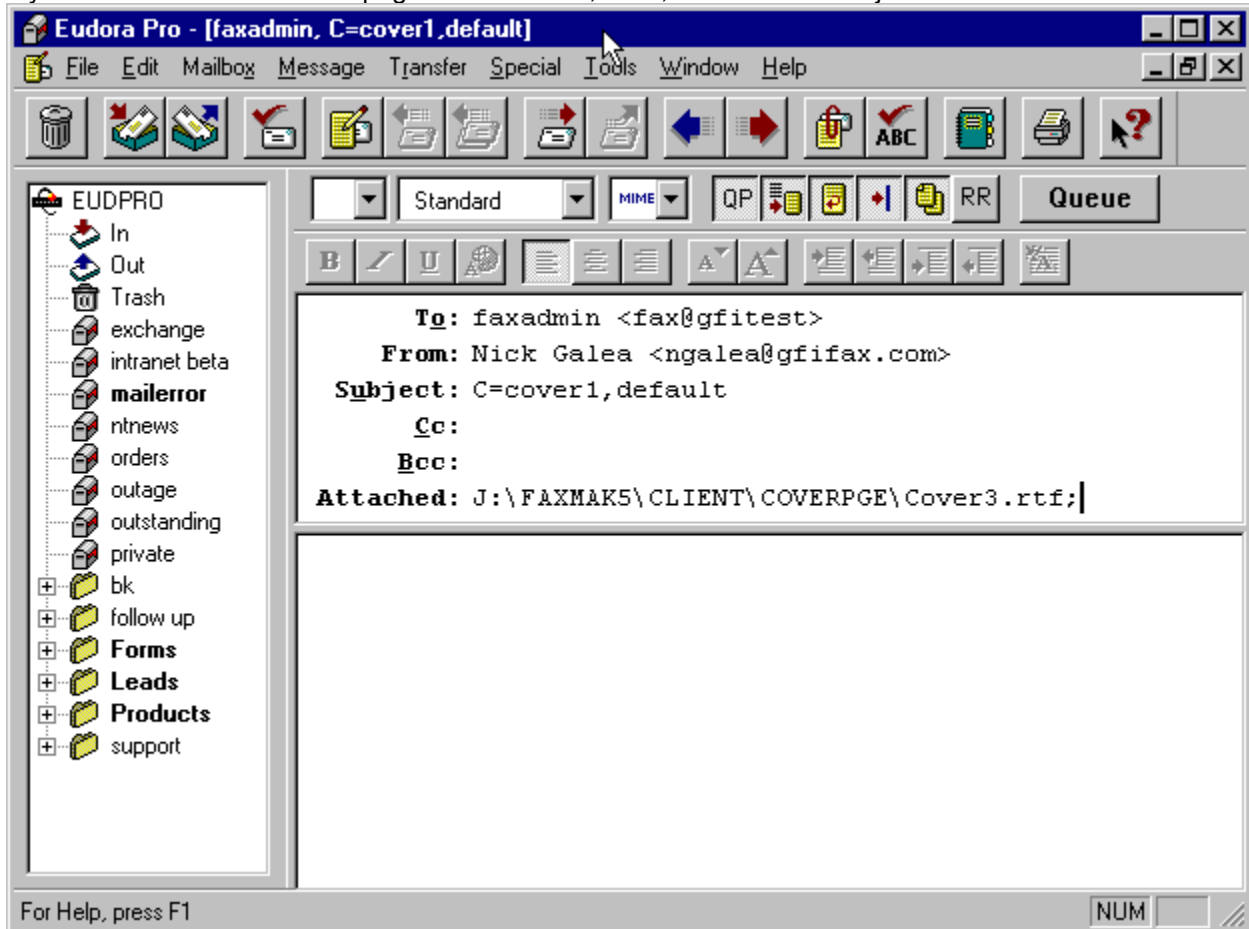

Setting a coverpage as default from your client

Template administration options

FAXmaker allows users to add multiple templates, which can be used interchangeably, and to set a particular template as default.

Before a template can be used, the template file (RTF format) must be stored on the server and it must be given a name.

To store a template:

To: **faxadmin<fax@your domain name>**

Subject: **T=template name{ ,default }{ ,delete }**

Attachment: **attach your template**

! Do not add multiple attachments. To insert an attachment in your e-mail package, use the 'Attach file' command from the message menu.

If you wish this template to be the default template, add ", default" in the subject line.

If you wish to delete this template file and name, add ", delete" in the subject line and do not attach a file.

Attachment administration options

FAXmaker allows users to store attachments, for example a price list or product brochure. The advantage of this is that you do not need to re-send the physical file each time you want to attach it to your fax.

Before an attachment can be used, the attachment (in FAXmaker fax format) must be stored on the server and it must be given a name.

To store a fax attachment:

To: **faxadmin<fax@your domain name>**

Subject: **A=attachment name{ ,delete }**

Attachment: **attach your attachment**

Do not add multiple attachments. To insert an attachment in your e-mail package, use the Attach file command from the message menu.

If you wish to delete this attachment file and name, add ", delete" in the subject line and do not attach a file.

Setting the default fax resolution

Each user can specify the default resolution with which a fax must be sent. A fax can be sent at high resolution, which results in a sharper looking fax, but also in longer transmission times. It can also be sent in normal resolution, which cuts transmission time roughly in half.

To change the default resolution setting:

To: **faxadmin<fax@your domain name>**

Subject: **defaults**

In the Message-body:

Resolution = {high} or {normal}

Setting the FAX header

Each user can specify a personal fax header, to be displayed on top of each fax he or she sends.

To enter a personal fax header:

To: **faxadmin<fax@your domain name>**

Subject: **defaults**

In the Message-body:

FAX header = fax header

Where fax header is the word or number, which will appear on top of the fax.

Setting multiple options at a time

You can specify multiple default settings in one go by adding several command lines.

For example:

To: **faxadmin<fax@gfitest>**

Subject: **defaults**


In the Message-body:

Coverpage = coverpagegfi

Template = templategfi

FAX header = GFI

Resolution = high

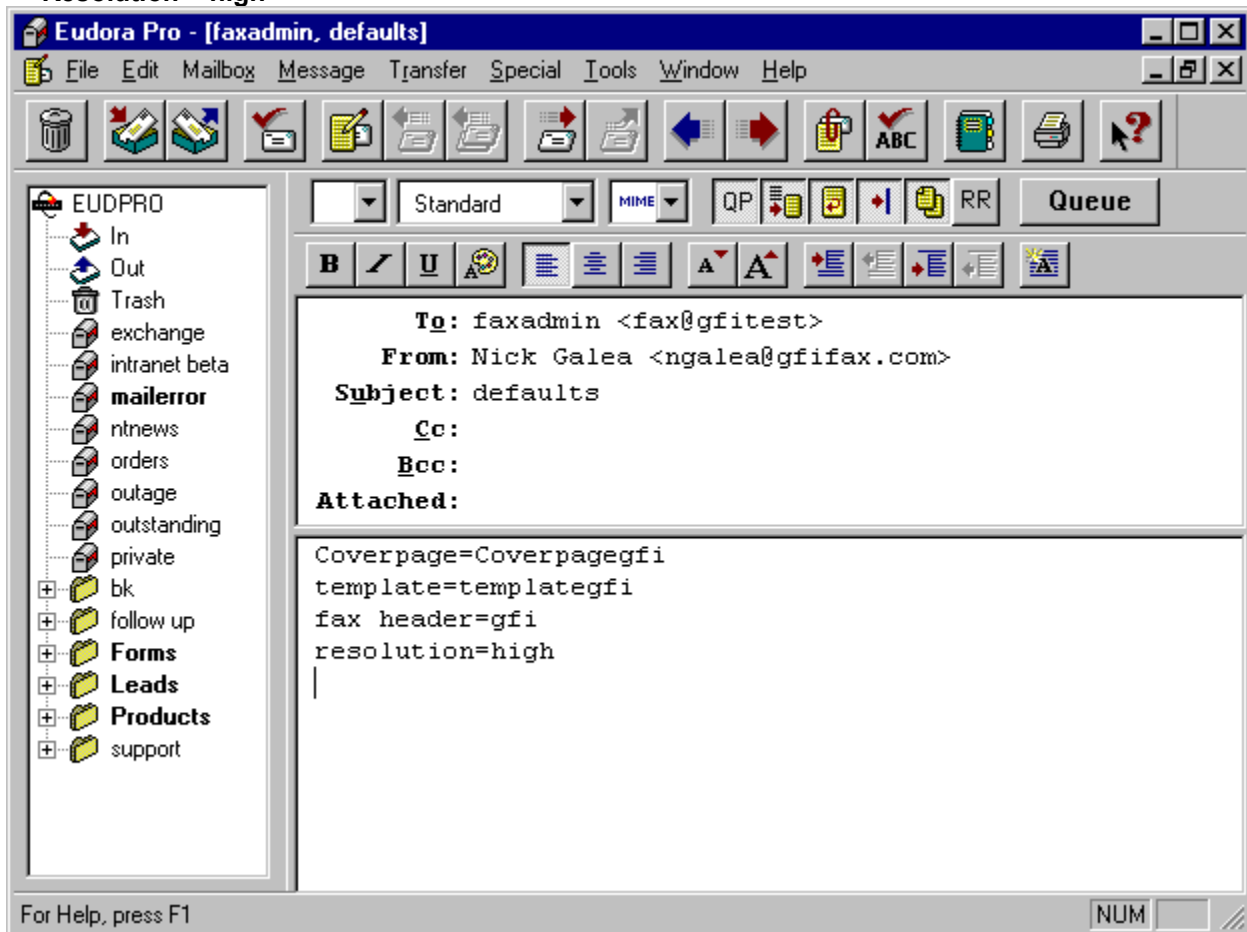

Setting multiple options as defaults

This will set coverpagegfi as the default coverpage, templatgfi as the default template, GFI as the personal fax header and high as the default fax resolution.

Retrieving the defaults

To retrieve all your personal default settings at any one time, simply send a message to faxadmin with defaults as the subject of the message.

To retrieve the defaults:

To: **faxadmin<fax@your domain name>**


Subject: **defaults**

Leave the Message-body empty

| FAXmaker is insensitive to case. This means that it does not matter whether you type your text in capitals or not.

Introduction

With the FAXmaker Viewer, you can view, print and save fax files. The FAXmaker Viewer can be activated by double clicking on the FAXmaker attachment displayed in the message dialog of the incoming or outgoing fax.

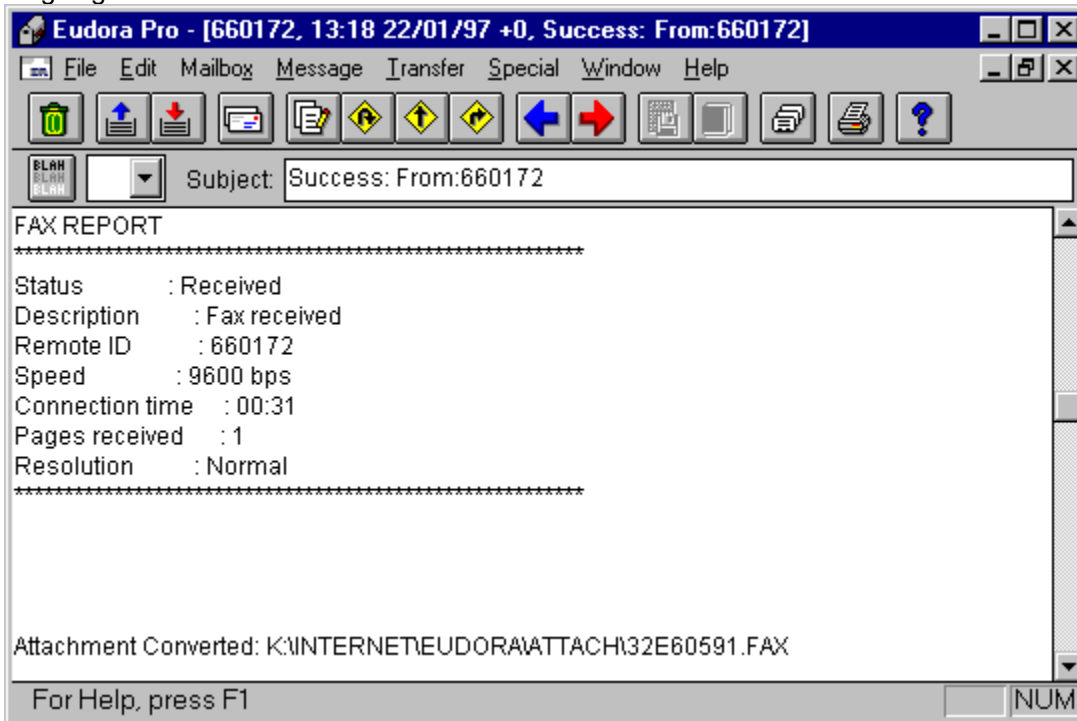

Click on the fax attachment to view a received fax

Viewing Faxes

The viewer can be used to:

1. View incoming or outgoing faxes by double clicking on the fax attachment in the Message dialog of your E-mail package. The FAXmaker Viewer is automatically activated and will display the fax on your screen.
2. Preview outgoing faxes by double clicking on the fax attachment in the Message dialog of your E-mail package. The FAXmaker Viewer is automatically activated and will display the fax as it will be sent.

In the Viewer itself you can:

- a. Preview pages one by one, using the 'Next' or 'Previous' command from the 'Page' menu. When your document is made up of one page, these functions will be dimmed.
- b. Re-size the document on your screen by choosing either the 'Horizontal Fit' or the 'Vertical Fit' from the 'View' menu.
- c. Zoom in or out whilst viewing the document from a number of viewpoints by choosing an appropriate zoom value from the 'View' menu.
- d. Invert the image by choosing the Invert command from the 'View' menu.
- e. Flip the image if the fax was received upside down.
- f. Print the document to your local printer by choosing the 'Print' command from the 'File' menu.

Scale to Grey

The advanced fax viewer, available for Windows 95 and NT 4, includes a scale to grey option (located in the view menu), which allows you to view the fax at a much higher resolution.

Fax annotation

In Windows 95 or NT 4, you can annotate faxes using the advanced FAXmaker viewer. The following annotation tools are at your disposal:



Annotation tools

1. Select 'Annotation'.
2. Draw freehand line.
3. Highlight a particular section of a fax.
4. Draw a straight line.
5. Draw a rectangle.
6. Draw filled rectangle.
7. Add text to a fax.
8. Attach a note.
9. Add text stored in a file.
10. Add a stamp.

To change any of the defaults the tools, right click your mouse above a tool and select properties. The default stamp texts can for instance be changed in this way.

| Save your annotations! Your annotations are only made permanent if you select save from the menu.
.The FAXmaker viewer

Windows NT 4/95 only, other platforms do not include annotation.

Server software problems

"The modem does not dial out."

In some cases your modem may not dial out, returning the error message "No dial tone". The problem could be caused by the fact that not all export modems recognise the dial tone. To solve this, disable "Wait for Dial Tone" in the Fax setup window of the server, as explained in the Chapter 'The Fax server'.

FAQ on <http://www.gfifax.com>

A FAQ is a list of frequently asked questions. GFI FAX & VOICE maintain a support FAQ, which lists answers to most common problems. If you have a problem with FAXmaker and have access to the INTERNET, please read this FAQ first.

The FAQ's website URL is <http://www.gfifax.com/pages/intrafaq.htm>. The FAQ is located under the section 'product support'.

The web site will always have the most up to date listing of support questions and patches.

How to request for support

If, after using the FAQ and this manual, you have any problem which you cannot solve yourself, please send an e-mail to support@gifax.com. We will send you a reply as soon as possible.

Be sure however to register your product on the web site first at <http://www.gifax.com/pages/regform.htm>.

You can also contact your dealer or distributor or contact one of GFI's offices.

