

Table of Contents

Copyright

Introduction to ClipMate

QuickStart

Features new to version 3.1

Features new to version 3.0

Other Features

Windows 95 Issues

How is ClipMate different than ClipBook?

Installation

Basic Installation

Advanced Installation

Main Window

Main Window Overview

Layout - Full vs. Brief

Clip Item Selection List Box

Toolbar

Menus

Magnification Window

Magnification Overview

ThumbNail Window

Visual Selection by ThumbNail

Advanced Topics

Clipboard Formats

Application Profile

Troubleshooting

Memory Management with "Load On Demand"

Tips, Hints, Q&A

Tips for the Power User

Questions & Answers

Registration/Ordering Information

Purchasing a Registered Version of ClipMate

Pricing

Registration Benefits:

BONUS for Registered Users!

Placing Your Order

Upgrading From A Previous Version Of ClipMate

Shareware Marketing - What is it?

How Do I Get Rid Of The Annoying *Registration Reminder* Screen?

Service & Support

Ordering, Downloading, and Contact Information

Support Policy

ASP

Copyright

Copyright © 1991-1995 Thornton Software Solutions

All rights reserved.

Any use of the *unregistered version* of ClipMate past the 30-day evaluation period is prohibited, and a violation of the copyright.

For license, warranty, and disclaimer, see: VENDINFO.DIZ

QuickStart

Note: The QuickStart guide appears when you run version 3.1 for the first time. After that, it can be accessed from ClipMate's HELP menu.

QuickStart Checklist:

- Install ClipMate - See: [Basic Installation](#)
- Are you using Windows 95? See [Windows 95 Issues](#)
- Old Users - See [Features new to version 3.1](#)
- New Users - See Below

Basic ClipMate Operation

As you Cut and Copy data from other applications, and before you paste it anywhere, ClipMate will *automatically* make a copy of the data for itself, and store it internally. In other words, everything that you copy, from any application, is automatically captured in ClipMate. ClipMate isn't limited to just TEXT, either. ClipMate supports most clipboard formats, including Bitmap, Picture, Rich Text Format, and even OLE objects.

For each item of data (clip item), a title is formed - from the first 50 characters of text, if it is text data, otherwise the title will be composed of the name of the creating application, the nature of the data (PICTURE, BITMAP, etc.), and a serial number. The titles are visible in the Clip Item Selection List Box, which is the drop-down box beneath the toolbar.

When you're ready to paste an item somewhere, just select it from the Clip Item Selection List Box, and it is automatically placed back onto the clipboard, ready for pasting. The Thumbnail Selection Window can be used to pick an item visually, with the same effect as selecting from the drop-down list. You can use the Magnification Window to preview an item, and edit it (if it is text data).

Don't worry about the file options in the File Menu. By default, ClipMate will maintain all of the data for you, in the DEFAULT.CLM file. This default arrangement is perfect for most users, especially beginners. (Advanced users may want to have multiple data files). You may be prompted to save when closing ClipMate, but you can have this automatically confirmed, through the User Preferences dialog box.

Important! *ClipMate can't do its job if it isn't running. We suggest placing ClipMate in your startup group (just the ClipMate icon - not all of them) so that it is always available to capture your data, not just when you have the foresight to run it before-hand.*

Beyond The Basics



The Delete button will delete the selected item. (Currently shown in the Clip Item Selection List Box)



The Print button will print an item, but only if it is text.



Use the Glue button to put ClipMate into a mode where every time you copy some text, instead of

creating a new item in ClipMate, it just adds to the previous item. The drop-down list just shows an "in process" message, letting you know that Glue is working. When you're done copying your data, press Glue again, and you've got all of the data, in one item - ready to paste.



The Magnification Window lets you view an item, assign a title, and if it is TEXT, you can edit and re-format the data.



The two buttons on the right end of the toolbar allow you to switch between the Recyclable List and the Safe List. Click on them, and you'll see that they act like radio buttons - when one is pushed, the other pops out. By default, all data will go into the Recyclable List, which will grow to 100 items, after which, an old item is automatically deleted for every new item that is created. New data on top, old data on bottom. The Safe List, however, doesn't manage itself automatically. Data stays there until you delete it. This is a good place to keep often-used names, addresses, boilerplate text, graphics etc..



Use the Copy To Safe button to Copy items from the Recyclable List into the Safe List, where they stay forever (or until you delete them).

If your data has unwanted line breaks in it (this often happens when you glue things), use the Flow Paragraph option from the Edit Menu or the Magnification Window, to re-format.



The other button (two buttons actually) on the top row of the toolbar is for PowerPaste. PowerPaste is a very useful feature lets you paste data in rapid succession. If you have copied a series of items that you want to paste somewhere, as individual items, use PowerPaste. You just copy all of your data, select the first one in ClipMate's drop-down list, and activate PowerPaste (use the top plug to work your way from oldest to newest, and the bottom plug for newest to oldest). Then go to the target application, and just start pasting. ClipMate will know that you've pasted, and automatically advance to the next item in the series. Give it a try! You'll find many uses for this.



Next to the Clip Item Selection Drop-Down, is the Multi-Select button. This opens a dialog where you can pick multiple items to be used in a Delete, Print, Move-to-save, or Glue operation.



The Thumbnail button opens the Thumbnail Selection window, where you can visually select an item for pasting.

Finally, you'll want to investigate how the Application Profile can be used to selectively capture certain data formats, while leaving the "garbage" behind. ClipMate will make some default choices, based on typical use of popular applications. But the defaults may not suit your needs or application suite, so we've made it easy to customize ClipMate to capture only the data that YOU need.

Also See:

- [Features new to version 3.1](#)
- [Features new to version 3.0](#)
- [Purchasing a Registered Version of ClipMate](#)
- [Main Window Overview](#)
- [Tips for the Power User](#)

Features new to version 3.1

Auto-Save

ClipMate can now save data on an interval, to protect from data loss due to system crashes. See: User Preference Dialog Box.

Windows 95 Compatibility

Although ClipMate is not yet a 32-bit application, it runs well under Windows 95. We made some minor changes to accomodate the new clipboard formats that Windows 95 uses, and the new user interface.

Auto-Backup, with Recovery

In case of system failure while ClipMate is saving its file, or a severe data incompatibility, ClipMate now has a backup/recover feature, to prevent data loss.

WordPerfect 6.1 Compatibility

ClipMate had a hard time recognizing data formats from the new release of WordPerfect. Not any more!

Bug Fixes

Yes, we found a few. See the CLMREAD.TXT file for a list of what's been fixed.

Also See: Features new to version 3.0

Features new to version 3.0

ClipMate 3.0 has many enhancements that can help make you more productive than ever before! Anyone who has used ClipMate 2.0 will appreciate the completely-redesigned [FILTER](#) facility, now known as [Application Profile](#). There are also several features that make ClipMate more useful when run as an Icon, such as "Sticky Icon", "Icon [Title](#)", and "Control Menu". There is even a feature to indent/un-indent blocks of text.

The new features are listed below, and are explained in greater detail later on. In case you haven't used the previous 2.0 release, be sure to review the section titled [Other Features](#).

Application Profile - The Improved FILTER facility

Previously known as FILTER, this feature has been completely re-designed to make it more user-friendly. In most cases, it will determine the correct settings, with no user intervention.

The Application Profile instructs ClipMate to collect only the data formats that YOU wish to work with, and discard the rest. For example, Microsoft's *Word for Windows 6.0* provides [clipboard](#) data in 8 different formats - most of which are redundant, and are provided for OLE purposes, or for compatibility with applications that you may never use! Without a way to omit the formats that you don't need, you would quickly be buried by data, and no matter how fast your processor is, you would experience dramatic slowdowns when copying data.

ClipMate's Application Profile is smart enough to pick and choose the data that you want, leaving the rest behind. This greatly speeds the copying process, and reduces the amount of memory and resources consumed. Furthermore, ClipMate 3.0 uses a "stealth" technology, which in most cases, will build the Application Profile with no intervention needed on your part. It is easy for you to override the default decisions, if you need to. **See: [Application Profile](#).**

Support For 16-Bit Bitmaps

Video drivers that support 65,000 simultaneous colors are now supported, along with 24-bit drivers, supporting 16 million colors.

Sticky Icon

ClipMate now features the ability to lock the icon position, so that whenever it is minimized to an icon, the icon will always be in the same place. It "sticks", so to speak. Quickly toggle this feature from the CONFIG menu, or the CONTROL menu. **See: [Lock Icon Position](#).**

Icon Title

ClipMate now has the ability to use the title of the current [Clip Item](#) as the title shown under the Icon when it is iconified. Toggle this option in the User Preferences dialog, found under the CONFIG menu. **See: [User Preference Dialog Box](#).**

Control Menu

Many of the options listed under the various menu headings have been duplicated in the CONTROL

menu, also known as the SYSTEM menu. This is the menu that shows when you click on a running icon, or on the square button on the upper-left of most apps.

The significance of this menu is that you can get to most features while ClipMate is iconified, running in Brief View, or if you turn off the main menu. Used in conjunction with the Icon Title, ClipMate is quite usable in the iconified state. **See: Control Menu.**

Main Menu Is Optional

If you don't need the main menu, turn it off. You can still access many options from the Control Menu. Toggle this option in the User Preferences dialog, found under the CONFIG menu.

Auto Capture Can Be Disabled

If you don't want ClipMate to capture data, you can easily make it ignore new clipboard data. Just toggle the state with this new menu option, found in the CONFIG menu. **See: Auto Capture.**

Select Next/Prev Item From Menu

Instead of selecting an item from the drop-down list, ThumbNail View, or Magnify, you can use the "Select Previous Item" or "Select Next Item" menu options, found under the View menu. As long as the ClipMate window has focus, you can use the Ctrl+P and Ctrl+N hotkeys, respectively. **See: Select Previous/Next.**

Flow Paragraph

This feature has now been brought out to the Edit menu, for convenience. It still resides in the Magnification Window, as well.

Magnification Window

The << and >> buttons will shift a block of text to the left, or to the right, respectively. Programmers, and users of 3270 Emulators, will appreciate this feature, as it lets you indent blocks of text easily, when the editor at hand just won't do it. **See: SHIFT TEXT << >>.**

Also See: Other Features.

Other Features

Support for Graphics, and other Large Data types

ClipMate supports non-textual data types, such as BITMAP, PICTURE, RTF, and even OLE objects. ClipMate's advanced memory management and filtration facilities allow you to collect these large data types without draining your system memory and resources.

For more information see: [Clipboard Formats](#).

PowerPaste

ClipMate has always had the ability to *automatically* collect data in the background, as you work within your application. PowerPaste lets you use your data just as easily. Simply turn PowerPaste on, go to your application, and start pasting. When ClipMate detects that you've pasted data, it *automatically* advances to the next clip item. Paste again, and you get the second item of data. Paste once more, and you get the third item. You have the option of working your way up the clip list (toward newer data) or down the clip list (toward older data).

This feature is particularly powerful when working with applications that won't accept Glued data, such as an order-entry screen.



See: [PowerPaste™](#).

Load On Demand

Large data types such as BITMAP, PICTURE, RTF, and OLE, require a lot of memory. ClipMate normally stores these large items on disk, until needed. When you access a Clip Item, ClipMate checks to see if it is in memory, or on disk. If it is on disk, it automatically re-loads the item for you.

See: [Memory Management with "Load On Demand"](#).

ThumbNail View

Using the ThumbNail View Window, you can see a grid of ThumbNail sketches of BITMAPs, PICTUREs, or even text. The grid is configurable to display images in a grid ranging from 2x2 to 8x8, with an option to show graphics, text, or both. When viewing thumbnails of text items, you can use a very small font, so that you can visually select text items by their appearance.

See: [Visual Selection by ThumbNail](#).

Drag and Drop

You can use the File Manager to drag and drop BITMAP files (.BMP) onto ClipMate. They will then be available to paste into other applications, without the work of copying them from another application, such as Paintbrush. They behave like regular clip items, except that the actual .BMP files will NOT be deleted from the disk by ClipMate when the clip item is deleted from ClipMate, or during the normal purge process of the recyclable list.

Windows 95 Issues

Is it August 24th yet? If so, then you're probably wondering about Windows 95, whether ClipMate will still run, and whether the new environment makes ClipMate obsolete. And what about these new "32-bit" applications? Will ClipMate be 32-bit?

ClipMate runs Just Fine under Windows 95

ClipMate 3.1 is a 16-bit software product. That means that it will run under Windows 95, but runs in a common memory area along with other 16-bit applications. This has no impact on what programs it can work with. Only that it is vulnerable to other 16-bit applications crashing, overwriting memory, and locking up. Also, all of the 16-bit applications will multi-task as a group, and not "pre-emptively". The good news in this is that it runs fine, just like it always did under Windows 3.1. In fact, here at Thornton Software Solutions, we only use Windows 3.1 for testing. We've been using NT since 11/94, and the Windows 95 preview since 3/95. We would never go back!

Obsolete? No Way!

The clipboard in Windows 95 is essentially the same as the clipboard found in previous versions of Windows for Workgroups. None of ClipMate's functionality has been incorporated into the native clipboard. So, you still need ClipMate.

32-bit Is Coming!

We are working on a port to a full 32-bit version right now. There are two steps involved here, (if you care). First, we are porting from Borland's Turbo Pascal to Borland's slick new Delphi environment. We have already identified thousands of lines of code that we can simply discard, when we adopt some of Delphi's built-in features. All of our custom toolbar code, and most of the bitmap manipulation code can simply be replaced by Delphi properties and functions. And Delphi makes slick new interface features like tabbed dialogs, easily available.

Borland has promised to ship the 32-bit version of Delphi "shortly after Windows 95 ships". We figure that we will have it before year-end. It should be a simple matter to re-compile for 32-bits. We MAY at that time, add some new features, which should be easy to accomplish under the Windows 95 environment, such as Rich Text Format display in the Magnification Window.

The New Version

The new version will likely ship in Q1 '96. It will sport a beautiful new interface (thanks to Delphi), and will come in BOTH 16 and 32-bit versions. You'll get both versions for one price. Availability, features, pricing, and upgrade policy are not yet established.

IMPORTANT: See [Ordering, Downloading, and Contact Information](#) to find out where you can get information on the upcoming 32-bit version.

Related Topics:

[Running ClipMate 3.1 Under Windows 95](#)

Running ClipMate 3.1 Under Windows 95

ClipMate should perform well under Windows 95 as a 16-bit application. It will work with both 16 and 32-bit applications.

There are just a few things that you should know about running ClipMate under Windows 95. (Based on pre-release build 490 - the June beta)

New Clipboard Format - Locale

A new clipboard format has been added, called "Locale". It is supposed to be used by applications to consider the nationality of the local language when selecting the font to use when pasting text. We don't know if it is really useful or not. If you work in English, there is probably no need for it. If you work in a non-English character set, it might be useful to turn on. We would be interested to know where and when it is useful!

Window Sizing Issues

ClipMate's main window (the one with the toolbar on it) doesn't dynamically re-size itself as system elements, such as the menu bar height or title bar height, change. This wasn't a problem before, as they never changed. However, Windows 95 lets you change all of this. Therefore, you can end up chopping off part of ClipMate's window. We have added some manual override settings, as a temporary work around (we'll fix this in the 32-bit release).

In the \systemdirectory\CLIPMATE.INI file, you can add two new settings under the [ClipMate] section:

```
[ClipMate]
H=101
W=320
```

These are default values - play with them until things look right. You will probably be adding 5-10 units (pixels) to the H (height) value.

Re-Start ClipMate to see the change.

Sticky Icon Won't Stick

Windows 95 doesn't allow icons to be placed anywhere but the toolbar, so the sticky icon feature doesn't apply. It doesn't hurt anything, it just doesn't work. This feature is quickly becoming obsolete, and will eventually be removed.

Lost, or Duplicate INI Files

ClipMate stores all of its important settings, such as window placement, registration number, and the serial number of the next item, in the CLIPMATE.INI file. This is stored in your system directory, such as C:\WINDOWS, C:\WIN95 or D:\WINNT35. If you upgraded to Windows 95, and placed the new software in the old directory (ex: C:\WINDOWS), then there will be no problem. However, if you installed "clean" into a new directory, then there is the strong possibility that you are causing the old CLIPMATE.INI file to be abandoned, and a new one to be built. This can be bad for two reasons: 1) It forgets your registration number, and 2) the serial number will be reset to zero.

The registration number is just inconvenient - the serial number can cause data loss. You see, items will

re-cycle the serial number, causing items to be over-written, and the associated data files to be orphaned.

You can easily verify this - are there multiple copies of CLIPMATE.INI in various system directories? If so, then take the one that you've always used, and move it to the new system directory (ex: copy c:\windows\clipmate.ini c:\win95\clipmate.ini).

Note: This strategy doesn't work if you want to dual-boot. If you want to really have two operating systems, each using ClipMate, then you must have two .ini files. So... edit one of the .ini files, and set the serial number to 10000 higher than the other one. That way, they (probably) won't overlap. Not for a long time, anyway. Don't set higher than 32000 - this would cause an error.

How is ClipMate different than ClipBook?

Maybe you've seen the ClipBook application that comes with Windows 95, Windows NT, and Windows for Workgroups 3.11. This is an improvement over the old clipboard, but it is still far from ideal. ClipBook doesn't capture data *automatically* - you have to manually add each item, and give it a title.

ClipMate has powerful features such as Glue, PowerPaste, and Print.

ClipMate's memory management, automatic data management, and flexible interface makes it convenient and practical to keep hundreds of items on hand. ClipBook, by comparison, is cumbersome and memory intensive.

ClipMate is the only clipboard utility that filters-out unwanted data formats (See Application Profile). Most of today's applications, especially those that use OLE, can provide data in a variety of formats (Excel 5.0 provides 21 separate formats). You don't want all of those extra formats! You don't have the time to wait for them to be generated, and you don't have the space to store them! ***ClipMate is the only clipboard utility that lets you specify which data formats you will work with.***

Basic Installation

System Requirements

Installation

System Requirements

To run ClipMate, you will need the following:

Microsoft Windows 3.1, Windows 95, or Windows NT.

VGA (or better) video.

Minimum 500K disk space (for the program and typical collection of data).

Minimum 4MB of RAM, if you wish to collect large data types, such as Bitmaps.

Installation

Note: You can install directly from a floppy disk, or from a hard drive. These directions assume that you're installing from the A: floppy, and that the files are de-compressed. Make appropriate substitutions if you are using the B: drive, a CD ROM, or have already copied the files to a directory on your hard drive.

1. From the Program Manager's FILE menu, choose the RUN command.
2. Enter **A:Setup**
3. You will be presented with the CLMREAD.TXT file, from within Notepad. Be sure to read, any WARNINGS that are present. Quit out of Notepad, by selecting FILE | EXIT.
4. You will then be presented with the installation dialog box. By default, ClipMate will be installed into **C:\ClipMate**. If you wish to override this, just highlight and overwrite the directory in the "Install to Directory" field. Press OK to continue.
5. The files will now be copied. Note that if the source and target directories are the same, then no files will actually be copied. Also, if you are installing on top of a previous version of ClipMate, then you may be prompted to approve replacement of files with the same name.
6. The next prompt will ask you whether or not the ClipMate icon should be added to the Program Manager. If you answer OK, then the setup program will create a ClipMate group, and place the ClipMate icon in it, along with icons for various documentation files. It is strongly suggested that you move or copy the ClipMate icon to the STARTUP group, so that it will run automatically, every time that you start Windows.
7. If you are installing over a previous version of ClipMate, your data will be converted to the new format when you first run ClipMate. If you have multiple files, you'll have to open and save each one separately from within ClipMate. By default, ClipMate will try to store all new data files in the \CLIPMATE\DATA subdirectory.

Also See: [Advanced Installation](#)

Advanced Installation

Windows 3.1 users can take advantage of the HOTKEY, RUN MINIMIZED, and STARTUP GROUP features that are inherent to Windows 3.1 (and presumably any future releases of Windows).

Related Topics:

[Home Directory](#)

[Network Installation](#)

[Hotkey](#)

[Run Minimized](#)

[Startup Group](#)

[Specifying Data Files](#)

[De-Installation](#)

[Distribution Files](#)

[ClipMate.INI](#)

[CLIPFLTR.INI](#)

[What ClipMate Does to Your System](#)

[Known Problems](#)

Home Directory

ClipMate will normally be launched from an icon, which sets the "current directory" to the directory from where ClipMate is run from (ex: c:\clipmate). However, with certain program launch programs, the "current directory" isn't set properly, causing ClipMate to lose track of where the data files reside. If you suspect that this is happening, simply add the following line to the [ClipMate] section of CLIPMATE.INI (found in your Windows directory):

```
Home Directory=c:\clipmate
```

Network Installation

You can share ClipMate executable files, help files, DLL's, etc., on a shared network drive. However, the data must be kept private, either on the user's home directory, or on the local drive. In each user's CLIPMATE.INI file, set the Home Directory to wherever you'd like the data to be stored (actually, the data will be stored UNDER that directory). Use something like:

```
Home Directory=H:\users\username\clipmate
```

This will have to be done in EACH USER's clipmate.ini, found in the windows directory.

Hotkey

You can set a hotkey combination to activate ClipMate (once it's running) and bring it to the top of all other windows. To use, highlight the ClipMate icon in the Program Manager (the one that's actually on the Program Manager, NOT the one that represents the running application). Select FILE | PROPERTIES from the Program Manager's menu. You will be presented with the Properties dialog box for ClipMate. Click your mouse in the Hotkey field. Give it a hotkey, probably some combination of Ctrl + Alt + whatever you want. We use Ctrl+Alt+C (C as in ClipMate!).

Run Minimized

If you normally wish ClipMate to be iconified when run, you can set the properties of the ClipMate icon to cause ClipMate to start as an icon. To use, highlight the ClipMate icon in the Program Manager (the one that's actually on the Program Manager, NOT the one that represents the running application.) Select FILE | PROPERTIES from the Program Manager's menu. You will be presented with the Properties dialog box for ClipMate. Check the Run Minimized check box. That's it!

Startup Group

The Startup Group is a Windows 3.1 feature that lets you easily determine which programs will automatically execute when Windows is loaded. You will probably want to put ClipMate in your startup group.

Specifying Data Files

If you wish to use a filename for your data, other than DEFAULT.CLM, you can specify your filename as a parameter to ClipMate. In this case the Command Line in the Program Manager would be:

```
C:\ClipMate\ClipMate.exe myfile.clm
```

De-Installation

In the event that you need to de-install ClipMate, there is a short write-up in the CLMREAD.TXT file.

Distribution Files

The following files are provided with ClipMate, and constitute a complete ClipMate package:

- CLIPMATE.EXE - The executable program - requires Windows 3.1
- CLIPMATE.HLP - Help file
- CLMICON.S.DLL - Dynamic Link Library to support the Toolbar
- MYTOOLS.DLL - DLL to provide some library routines from Delphi.
- CLMREAD.TXT - README file with any special considerations or installation notes
- CLMREG.TXT - Registration form
- DEFFLTR.INI - Default settings for Application Profile (FILTER)
- FILE_ID.DIZ - BBS Standard Description File
- SETUP.EXE - Installation Program
- SETUP.INF - Installation Program
- SITELIC.TXT - Registration form for Site Licenses, Multi-User Licenses
- VENDINFO.DIZ - VENDINFO File for BBS and Vendor distribution
- VENDOR.DOC - Not Used - points back to VENDINFO.DIZ
- VENDOR.TXT - Not Used - points back to VENDINFO.DIZ

Obsolete Files:

- HINTS.TXT
- FILTER.CLF

ClipMate.INI

The ClipMate.INI file holds various settings and preferences, and is saved every time that ClipMate is shut down, whether or not a change has actually taken place. It has nothing to do with the ASK USER vs. ALWAYS SAVE option, found in the CONFIG screen.

If you ever need to restore default settings, you can delete any and every line in this file, except for the lines containing SerialNumber, Registered Name, and Registered Number.

Note: CLIPMATE.INI is stored in your Windows directory. With the advent of Windows 95 and Windows NT, this often varies. ex: C:\WINDOWS, C:\Win95, C:\WINNT35.

CLIPFLTR.INI

This file holds the "Application Profile" settings. It is stored in ClipMate's home directory, and is initially populated from DEFFLTR.INI, which provides default values for some popular applications. As ClipMate experiences data from applications not already listed in this file, it will grow. Feel free to share this file with others - especially in a workgroup or LAN situation, where you and your co-workers use the same applications. If you come across a popular application (especially a new version) that isn't already listed in this file, please feel free to Email or Fax the resulting profile information to us, so that we can include it with future releases of ClipMate.

What ClipMate Does to Your System

The first time that you run ClipMate, it will create \Windows\ClipMate.ini. WIN.INI is not altered in any way, nor are any of your other system files.

ClipMate will create a \clipmate\data directory, where it will store the data that it collects. You will be prompted for permission to create this directory when ClipMate is run for the first time.

ClipMate will save the clipboard data into DEFAULT.CLM, or another .CLM file that you specify.

Known Problems

Norton Desktop for Windows users will need to upgrade to Norton Desktop version 2.0 in order to use ClipMate. Also, see write-up in CLMREAD.TXT

If you ran ClipMate 3.0 under Windows 95, then your CLIPFLTR.INI was likely corrupted. It will be replaced when you first run version 3.1.

Main Window Overview

ClipMate's Main Window contains a drop-down Combo Box, showing the title of the currently-selected clip item, a toolbar, and pull-down menus. Buttons and menus provide access to other ClipMate windows, and functions. Often, the buttons will change their appearance, to indicate a particular mode of operation, or they may be grayed-out, to indicate the inability to access a particular function.

For More Information See:

Clip Item Selection List Box, and


Toolbar.

Layout - Full vs. Brief

ClipMate gives you the option of displaying all of its graphical controls, along with the Menu (Full Layout), or just showing some of the graphical controls, with no Menu (Brief Layout). When in Brief Layout, some of the missing controls and menu options can be found in the Control Menu. An alternative to Brief Layout is to run as an Icon, which also benefits from the Control Menu.

See [Control Menu](#).

Clip Item Selection List Box

Master The ClipBoard with ClipMate! 

The Clip Item Selection List Box is your primary method for recalling data back onto the clipboard. You will use the mouse to activate it, and then make your selection from it's scrolling list of Clip Item Titles. Once you've made your selection, the selected Clip Item is copied onto the Clipboard. When performing certain operations, such as a Multi-Selection, Auto Glue, or if ClipMate doesn't have a currently selected item, it will show a status message in this space.

Related Topics:

[Using the Mouse](#)

[Using The Keyboard](#)

[Rules of Thumb](#)

Using the Mouse

The Clip Item Selection List is used to copy CLIP ITEMS from one of the Clip Item Lists back onto the Clipboard. You can accomplish this by simply selecting the title of a stored Clip Item from the Clip Item Selection List.

The Clip Item Selection List is a standard Windows Combo Box, which incorporates a static text window with a drop-down list. By clicking the down arrow icon to the right of the text window, you will see a scrolling list, by title, of the Clip Items in the active list. When you have made your selection, the list will go away, the title of the selected Clip Item will appear in the text window, and the item will be copied to the Clipboard.

Using The Keyboard

Alternatively, you can use the up and down arrows on the keyboard to make your selection. This sometimes has an advantage, such as when you are browsing the list through the magnification window. It is very easy to sequentially zip through each Clip Item by hitting the down-arrow cursor key. In order to use the cursor key, you must first give input focus to the list box, or the text window at the top of the list box. To do this, simply click on the text window itself with the mouse, and it will appear as reverse video, indicating that it has the input focus. You should learn to use both methods, as they each have advantages.

Rules of Thumb

- Whenever either of the Clip Item Lists becomes active, the top entry of the active list will be shown in the text window, and therefore will also be copied to the Clipboard. This includes the initial activation of the Recyclable List, upon startup.
- Whenever the Clipboard contents are erased by an application, or it contains only formats that are filtered out by the user-definable filter, the selection list will display a message stating that the clipboard is empty, or invalid.
- During certain operations where there is no single current selection, such as Multi-Select, the selection list box may display messages, stating that such an operation is taking place.

Toolbar



PowerPaste™



Delete



Print Text Item



Glue Text



Magnify Button



Copy to Safe List



Activate Recyclable List



Activate Safe List



Multiple Selection List Dialog Box



ThumbNail Select



PowerPaste™

When activated, PowerPaste allows you to paste multiple items into an application, without having to continuously access ClipMate in order to select the next item. This gives ClipMate a "hands-off" mode, and makes it quick and easy to use ClipMate's data.

As you paste data into an application, ClipMate senses that you've pasted the current item, and *automatically* advances to the next item. Paste again, and you get the second item. Paste once more, and you get the third item. This process continues until you deactivate PowerPaste, or you reach the end of the clip list (in the chosen direction).

Related Topics:

[Direction - Up or Down?](#)

[Selecting The Starting Position](#)

[Activating PowerPaste](#)

[Ending PowerPaste](#)

[Real-Life Example](#)

[Troubleshooting PowerPaste](#)

Direction - Up or Down?

As PowerPaste advances its way through the current Clip List, it can either work its way UP (toward newer data) or DOWN (toward older data). Once activated, you can keep pasting until you encounter either the top or bottom of the current list. You select the direction by pressing one of the two "outlets" that form the PowerPaste button.

It is useful to note that when Power Pasting, there is nothing that prevents new data from being copied into ClipMate. It will appear on top of the list, and not at the location of the PowerPaste pointer. So, if you're Power Pasting UP, you can encounter this new data if you continue far enough.

In the following example, the user has set the Start Point at "Item W", and pressed the UP PowerPaste button. Therefore, pasting data into an application will yield Item W, Item X, Item Y, and then the "Brand New Item Z", which enters ClipMate after the PowerPaste has been initiated.

PowerPaste at Work



There are many possibilities. You could start with "Item A", and work your way up through all of the items, in their original sequence. Or you could start at the top of the list, and work your way down, in reverse order.

Note: The direction of PowerPaste determines whether you get the data in the order that you copied, or in reverse. UP will preserve the order, DOWN will reverse it.

Selecting The Starting Position

PowerPaste will begin with the currently-selected Clip Item, which will be visible in the Clip Item Selection Box. If you have made no selections, this will be the top of the current list, by default. This is often suitable for Power Pasting DOWN. If you want to PowerPaste UP, then you won't get very far unless you select a starting point farther down the list. Of course, if you plan on copying more data to ClipMate, then the top might be a fine place to start.

Activating PowerPaste

The PowerPaste button is actually two buttons, an upper outlet, and lower outlet, which correspond to PowerPaste (up) and PowerPaste (down) from the EDIT menu.

When you press either outlet, it "Glow" to show you that it is active. If you press the other outlet, it will "Glow", and the other one will return to normal. In this way, it works much like a pair of Radio Buttons because they are mutually exclusive.

Ending PowerPaste

Click on the active "outlet", and the operation will end. Note that if you reach either end of the list, the operation will automatically terminate, with an audible Beep.

Real-Life Example

At Thornton Software Solutions, we use PowerPaste every time that we fill orders. Many of our orders come by CompuServe's SWREG service, which is very popular with our customers. While the electronic form was always readable and quick, it didn't really save us any time during order entry, as it isn't in a format that our order entry system can use. Early versions of ClipMate helped somewhat, as we could copy the data fields, and then paste them (one at a time) into our order entry screen. Unfortunately, this meant a lot of switching back-and-forth between ClipMate and our order entry screen.

PowerPaste solves this problem. Now we just copy the individual fields from the SWREG order (Name, Company, Street1, Street2, City, State, Zip, Country, Quantity, CompuServe ID) into ClipMate. We do all of the orders at once, so there could be a lot of data (the more, the better!) To set our starting point, we pull down the Clip Item Selection List to select the first item of data that we want to paste (the customer name of the first order). Next, we press the PowerPaste Up button, as we want to paste the items in sequence, from oldest to newest. Then, we go to the order-entry screen and tab to the "Customer Name" field. Paste the data, tab to "Company Name" field. Paste the data, and tab to the next field. Paste and tab, until the whole order is done. Begin a new order, and repeat the paste-tab process.

As you can see, this is much easier than switching back and forth to ClipMate in order to retrieve the data. And compared to keying-in all of this data, it's fantastic!

Note: In the above example, we used the TAB key a lot. This has nothing to do with ClipMate, or PowerPaste. It is just used to navigate from one field to another, in our order-entry screen.

Troubleshooting PowerPaste

There can be problems PowerPasting into certain applications that hold the clipboard open too long when pasting. You will get a message from ClipMate saying that there is an "Error Opening Clipboard". A possible work-around is to slow down the PowerPaste action, by adding the following line to the \WINDOWS\CLIPMATE.INI file, under the [CLIPMATE] heading:

PPDELAY=500

The delay interval is in milliseconds (1000 ms = 1 second). The default is 100, which is nearly instantaneous. Slowing it down will give your application more time to paste its data, but you need to keep this delay in mind when pasting, as you can get ahead of PowerPaste.



Delete

This operation works with single or Multiple Selections.

Deletes the currently selected Clip Item or Items from the Active List.

The next item in line is then copied to the Clipboard, and that item is shown in the Clip Item Selection List Box.

Note: A new feature to ClipMate 3.0 is the ability to delete all clip items. This can be done with the Delete Items | All Items menu item, found under the Edit menu.



Print Text Item

Prints the currently selected Clip Item or Items.

This feature operates on text items only.

This operation works with single or Multiple Selections.

Printer support is very generic. Output will appear in a font that is supported by your printer, such as Courier. There are no options for fonts, margins, or such. The purpose of this is so that ClipMate can give basic printer services to as many printers as possible. Now, ClipMate users can print any text that they can get into the Clipboard - with only a mouse click! If you need more sophisticated printing, just paste your data to any application that meets your needs!

Item(s) will be printed to the default Windows printer, unless you have specified a printer using the Print Setup option, found in the FILE menu. Once you have chosen a printer with Print Setup, it stays that way until you change it to something else. It is not reset upon shutdown. This makes it very convenient for users with more than one printer. Many ClipMate users direct their ClipMate output to their desktop (dot-matrix) printer, while leaving their shared network (laser) printer for other tasks, such as word processing.

NOTE: The notion of retaining a printer selection from session to session is not typical practice in Windows. However, it makes sense in this case. If you use ClipMate to make 3270 emulation more bearable, I'm sure you'll agree. There is a potential pitfall that could arise, if you were to delete the printer definition for the printer that you have chosen as ClipMate's printer. If you do this, just select another printer with the Print Setup option of the File menu.

Note: In previous versions, there was a shortcut key associated with this function. It was removed, as it collided with the shortcut key for Next/Prev item selection.



Glue Text

This feature operates on text items only.

If you glue several items that contain multiple formats, only the text component will be Glued.

This feature was known as CONCATENATE in previous versions of ClipMate.

The Glue function concatenates (appends together) selected Clip Item(s) into one big Clip Item. The resulting item is then copied back onto the Clipboard, for use by other applications.

There are two ways to use this feature. The first method is to turn the "Glue Mode" on, and then copy data to the clipboard. As each item enters the clipboard, ClipMate "Glues" it to the previous occupant of the Clipboard. We'll call this "Auto Glue". The second method is to glue existing clip items together within ClipMate. We'll call this "Manual Glue".

Related Topics:

Auto Glue

Manual Glue (Formerly known as Concatenate)

Auto Glue

Auto Glue is a special mode of operation, where ClipMate appends each new text item directly to the end of it's predecessor, rather than creating new Clip Items for each new piece of text. If you turn on the Glue mode, and then copy 10 paragraphs to the clipboard from other applications, you will have ONE Clip Item that is 10 paragraphs long. In addition, the resulting Clip Item will always be on the Clipboard, and will be up-to-date (as long as Auto Glue is still on). You won't even have to interact with ClipMate at all to use this new item.

To use, just click the Glue Button, or select Glue Together from the Edit menu. You should NOT perform a Multiple Selection prior to entering Glue Mode. Doing so would invoke a "Manual Glue", which is discussed in the next section.

When you enter Glue Mode, a fresh, empty Clip Item is created. It will initially have a title stating <<Glue In Process...>>. As you Copy text from other applications, the title will change to indicate the number of items that have been Glued together. To finish, click on the Glue Button again. The title will change to <<Glue Finished, (x) Items>>, and ClipMate exits Glue Mode. At any time during the Glue operation, you can utilize the new item in its current state.

The Auto-Glue Mode will end automatically if you try to use other ClipMate functions while it is active. You may open or close the Magnification Window, but only to browse the data. Any other action will terminate the current Glue operation, as if you had pressed the Glue Button to turn the Glue off. Once stopped, you can't re-start a Glue. However, you can perform a Multiple Selection, and use the Manual Glue to put several Glues (or single items) together.

Manual Glue (Formerly known as Concatenate)

This operation requires you to have previously performed a Multiple Selection.

The Manual Glue is useful for making one large Clip Item from several smaller items. You select the items that you want by performing a Multiple Selection, and then pressing the Glue Button (or Glue Together from the Edit menu.)

One advantage that Manual Gluing has over Auto Gluing is that you don't have to plan it in advance. Another is that it is easy to change the order of the result, as the Multiple Selection gives you the ability to select items in any order that you want, and will glue the items in that order. It also has a confirmation window to show you the order that you've selected.

Example of Manual Gluing in action:

Let's say that you need to buy a PC for your office at work. You sign onto the on-line corporate catalog, and browse around to see what's out there. Whenever you see something that you want, copy it to the clipboard. When you're done shopping, use the Multiple Selection List Dialog to select the components of your new computer system, in whatever order you want. Use the GLUE button to combine your Multiple Selection into one big Clip Item that you can then paste into the order form, or on-line order screen. Painless!



Magnify Button

Also accessible from the View Menu.

Opens, or Closes the Magnification Window.

When the Magnification Window is open, the Magnify Button will appear to be checked. In this way, it functions like a standard Windows Check Box. When you press it again, it pops up and the Magnification Window closes.

For more information, see [Magnification Overview](#).



Copy to Safe List

Availability: This button is not available in the Brief Layout.

Copies selected Clip Item(s) to the Safe List.

This operation is only available when the Recyclable List is the Active List.

This operation works with single or Multiple Selections.



Activate Recyclable List

Availability: This button is not available in the Brief Layout.

Also accessible from the View Menu.

Causes the Recyclable List to become the Active List.

The Recyclable Button and Safe Button are bound together, and act like radio buttons. When you press one, it takes on a depressed appearance, and the other button pops out. This makes it easy to see which list you're working with.



Activate Safe List

Availability: This button is not available in the Brief Layout.

Also accessible from the View Menu.

Causes the Safe List to become the Active List.

The Recyclable Button and Safe Button are bound together, and act like radio buttons. When you press one, it takes on a depressed appearance, and the other button pops out. This makes it easy to see which list you're working with.



Multiple Selection List Dialog Box

This option consists of a dialog box that allows you to select more than one Clip Item at a time, as compared to the Clip Item Selection List Box, which will select only one Clip Item at a time. There are several operations that take advantage of the multiple selection, such as Delete, Print, Glue, and Copy to Safe List.

The Multiple Selection Dialog Box consists of two List Boxes:

The Selection List is on your left. This is where you make your selections.

The Confirmation List is on your right. This shows your selections in the order in which you made them. It is for your reference only, and can't be manipulated.

Here's how to use the Multiple Selection Dialog Box:

- 1) If you will need to see the Magnification Window, activate it first before opening the Multiple Selection Dialog Box. Use of the Magnification Window is highly recommended, because it makes it easy to see what you are selecting.
- 2) Press the MS button to bring up the dialog box. Once the dialog box is up, you can't go back to the rest of ClipMate without pressing either OK or CANCEL.
- 3) If necessary, move and/or re-size the Magnification Window.
- 4) The Selection List appears in the list box on the left. With the mouse or spacebar, select the Titles of the Clip Items that you want to work with. As you make each selection, the Clip Item you select is displayed in the Magnification Window. The Magnification Window only holds one Clip Item at a time, so only the most recent selection will be shown. To de-select, simply click again.
- 5) In the Confirmation List (on the right), your selections will appear in the order that you selected them. This READ ONLY window provides visual confirmation that you have selected the items in the order that you intended. It is especially helpful when Gluing Clip Items, because it gives an outline of what you are composing. For the Copy to Safe List operation, the order also comes into play. The items will be copied to the Safe List in the order that you selected them, and therefore the order that they appear in the Confirmation Window.
- 6) If you change your mind about a particular item, just click it again. The highlighting will disappear, and it will be removed from the Confirmation List on the right. You can select and de-select as many times as you wish.
- 7) When you are done with your selections, press OK.
- 8) The Delete, Print, Glue, and possibly Copy to Safe (depending upon what list is currently active) buttons will now be enabled. You can now perform any of these functions using the multiple selection.



ThumbNail Select

Opens or closes the Graphic Selection Window.

See: Visual Selection by ThumbNail.

Menus

While ClipMate's most often-used features are represented by buttons on the toolbar, there are still more functions to be found in the menus. The next several pages describe the functions that are found in the menus. Full descriptions are given for functions that are unique to the menus. Where a toolbar equivalent exists, a reference is made to that description.

The Main Menu is not available in the Brief Layout.

Related Topics:

[Control Menu](#)

[File Menu](#)

[Edit Menu](#)

[View Menu](#)

[Config Menu](#)

[Help Menu](#)

Control Menu

The Control Menu is a special menu that is accessed by clicking on the "System Box" on the upper-left of the main window, or by single-clicking on the ClipMate icon (when minimized). It duplicates many of the menu options found in the regular Main Menu (so we won't list them here). It is very handy when you have the Main Menu turned off, when using the Brief Layout, or when running ClipMate as an Icon.

Click Once Here
For Control Menu





File Menu

The File menu includes commands that enable you to open and save ClipMate files.

For the most part, it will not be necessary for you to ever choose any of these. ClipMate will automatically open DEFAULT.CLM when it launches, or a file that you specify on the command line (of the icon that launches ClipMate). Upon closing, ClipMate will attempt to save both of the Clip Item Lists (Recyclable and Safe) into the current file. Depending upon the option that you have selected in the CONFIG screen, you may be prompted before the file is saved. Therefore, if you always use DEFAULT.CLM, you will never need to use the FILE menu.

Here are the menu options:





- **New** - Clears storage, creates a new file.
- **Open** - Opens existing file.
- **Recover** - Restores .BAK file from last successful SAVE, overwriting .CLM file. **See Features new to version 3.1.**
- **Save** - Saves current file.
- **Save As** - Saves current file with new name.
- **Print Setup** - Set printer See:  Print Text Item.
- **Print Item(s)** - Prints current item, or multiple-selection of items. See:  Print Text Item.
- **Exit** - Ends ClipMate. Alternatively, double-click on the control box (in the upper left hand corner) in the main window.

EXIT NOTE: If Always Save is checked in the CONFIG screen, then the current file (usually DEFAULT.CLM) will automatically be saved. Otherwise, you will be prompted to save changes if either list has been added to or modified in any way. The ClipMate.INI file in the Windows directory will be updated upon exiting from ClipMate.

Edit Menu

The Edit Menu allows you to manually alter the contents of either of the two lists.



Most commands are available on the Icon Bar, and are further described in the MAIN WINDOW section.

- **Delete Item** - Remove Clip Item from active list. See  Delete.
- **Edit Title** - Changes the title of a Clip Item.
The Edit Title dialog box allows you to change the title of a Clip Item. Although the title is initially constructed from the first 50 characters of the Clip Item, changing the title will have no effect on the Clip Item. It is provided for your reference only.
As an alternative to this dialog box, you can edit the title in the Magnification Window.
- Glue - Glues CLIP ITEMS together. See  Glue Text.
- **Flow Paragraph** - Removes unwanted Line-Breaks from TEXT. See: Flow Paragraph Button.
- **Copy to Safe List** - Puts a copy of the selected Clip Item on the Safe List. See  Copy to Safe List.
- **PowerPaste** - Up/Down - Initiates/Terminates PowerPaste. See:  PowerPaste™.

View Menu

The View Menu allow you to change the Active List, open or close the Magnification Window, or perform word searches with the Find or Find Next commands.

Most commands are available on the Icon Bar, and are further described in the MAIN WINDOW section.

- **Toggle Recyclable List** - Switch from Safe to Recyclable list. See:  Activate Recyclable List.
- **Toggle Safe List** - Switch from Recyclable to Safe list. See:  Activate Safe List.
- **Magnify** - Open Magnification Window. See: Magnification Overview.
- **ThumbNail Select** - Open ThumbNail Selection Window. See: Visual Selection by ThumbNail.
- **Find** - Find item by text content or title. See: Find, Find Next.
- **Find Next** - Repeat Find.
- **Select Previous/Next** - Select Prev/Next item current list. See: Select Previous/Next.

Related Topics:

Find, Find Next

Select Previous/Next

Find, Find Next

You can use the accelerator keys, (CTRL+F and F3, respectively) even if the view menu is not visible (Brief Layout).

The Find command will prompt you for some text to search for, and then search the Active List for the first occurrence of the specified text. It is NOT case sensitive, and you can use partial words. Wild Cards are NOT supported.

If the string is found, the corresponding Clip Item is selected, and displayed in the Title Window of the Clip Item Selection List Box. If not, then you will receive a notification message, and the Title Window will be blank.

If the Magnification Window is active, then it will also reflect results of the search, in the same way that the Title Window of the Clip Item Selection List Box does.

Select Previous/Next

Select Prev/Next item current list. If ClipMate's Window has focus, you can use the hotkeys: Ctrl+N, Ctrl+P to scroll through the list. This can be very handy if you like to keep your hands on the keyboard. If you do, be sure to use it in conjunction with a HOTKEY. See [Hotkey](#).

Config Menu

Auto Capture

User Preference Dialog Box

Application Profile (FILTER)

Lock Icon Position

Auto Capture

ClipMate's most powerful feature is the ability to automatically capture clipboard traffic. However, sometimes you may want to turn this feature off, and still leave ClipMate running. For example, if you have a lot of editing to do in an Excel spreadsheet, and you really don't want to keep any of the resulting data in ClipMate. BUT, you need to paste things FROM ClipMate into Excel. Just toggle the Auto Capture option from the CONFIG or CONTROL menus.


Note: When Auto Capture is disabled, the ClipMate title bar will say NOT CAPTURING, and if iconified, a big X will appear over the icon.

Note: Unlike most settings, this setting will NOT be saved from one session to the next.

User Preference Dialog Box

Accessible from the CONFIG pull-down menu (when ClipMate is in the Full Layout) or the CFG Button (when ClipMate is in the Brief Layout).

The Config Dialog Box lets you change various settings of ClipMate's main window. The settings are stored in the ClipMate.INI file for later retrieval.

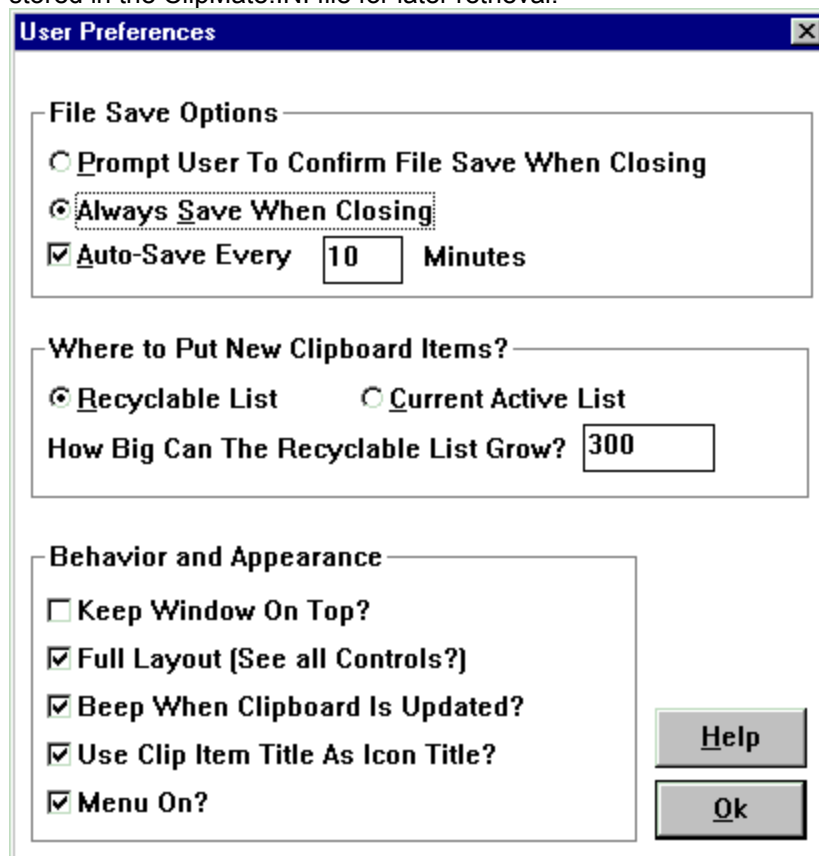The image shows a 'User Preferences' dialog box with a blue title bar and a close button. It contains three sections: 'File Save Options', 'Where to Put New Clipboard Items?', and 'Behavior and Appearance'. In 'File Save Options', 'Always Save When Closing' is selected with a radio button, and 'Auto-Save Every' is checked with a checkbox, set to 10 minutes. In 'Where to Put New Clipboard Items?', 'Recyclable List' is selected with a radio button, and the 'How Big Can The Recyclable List Grow?' is set to 300. In 'Behavior and Appearance', 'Keep Window On Top?' is unchecked, while 'Full Layout [See all Controls?]', 'Beep When Clipboard Is Updated?', 'Use Clip Item Title As Icon Title?', and 'Menu On?' are all checked. 'Help' and 'Ok' buttons are on the right.

Prompt User To Confirm File Save When Closing?

When you close ClipMate, a check is made to see if the current file needs saving. If so, then this value determines whether ClipMate will prompt you first before saving the file. The "Current File" is the .CLM file that ClipMate is currently using to store the clipboard data (usually DEFAULT.CLM, unless you have specified otherwise).

Default: Always Save

Auto Save?

ClipMate can save the file automatically for you. The save operation only occurs if needed (if there have been any changes since last save). Suggested intervals are 10 to 60 minutes, although you can go up to 24 hrs (1440 minutes).

Default: Off, interval: 10 min.

Where to Put New Clipboard Items?

When ClipMate detects that there is a new Clip Item to retrieve from the Clipboard, it must decide which list to put it in. If the Recyclable List is currently active, then the new item will always go there. If the Safe

List is active, then it checks this value, and places the item accordingly. This is useful in order to keep from cluttering up your Safe List with trivial items, if you happen to have the Safe List active. On the other hand, you may want to turn on Current Active List, if you want to collect some items that you want to keep for a long time.

Default: Recyclable List

Number Of Items To Keep In Recyclable List

This allows you to control the length of the Recyclable List. ClipMate will accumulate Clip Items in the Recyclable List, and allow the list to grow until this limit is reached. When the list is at its limit, the oldest item will drop off from the bottom for every new item added to the top.

Note: Increasing this value will cause ClipMate to keep more Clip Items, but the trade-off is that it will use more memory.

Note: This has no effect on the number of items kept in the Safe List, which can grow indefinitely.

Default: 100 (Clip Items saved in the Recyclable List)

Keep Window on Top?

This allows ClipMate to "float" to the top of all other windows. It is especially helpful when you have a lot of windows open, or if you are using an application that is running full-screen, such as a word processor.

When ClipMate is iconified, it will also continue to float on top. This is very useful if used in conjunction with the Lock Icon Position and Use Clip Item Title As Icon Title options.

Default: unchecked (no)

Full Layout?

ClipMate gives you the option to display all of its graphical controls, along with the Menu (Full Layout), or just show some of the graphical controls, with no Menu (Brief Layout). This is where you make that choice. See Layout - Full vs. Brief.

Default: Full Layout

Beep When Clipboard is Updated?

ClipMate has the option of beeping every time that the clipboard is updated. This is often a useful tool for learning how ClipMate works, or how various applications behave.

Default: unchecked (no)

Use Clip Item Title As Icon Title?

ClipMate now has the ability to use the title of the current Clip Item as the title shown under the Icon when it is Iconified. As the clipboard contents change, the title is updated. This is very handy if you like to minimize ClipMate to an Icon. Very useful when used in conjunction with these options:

Application Profile (FILTER)

This opens the Application Profile dialog box, which allows you to determine which formats ClipMate will collect.

See: Application Profile.

Lock Icon Position

This locks the position of the ClipMate icon. Do you routinely move the minimized icon to the same place, every day? If so, this feature is for you. Just move it to where you want it, and lock it. It won't move from that spot until you unlock it. Very useful in conjunction with the User Preference Dialog Box option.

Note: This has no effect under Windows 95.

See: User Preference Dialog Box.

Help Menu

About

Accessible from the Help | About pull-down menu (when ClipMate is in the Full Layout) or the ? Button (when ClipMate is in the Brief Layout).


In addition to displaying the "normal" about information, this Dialog Box gives you the opportunity to register ClipMate, and access the on-line help. The HELP button is provided in order to give access to HELP when ClipMate is in the Brief Layout.

Help Info:

- Release Date - If over 1 year old, see if a newer version is available. See: **Error! Reference source not found.** on page **Error! Bookmark not defined.**
- Number of Clip Items: - Total of both Recyclable and Safe Lists.
- Registered To: - Hopefully You!

Magnification Overview

The Magnification Window displays the Clip Item that is currently selected in the Clip Item Selection List Box. It permits you to get a full look at what the Clip Item actually looks like, rather than just a glimpse of the title. Also, you can edit either the Clip Item (text only), or the Title. There is a powerful Flow Paragraph function that will reformat the Clip Item by removing unwanted line breaks and spaces. This makes the text more usable by word-processing applications.

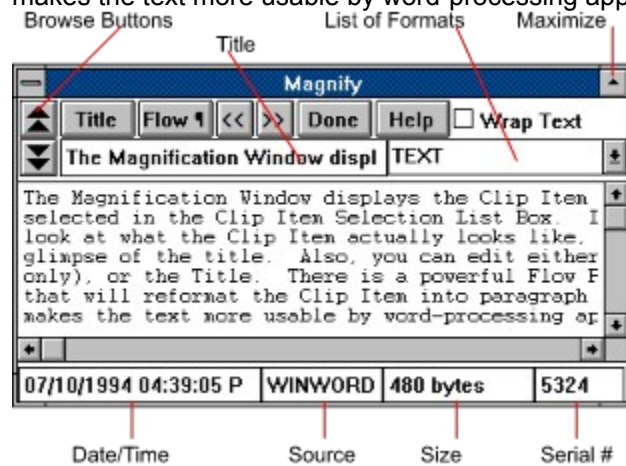

The Magnification Window is opened by either selecting the Magnify option under the View menu, or by pressing the Magnify Button. Upon opening it the button will display its "Depressed" (checked) state.

Related Topics:

[Magnification Controls](#)

[Editing](#)

Magnification Controls

Fields

Browse Buttons

Make Title

Flow Paragraph Button

SHIFT TEXT << >>

Wrap Text Checkbox

Fields

- **Title** - Title of Clip Item (Editable).
- **Format List** - List of formats. Change format displayed by selecting format. ex: if data contains PICT, BITMAP, and PALETTE, you can see either of these by selecting from this list.
- **Date/Time** - Time stamp of when the data was created.
- **Source** - Name of source application that provided the data. If OLE2, then it will specify OLE2 and type of data, such as Word 6.0 Document.
- **Size** - Bytes, bitmap dimensions, or number of palette colors.
- **Serial Number** - Serial number of item. Each item is assigned a serial number for assignment of titles, and for storing large items on disk.

Browse Buttons

The Browse Buttons will select the previous/next Clip Item in the Active List.



Moves you toward the top of the list (Newer Clip Items).



Moves toward the bottom of the list (Older Clip Items).

As items are selected, they are Copied to the Clipboard automatically.

If you try to browse past either end of the list, ClipMate will issue a short beep to let you know that there is nothing to browse in that direction.

Make Title

The Make Title button will form a new Clip Item Title from the selected text. This is useful when the Clip Item contains a text passage that you want to use as the title.

To use, just select some text (with your mouse), and then press the button. ClipMate will make a new title out of the selected text, up to the first 50 characters. The new title is immediately reflected in the title box, and the Clip Item Selection List Box.

Flow Paragraph Button

Note: This feature is now accessible from the Edit menu of the main window, and from the Control Menu.

The Flow-Paragraph button re-formats the Clip Item so that it may be easily used by word processors. It removes all of the extra line breaks and spaces that often are embedded within text that is copied to the Clipboard. Here's an example:

If your text looks like this when it gets into your word processor:

This is some text that was taken
from DOS and
it doesn't fit very well into the
word processor.
I would rather let the word processor
make the important
decisions, such as where the margins should
go, and whether
the paragraph should be indented. I hope I
don't have to
manually remove all of that junk!

You can use the Flow Paragraph button to make it look like this:

This is some text that was taken from DOS and it doesn't fit very
well into the word processor. I would rather let the word
processor make the important decisions, such as where the margins
should go, and whether the paragraph should be indented. I hope I
don't have to manually remove all of that junk!

The newly-formatted text only has line breaks that define the end of a paragraph, or breaks between paragraphs. Individual lines flow together to form paragraphs. You can then use your word processor to format the paragraph any way you want!

Most applications have their own quirks about how they put text on the Clipboard, therefore ClipMate's conversion algorithm is pretty generic at this point. It should cover most cases - if you find a shortcoming, please contact the author, and describe your particular situation and applications involved. Here is a summary of the algorithm that ClipMate currently uses to convert paragraphs:

1. Any blanks at the beginning of any line are removed.
2. Any occurrence of multiple blanks is removed, with the following exception: Two blanks are allowed to follow a period.
3. Any Line Break that is not immediately preceded or followed by another Line Break is removed.

You can convert more than one paragraph at a time, as long as there are at least two line breaks between them. One of these terminates the last sentence of the first paragraph, and the other one splits the two. More line breaks are OK. If only one line break is used, then the paragraphs will be joined together.

Note: Once the text has been flowed, word-wrap will be turned on, indicated by the activation of the Wrap Text Checkbox. See: [Wrap Text Checkbox](#).

SHIFT TEXT << >>

By pressing the << or >> buttons, the text will shift one space to the left or right, respectively. This causes the text to be indented, or un-indented. You can press multiple times, to shift multiple columns. This is a handy feature for anyone editing text documents with an editor that lacks the shift feature, or for anyone editing files on a mainframe.

Wrap Text Checkbox

The Wrap Text Checkbox is used to control whether or not the Magnification Window displays the Clip Item in a wrapping edit box. If the edit box doesn't wrap, a horizontal scroll bar is provided.

It is set automatically when you perform a Flow Paragraph. Each Clip Item knows whether or not it should wrap. As you browse through Clip Items, the check box will change, to reflect the wrap state for the current item. You can click it to change the setting for a given item.

The setting is embedded within the Clip Item, and is therefore stored to disk between sessions.

Editing

You may edit either the text of the Clip Item, or its title. When you edit the title, it won't appear in the Clip Item Selection List immediately. The Clip Item Selection List will be updated when another Clip Item is selected. Editing the title has the same effect as Edit Title.

Related Topics:

Editor Hot Keys

Editor Hot Keys

The following standard Windows Accelerator keys (hot keys) can be used in the Magnification Window:

Backspace	Deletes the character to the left of the insertion point.
Del	Deletes the character to the right of the insertion point.
Ctrl+X	(CUT) - Deletes the selected text and places it on <u>Clipboard</u> .
Ctrl+C	(COPY) - Places selected text on Clipboard.
Ctrl+V	(PASTE) - Inserts text from Clipboard to the active window.

Note: Cut/Copy/Paste cause the clipboard to be updated, and therefore cause the Magnification Window to display whatever you have just copied to or pasted from the Clipboard.

Copying To The Clipboard

You can copy part or all of the Magnification Window to the Clipboard, and thus back into ClipMate by using the accelerator key for copy: Ctrl+C. To do so, just select the text that you want to copy, and press Ctrl+C. You are then presented with only the text that you have selected. How is this? Your new text was copied to the Clipboard, and so ClipMate made itself a copy. New Clip Items are always made the current selection, as they reflect the current Clipboard contents (unless the Safe List is currently active).


Cross-Platform Editor

If you work in a multi-platform environment, you undoubtedly encounter a variety of non-windows editors, such as vi, Emacs, and ISPF, each with its own personality, and each with different command sets. As a Windows user, you may be baffled by the lack of a common user interface. Furthermore, you may not be interested in becoming an expert in any of these editors!


Many ClipMate users find that they can leverage ClipMate to compensate for a lack of expertise with such environments. If you can Copy & Paste with these applications (usually through the functionality of the terminal emulator), then you can use ClipMate to perform some of the simple editing for you. Just copy the text into ClipMate, use the Magnification Window to edit, and paste back into the other environment. You may need to delete the old text from the target application first, go into "insert" mode, and then use the terminal emulator to paste.

This is also very handy when working with the unix command prompt (again, assuming terminal emulation). If you type a long unix command that doesn't quite work, and you're not a unix expert (i.e. you don't know how to edit the command without retyping), then you can just copy to ClipMate, open the Magnification Window, edit the command, and paste back into unix. Very handy!

Visual Selection by ThumbNail

The ThumbNail Window is accessed by selecting "ThumbNail Select" from the VIEW menu, or by pressing the  button.

The Graphic Select window is used to select Clip Items visually from a grid, consisting of ThumbNail images. The dimensions of the grid can range from 2x2 up to 8x8 (thumbnails). When a BITMAP image is too large to fit within the bounds of its square in the grid, it is scaled down to a ThumbNail sketch. PICTURE images always scale up or down to fill their square, because PICTURES are scaleable, by nature. Text items can be shown, as well.

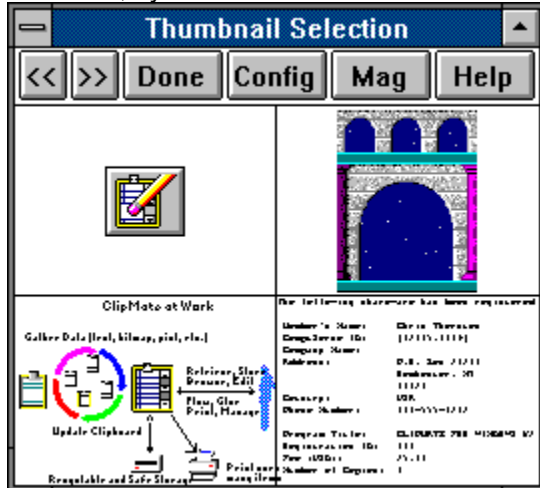

This screen shot shows a 2x2 grid of 4 items. The first is small enough that it doesn't require a ThumbNail. The next is a scaled-down version of the original "arches.bmp". Following that is a PICTURE image of the "ClipMate at Work" graphic. It is automatically scaled to fit within its box. The last is a text item, scaled down to a very small font. Although the text can't be read, the distinct layout of the text often gives a visual cue as to the nature of the text, or the origin. In this case, this data is from an electronic order for ClipMate, which has a distinct visual format, and can be easily recognized.

Note: *The Font Size displayed in the graphic grid is for local display purposes only, and has no relation to the font that was used in the originating application*

Selection of data is performed by clicking on a square with the mouse. If you open the Magnification Window, you'll see your selection appear.

Sometimes you'll notice a green rectangle surrounding an item. This is to let you know that this item doesn't yet have a ThumbNail. This occurs when items are new, or if the grid has been made smaller since they were originally copied. New items will automatically generate a ThumbNail when the data is saved.

Related Topics:

[ThumbNail Controls](#)

[ThumbNail Configuration Dialog Box](#)

ThumbNail Controls

Each ThumbNail is a Button

Browse Buttons

Done

Config

Mag

Help


Each Thumbnail is a Button

Just click on a Thumbnail picture to load its larger counterpart into ClipMate, and make it the current clip item.

Browse Buttons

Allow you to page forward and back, a screenful at a time.

Done

Quit this Window. Or, you can press the  button on the main window.

Config

Opens the Graphic Configuration Dialog Box.

See: **ThumbNail Configuration Dialog Box.**

Mag

Opens or closes the Magnification Window. Although there are several other ways to open/close the Magnification Window, this button is also added as a convenience. Note that the two windows will be easiest to use when they do not overlap each other. We suggest finding good "homes" for the Magnification Window, and the ThumbNail Window, and leaving them in the same place most of the time.

See: Magnification Overview.

Help

Summons Help for this window.

ThumbNail Configuration Dialog Box

This dialog allows you to configure the appearance of the ThumbNail Window.

Related Topics:

[Display Mode](#)

[Display Preference](#)

[Font Size for Text](#)

[X*Y Dimension](#)

[Refresh Thumbnails On Save?](#)

Display Mode

You have the option of showing text, graphics, or both in the Graphic Select window. Use the Display Mode to set your preference.

Text - allow text to display.

Graphics - allow graphics (BITMAP or PICTURE) to display.

Display Preference

If both BITMAP and Picture are both present, which one is shown?

Font Size for Text

The size that text items will be displayed in the grid. This has absolutely no relationship to the font which the data was displayed in when it was originally copied, nor does it affect the data later on, when it is pasted to something else. It is simply for purposes of display in the graphic selection window.

X*Y Dimension

Determines the dimension of the grid. From 2x2 squares up to 8x8 squares.

Refresh Thumbnails On Save?

For the sake of speed and convenience, the thumbnails are stored on disk, once the item that they represent has been saved. As the window size is adjusted, they aren't automatically re-sized because they are often "close enough" to do the job. You can force a re-generation of all thumbnails by checking this box, and then saving the clip file (from the Main Window's FILE | SAVE menu, or by shutting down ClipMate). Note that this may take the shut-down process a little longer than normal.

Clipboard Formats

The Windows clipboard can simultaneously hold the same data item in many different formats. To ensure compatibility and interoperability with as many applications as possible, most software packages will provide data in several formats. There are extreme examples, such as Microsoft Excel, which often provide as many as 17 clipboard formats, representing the same item of data!

Analysis shows that not all formats are viable, once the host application loses ownership of the clipboard. Many of these formats simply evaporate, and others become invalid.

Furthermore, many of these data types become quite large and can quickly become a drain on resources. For example, if you copy a screenful of spreadsheet cells you could end up with a 600K BITMAP and a large PICTURE drawing of your cells, along with your textual data!

To top it off, many of these formats aren't usually provided at the time of the copy. Instead, applications will simply inform the clipboard that they CAN provide these formats. Think of it as a sort of "advertising". When an application actually asks for the data in a particular format, the clipboard informs the host application that the particular format is requested, and the host application then provides the data. This process is known as "Delayed Rendering", and can cause ClipMate to appear to dramatically increase the time needed to copy data.

So far, it sounds like a lot of bad news. Will ClipMate's new features bury you in data that you don't want, and make it take longer to copy data? The answer is **NO!** ClipMate's Application Profile facility allows you to determine what formats will be retained, and which formats will be ignored. The filtration can be defined globally, or by application by application, to give you the flexibility that you need.

For more information on the use of Application Profiles, See: Application Profile.

Related Topics:

TEXT

OEMTEXT

OWNER DISPLAY

BITMAP

PICTURE (Metafile)

Rich Text Format

Private Formats

OLE (Object Linking and Embedding)

TEXT

An array of character data with a *hard return* (carriage return + linefeed) terminating each line, with no associated font, size, margins, or other formatting.

OEMTEXT

Data is identical to TEXT format, but the Clipboard Viewer (the one that comes with Windows) displays it with a proportional font. Applications receiving data don't treat it any differently, so there is no value in capturing OEMTEXT when TEXT is available. For that reason, ClipMate always ignores OEMTEXT.

OWNER DISPLAY

Also known as Owner Draw. This is not really a clipboard format at all, because it is just a method for a host application to display it's data within the window of another application, such as the Clipboard Viewer. There is no data on the clipboard, so ClipMate will always ignore this transient format.

BITMAP

A graphic image, composed of individual *pixels*, or dots. ClipMate can handle bitmaps of any number of colors. When displayed on a video adapter capable of displaying 256 colors, bitmaps are often accompanied by a palette, which optimizes the colors of the display to enhance the image. When running 16 or 24-bit video cards with proper drivers, a palette is not needed and is not usually present.

Bitmaps are often used for very complex images originating from the real world, such as photographs.

Bitmaps are common in Windows, and can be created by the Paintbrush program that comes with Windows.

PICTURE (Metafile)

The proper name for this format is actually METAFILE. It is also called MetafilePICT, and Vector Drawing.

Metafiles are graphic images that consist of one or more common drawing objects, such as rectangles, circles, lines, and formatted text. Metafiles are most suited to human- or machine-generated images, such as architectural or engineering drawings, or clip art. Metafiles are scaleable, and they often look as good full-screen as they do when scaled down. Metafiles often contain text, with font information. This often makes them desirable for corporate logos. When printed, the image is re-drawn at printer resolution. If you have True Type fonts in a Metafile, they will look FANTASTIC when printed.

Most commercial drawing programs can generate Metafiles, and so can the OLE drawing module (DRAW) that comes with many of the Microsoft products.

Rich Text Format

Rich Text Format (RTF) is a private clipboard format employed by Microsoft applications, to enable them to share formatted text. Several non-Microsoft packages have adopted this format as well. RTF contains all of the formatting for text such as font, size, color, margins, borders, etc. It can even contain other items, such as graphics and OLE objects.

RTF is usually very large. It is not unusual to see RTF clipboard items of 200 - 600K in size. Also, it will usually take an application several seconds to produce the RTF format, and place it on the clipboard. The reason that you might not notice the delay is that RTF is a prime candidate for Delayed Rendering.

Private Formats

There is an established and publicized list of standard clipboard formats, which are known as *public formats*. Most of the popular ones are listed above. Applications may generate their own *private formats* at any time. Public formats are the most useful, because they are usually supported by a wide variety of applications. Examples are Text, BITMAP, and PICTURE. Private formats, on the other hand, are generally useless to any application besides the application that created the data. Sometimes several applications from the same vendor will share private formats, which makes them more useful. Most often, the data is only useful to the application that created it.

Since most private formats are usually meant to be used only by the originating application, there is a potential hazard involved when using them. Often, these formats are just pointers that refer to data structures residing within the original application, and don't actually contain the data at all. These are transient formats. If ClipMate re-posts this format to the clipboard at a later time, the pointers are invalid. This can cause a Run-Time Error or GPF in the original application. If you find that this is the case, you'll have to remove the offending format(s) from the filter for that application.

OLE (Object Linking and Embedding)

ClipMate has the ability to store OLE objects. Simply stated, OLE lets applications that use different data formats share data without converting the data to a common format. For example, a sound object can be pasted into a word-processing document. The sound can then be played back by activating the object (double-click). Your word processor doesn't have to know how to play sounds - it just has to follow the rules of OLE. In many cases, the OLE object can be activated or edited by double-clicking on it. In Microsoft Word for Windows, for example, the draw program is an OLE server. Double-Click on a graphic, and it activates the Draw program to edit the object. Within the Draw program, there is no option to save the file - instead, the option is to update the drawing in the Word for Windows document. You can do the same thing with an Excel spreadsheet object. You can actually embed a spreadsheet within a word processing document. Don't like the numbers? Double-click to edit the object in Excel. Instead of saving the Excel file, you update the Word document. In these cases, the Word for Windows document is considered to be a Compound Document, because it contains other types of data within itself.

OLE is initiated by an OLE Server copying data to the clipboard, and then by an OLE Client pasting that data into itself. The OLE Client looks at the list of available formats, from top to bottom. If it finds an acceptable format, it just uses that format, and doesn't bother with OLE. Otherwise, it finds the series of formats that magically comprise an OLE object, and pastes them into itself, creating the object. These magic formats that make OLE happen are:

1. OBJECTLINK - Where did the data come from?
2. OWNERLINK - Which application owns the data?
3. NATIVE - The data itself.
4. PICTURE, DIB, or BITMAP - The "Presentation Format".
5. DataObject - Required for OLE2.
6. Object Descriptor - Required for OLE2.
7. Link Source Descriptor - Required for OLE2.

The Presentation Format is a special case. One of these formats is used to display the data in the client application. The nature of this depends on the nature of the OLE object. For a sound object, it would be an Icon of the sound recorder. For a graphic object, it would be a picture or bitmap of the graphic itself. Have you wondered why you get silly icons of certain applications when you're copying formatted text? This is because the application is conforming to OLE.

Related Topics:

[Using OLE in ClipMate](#)

Using OLE in ClipMate

When defining your Application Profile for any given OLE Server (such as the Sound Recorder), make sure that you include all of the necessary formats: ObjectLink OwnerLink, Native, and a Presentation Format. By your having done this, ClipMate will capture and preserve the OLE objects. Beware that OLE objects can get quite large. If you want to enable OLE2, then you will also need DataObject, Object Descriptor, and Link Source Descriptor.


Application Profile

The Application Profile provides a means for reducing the amount of unwanted clipboard data that is collected by ClipMate.

As discussed in the section on Clipboard Formats, ClipMate would quickly become unusable if it automatically captured every item of data, in every format provided. ClipMate's Application Profile facility allows you to be selective about the data formats that ClipMate will capture, on an application-by-application basis.

You can configure ClipMate's Application Profile to allow only certain types of data, from certain applications. You could easily configure it to capture TEXT and Rich Text Format from Word for Windows, BITMAP from Paintbrush, Picture from Corel Draw, and to ignore Excel completely! ClipMate's Application Profile ensures that you deal only with the formats that you choose to work with.

One of the important new features of ClipMate 3.0 is the ability to automatically determine proper filters. ClipMate tries to determine whether the application sending data is a writing application, or a drawing application. For writing applications, it will automatically enable TEXT and any of the known formatted text formats, such as Rich Text Format. For a drawing application, it will enable PICTURE and BITMAP. If neither of these cases is apparent, then it will present you with a list of available formats, and ask you to pick the format(s) that you want to capture. This should occur rarely, if ever, because most applications will provide at least one of the formats mentioned above.

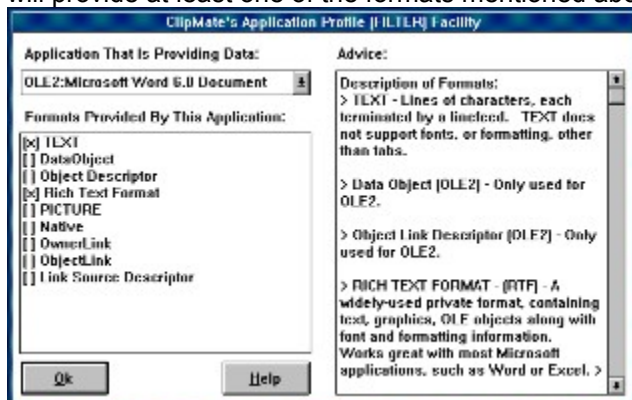

Here is the Application Profile dialog box which is accessed from the CONFIG or CONTROL menus. It is presently displaying the settings for a Microsoft Word 6.0 Document. Notice the OLE2 as part of the application title. This indicates that Word is utilizing the OLE2 facility to handle the copying. Likewise, many of the formats listed are OLE-related. Usually, you'll find that the OLE objects are a bit bulky, and that leaner formats such as Rich Text Format and TEXT get the job done more efficiently. Therefore, the selected formats are TEXT and RICH TEXT FORMAT. By clicking on the (x) checkmark, you can select or de-select a format. Of course, this be implemented beginning with the next item copied from that application, and will not retroactively apply to previously copied items.

In the box on the right are notes about the various formats provided, if we know anything about them.

Note that it is certainly acceptable to have no formats selected. This causes ClipMate to ignore all data from a given application.

The Application Profile continues to learn more and more about your applications as you work with them. Unlike version 2.0, it keeps a complete list of all formats encountered by the various applications, not just the ones that you want to work with. Undesirable formats are just displayed with no checkmark (x), as opposed to the desired formats which have the checkmark. If ClipMate encounters an unlisted format for

an application with an existing profile, it will add the new format to the list, in the un-checked state. It is then available to be selected by you, if you choose to work with it. This will happen often with applications like Microsoft Access, which uses different formats for different aspects of a project (controls, data, report, etc.).

See: [Clipboard Formats](#).

See: [CLIPFLTR.INI](#).

Related Topics:

[Format Viability Test](#)

Format Viability Test

The Format Viability Test can help you to troubleshoot problems with the clipboard and determine whether an application does indeed provide any formats that are worth keeping. Simply put, it involves using the clipboard viewer that comes with Windows (clipbrd.exe) to capture data, save it to a file, read the file back in, and paste it back into the originating application. There are four likely results:

1. A successful paste, with good-looking data. This indicates that there is at least one format that has what you need. All you need to do now is to figure out which format is the best, and create a filter for just that format, and maybe something that will show up in the Mag Window, such as Text.
2. A successful paste, with strange-looking data. In this case, the application is holding back the most useful format. Microsoft Excel is an example of such an application. None of its 21 clipboard formats are as good as an internal paste. Try experimenting with different filters, to see which format comes closest. Hopefully, something will be useful.
3. A failure message. The application tried to use one of the formats, but it was invalid. The application was smart enough to recognize this. Most likely, the offending format is a *private format*, used internally by the application. It probably is a pointer to some data that is now invalid. See if there are any special paste options, like Paste Special. Perhaps one of the other formats will work better. Try to use ClipMate's Application Profile to eliminate the offending format. Often, private formats will have a name that indicates the application. You need to find the best format(s) to include, and *absolutely need to eliminate the offending formats by having them un-checked in the Application Profile*.
4. A fatal error in the application. The same case as (3) above, but the application wasn't smart enough to see the problem in time. Use the same techniques to get out of trouble.

Conducting The Test:

1. Close ClipMate, if it is running. The test will be conducted without ClipMate, in order to avoid confusion.
2. Open the Windows clipboard viewer (the one that comes with Microsoft Windows - clipbrd.exe)
3. From AppXYZ (your application), copy some data. If AppXYZ is a word processor, copy several paragraphs, preferably with different fonts.
4. Click on the clipboard viewer. Pull down the DISPLAY menu, and write down the list of the formats provided.
5. Close AppXYZ.
6. Click on the clipboard viewer AGAIN. Pull down the DISPLAY menu, and write down the list of the formats provided. Has the list changed? What's missing?
7. Save the clipboard to a file, using FILE | SAVE AS. Call it AppXYZ.CLP
8. Delete the clipboard contents, using EDIT Delete.
9. Open AppXYZ.CLP, using clipboard's FILE, OPEN.
10. Has the format list changed? (Use the DISPLAY Menu to check).
11. Run AppXYZ again.

12. Paste the data. Does it look OK? If so, then we're in business. One of the formats on the clipboard is a winner. Experiment with filters, and see what you can eliminate. I recommend keeping TEXT because it will help you to identify data and see it in the Magnification Window.

For more information on the cause behind some of the problems outlined here, see: [Unfortunate Clipboard Tricks](#).

Troubleshooting

Unfortunate Clipboard Tricks

Not all applications treat the clipboard the way that you would expect them to. In many cases, software developers take "shortcuts" when dealing with clipboard operations. These shortcuts can sometimes cause problems when using ClipMate, although they are not usually serious. We have arbitrarily assigned names to these phenomena, such as "Local Clipboarding" and "Silent Clipboarding".

Related Topics:

[Local Clipboarding](#)

[Silent Clipboarding](#)

[Transient Data](#)

Local Clipboarding

Unfortunately, many applications prefer to use the clipboard only as a means of exchanging data with other applications. When you perform a CUT or COPY within these applications, the clipboard is not necessarily updated with the "good stuff" that the application uses internally. Instead, it creates formats that might be useful to other applications. Subsequently, when you PASTE within the same application, it tends to use its LOCAL copy, rather than the data that is on the clipboard. For this reason, data that is stored in ClipMate may not exactly match the data that was copied.

Silent Clipboarding

Some applications, such as the OLE DRAW module that comes with some Microsoft products, use this mode of operation. If you use the DRAW package and copy several items, you'll find that only the last one shows up in ClipMate. But how is this? The whole idea of ClipMate is that it holds more than one item!

That is all well and good, as long as applications actually update the clipboard when performing cuts or copies. In order to save time, the DRAW module works locally, and bypasses the clipboard. When it senses that the user has given focus to another window, either by closing DRAW, or by clicking outside of its borders, it then updates the clipboard. Thus giving the illusion of clipboard support. Unfortunately, ClipMate can't detect anything that DRAW is doing until it updates the clipboard.

There is a clumsy, but effective work-around. Keep ClipMate visible on the screen while you are working in DRAW. If you're working full-screen, make ClipMate float on top, and iconify it. Or use a hotkey to call it to the top. The idea is that whenever you copy data with DRAW, just click on ClipMate. DRAW then loses focus, which forces the clipboard update. ClipMate will then get the data.

Transient Data

Another trick that applications sometimes play with the clipboard is to provide TRANSIENT data, which isn't really data at all. The most common form of transient data is the OWNER DISPLAY format. When viewed in the clipboard viewer that comes with Windows, the Owner Display format seems to accurately represent the data that was copied. The fonts are the right size, the pictures look great, and it seems to take no time at all to copy. In reality, the data is not really there at all. The host application is actually drawing the data in the window of the clipboard viewer. This format is absolutely worthless to ClipMate, and is therefore ignored.

Memory Management with "Load On Demand"

ClipMate employs a sophisticated scheme called *Load On Demand* to manage memory and resources efficiently. This was made necessary by the additional capability to handle large data types, such as Bitmaps and OLE objects. It is not unusual for bitmaps to occupy several hundred Kilobytes of memory. OLE objects, and private data formats such as RTF, can easily exceed 1 megabyte in size. Early prototypes of ClipMate v2.0 illustrated the resource constraints that the new capabilities imposed. Given the fact that many ClipMate users like to store 25, 50, even hundreds of Clip Items, it was decided that ClipMate should only load data that was currently in use. Once data has been saved to disk, it should stay there until needed. So a *Load On Demand* feature was implemented for any text item over 1k in size, and any other format, no matter what size.

The Catch: Until a clip item has been saved at least once, it must be kept in main memory, and is not a candidate for offloading. They will accumulate in memory until you save the file. This will not normally create a problem, unless you are working heavily with large data items, such as large bitmaps, RTF, or OLE objects. For example, if you are capturing full-size screen shots of 800x600 pixels, you won't want to capture more than 4 or 5 before saving the file. If you are working with small bitmaps, such as 100x100 pixels, you can probably do as many as you'd like.

Related Topics:

[The DATA Directory:](#)

The DATA Directory:

ClipMate maintains a DATA directory beneath its home directory, to store all data files. There is not a direct correlation between the number of Clip Items and the number of files. If you only use small text items, then there will only be the .CLM file (the main ClipMate data file). If you use complex clip items, with several formats, there can be multiple files per clip item. If you keep lots of clip items, there may be quite a few files here. You'll find the following file types:

.AUX	Private formats, RTF, OLE objects, and large text items. Prefixed with serial number of clip item.
.BAK	Backup of the .CLM file. If you have a disaster, you can use this to recover to the last successful save.
.BMP	Bitmaps. Prefixed with a serial number. If the serial number begins with a "t", then they are thumbnail bitmaps.
.CLM	The main ClipMate data file. It holds text items smaller than 1K, and has pointers to other files for the other data types.
.WMF	Pictures. Prefixed with serial number of clip item.

Note that the filenames of the .AUX, .BMP, and .WMF files will contain the serial number of the corresponding clip item. See: Fields.

Tips for the Power User

If you have a tip that you would like to share with other users, send it to us. If we use it in the manual and on-line help, we will credit you as the source, and give you a free upgrade!

Related Topics:

ThumbNail Text

Fax Your Signature

ThumbNail Text

You may find it surprisingly easy to use the ThumbNail View to find text items. The reason for this is that you probably have a good idea what certain items look like, whether or not you could quote any given word or phrase from it (needed for Word Search). How many times have you thumbed through a magazine, looking for an article? Often, data that you receive electronically will have a particular visual characteristic that you can identify with a glance. ClipMate's ThumbNail View can help you find those items quickly.

Within the ThumbNail Window's Configuration Dialog Box, there is an option for font size. Use a small font, so small that you might not even be able to read the data.

Place the ThumbNail Window and the Magnification Window side-by-side.

Don't try to read the thumbnails, **look at them**. If you see what you're after, click on it, and then read it in the Magnification Window.

For more information, see: [Visual Selection by ThumbNail](#), and [ThumbNail Configuration Dialog Box](#).

Fax Your Signature

Fax modems are handy items, especially for sending documents directly from your word processor. Unfortunately, you normally can't sign a document that you're sending, like you can with a traditional fax machine.

ClipMate can't solve this problem all by itself, but it can be part of the solution. Just sign your signature several times on a sheet of paper, and use someone else's traditional fax machine to fax your signature to your fax modem. Assuming that your fax modem comes with capable viewer software, you can copy your signature to ClipMate. Title the new item as "My Signature", and move it to ClipMate's Safe List. Now, you'll always have your signature ready to paste into FAX documents.

Questions & Answers

Can I delete multiple Clip Items?

Why Do I Get Duplicate Items?

Why Do I Receive Data From Both OLE2: and WinWord?

Why do I lose the formatting of text?

When copying bitmaps, why does the ClipMate window flash?

Why can't I paste table cells back into a table (Word for Windows)?

Can I delete multiple Clip Items?

Certainly! Use the Multiple Selection Dialog Box to select all of the items that you want to delete, then press the Delete button. Save the file, and they're gone for good.

Also, you can use the new Delete All function, found under the Edit | Delete menu.

Why Do I Get Duplicate Items?

Sometimes when you close an application, you'll get a duplicate of the last item copied. This is because the application wants to eliminate any "garbage" data, usually as a result of Delayed Rendering or other clipboard tricks. Some applications will ask you if you want to preserve the clipboard, this is really the same thing. In either case, the clipboard will be updated, and ClipMate will be triggered, thus causing the duplicate.

If you're using an OLE2-compliant application, such as Microsoft Word 6.0, you'll notice that the first item will have OLE2 as the source application, and the duplicate will be from WinWord. Likewise with other OLE2 apps, such as EXCEL 5.0. This is because the cleanup isn't done through OLE2, it is done directly by the application. You can use this to your advantage, as you can use the Application Profile to avoid the duplicate. Simply edit the Application Profile for the main application to ignore all formats (no formats checked) for only the main application, such as WINWORD. All of the data that you want will come in as OLE2, and ClipMate will ignore the duplicate.

Why Do I Receive Data From Both OLE2: and WinWord?

This happens when you close an OLE2-compliant application. See the answer to: [Why Do I Get Duplicate Items?](#).

Why do I lose the formatting of text?

You are probably filtering-out the format that your application needs, in order to properly format the data. By default, ClipMate will accept TEXT and BITMAP, but will ignore everything else. It sounds like you need to develop a good filter, to be used with your application.

For more information, see: [Application Profile](#).

When copying bitmaps, why does the ClipMate window flash?

This is necessary in order to properly adjust the palette, when copying bitmaps.

Why can't I paste table cells back into a table (Word for Windows)?

This is an example of where some applications, like Microsoft's Word for Windows, use local data when copy & pasting. You can get table cells into ClipMate through the RTF format, but then WinWord thinks you're trying to paste one table into another, which is illegal. When WinWord is working with local Cut & Pastes, it doesn't use the data on the clipboard.

Purchasing a Registered Version of ClipMate

During your evaluation of ClipMate, you have been using a SHAREWARE or "evaluation" copy of ClipMate. You are entitled to use ClipMate for 30 days, for the purpose of evaluation. After this time you are required to purchase a Registered Copy. If you feel that ClipMate doesn't meet your needs, or for any reason you decide that you don't want to purchase a registered copy, you are required to delete the program from your computer. This is the ultimate "Try Before You Buy" marketing strategy. For more information on this marketing principle, See: [Shareware Marketing - What is it?](#).

Purchasing your registered copy of ClipMate entitles you to continue using the product, and gives you specific benefits, such as a printed manual, the latest version on diskette, and access to technical support. Also, the (somewhat annoying) Registration Reminder screens will be removed! For more information on benefits of registration, See: [Registration Benefits:](#).

NOTICE: Continued use of the unregistered version of ClipMate past the 30 day evaluation period is a violation of federal copyright laws.

See Also:

[Placing Your Order](#)

[Pricing](#)

[Registration Benefits:](#)

[BONUS for Registered Users!](#)

[Upgrading From A Previous Version Of ClipMate](#)

Pricing

The registration fee for ClipMate, if purchased directly from Thornton Software Solutions, is \$25.00 in U.S. funds.

Upgrades from previous versions are available! See: [Upgrading From A Previous Version Of ClipMate](#).

Shipping in North America is free.

Outside of North America, Add \$2.00 for overseas shipping & handling. (Airmail is standard service)

Multi-User and Site License pricing is available. See: SITELIC.TXT for details.

Registration Benefits:

By registering ClipMate, you gain the following:

1. A new diskette - We will send you the latest and greatest release of ClipMate, on your choice of either a 3.5" (the default), or 5.25" diskette.
2. A printed Manual.
3. A registration number - which will remove the annoying "SHAREWARE NOTICE" reminder screens.
4. Peace of mind - you have fulfilled your obligation, and have made the Shareware concept work. You are not breaking the law, at least in this particular case!
5. Access to support - If you have problems using ClipMate, we are here to help you. Support is guaranteed for 90 days from the date of registration. If we can't resolve your problem to our mutual satisfaction, we will refund your money, as long as the problem is brought to our attention within the 90 day window.

BONUS for Registered Users!

To fill the otherwise empty remaining space on your registered diskette, we have put together a collection of excellent shareware utilities by other authors. If you like ClipMate, then you may also like Fast-Paste by Robert Nee, BarClock by Atomic Dog Software, and Bob's CD Player by Robert Hayes (Bob). The selections change often, as we find new programs, and as disk space dictates. Be assured, however, that we will fill the remaining space with high-quality shareware - yours to evaluate, under normal shareware terms.

One program that we know for sure will be there is FAST-PASTE by Robert F. Nee. Fast-Paste is a utility that allows easy access to the clipboard for DOS applications running in a Window. Instead of having to use the window's control bar to EDIT | MARK, EDIT | COPY, you just use the left mouse button to highlight data. Release, and it is copied to the clipboard (and ClipMate). Click with the right mouse button, and it pastes. This is a big time saver to anyone working with windowed DOS applications, and is a natural complement to ClipMate. At Thornton Software Solutions, we use it every day!

Placing Your Order

[Ordering Directly From Thornton Software Solutions](#)

[Ordering Through CompuServe](#)

[Egghead and Other Resellers](#)

[Local Registrations In Other Countries](#)

Ordering Directly From Thornton Software Solutions

We can take Personal Checks, Money Orders, VISA, Mastercard, and even Cash. Purchase Orders are also acceptable. You can find an order form in either of the two files:

- CLMREG.TXT for single-user licenses.
- SITELIC.TXT for multi-user and site licenses - recommended if you need 5 or more copies.

We recommend that you select one of these forms, edit it electronically, print it, and mail, FAX, or Email it to Thornton Software Solutions. Additionally, you can phone us with a credit card number, at (716) 227-6505.

TIP For Editing Order Form: Notepad works well, if you're going to Email it. Otherwise, use Write, or import into your favorite word processor.

See: [Contacting Thornton Software Solutions](#)

For Registration Benefits, Pricing, Etc, See: [Purchasing a Registered Version of ClipMate.](#)

Related Topics:

[Overseas Payment Options?](#)

Overseas Payment Options?

If you are outside of the U.S., and are unable to send a check drawn on a U.S. Bank, and don't have a Visa/Mastercard, then try a postal money order. Another alternative is to send cash. Our mail orders go to a Post Office Box, and we have never had a problem with cash getting "lost" in the mail. Under no condition should you send a check drawn on a non-U.S. bank. Our bank will not process foreign checks, and therefore we will not process orders with payment by a foreign check!

See Local Registrations In Other Countries.

Ordering Through CompuServe

Through an arrangement with CompuServe, you may order a registered copy of ClipMate, and charge it to your CompuServe account. This is different than sending us a creditcard order to our CompuServe account, which you can also do.

ORDERING:

Sign-on to CompuServe, and GO SWREG (Shareware Registration) .

Select Register Shareware from the main SWREG Menu.

Select Registration ID from the SEARCH BY menu.

Enter 173 as the ID.

ClipMate's description should be on the screen. Enter Y to register.

See alternative methods of Ordering:

[Ordering Directly From Thornton Software Solutions.](#)

[Local Registrations In Other Countries](#)

Egghead and Other Resellers

We realize that many companies only purchase software through particular channels, or may have formed alliances with large resellers such as Egghead Software. This often makes it difficult to order the software that you need (like ClipMate).

Good News! You can purchase ClipMate as a special order through Egghead Software.

Egghead SKU: 913038 ClipMate for Windows.

Contact Egghead for pricing.

The package that you receive will contain a registration card, which you must complete and return. This will add you to our customer database, which will qualify you for technical support upgrade notices.

If you need to purchase from another reseller, just give them a copy of our order form, (CLMREG.TXT) and have them contact us. **See:** [Contacting Thornton Software Solutions](#)

Note: Orders placed with resellers may add a week or so to the normal delivery time.

Local Registrations In Other Countries

We have made arrangements with dealers in several other countries to accept payment locally, for fully registered versions (no upgrades). Contact one of these dealers for local pricing and other benefits, such as manual translations or language-specific versions of ClipMate. Prices and services vary by dealer, and will evolve over time.

Related Topics:

[GERMANY \(Deutschland\) - Local Registration](#)

[FRANCE - Local Registration](#)

[Nederland en België \(The Netherlands and Belgium\) - Local Registration](#)

[Japan - Local Registration](#)

GERMANY (Deutschland) - Local Registration

You can contact this German company, which can accept registrations in DM. Just fill-out CLMREG.TXT, include a check (DM) or credit card info, and send to DER PD-PROFI.

DER PD-PROFI Gerd Zoettlein

Schulstr. 13

D-86666 Burgheim

Tel. 08243-1296

Fax. 08243-8674

CIS. 100326,53

Preis DM 54.-- plus Registriergebuehr DM 25.-- plus Versand

Zahlung per NN, Vorkasse, Kreditkarte

FRANCE - Local Registration

We have an agreement with WINDOWSHARE SARL to take orders for us in all of French-Speaking Europe. You have the choice of dealing with WindowShare, or directly with Thornton Software Solutions. The advantage of WindowShare, is that they can accept payment in Francs.

To order from Windowshare, just print the French Order Form from this help file, complete, and submit to Windowshare.

French Order Form (WindowShare)

Bon de Commande Français

ClipMate for Windows 3.1 LICENCE d'UTILISATION

(Les sociétés peuvent nous consulter pour des licences multipostes
ou des licences multiples)

Remplacez le soulignement par les renseignements demandés.

Imprimez cette fiche, et adressez le tout avec votre règlement

de 270 FF TTC (pour chaque poste), TVA (18,6 %)

et port compris à :

WINDOWSHARE Sarl

46-48 route de Thionville

57140 WOIPPY France

Fax:(+33)87 32 37 75

Vox:(+33)87 30 85 57

Minitel 3615 WinShare

Nom et Prénom : _____

Adresse : _____

Code Postal et Ville : _____

Nombre de licences : _____

Date _____

Disquette : ___ 3 1/2" ___ 5 1/4"

Total TTC _____

Paiement par chèque (bancaire ou postal), Eurochèque, mandat-lettre, ou carte bancaire. (barrer la mention inutile)

Carte bancaire, indiquez ici les 16 chiffres et la date d'expiration.

_____ Exp. : _____

Signature :

Merci de respecter le principe du shareware.

Nederland en België (The Netherlands and Belgium) - Local Registration

ClipMate for Windows Registratieformulier Nederland en België

(druk dit formulier af d.m.v. \BESTAND\AFDRUKKEN in bovenstaand menu)

Nederlandse en Belgische gebruikers van ClipMate kunnen de geregistreeerde versie aanschaffen bij CopyCats. Vul dit formulier in, en stuur het gelijktijdig of tezamen met uw betaling naar:

CopyCats Software & Services

Postbus 1088

1700 BB Heerhugowaard

Nederland

Tel./Fax: +31 (0)2207-45993

Na 10/10/95: +31 (0)72-5745993

Door registratie wordt u legaal gebruiker en ontvangt u de nieuwste versie van ClipMate op disk met een registratiecode en gedrukte handleiding. Tevens kunt u gedurende minstens 90 dagen een beroep doen op technische ondersteuning. Als bonus treft u op de ClipMate disk sharewareversies van andere uitstekende utility-programma's voor Windows.

Ja, ClipMate bevalt me! Stuur de geregistreeerde versie naar:

Naam :
Bedrijf :
Adres :
Postcode: Woonplaats:
Land :
Telefoon: Fax:
BTW-nummer (bedrijven België): |B|E|_|_|_|_|_|_|_|_|_|_|

De prijs van ClipMate bedraagt Dfl. 69,95 / 1295 BFr. inclusief BTW en verzending (1102 BFr. bij vermelding van BTW-nummer).

Betaalwijze (aankruisen a.u.b.):

☐ Bijgesloten cheque of betaalkaart Datum:-....-19....

☐ NL: Overmaking aan Postbank 43.28.577 Handtekening:

☐ B: Overmaking aan Postrekening 000-1656064-80

☐ Op rekening (overheid/bedrijven, uitsluitend schriftelijk)

*** Dank u voor uw registratie van ClipMate! ***

Japan - Local Registration

This program can be registered locally in Japan. For details, contact:

P. & A. Shareware Distribution.

302 Bellwinds, 1367-23

Nakagami, Akishima

Tokyo, 196 Japan

Tel: 0425-46-9141

Fax: 0425-46-9142

NIFTY-Serve: PAF02461

Let them know that you are interested in purchasing a registered version of ClipMate 3.1.

Upgrading From A Previous Version Of ClipMate

NOTE: *If you are a registered user of 3.0, then there is no upgrade charge. Simply download the software, and run. Your registration number for 3.0 will continue to work. Enjoy!*

If you are a registered user of a previous version of ClipMate, there is an attractive upgrade path available. By upgrading, you will receive a new diskette, manual, and registration number for ClipMate 3.1. Upgrade Pricing is as follows:

Single-User From 1.x: \$15.00 U.S.

Single-User From 2.x \$10.00 U.S.

Single-User From 3.0 \$2.00 U.S.

(We'd prefer that you just download and run - your 3.0 registration number is still valid!)

Multi-User License \$25.00 U.S.

(From 1.x or 2.x):

(Covers All Copies, Regardless of license size!)

Use the order form in CLMREG.TXT. *Be sure to include your registration number, to qualify for the upgrade offer.*

CompuServe Users:

If you are on CompuServe, you can use the SWREG service to upgrade. Follow the instructions in , but substitute the following product:

Program Title: CLIPMATE 3.0 UPGRADE

Registration ID: 1120

Note: When you install ClipMate 3.0/3.1 on top of a previous release, you will be granted a 60-day grace period, during which time the dreaded "Registration Reminder" screen will not appear. This extra time is provided as a courtesy to our current customers.

Shareware Marketing - What is it?

DEFINITION OF SHAREWARE - Provided by the Association of Shareware Professionals (ASP)

Shareware distribution gives users a chance to try software before buying it. If you try a Shareware program and continue using it, you are expected to register. Individual programs differ on details -- some request registration while others require it, some specify a maximum trial period. With registration, you get anything from the simple right to continue using the software to an updated program with printed manual.

Copyright laws apply to both Shareware and commercial software, and the copyright holder retains all rights, with a few specific exceptions as stated below. Shareware authors are accomplished programmers, just like commercial authors, and the programs are of comparable quality. (In both cases, there are good programs and bad ones!) The main difference is in the method of distribution. With shareware, the author specifically grants the right to copy and distribute the software, either to all and sundry or to a specific group. For example, some authors require written permission before a commercial disk vendor may copy their Shareware.

Shareware is a distribution method, not a type of software. You should find software that suits your needs and pocketbook, whether it's commercial or Shareware. The Shareware system makes fitting your needs easier, because you can try before you buy. And because the overhead is low, prices are low also. Shareware has the ultimate money-back guarantee -- if a program doesn't meet your needs, you don't pay for it.

ClipMate is a "shareware program" and is provided at no charge to the user for evaluation. Feel free to share it with your friends, but please do not give it away altered or as part of another system. The essence of "user-supported" software is to provide personal computer users with quality software without high prices, and yet to provide incentive for programmers to continue to develop new products. If you find this program useful and find that you are using ClipMate and continue to use ClipMate after a reasonable trial period (30 days), you must make a registration payment of \$25.00 to the author.

Site License arrangements are available.

Anyone distributing ClipMate for any kind of remuneration must first contact the author for authorization. This authorization will be automatically granted to distributors recognized by the Association of Shareware Professionals (ASP) as adhering to its guidelines for shareware distributors, and such distributors may begin offering ClipMate immediately (However the author must still be advised so that the distributor can be kept up-to-date with the latest version of ClipMate).

You are encouraged to pass a copy of ClipMate along to your friends for evaluation. Please encourage them to register their copy if they find that they can use it. No one may distribute a partial or altered copy of ClipMate. Because the registration information is stored in the ClipMate.INI file, this file **MUST NOT BE DISTRIBUTED**. If you don't have a complete copy, you should obtain another copy from a reliable source, such as CompuServe, or contact the author directly.

If you are uncertain whether you have a complete package, see: [Distribution Files](#), to ensure that all of the required files are present

This definition of Shareware is based upon a shareware definition that was provided by the Association of Software Professionals.

For more information on the ASP, see: [ASP](#)

How Do I Get Rid Of The Annoying *Registration Reminder* Screen?

Register Your Copy!

See: Purchasing a Registered Version of ClipMate

Ordering, Downloading, and Contact Information

[Ordering ClipMate](#)

[What Is The Current Version Of ClipMate?](#)

[Downloading The Latest ClipMate](#)

[Contacting Thornton Software Solutions](#)

Ordering ClipMate

If you're using an Evaluation Version of ClipMate, you will need to purchase a registered copy to continue using ClipMate past the 30 day evaluation period. There are many ways to order your copy of ClipMate, including on-line options, fax, mail, and phone. You can pay by credit card, check, PO, and cash. The order form can be found in CLMREG.TXT. Site license information is in SITELIC.TXT. For other options, such as on-line ordering, ordering outside of North America, and through resellers, **See "Pricing" Pricing and "Placing Your Order" Placing Your Order in the on-line Help.**

What Is The Current Version Of ClipMate?

This is our most popular question. To help answer it, we have established a page on the World Wide Web (<http://delta.com/tsoft/clipmate.htm>), where you can easily browse our product information, see what version is current, and download files.

We are also implementing a list server (automated Email) to keep you informed of what version is current, upcoming releases, and good download sites. This is a free service, and is open to registered and unregistered users alike. To join our mailing list, send internet Email to our list server:

Send Email To: **majordomo@majordomo.eznet.net**
with this message: **subscribe clipmate**

Note: You'll get a quick response from the list server, welcoming you to the list, and flagging any errors. Anything in the note, such as your signature file, will probably be flagged as an error - just look for the result of the "subscribe" command - that's all you care about.

Downloading The Latest ClipMate

Internet - WWW, FTP

We have a Word Wide Web (WWW) home page at <http://delta.com/tsoft/clipmate.htm>
Check here to see what the current release of ClipMate is, and what may be coming in the future.

OR

Anonymous ftp from <ftp.eznet.net> /pub/tsoft. Browse the directory for clipmt*.zip, as the version (last 2 digits) can change.

MSN - The Microsoft Network

Thornton Software Solutions has just opened a support forum on the Microsoft Network (MSN). GO keyword: CLIPMATE. (The GO menu is hidden in the Edit menu of MSN Central. Edit | Go To | Other Location - CLIPMATE.)

Visit our forum for latest product information and downloading the newest version. Also, there will be discussion threads for sharing tips, ideas, and (heaven forbid) problems with other users, and our support staff.

Also, you can easily go "up" a level to visit forums of other ASP Software Companies, and visit the ASP forum itself. You'll find a hundreds of quality shareware programs from ASP member companies.

CompuServe

ClipMate exists on CompuServe in several forums. Some of the ones that we upload directly to are:

- GO WINSHARE File: CLIPMT*.ZIP in lib 6.
- GO WINUSER File: CLIPMT*.ZIP in lib 3.
- GO IBMFF Keyword: CLIPMATE

America Online (AOL)

From the GoTo menu, select Keyword. Key in QUICKFIND. This brings you to the Software Search dialog. Key in ClipMate as the search keyword. Look for the file with the most recent version number.

CD-ROM

Beware of old CD-ROMs. Check the dates on the CD, and on the files included. If the file dates look old, then you have what is known as "shovelware". If you have a copy of ClipMate that is over 1 year old, please look for a newer version - preferably one of the sources listed here.

BBS

If your local BBS has the ASP CD-ROM mounted, then you should be able to find ClipMate on the disk under \PROGRAMS\UTILITIES\CLIPMT*.ZIP. Another option is to dial into one of the "ASP Hub Network" sites, which should allow anybody to connect, and download 1 program for no cost other than your phone charges. Here they are:

- Consultant BBS, Brooklyn, NY, (718-837-3236)
- Break RBBS, Dale City, VA, (703-680-9269)
- Twilight Zone, Auburndale, WI, (715-652-2758)
- Data Exchange Leesville, LA, (318-239-2122)
- Attention to Details, Mira Loma, CA (909-681-6221)
- SPACE BBS, Menlo Park, CA, (415-323-4193)
- Knightec BBS, Orangeville, Ontario, **CANADA** (519-940-0007)

Contacting Thornton Software Solutions

Feel free to contact us for current ordering information, site license prices and terms, bundling arrangements, publishing rights, overseas representation, and of course, pre and post-sales technical support.

You can reach us at any of the following:

CompuServe:	70743,2546
Internet:	70743.2546@compuserve.com
	tsoft@eznet.net
WWW	http://delta.com/tsoft/clipmate.htm
MSN	GO CLIPMATE
Phone:	(716) 227-6505
FAX (24 hrs):	(716) 227-1145
Mail:	Thornton Software Solutions
	PO Box 26263
	Rochester, NY 14626
	USA
List Server:	Email to majordomo:majordomo.eznet.net
	Include this text in the body:
	subscribe clipmate

Support Policy

Registered users of ClipMate are entitled to support for 90 days from the receipt of the registered copy. If you have problems using ClipMate, we are here to help you.

Please provide a description of the problem, as well as a description of the hardware and software that you're using.

If we can't resolve your problem to our mutual satisfaction, we will refund your money, as long as the problem is brought to our attention within the 90 day window.

To Contact Thornton Software:

See: [Contacting Thornton Software Solutions](#)

ASP

Thornton Software Solutions is a member of the Association of Shareware Professionals. The ASP is an association for shareware authors and vendors with the general goals of educating shareware authors and distributors and the public, setting standards, sharing resources and information among members. Membership is open to programmers who are authors of at least one "nontrivial" product which is currently marketed and supported as shareware, who agree to abide by standards adopted by the association, and whose membership, in the judgment of the Membership Committee, will not be detrimental to the goals or reputation of the ASP. Also, Associate Membership is open to Vendors and Bulletin Board operators.

Whenever you see the ASP logo, or the ASP initials, you are assured that the associated product will be fully-functional, and of high quality.



Related Topics:

[OMBUDSMAN](#)

OMBUDSMAN

As an ASP member, we are required to display this statement:

This program is produced by a member of the Association of Shareware Professionals (ASP). ASP wants to make sure that the shareware principle works for you. If you are unable to resolve a shareware-related problem with an ASP member by contacting the member directly, ASP may be able to help. The ASP Ombudsman can help you resolve a dispute or problem with an ASP member, but does not provide technical support for members' products. Please write to the ASP Ombudsman at 545 Grover Road, Muskegon, MI 49442 or send a CompuServe message via CompuServe Mail to ASP Ombudsman 70007,3536.

Glossary of Terms

Active List

Application Profile

Archived

Clip Item

Clip Item Lists

Clipboard

Delayed Rendering

Filter

Glue

Layout

Title

Transient Formats

Active List

Whichever of the two Clip Item Lists is currently shown in the Clip Item Selection List Box is the Active List. Its corresponding button will appear to be depressed. The button representing the other list will be sticking up, ready to be pushed. The lists are mutually exclusive, as only one can be active. See:



Activate Recyclable List.

Application Profile

The facility for reducing the amount of unwanted clipboard data that is collected by ClipMate, formerly known as FILTER. See: Application Profile.

Archived

BBS and Disk vendors often compress and group files together to save space, and keep all of the distribution files together. If the file extension is .EXE, then it is a self-extracting archive. Just execute it, and it will unpack itself. If the extension is .ZIP, then you will need PKUNZIP version 2.04G or later to decompress.

Clip Item

When any application places text on the Clipboard, ClipMate makes a copy for itself. This copy of the clipboard contents is considered to be a Clip Item, and is stored in a Clip Item List.

A Clip Item will have a Clip Item Title, that is initially constructed from the first 50 characters of the clip item. You may edit this title in the Magnification Window, or by selecting Edit Title from the EDIT menu.

Clip Items are dynamically sized upon creation. They will typically consume a byte of memory for each character in the text, plus 50 characters for the title, and a few extra bytes to keep track of everything.

You can edit the Clip Item in the Magnification Window.

New Clip Items will be placed on one of the Clip Item Lists, depending upon which list is the Active List, and the option chosen in the CONFIG screen.

Clip Item Lists

Clip Items are stored in Clip Item Lists as they are pasted from the Clipboard. ClipMate supports two Clip Item Lists:

Recyclable List: Maintains a user-defined number of Clip Items. New Clip Items are at the top of the list, and work their way down as still newer items are added. When the number of Clip Items in the list exceeds the user-specified limit, clip items are deleted from the list, thus freeing up space in the system. Since the space is re-usable, the list is known as the Recyclable List.

Safe List: Stores as many Clip Items as you would ever want to keep. Like the Recyclable List, new Clip Items enter at the top of the list, and work their way down as still newer items are added. But YOU are responsible for deleting obsolete clip items. This is a handy way to keep track of "Boiler-Plate" items, such as letter templates, return-addresses, or even often-used chunks of code, if you happen to be a programmer.

New Clip Items will be placed on one of the Clip Item Lists, depending upon which list is the Active List, and the option chosen in the Config screen.

Clipboard

The Windows clipboard acts as a repository for data in a variety of formats. Applications can place data into the Clipboard, through Copying or Cutting. Applications can retrieve data from the Clipboard by Pasting.

In actuality, there is no Clipboard program. At least not in the sense that you could point to a particular program, and declare it to be the clipboard. The Clipboard Utility that comes with Windows is not the Clipboard, it is just a utility that can be used to display or delete the contents of the Clipboard. It does not have to be open, or even on your hard disk in order to perform Clipboard functions. In real terms, the Windows Clipboard is set of Windows functions that programs use to share data.

The Clipboard can be used to hold a variety of formats, usually simultaneously. Some common formats are BITMAP, Symbolic Link, TIFF, etc.

This definition is partly based upon the definition of the Clipboard in Tom Swan's [Turbo Pascal for Windows 3.0 Programming](#).


Delayed Rendering

A clipboard technique where the host application will "advertise" clipboard formats, without actually providing the data. When another application requests the data, Windows instructs the host application to provide the data to the clipboard. This makes the initial copy seem fast, since no real work is done. This is why you need to be conservative when designing filters - you don't want to wait forever to get your data! See: [Unfortunate Clipboard Tricks](#).

Filter

See: [Application Profile](#)

Glue

Append or concatenate two or more text items together, forming a larger item. See:  Glue
Text.

Layout

ClipMate gives you the option of displaying all of its graphical controls, along with the Menu (Full Layout), or just showing a some of the graphical controls, with no Menu (Brief Layout). See [User Preference Dialog Box](#) for details on how to change the Layout.

Title

Clip Items have titles that describe the data. If there is a TEXT format present, then the first 50 characters are used to create the title. Otherwise, the title is a combination of the name of the app that created the data, the first data format encountered, and the serial number. If multiple formats are encountered, then a (+) follows the format name, to let you know that multiple formats exist. For example: PBRUSH: BITMAP(+): 5537 indicates an item from PBRUSH (Paintbrush), which has a bitmap, and at least one other format, and is serial number 5537.

You may change the title of any item: See: [Edit Menu](#).

Transient Formats

Data items that depend on the originating application for their existence. See: [Unfortunate Clipboard Tricks](#).

